



SENTON

Choose certainty.
Add value.

Page 1 of 63

Prüfbericht / Test Report

Nr. / No. 69861-04467-1 (Edition 1)

Applicant: IDENTEC Solutions AG
Type of equipment: Active Tag for Shipping Containers
Type designation: i-Q310 CST
Order No.: 1230094
Test standards: FCC Code of Federal Regulations,
CFR 47, Part 15,
Sections 15.107, 15.109, 15.205, 15.207, 15.209, 15.215 and 15.240

Industry Canada Radio Standards Specifications
RSS-Gen Issue 3, Sections 6, 7.2.2, 7.2.4 and 7.2.5
RSS-210 Issue 8, Section A5 (Category I Equipment)

Note:

The test data of this report is related only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.



Table of Contents

1	Description of the Equipment Under Test (EUT).....	3
2	Administrative Data	3
3	Identification of the Test Laboratory.....	5
4	Summary.....	6
5	Operation Mode and Configuration of EUT	7
6	Measurement Procedures	8
6.1	Bandwidth Measurements	8
6.2	Pulse Train Measurement.....	9
6.3	Radiated Emission Measurement 9 kHz to 30 MHz.....	10
6.4	Radiated Emission in Fully or Semi Anechoic Room.....	12
6.5	Radiated Emission at Alternative Test Site.....	14
7	Photographs Taken During Testing.....	16
8	Test Results for Transmitter	22
8.1	Occupied Bandwidth	24
8.2	Bandwidth of the Emission.....	28
8.3	Designation of Emissions.....	30
8.4	Pulse Train Measurement.....	31
8.5	Duration of emission	33
8.6	Restricted Bands of Operation.....	35
8.7	Radiated Emission Measurement 9 kHz to 30 MHz.....	37
8.8	Radiated Emission Measurement 30 MHz to 1 GHz.....	38
8.9	Exposure of Humans to RF Fields	40
9	Test Results for Receiver.....	42
9.1	Radiated Emission Measurement 30 MHz to 1 GHz.....	43
10	Referenced Regulations.....	44
11	Test Equipment List with Calibration Data	46
12	Revision History	47
Annex A	Charts taken during testing.....	48



1 Description of the Equipment Under Test (EUT)

General data of EUT	
Type designation ¹ :	i-Q310 CST
Parts ² :	
Serial number(s):	18717467713013
Manufacturer:	IDENITEC Solutions AG
Type of equipment:	Active Tag for Shipping Containers
Version:	As received
FCC ID:	OO4-IQ310CST
Additional parts/accessories:	

Technical data of EUT	
Application frequency range:	433.5 - 434.5 MHz
Frequency range:	433.92 MHz
Operating frequency:	433.92 MHz
Type of modulation:	FSK
Pulse train:	100 ms
Pulse width:	10.1 ms
Number of RF-channels:	1
Channel spacing:	N/A
Designation of emissions ³ :	172F1D
Type of antenna:	Integrated
Size/length of antenna:	
Connection of antenna:	<input type="checkbox"/> detachable <input checked="" type="checkbox"/> not detachable
Type of power supply:	Battery supply
Specifications for power supply:	nominal voltage: 3.6 V

2 Administrative Data

¹ Type designation of the system if EUT consists of more than one part.

² Type designations of the parts of the system, if applicable.

³ Also known as "Class of Emission".



Application details

Applicant (full address):	IDENTEC Solutions AG Millennium Park 2 A-6890 Lustenau Österreich
Contact person:	Herr Daniel Egger
Order number:	1230094
Receipt of EUT:	February 24, 2012
Date(s) of test:	March 7, 2012 to March 22, 2012
Note(s):	

Report details

Report number:	69861-04467-1
Edition:	1
Issue date:	



3 Identification of the Test Laboratory

Details of the Test Laboratory

Company name:	TÜV SÜD SENTON GmbH
Address:	Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany
Laboratory accreditation:	DAR-Registration No. DAT-PL-171/94-03
FCC test site registration number	90926
Industry Canada test site registration:	3050A-2
Contact person:	Mr. Johann Roidt
	Phone: +49 9421 5522-0 Fax: +49 9421 5522-99

4 Summary

Summary of test results

The tested sample complies with the requirements set forth in the

Code of Federal Regulations CFR 47, Part 15, Sections 15.107, 15.109, 15.205, 15.207, 15.209, 15.215 and 15.240

of the Federal Communication Commission (FCC) and the

**Radio Standards Specifications
RSS-GEN Issue 3, Sections 6, 7.2.2, 7.2.4, 7.2.5 and
RSS-210 Issue 8, Section A5 (Category I Equipment)**

of Industry Canada (IC).

Personnel involved in this report

Laboratory Manager:



Mr. Johann Roidt

Responsible for testing:



Mr. Martin Steindl

Responsible for test report:

Mr. Martin Steindl



5 Operation Mode and Configuration of EUT

Operation Mode(s)

The EUT was tested in continuous transmitting and receiving mode.

Configuration(s) of EUT

For transmitting mode the EUT was configured as reader triggered active transponder. The transponder is triggered manually. The receiving mode was tested in stand-alone-mode. For radiated emission tests the EUT was set to a special test mode to ease tests.

List of ports and cables

<i>Port</i>	<i>Description</i>	<i>Classification⁴</i>	<i>Cable type</i>	<i>Cable length</i>

List of devices connected to EUT

<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>

List of support devices

<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>
1	Laptop PC	DELL dimension		DELL
2	Active Tag Reader	i-Port F310	18721762377786	Identec

⁴ Ports shall be classified as ac power, dc power or signal/control port

6 Measurement Procedures

6.1 Bandwidth Measurements

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 2, section 2.202(a) CFR 47 Part 15, section 15.215(c) IC RSS-Gen Issue 3, sections 4.6.1 and 4.6.2 IC RSS-210 Issue 8, section A1.1.3 ANSI C63.4, annex H.6
Guide:	ANSI C63.4 / IC RSS-Gen Issue 3, sections 4.6.1 and 4.6.2
Measurement setup:	<input type="checkbox"/> Conducted: See below <input checked="" type="checkbox"/> Radiated: Radiated Emission in Fully or Semi Anechoic Room (6.4)
<p>If antenna is detachable bandwidth measurements shall be performed at the antenna connector (conducted measurement) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.</p> <p>If radiated measurements are performed the same test setups and instruments are used as with radiated emission measurements for the appropriate frequency range.</p> <p>The analyzer settings are specified by the test description of the appropriate test record(s).</p>	




6.2 Pulse Train Measurement

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, section 15.35(c) IC RSS-Gen Issue 3, section 4.5
Guide:	ANSI C63.4
Measurement setup:	<input type="checkbox"/> Conducted: See below (direct connection or via test fixture) <input checked="" type="checkbox"/> Radiated: Radiated Emission in Fully or Semi Anechoic Room (6.4)
<p>If antenna is detachable pulse train measurements shall be performed at the antenna connector (conducted measurement). The RF output terminals are connected to a spectrum analyzer or to a diode detector in combination with an oscilloscope. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.</p> <p>If antenna is not detachable a test fixture may be used instead of direct connection to RF output terminals.</p> <p>If radiated measurements are performed similar test setups and instruments are used as with radiated emission measurements for the appropriate frequency range. However, the spectrum analyzer may be replaced by a diode detector connected to an oscilloscope.</p>	

6.3 Radiated Emission Measurement 9 kHz to 30 MHz

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.205 and 15.209 IC RSS-GEN Issue 3, sections 7.2.2 and 7.2.5
Guide:	ANSI C63.4
<p>Radiated emission in the frequency range 9 kHz to 30 MHz is measured using an active loop antenna. First the whole spectrum of emission caused by the equipment is recorded at a distance of 3 meters in a fully or semi anechoic room with the detector of the spectrum analyzer or EMI receiver set to peak. This configuration is also used for recording the spectrum of intentional radiators.</p> <p>Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>If worst case emission of the EUT cannot be recorded with EUT in standard position and loop antenna in vertical polarization the EUT (or the radiating part of the EUT) is rotated by 90 degrees instead of changing the loop antenna to horizontal polarization. This procedure is selected to minimize the influence of the environment (e.g. effects caused by the floor especially with longer distances).</p> <p>Final measurement is performed at a test distance D of 30 meters using an open field test site. In case the regulation requires testing at other distances, the result is extrapolated by either making measurements at an additional distance D of 10 meters to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance. The provisions of CFR 47 Part 15 sections 15.31(d) and (f)(2) apply. According to CFR 47 Part 15 section 15.209(d) final measurement is performed with detector function set to quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where, for non-pulsed operation, average detector is employed.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p>	

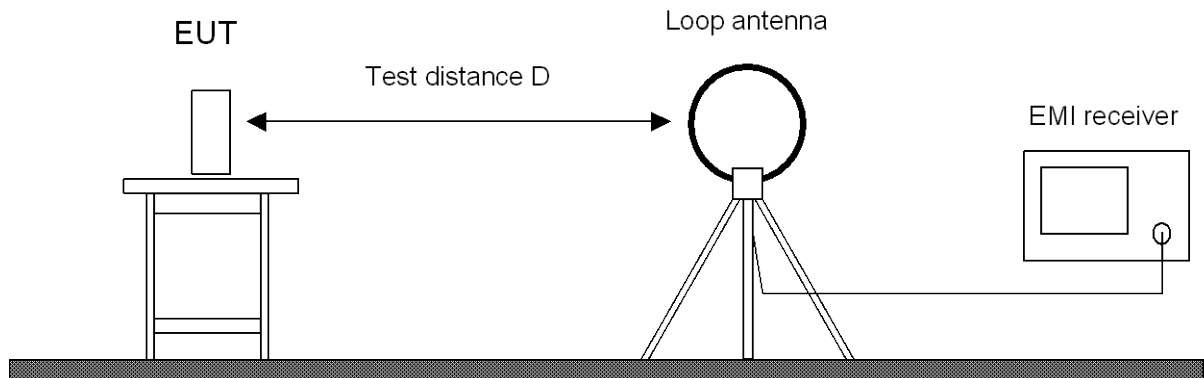




Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/> Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input type="checkbox"/> Test receiver	ESHS 10	1028	860043/016	Rohde & Schwarz
<input type="checkbox"/> Preamplifier	Cabin no. 2 CPA9231A	1651	3393	Schaffner
<input checked="" type="checkbox"/> Loop antenna	HFH2-Z2	1016	882964/1	Rohde & Schwarz
<input checked="" type="checkbox"/> Fully anechoic room	No. 2	1452	---	Albatross
<input type="checkbox"/> Semi anechoic room	No. 3	1453	---	Siemens
<input type="checkbox"/> Semi anechoic room	No. 8	2057	---	Albatross

6.4 Radiated Emission in Fully or Semi Anechoic Room

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.109 and 15.209 IC RSS-GEN Issue 3, sections 6.1 and 7.2.5
Guide:	ANSI C63.4
<p>Radiated emission in fully or semi anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33.</p> <p>Measurements are made in both the horizontal and vertical planes of polarization using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz).</p> <p>Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used.</p> <p>All tests below 8.2 GHz are performed at a test distance D of 3 meters. For higher frequencies the test distance may be reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p> <p>Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.</p> <p>During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>For final testing below 1 GHz a semi anechoic room complying with the NSA requirements of ANSI C63.4 for alternative test sites is used (see 6.5). If prescans are recorded in fully anechoic room they are indicated appropriately.</p>	

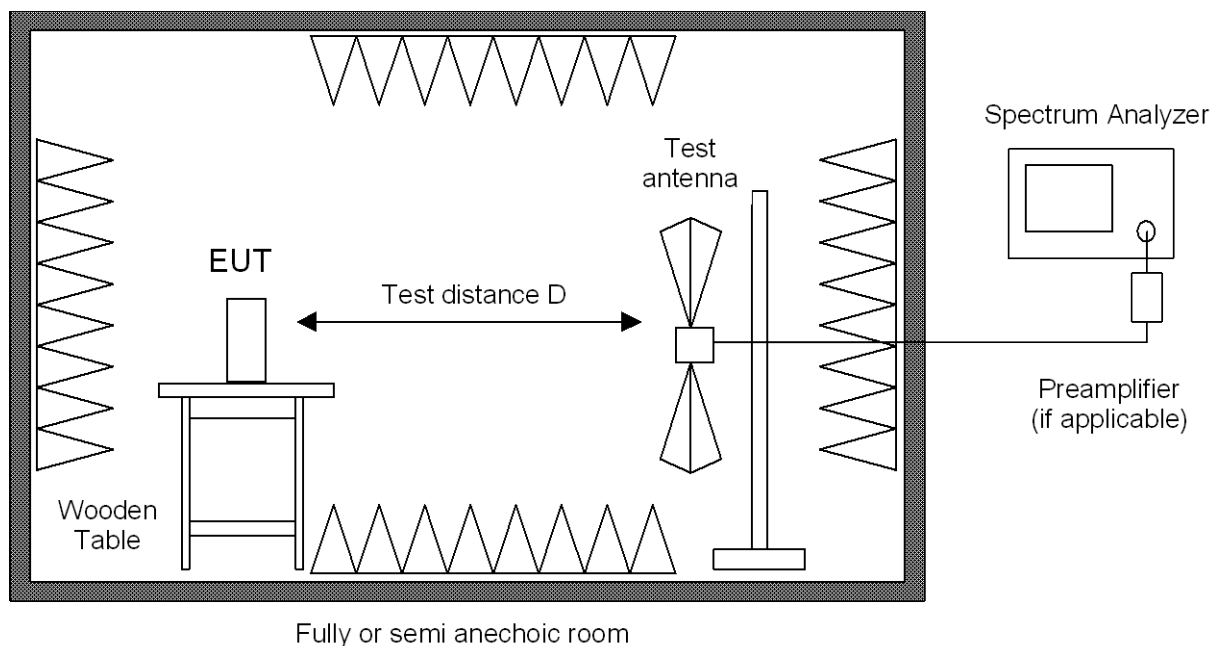


Test instruments used:

Type		Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input type="checkbox"/>	EMI test receiver	Cabin no. 3 ESPI7	2010	101018	Rohde & Schwarz
<input type="checkbox"/>	EMI test receiver	ESU8	2044	100232	Rohde & Schwarz
<input type="checkbox"/>	EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input checked="" type="checkbox"/>	Preamplifier	Cabin no. 2 CPA9231A	1651	3393	Schaffner
<input type="checkbox"/>	Preamplifier	R14601	1142	13120026	Advantest
<input checked="" type="checkbox"/>	Preamplifier (1 - 8 GHz)	AFS3-00100800-32-LN	1684	847743	Miteq
<input type="checkbox"/>	Preamplifier (0.5 - 8 GHz)	AMF-4D-005080-25-13P	1685	860149	Miteq
<input checked="" type="checkbox"/>	Preamplifier (8 - 18 GHz)	ACO/180-3530	1484	32641	CTT
<input type="checkbox"/>	External Mixer	WM782A	1576	845881/005	Tektronix
<input type="checkbox"/>	Harmonic Mixer Accessories	FS-Z30	1577	624413/003	Rohde & Schwarz
<input checked="" type="checkbox"/>	Trilog antenna	Cabin no. 2 VULB 9163	1722	9163-188	Schwarzbeck
<input type="checkbox"/>	Trilog antenna	Cabin no. 3 VULB 9163	1802	9163-214	Schwarzbeck
<input type="checkbox"/>	Trilog antenna	Cabin no. 8 VULB 9163	2058	9163-408	Schwarzbeck
<input checked="" type="checkbox"/>	Horn antenna	3115	1516	9508-4553	EMCO
<input type="checkbox"/>	Horn antenna	3160-03	1010	9112-1003	EMCO
<input type="checkbox"/>	Horn antenna	3160-04	1011	9112-1001	EMCO
<input checked="" type="checkbox"/>	Horn antenna	3160-05	1012	9112-1001	EMCO
<input checked="" type="checkbox"/>	Horn antenna	3160-06	1013	9112-1001	EMCO
<input checked="" type="checkbox"/>	Horn antenna	3160-07	1014	9112-1008	EMCO
<input type="checkbox"/>	Horn antenna	3160-08	1015	9112-1002	EMCO
<input type="checkbox"/>	Horn antenna	3160-09	1265	9403-1025	EMCO
<input type="checkbox"/>	Horn antenna	3160-10	1575	399185	EMCO
<input checked="" type="checkbox"/>	Fully anechoic room	No. 2	1452	---	Albatross
<input type="checkbox"/>	Semi anechoic room	No. 3	1453	---	Siemens
<input type="checkbox"/>	Semi anechoic room	No. 8	2057	---	Albatross

6.5 Radiated Emission at Alternative Test Site

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.109,15.209 and 15.240 IC RSS-GEN Issue 3, sections 6.1 and 7.2.5 IC RSS-210 Issue 8, section A5
Guide:	ANSI C63.4
<p>Radiated emission in the frequency range 30 MHz to 1 GHz is measured within a semi-anechoic room with groundplane complying with the NSA requirements of ANSI C63.4 for alternative test sites. A linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna") is used. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p> <p>Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in fully anechoic room.</p> <p>If no prescan in a fully anechoic room is used first a peak scan is performed in four positions to get the whole spectrum of emission caused by EUT with the measuring antenna raised and lowered from 1 to 4 m to find table position, antenna height and antenna polarization for the maximum emission levels.</p> <p>Data reduction is applied to these results to select those levels having less margin than 10 dB to or exceeding the limit using subranges and limited number of maximums. Further maximization is following.</p> <p>With detector of the test receiver set to quasi-peak final measurements are performed immediately after frequency zoom (for drifting disturbances) and maximum adjustment.</p> <p>Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>In cases where prescans in a fully anechoic room are taken (e. g. if EUT is operating for a short time only or battery is discharged quickly) final measurements with quasi-peak detector are performed manually at frequencies indicated by prescan with EUT rotating all around and receiving antenna raising and lowering within 1 meter to 4 meters to find the maximum levels of emission.</p> <p>Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.</p>	

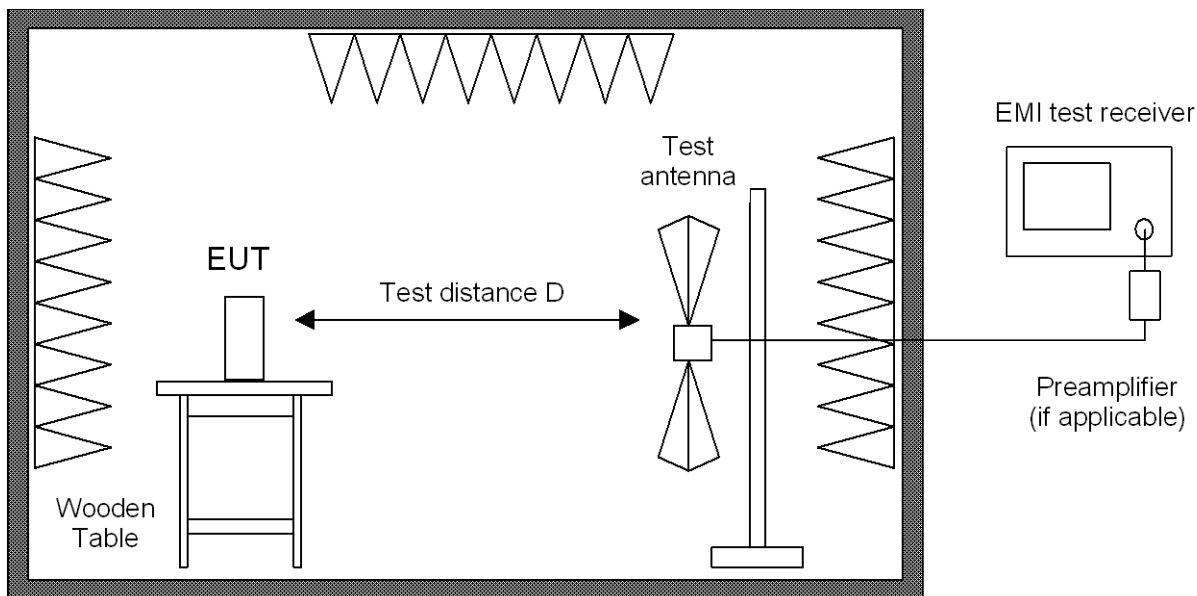

Alternate test site (semi anechoic room)

Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/> EMI test receiver	ESU8	2044	100232	Rohde & Schwarz
<input checked="" type="checkbox"/> Trilog antenna	Cabin no. 8 VULB 9163	2058	9163-408	Schwarzbeck
<input checked="" type="checkbox"/> Semi anechoic room	No. 8	2057	---	Albatross



7 Photographs Taken During Testing

Test setup for radiated emission measurement 9 kHz – 30 MHz





Test setup for radiated emission measurement (fully anechoic room)



Test setup for radiated emission measurement (fully anechoic room) - continued -



Test setup for radiated emission measurement (alternate test site)

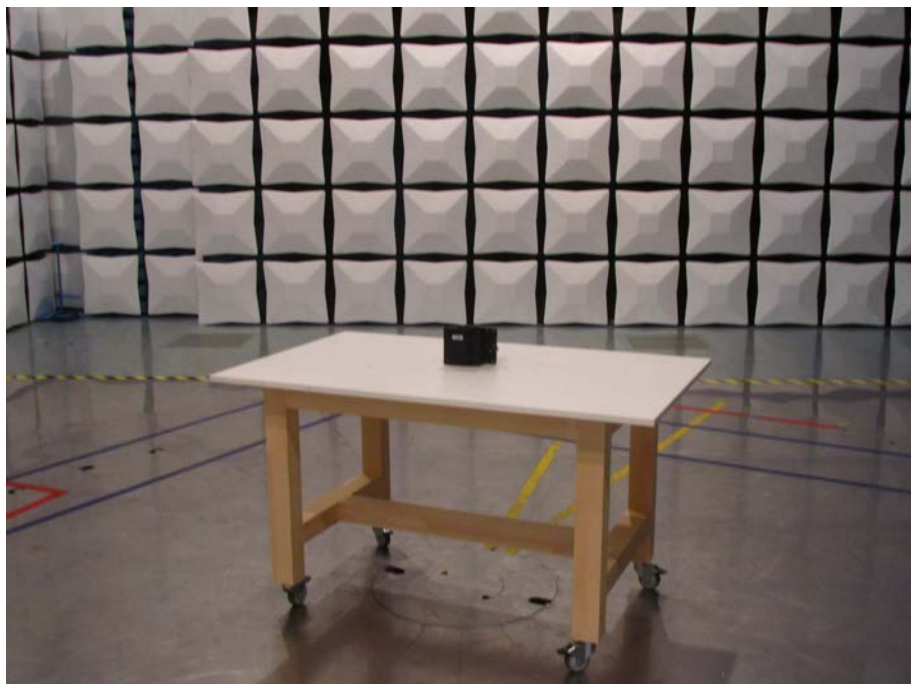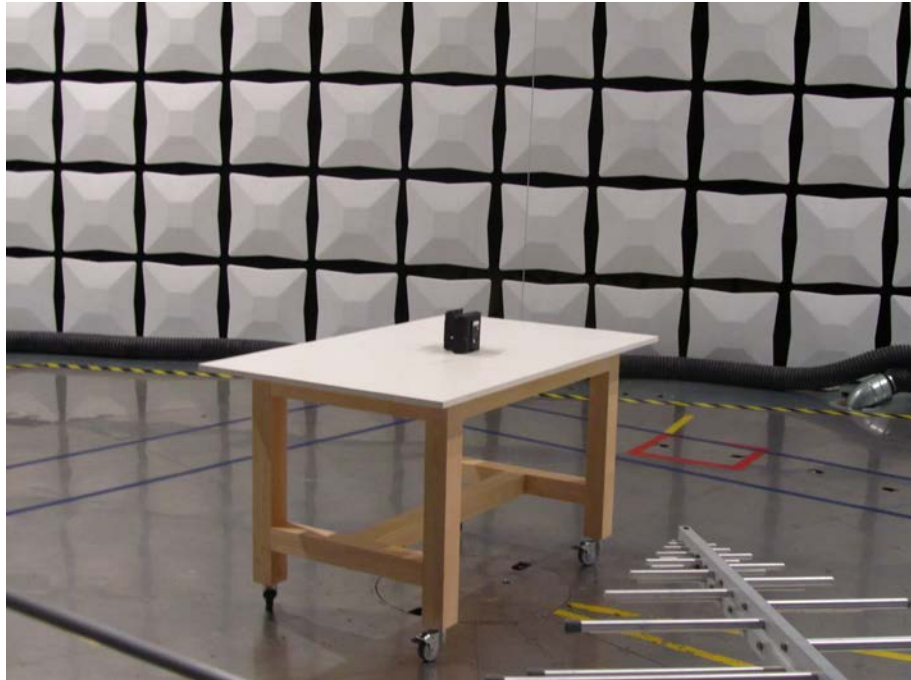

Test setup for radiated emission measurement (alternate test site) - continued -





8 Test Results for Transmitter

FCC CFR 47 Parts 2 and 15			
Section(s)	Test	Page	Result
2.1046(a)	Conducted output power	---	Not applicable
2.202(a)	Occupied bandwidth	24	Recorded
2.201, 2.202	Class of emission	30	Calculated
15.35(c)	Pulse train measurement for pulsed operation	31	Recorded
15.240(b)	Duration of emission	33	Test passed
15.205(a)	Restricted bands of operation	35	Test passed
15.207	Conducted AC powerline emission 150 kHz to 30 MHz	---	Not applicable
15.205(b) 15.209 15.240(c)	Radiated emission 9 kHz to 30 MHz	37	Test passed
15.205(b) 15.209 15.240(b) 15.240(c)	Radiated emission 30 MHz to 1 GHz	38	Test passed



IC RSS-GEN Issue 3			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
4.8	Transmitter output power (conducted)	---	Not applicable
4.6.1	Occupied Bandwidth	24	Recorded
8	Designation of emissions	30	Calculated
4.5	Pulsed operation	31	Recorded
7.2.4	Transmitter AC power lines conducted emissions 150 kHz to 30 MHz	---	Not applicable
7.2.2	Restricted bands and unwanted emission frequencies	35	Test passed
7.2.2(b)(c) 7.2.5	Unwanted emissions 9 kHz to 30 MHz	37	Test passed
7.2.2(b)(c) 7.2.5	Unwanted emissions 30 MHz to 1 GHz	38	Test passed
5.6	Exposure of Humans to RF Fields	40	Exempted from SAR and RF evaluation

IC RSS-210 Issue 8			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
A5(a)	Pulsed operation	31	Test passed
A5(a)	Duration of emission	33	Test passed
A5(b)	Unwanted emissions 9 kHz to 30 MHz	37	Test passed
A5(b)	Unwanted emissions 30 MHz to 1 GHz	38	Test passed




8.1 Occupied Bandwidth

Rules and specifications:	CFR 47 Part 2, section 2.202(a) ANSI C63.4, annex H.6	
Guide :	ANSI C63.4	
Description:	The occupied bandwidth according to CFR 47 Part 2, section 2.202(a), is measured as the 99% emission bandwidth, i.e. below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.	
	The occupied bandwidth according to ANSI C63.4, annex H.6; is measured as the frequency range defined by the points that are 26 dB down relative to the maximum level of the modulated carrier.	
	The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
	30 MHz to 1000 MHz	10 kHz
	1000 MHz to 40 GHz	100 kHz
	The video bandwidth shall be at least three times greater than the resolution bandwidth.	
Measurement procedure:	Bandwidth Measurements (6.1)	

Comment:	
Date of test:	March 15, 2012
Test site:	Fully anechoic room, cabin no. 2

Occupied Bandwidth (99 %) :

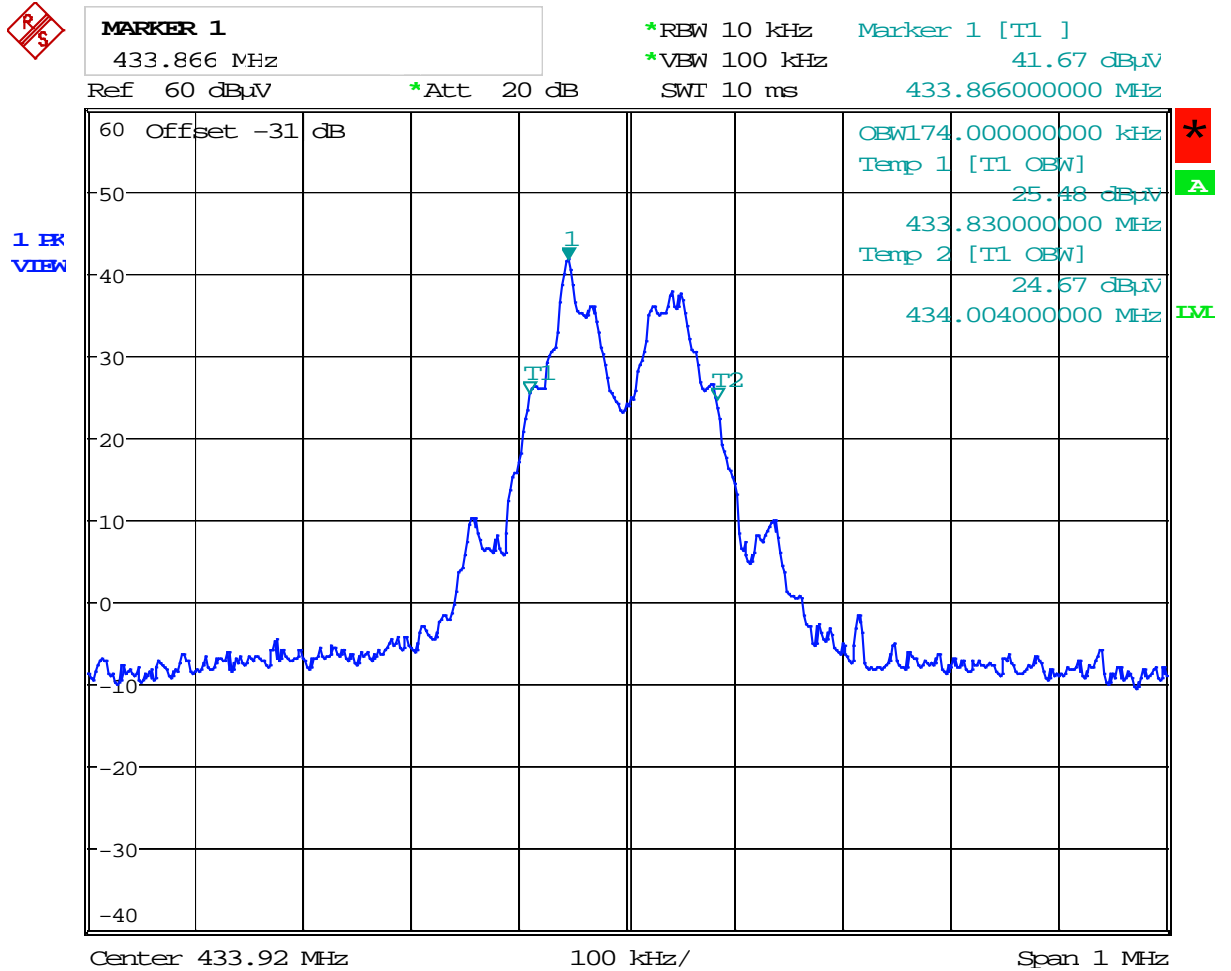

Date: 15.MAR.2012 13:21:58

Occupied Bandwidth (99 %): **174 kHz**




Occupied Bandwidth (continued)

Rules and specifications:	IC RSS-Gen Issue 3, section 4.6.1
Guide:	IC RSS-Gen Issue 3, section 4.6.1
Description:	<p>If not specified in the applicable RSS the occupied bandwidth is measured as the 99% emission bandwidth.</p> <p>The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth.</p> <p>The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is also recorded. The span between the two recorded frequencies is the occupied bandwidth.</p>
Measurement procedure:	Bandwidth Measurements (6.1)

Comment:	
Date of test:	March 15, 2012
Test site:	Fully anechoic room, cabin no. 2

Occupied Bandwidth (99 %) :

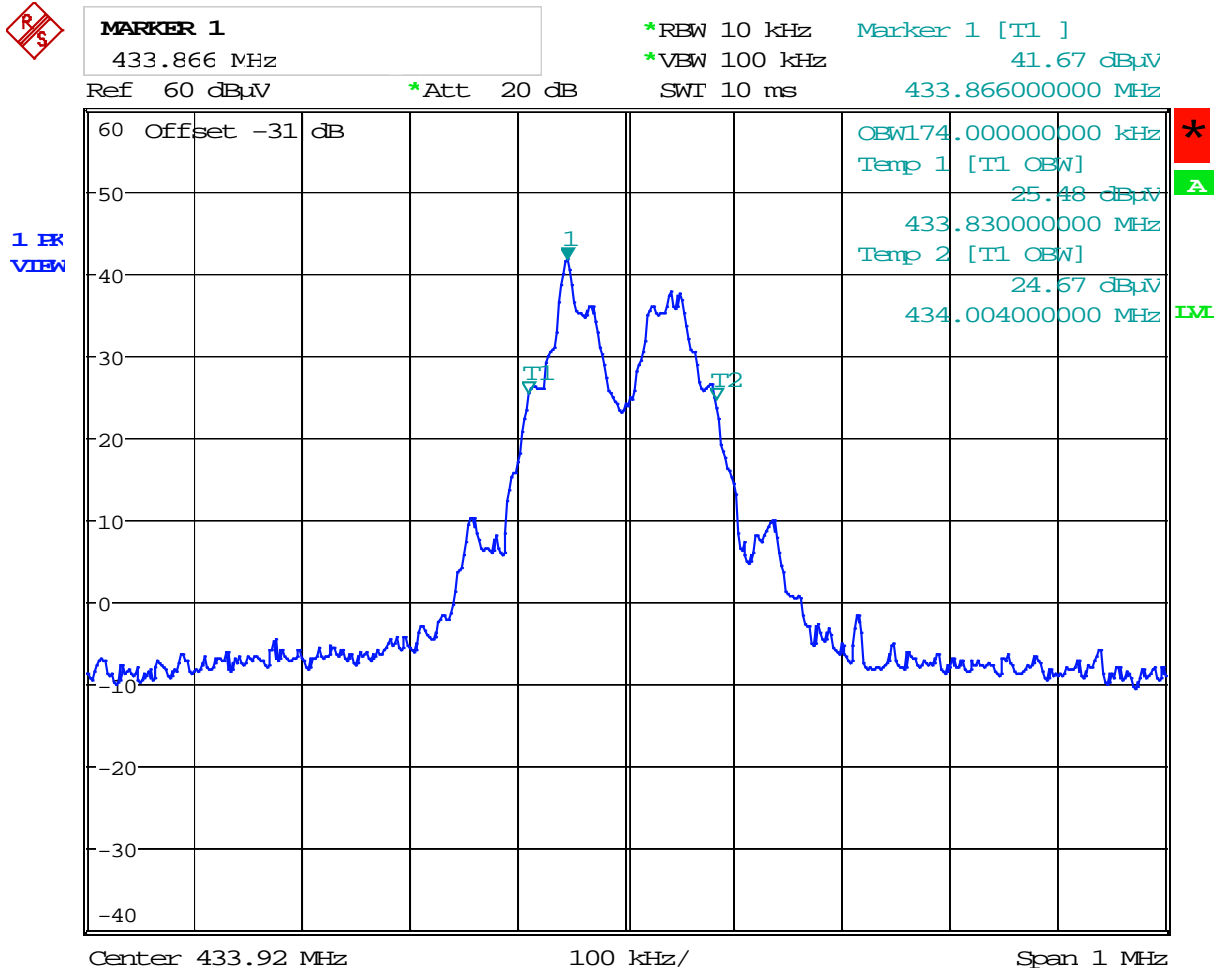

Date: 15.MAR.2012 13:21:58

Occupied Bandwidth (99 %): **174 kHz**


8.2 Bandwidth of the Emission

Rules and specifications:	CFR 47 Part 15, section 15.209 IC RSS-GEN Issue 3, section 7.2.5	
Guide :	ANSI C63.4	
Description:	<p>The 20 dB bandwidth of the emission is measured as the frequency range defined by the points that are 20 dB down relative to the maximum level of the modulated carrier.</p> <p>For intentional radiators operating under the alternative provisions to the general emission limits the requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.</p> <p>The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:</p>	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
	30 MHz to 1000 MHz	10 kHz
	1000 MHz to 40 GHz	100 kHz
The video bandwidth shall be at least three times greater than the resolution bandwidth.		
Measurement procedure:	Bandwidth Measurements (6.1)	

Comment:	
Date of test:	March 15, 2012
Test site:	Fully anechoic room, cabin no. 2



MARKER 3
 434.01 MHz
 Ref 60 dBµV *Att 20 dB *RBW 10 kHz Marker 3 [T1] 18.85 dBµV
 *VBW 100 kHz 434.010000000 MHz
 SWI 10 ms

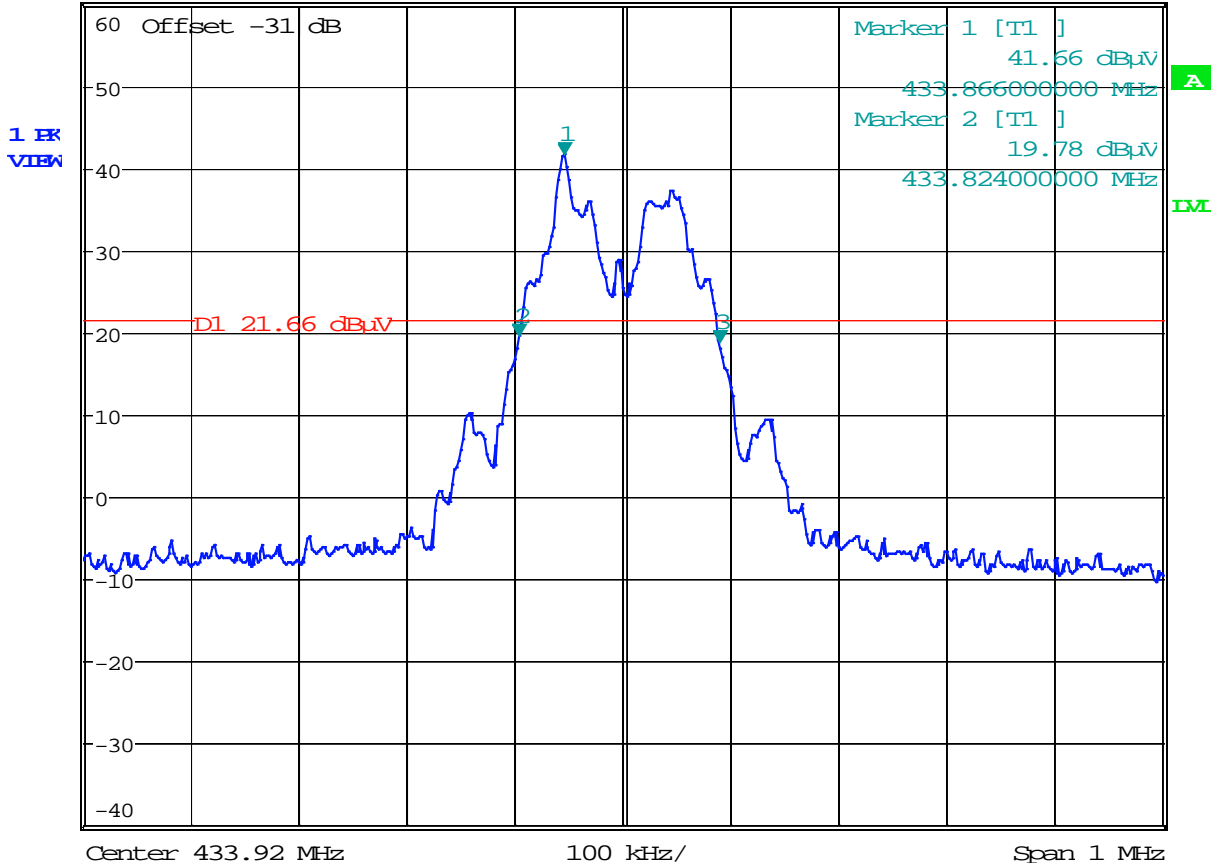

Date: 15.MAR.2012 13:19:36

Bandwidth of the emission:	186 kHz
----------------------------	----------------

8.3 Designation of Emissions

Rules and specifications:	CFR 47 Part 2, sections 2.201 and 2.202 IC RSS-Gen Issue 3, sections 8
Guide:	ANSI C63.4 / TRC-43

Type of modulation:	Frequency Shift Keying (FSK)
---------------------	------------------------------

B_n = Necessary Bandwidth	$B_n = 2DK + B$
D = Peak deviation	D = 80 kHz
K = Overall numerical factor	K = 1
B = Modulation rate	B = 6 kHz
Calculation:	$B_n = 2 \cdot (80 \text{ kHz}) \cdot 1 + 2 \cdot (6 \text{ kHz}) = 172 \text{ kHz}$


Designation of Emissions:	172KF1D
---------------------------	----------------

8.4 Pulse Train Measurement

Rules and specifications:	CFR 47 Part 15, section 15.35(c) IC RSS-Gen Issue 3, section 4.5
Guide :	ANSI C63.4
Measurement procedure:	Pulse Train Measurement (6.2)

Comment:	
Date of test:	March 15, 2012
Test site:	Fully anechoic room, cabin no. 2

Worst case 0.1 second interval:

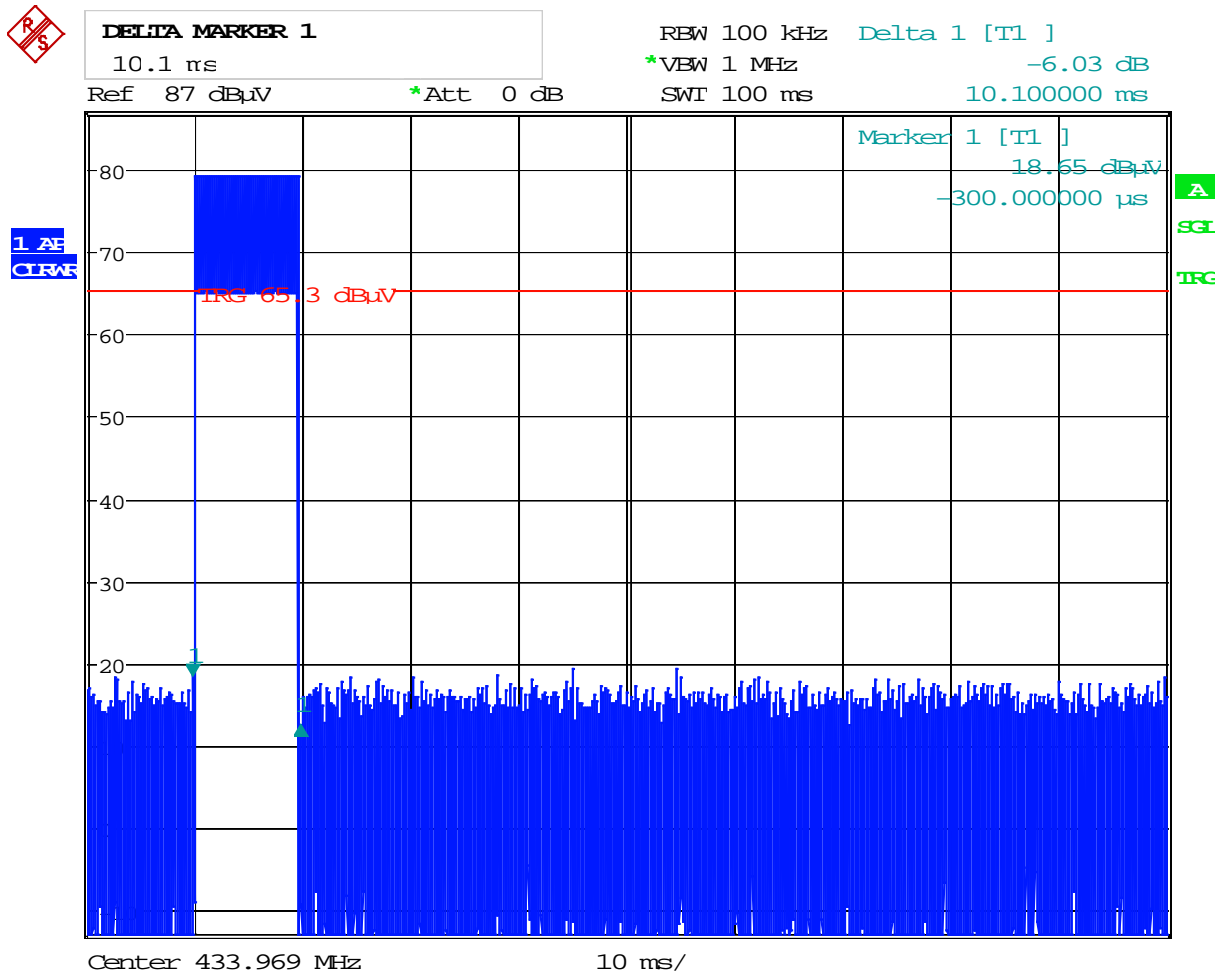

Date: 15.MAR.2012 14:19:07

Calculation of pulse train correction:

TX-On-Time (worst case):	T_{on}	=	10.1 ms
Pulse Train Time :	T_{pt}	=	100 ms
Period Time:	T_{period}	=	100 ms
Pulse Train Correction :	C_{pt}	=	$20 \cdot \text{Log}(T_{on} / T_{period})$ dB
		=	19.91 dB



8.5 Duration of emission


Rules and specifications:	CFR 47 Part 15, section 15.240(b) IC RSS-210 Issue 8, section A5(a)
Guide :	ANSI C63.4
Limit :	Devices authorized under these provisions shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than 60 seconds and be only permitted to reinitiate an interrogator in the case of a transmission error. Absent such a transmission error, the silent period between transmissions shall not be less than 10 seconds.
Measurement procedure:	Pulse Train Measurement (6.2)

Comment:	Transmissions of reader (low level emissions) were not evaluated.
Date of test:	March 15, 2012; March 23, 2012
Test site:	Fully anechoic room, cabin no. 2


Duration of emission:

TX-On-Time:	$T_{on} = 10.1 \text{ ms}$
-------------	----------------------------

Plots:

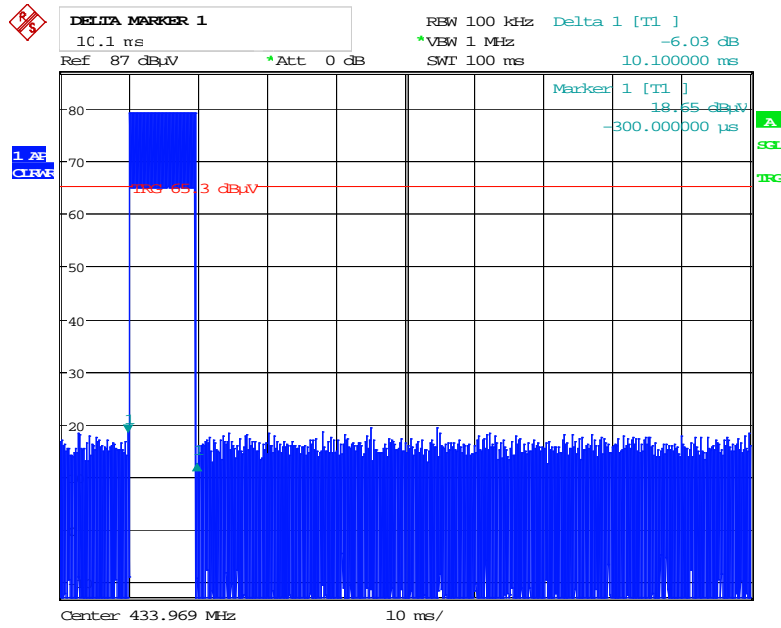

Date: 15.MAR.2012 14:19:07

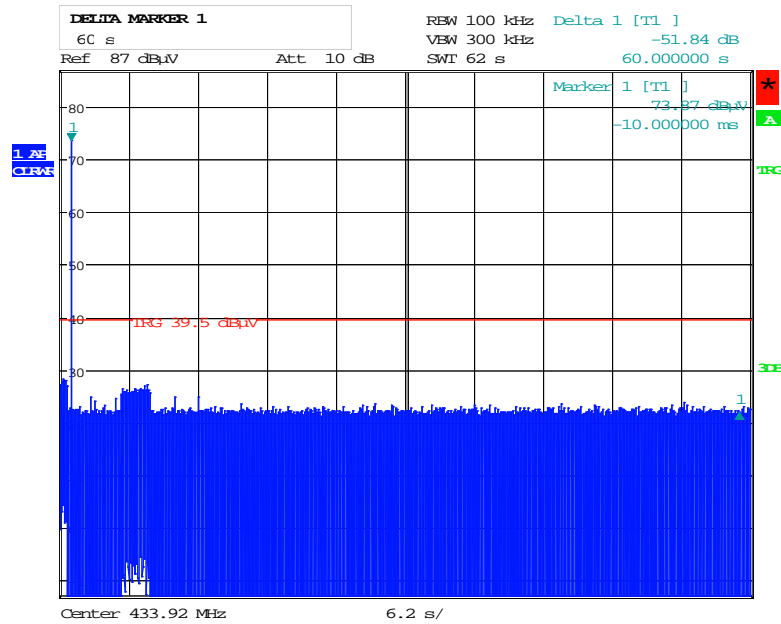

Date: 23.MAR.2012 10:51:55

8.6 Restricted Bands of Operation


Rules and specifications:	CFR 47 Part 15, section 15.205(a) IC RSS-210 Issue 8, section 7.2.2(a)
Guide:	ANSI C63.4
Limit:	Only spurious emissions are permitted in any of the frequency bands listed in CFR 47 Part 15, section 15.205(a) or IC RSS-210 Issue 7, section 2.2(a).
Measurement procedure:	Radiated Emission in Fully or Semi Anechoic Room (6.4)

Comment:	
Date of test:	March 15, 2012
Test site:	Fully anechoic room, cabin no. 2
Test distance:	3 meters



MARKER 3
 410 MHz
 Ref 60 dBµV *Att 20 dB *RBW 100 kHz Marker 3 [T1]
 *VBW 100 kHz 2.33 dBµV
 SWI 10 ms 410.00000000 MHz

1 K
 VIEW

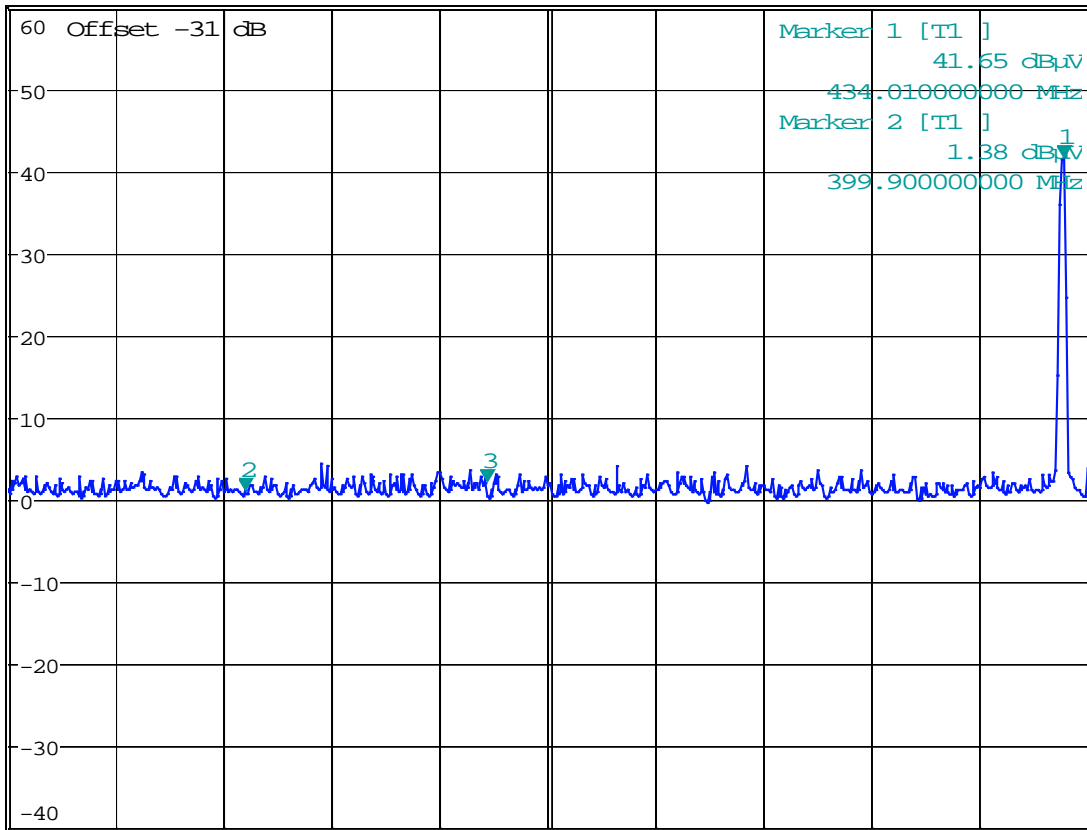

Start 390 MHz 4.5 MHz/ Stop 435 MHz

Date: 15.MAR.2012 13:24:08

Test Result:

Test passed

8.7 Radiated Emission Measurement 9 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, sections 15.205,15.209 and 15.240(b) IC RSS-GEN Issue 3, sections 7.2.2 and 7.2.5 IC RSS-210 Issue 8, section A5(b)			
Guide:	ANSI C63.4			
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement Distance d (meters)
	0.009 - 0.490	2400/F(kHz)	67.6 - 20 · log(F(kHz))	300
	0.490 - 1.705	24000/F(kHz)	87.6 - 20 · log(F(kHz))	30
	1.705 - 30.000	30	29.5	30
	Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.			
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.3)			

Comment:	
Date of test:	March 15, 2012
Test site:	Open field test site

Test Result:	Test passed
--------------	-------------

No emissions above noise level detected

Sample calculation of final values:

$$\begin{aligned} \text{Extrapolation Factor (dB)} &= (\text{Log}(d) - \text{Log}(d_1)) \cdot \text{Extrapolation Factor (dB/decade)} \\ \text{Final Value (dB}\mu\text{V}/\text{m)} &= \text{Reading Value } d_1 \text{ (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} \\ &\quad + \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)} \end{aligned}$$

Note: Extrapolation factor (dB) and final value (dB $\mu\text{V}/\text{m}$) are relating to distance d.



8.8 Radiated Emission Measurement 30 MHz to 1 GHz

Rules and specifications:	CFR 47 Part 15, sections 15.209, 15.240(a), 15.240(b) IC RSS-GEN Issue 3, section 7.2.5 IC RSS-210 Issue 8, section A5(b)		
Guide:	ANSI C63.4		
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	Above 960	500	54.0
	Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.		
Measurement procedures:	Radiated Emission in Fully or Semi Anechoic Room (6.4) Radiated Emission at Alternative Test Site (6.5)		

Comment:	
Date of test:	March 15, 2012, March 22, 2012
Test site:	Frequencies \leq 1 GHz: Semi-anechoic room, cabin no. 8 Frequencies $>$ 1 GHz: Fully anechoic room, cabin no. 2
Test distance:	Frequencies \leq 8.2 GHz: 3 meters Frequencies $>$ 8.2 GHz: 1 meter

Test Result:	Test passed
--------------	-------------



Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBµV)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
208.010	horizontal	Quasi-Peak	9.2	12.2		21.4	43.5	22.1
433.960	horizontal	Peak	76.4	18.0	0.0	94.4	95.0	0.6
433.960	horizontal	Peak	76.4	18.0	-19.9	74.5	91.0	16.5
867.740	horizontal	Quasi-Peak	9.6	24.6		34.2	46.0	11.8
1296.000	vertical	Peak	21.2	28.9	-19.9	30.2	54.0	23.8
1300.000	horizontal	Peak	15.1	28.9	-19.9	24.1	54.0	29.9
2168.000	vertical	Peak	14.2	32.7	-19.9	27.1	54.0	27.0
2170.000	horizontal	Peak	14.2	32.8	-19.9	27.0	54.0	27.0
2600.000	vertical	Peak	10.6	34.1	-19.9	24.8	54.0	29.2
2602.000	horizontal	Peak	12.1	34.1	-19.9	26.3	54.0	27.7
3040.000	vertical	Peak	11.5	36.1	-19.9	27.6	54.0	26.4
3904.000	vertical	Peak	7.6	39.0	-19.9	26.7	54.0	27.3
3910.000	horizontal	Peak	7.4	39.1	-19.9	26.5	54.0	27.5
4338.500	vertical	Peak	11.5	33.8	-19.9	25.5	54.0	28.5
4773.200	vertical	Peak	18.1	34.2	-19.9	32.4	54.0	21.6

Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} + \text{Pulse Train Correction (dB)}$$

8.9 Exposure of Humans to RF Fields

Rules and specifications:	IC RSS-Gen Issue 3, section 5.6
Guide:	IC RSS-102 Issue 4, section 2.5

Exposure of Humans to RF Fields	Applicable	Declared by applicant	Measured	Exemption
The antenna is				
<input type="checkbox"/> detachable				
<p>The conducted output power (CP in watts) is measured at the antenna connector:</p> $CP = \dots\dots\dots \text{ W}$ <p>The effective isotropic radiated power (EIRP in watts) is calculated using</p> <p><input type="checkbox"/> the numerical antenna gain: $G = \dots\dots\dots$</p> $EIRP = G \cdot CP \Rightarrow EIRP = \dots\dots\dots \text{ W}$ <p><input type="checkbox"/> the field strength⁵ in V/m: $FS = \dots\dots\dots \text{ V/m}$</p> $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \dots\dots\dots \text{ W}$ <p>with:</p> <p>Distance between the antennas in m: $D = \dots\dots\dots \text{ m}$</p>			<input type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/> not detachable				
<p>A field strength measurement is used to determine the effective isotropic radiated power (EIRP in watts) given by⁵:</p> $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = 826.3 \mu\text{W}$ <p>with:</p> <p>Field strength in V/m: $FS = 52.5 \text{ mV/m}$</p> <p>Distance between the two antennas in m: $D = 3 \text{ m}$</p>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Selection of output power				
<p>The output power TP is the higher of the conducted or effective isotropic radiated power (e.i.r.p.):</p> $TP = 826.3 \mu\text{W}$				

⁵ The conversion formula is valid only for properly matched antennas. In other cases the transmitter output power may have to be measured by a terminated measurement when applying the exemption clauses. If an open area test site is used for field strength measurement, the effect due to the metal ground reflecting plane should be subtracted from the maximum field strength value in order to reference it to free space, before calculating TP.



9 Test Results for Receiver

FCC CFR 47 Part 15			
Section(s)	Test	Page	Result
15.107	Conducted AC powerline emission 150 kHz to 30 MHz	---	Not applicable
15.109	Radiated emission 30 MHz to 1 GHz	43	Test passed
15.111(a)	Antenna power conduction emission of receivers 9 kHz to 1 GHz	---	Not applicable

IC RSS-Gen Issue 3			
Section(s)	Test	Page	Result
7.2.4	Conducted AC powerline emission 150 kHz to 30 MHz	---	Not applicable
6.1	Receiver spurious emissions (radiated) 30 MHz to 1 GHz	43	Test passed
6.2	Receiver spurious emissions (antenna conducted) 9 kHz to 1 GHz	---	Not applicable

9.1 Radiated Emission Measurement 30 MHz to 1 GHz

Rules and specifications:	CFR 47 Part 15, section 15.109 (Class B) IC RSS-Gen Issue 3, sections 6.1		
Guide:	ANSI C63.4		
Limit:	Frequency of Emission (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	Above 960	500	54.0
Measurement procedures:	Radiated Emission in Fully or Semi Anechoic Room (6.4) Radiated Emission at Alternative Test Site (6.5)		

Comment:	
Date of test:	March 7, 2012, March 21, 2012
Test site:	Frequencies ≤ 1 GHz: Semi-anechoic room, cabin no. 8 Frequencies > 1 GHz: Fully anechoic room, cabin no. 2
Test distance:	3 meters

Test Result:	Test passed
--------------	-------------

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBµV)	Correction Factor (dB/m)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
63.800	horizontal	Quasi-Peak	-4.5	13.0	8.5	40.0	31.5
205.770	horizontal	Quasi-Peak	-0.6	12.1	11.5	43.5	32.0
2404.000	vertical	Peak	6.6	36.0	42.6	54.0	11.4
2419.000	horizontal	Peak	6.6	36.1	42.7	54.0	11.3

Sample calculation of field final values:

$$\text{Final Value (dBµV/m)} = \text{Reading Value (dBµV)} + \text{Correction Factor (dB/m)}$$

10 Referenced Regulations

All tests were performed with reference to the following [regulations and standards](#):

<input checked="" type="checkbox"/>	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)	October 1, 2011
<input checked="" type="checkbox"/>	CFR 47 Part 15	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)	October 1, 2011
<input checked="" type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	December 11, 2003 (published on January 30, 2004)
<input type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	June 7, 2009 (published on September 15, 2009)
<input checked="" type="checkbox"/>	RSS-Gen	Radio Standards Specification RSS-Gen Issue 3 containing General Requirements and Information for the Certification of Radiocommunication Equipment, published by Industry Canada	December 2010
<input checked="" type="checkbox"/>	RSS-210	Radio Standards Specification RSS-210 Issue 8 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, published by Industry Canada	December 2010
<input type="checkbox"/>	RSS-310	Radio Standards Specification RSS-310 Issue 3 for Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment, published by Industry Canada	December 2010
<input checked="" type="checkbox"/>	RSS-102	Radio Standards Specification RSS-102 Issue 4: Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), published by Industry Canada	March 2010, footnote 13 updated December 2010
<input type="checkbox"/>	ICES-003	Interference-Causing Equipment Standard ICES-003 Issue 4 for Digital Apparatus, published by Industry Canada	February 7, 2004
<input checked="" type="checkbox"/>	CISPR 22	Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement"	1997



<input type="checkbox"/>	CAN/CSA- CEI/IEC CISPR 22	Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment	2002
		CAN/CSA CISPR 22-10 Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement (Adopted IEC CISPR 22:2008, sixth edition, 2008-09)	
<input type="checkbox"/>	CAN/CSA CISPR 22-10	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement (Adopted IEC CISPR 22:2008, sixth edition, 2008-09)	2010
<input checked="" type="checkbox"/>	TRC-43	Notes Regarding Designation of Emissions (Including Necessary Bandwidth and Classification), Class of Station and Nature of Service, published by Industry Canada	October, 2008



11 Test Equipment List with Calibration Data

Type	Inv.-No.	Type Designation	Serial Number	Manufacturer	Calibration Organization	Last Calibration	Next Calibration
EMI test receiver	2044	ESU8	100232	Rohde & Schwarz	Rohde & Schwarz	12/2010	06/2012
Spectrum analyser	1666	FSP30	100063	Rohde & Schwarz	Rohde & Schwarz	05/2011	11/2012
Preamplifier	1484	ACO/180-3530	32641	CTT	TÜV SÜD SENTON	06/2011	12/2012
Preamplifier	1651	CPA9231A	3393	Schaffner Electrotest	TÜV SÜD SENTON	05/2010	05/2012
Preamplifier	1684	AFS3-00100800-32-LN	847743	MITEQ	TÜV SÜD SENTON	10/2011	04/2013
Loop antenna	1016	HFH2-Z2	882964/0001	Rohde & Schwarz	Rohde & Schwarz	05/2011	11/2012
Double ridged waveguide horn antenna	1516	3115	9508-4553	EMCO Elektronik	Seibersdorf Laboratories	10/2010	10/2012
TRILOG Broadband Antenna	2058	VULB 9163	9163-408	Schwarzbeck	Rohde & Schwarz	05/2011	11/2012
Horn antenna	1012	3160-05	9112-1001	EMCO	---	No calibration required	
Horn antenna	1013	3160-06	9112-1001	EMCO	---	No calibration required	
Horn antenna	1014	3160-07	9112-1008	EMCO	---	No calibration required	



12 Revision History

Revision History			
<i>Edition</i>	<i>Date</i>	<i>Issued by</i>	<i>Modifications</i>
1	26.03.2012	Martin Steindl (az)	First Edition




Annex A Charts taken during testing

**Radiated Emission Test 9 kHz - 30 MHz
 acc. to FCC Part 15 Subpart C (FAR)**

Model: i-Q310 CST	Comment: - Internal battery supply - Transmitting continuously - Transmit Power: 0 dBm
Serial no.: 18717467713013	
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 03/15/2012 Operator: M. Steindl	
Test performed: by hand	File name: default.emi

Detector: Peak	List of values: 10 dB Margin 50 Subranges
-------------------	---

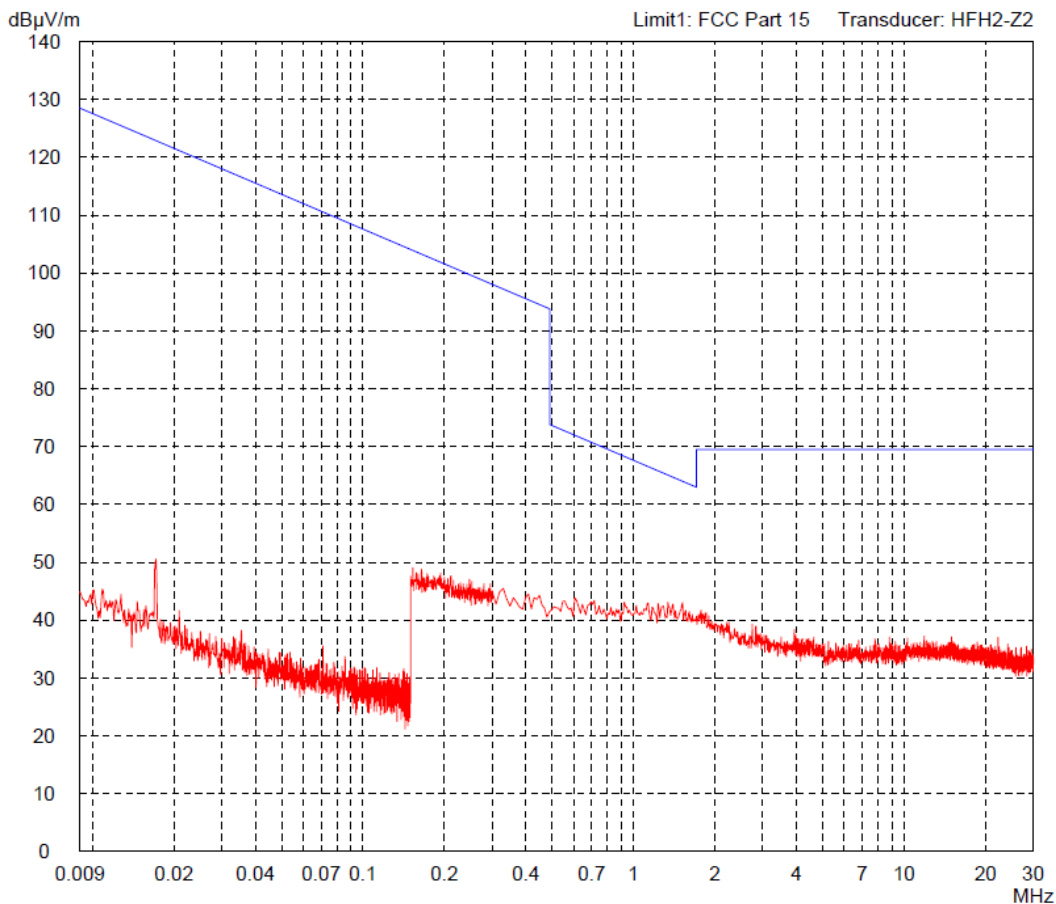


Result: Prescan	Project file: 69861-04467	Page of Pages
--------------------	------------------------------	---------------------

**Radiated Emission Test 30 MHz - 500 MHz
 acc. to FCC Part 15 Subpart C (FAR)**

Model: i-Q310 CST	Comment: - Internal battery supply - Transmitting continuously - Transmit Power: 0 dBm
Serial no.: 18717467713013	
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 03/15/2012	
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

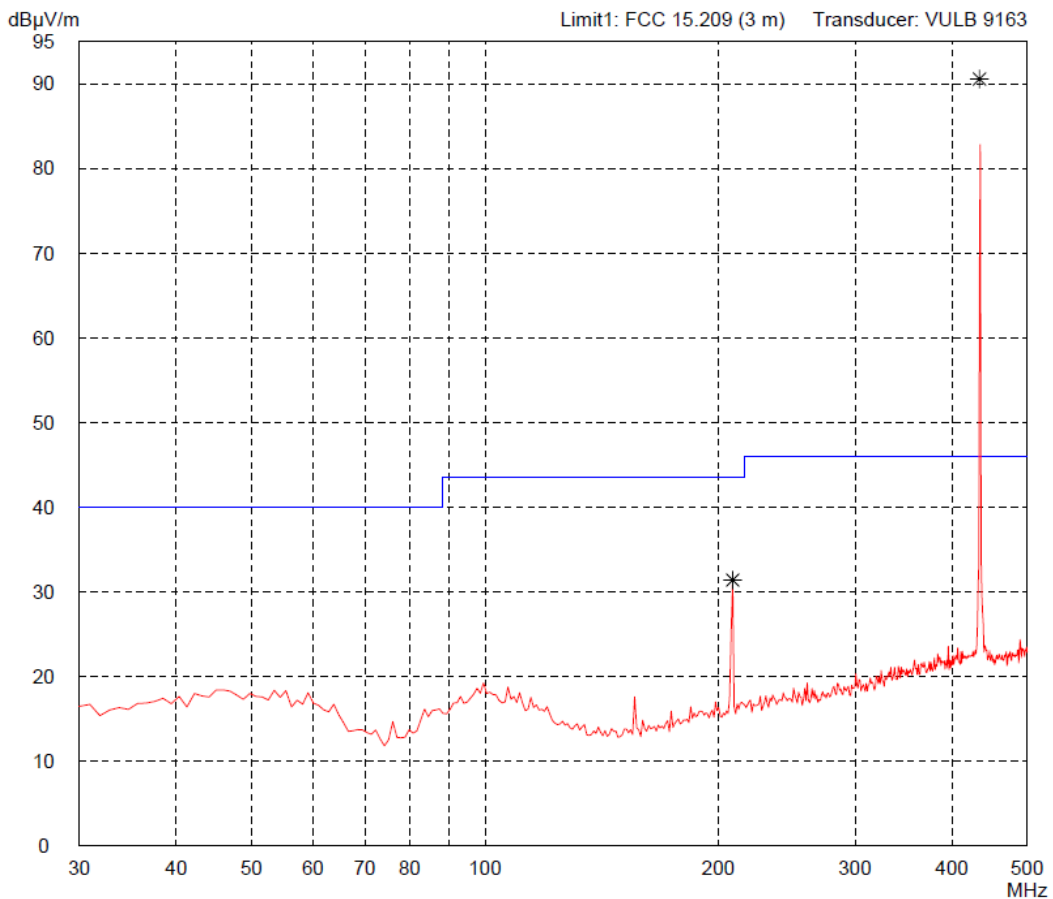


Result: Prescan	Project file: 69861-04467	Page of Pages
--------------------	------------------------------	---------------

**Radiated Emission Test 30 MHz - 500 MHz
 acc. to FCC Part 15 Subpart C (FAR)**

Model: i-Q310 CST	Comment: - Internal battery supply - Transmitting continuously - Transmit Power: 0 dBm
Serial no.: 18717467713013	
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 03/15/2012	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

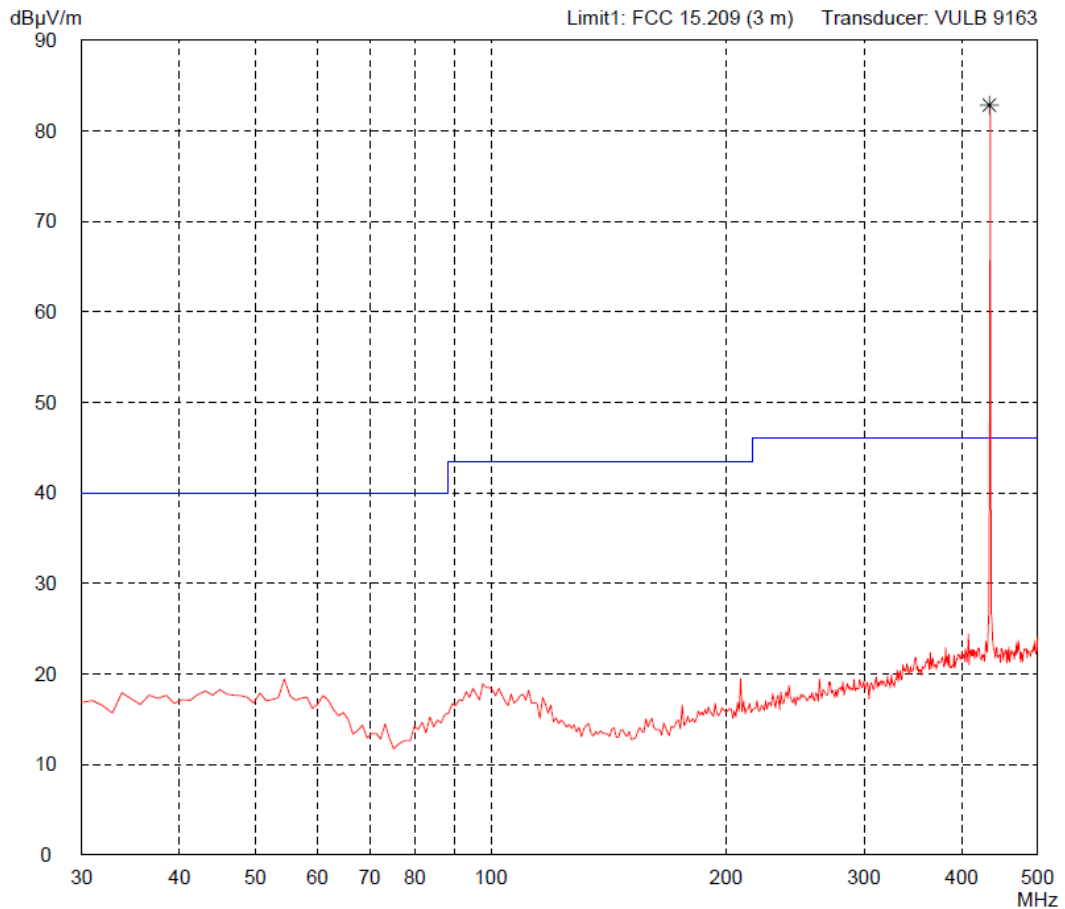


Result: Prescan	Project file: 69861-04467	Page of Pages
--------------------	------------------------------	--

**Radiated Emission Test 500 MHz - 1 GHz
 acc. to FCC Part 15 Subpart C (FAR)**

Model: i-Q310 CST	Comment: - Internal battery supply - Transmitting continuously - Transmit Power: 0 dBm	
Serial no.: 18717467713013		
Applicant: Identec Solutions AG		
Test site: Fully anechoic room, cabin no. 2		
Tested on: Test distance 3 metres Horizontal Polarization		
Date of test: 03/15/2012		Operator: M. Steindl
Test performed: automatically	File name: default.emi	

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

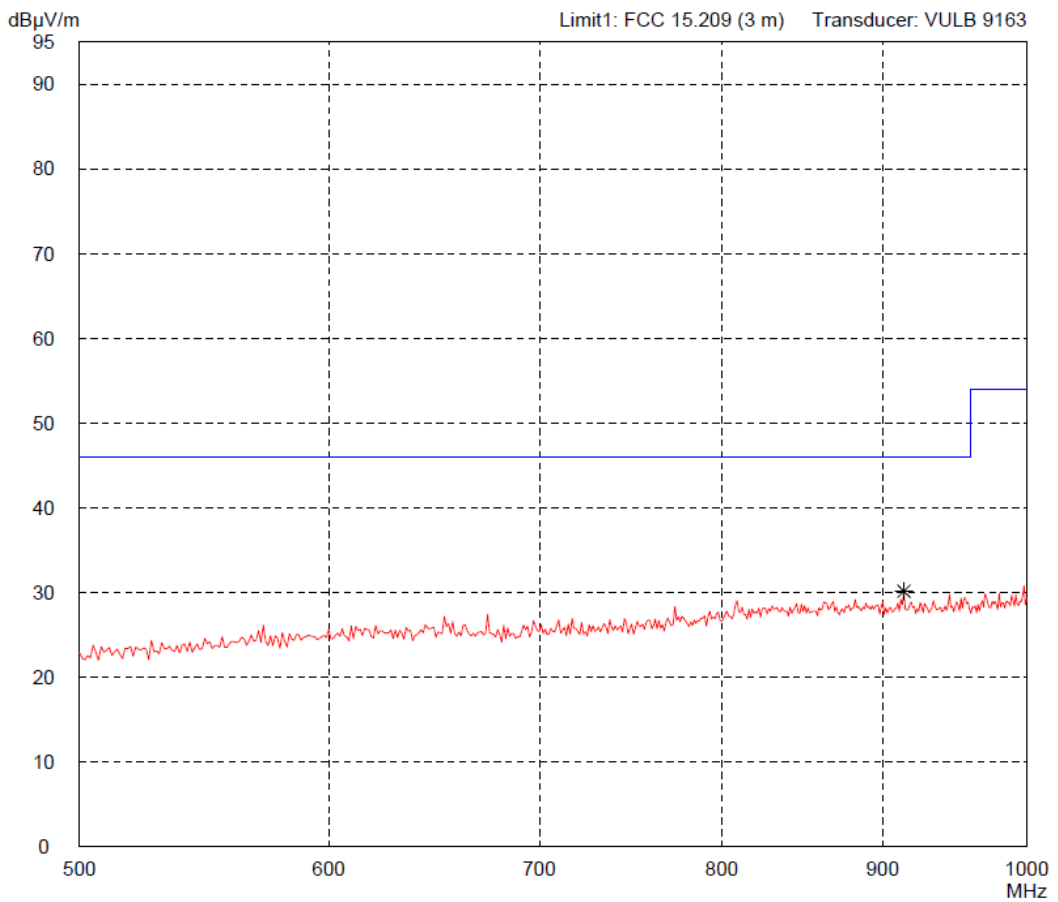


Result: Prescan	Project file: 69861-04467	Page of Pages
--------------------	------------------------------	---------------


**Radiated Emission Test 500 MHz - 1 GHz
 acc. to FCC Part 15 Subpart C (FAR)**

Model: i-Q310 CST	Comment: - Internal battery supply - Transmitting continuously - Transmit Power: 0 dBm
Serial no.: 18717467713013	
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 03/15/2012	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

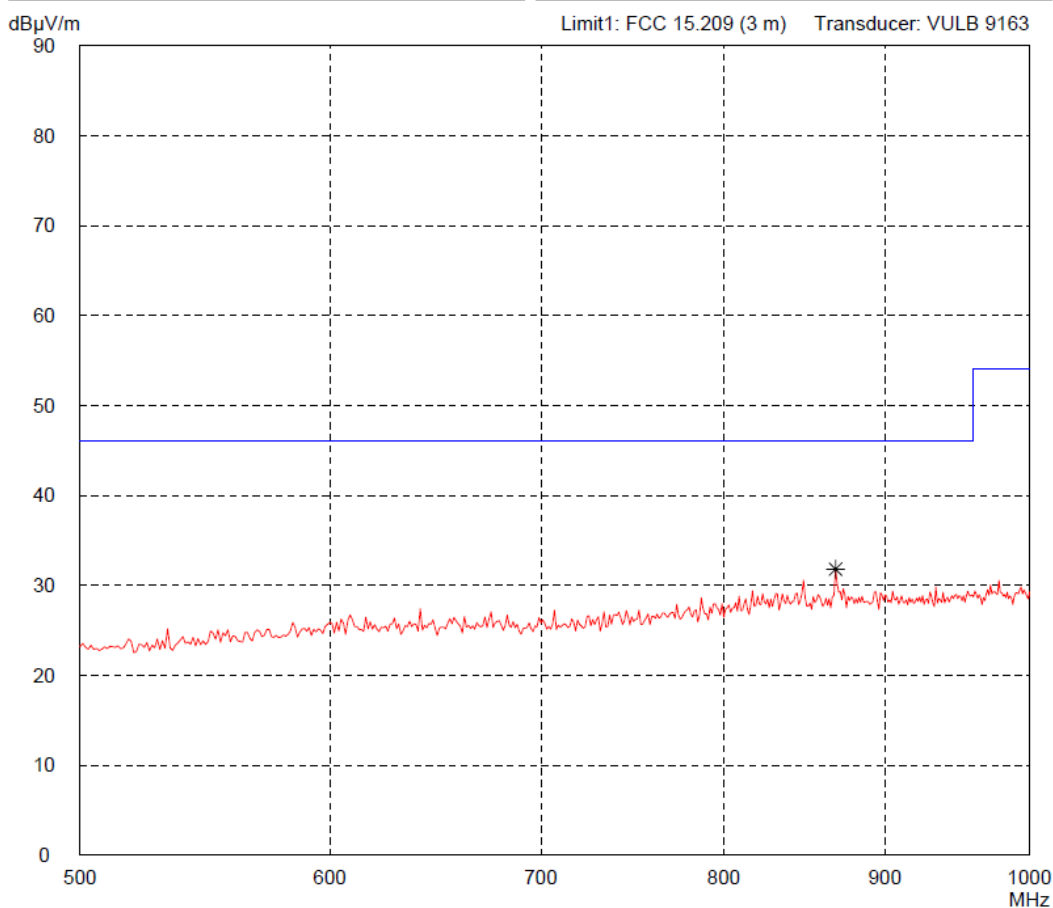

Result: Prescan	Project file: 69861-04467	Page of Pages
--------------------	------------------------------	---------------

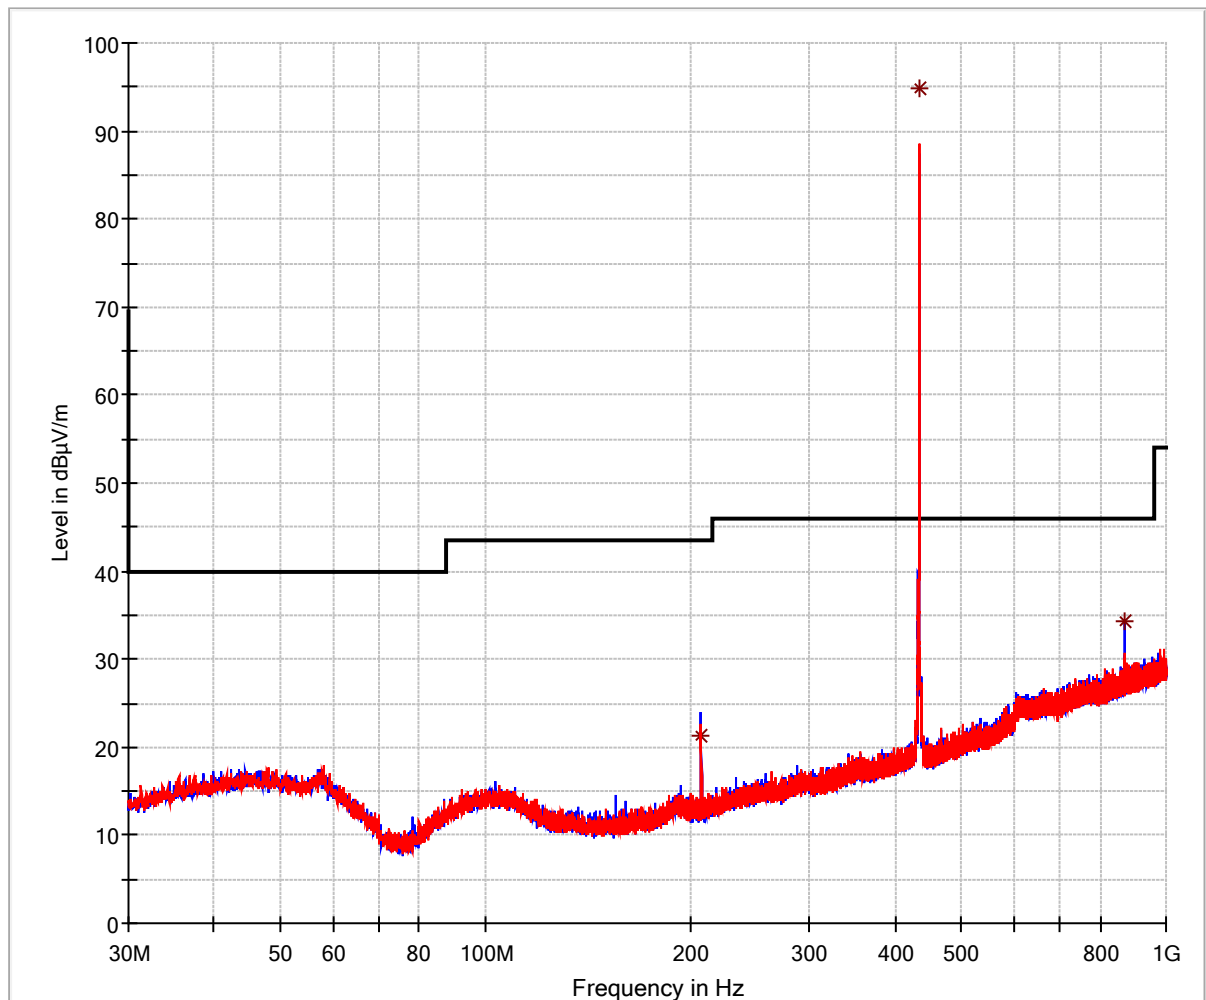

— FCC 15.209
* Final Result 1-QPK


— Preview Result 1V-PK+
— Preview Result 1H-PK+

Final measurement for transmitting mode

**Radiated Emission Test 1 GHz - 4 GHz
 acc. to FCC Part 15 Subpart C (FAR)**

Model: i-Q310 CST	Comment: - Internal battery supply - Transmitting continuously - Transmit Power: 0 dBm
Serial no.: 18717467713013	
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 03/15/2012	Operator: M. Steindl
Test performed: automatically	File name: default.emi


Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

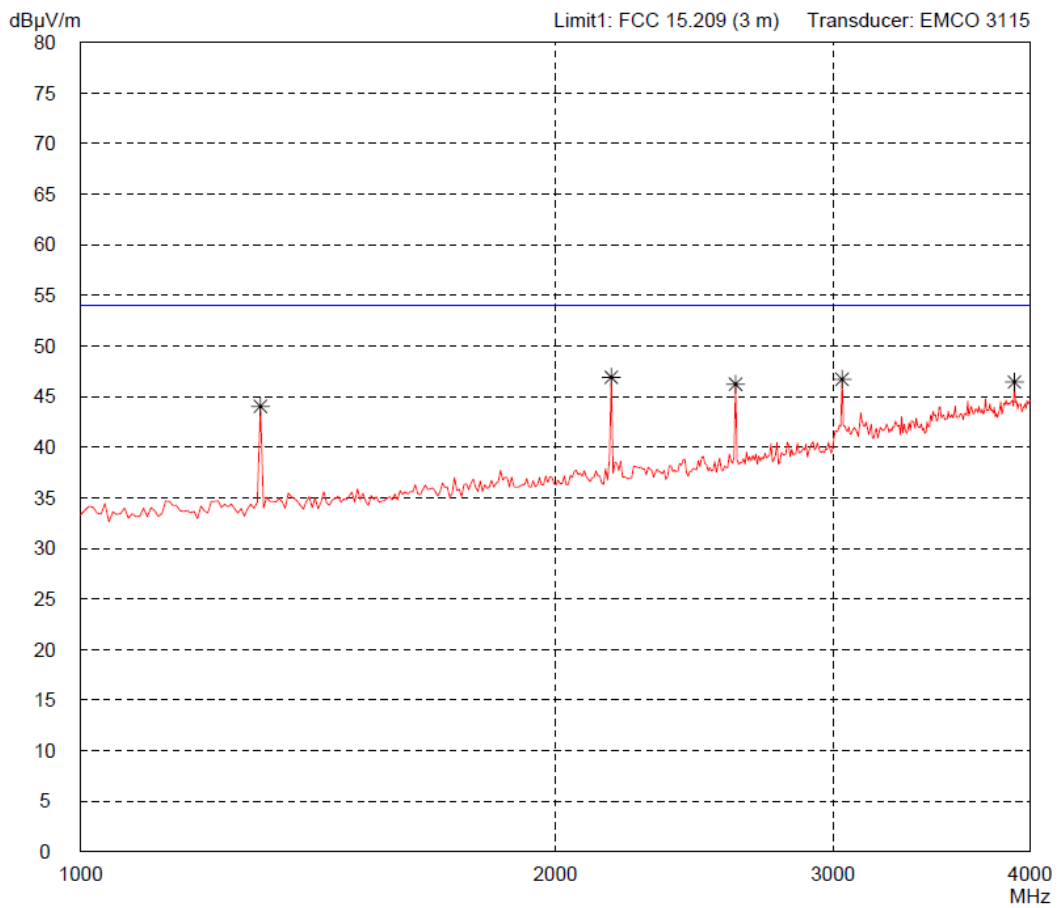

Result: Limit kept	Project file: 69861-04467	Page of Pages
-----------------------	------------------------------	---------------

**Radiated Emission Test 1 GHz - 4 GHz
 acc. to FCC Part 15 Subpart C (FAR)**

Model: i-Q310 CST	Comment: - Internal battery supply - Transmitting continuously - Transmit Power: 0 dBm
Serial no.: 18717467713013	
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 03/15/2012	Operator: M. Steindl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

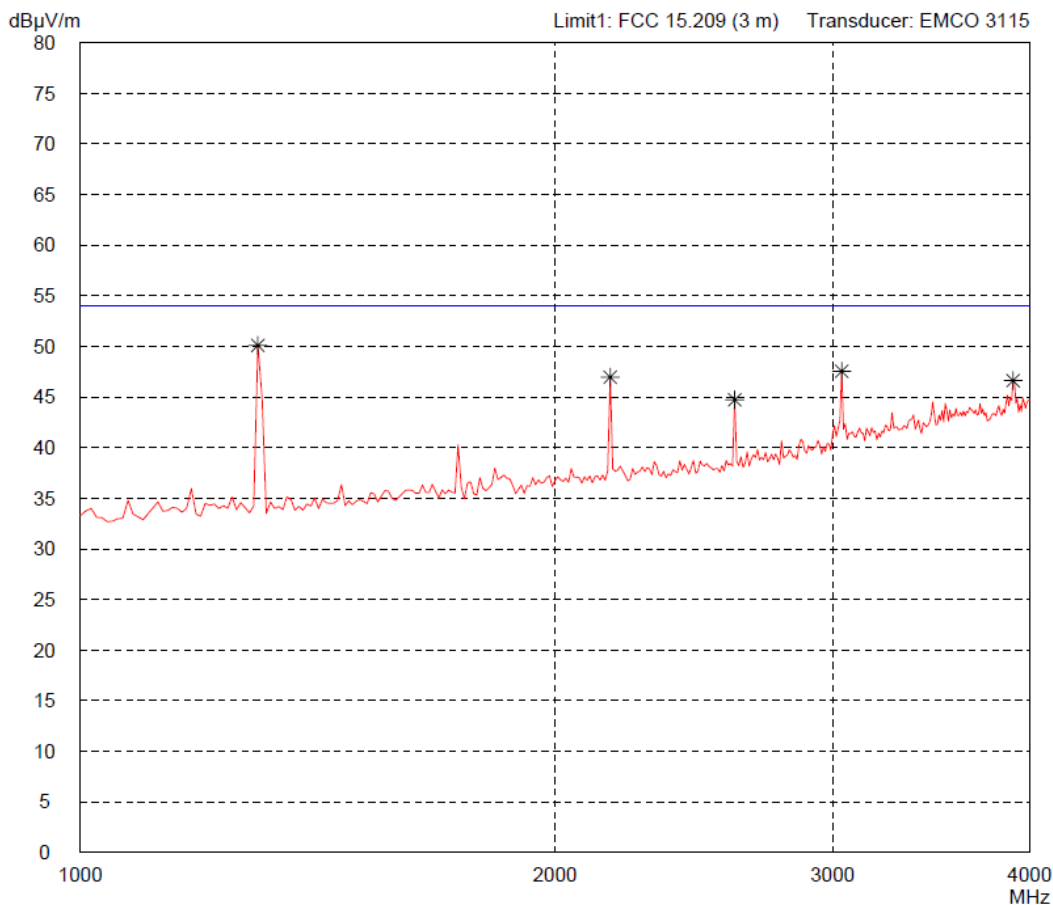


Result: Prescan	Project file: 69861-04467	Page of Pages
--------------------	------------------------------	---------------



**Radiated Emission Test 3.95 GHz - 5 GHz
 acc. to FCC Part 15 Subpart C (FAR)**

Model: i-Q310 CST	Comment: - Internal battery supply - Transmitting continuously - Transmit Power: 0 dBm
Serial no.: 18717467713013	
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 03/15/2012	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

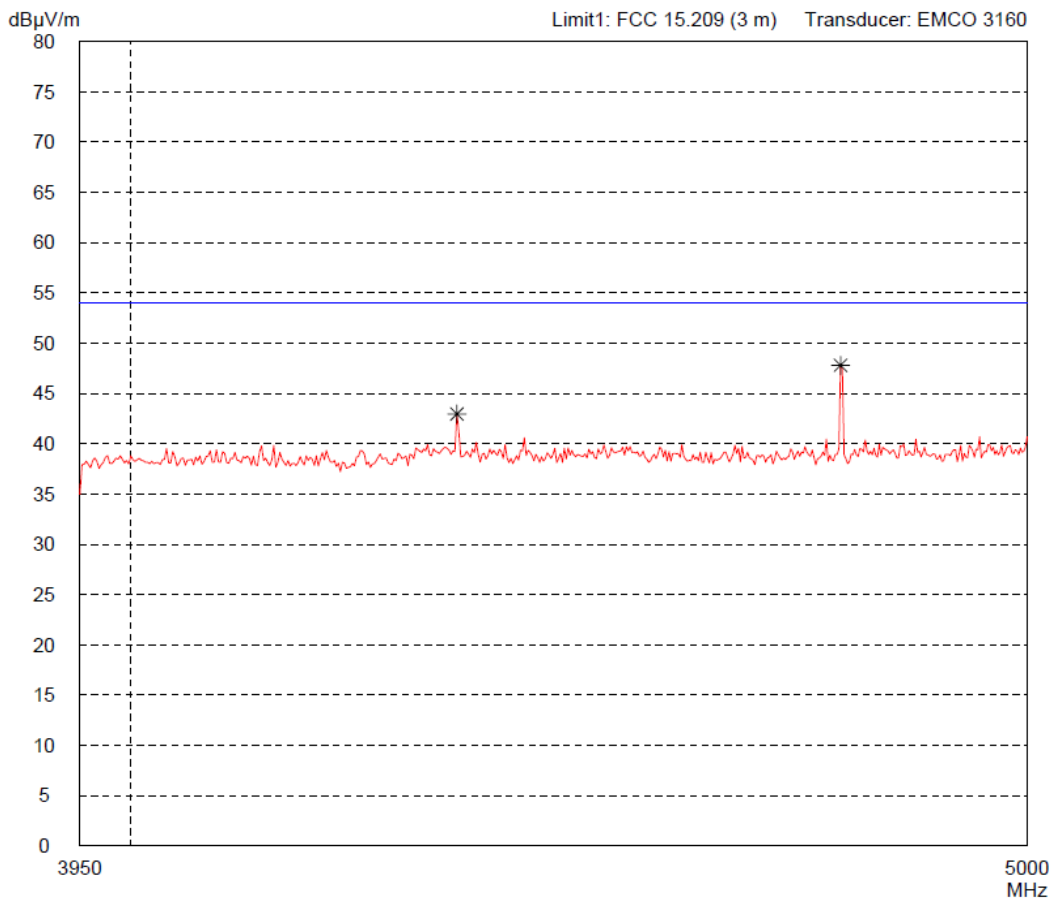


Result: Prescan	Project file: 69861-04467	Page of Pages
--------------------	------------------------------	---------------

**Radiated Emission Test 3.95 GHz - 5 GHz
 acc. to FCC Part 15 Subpart C (FAR)**

Model: i-Q310 CST	Comment: - Internal battery supply - Transmitting continuously - Transmit Power: 0 dBm
Serial no.: 18717467713013	
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 03/15/2012	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: 10 dB Margin	50 Subranges
-------------------	---------------------------------	--------------

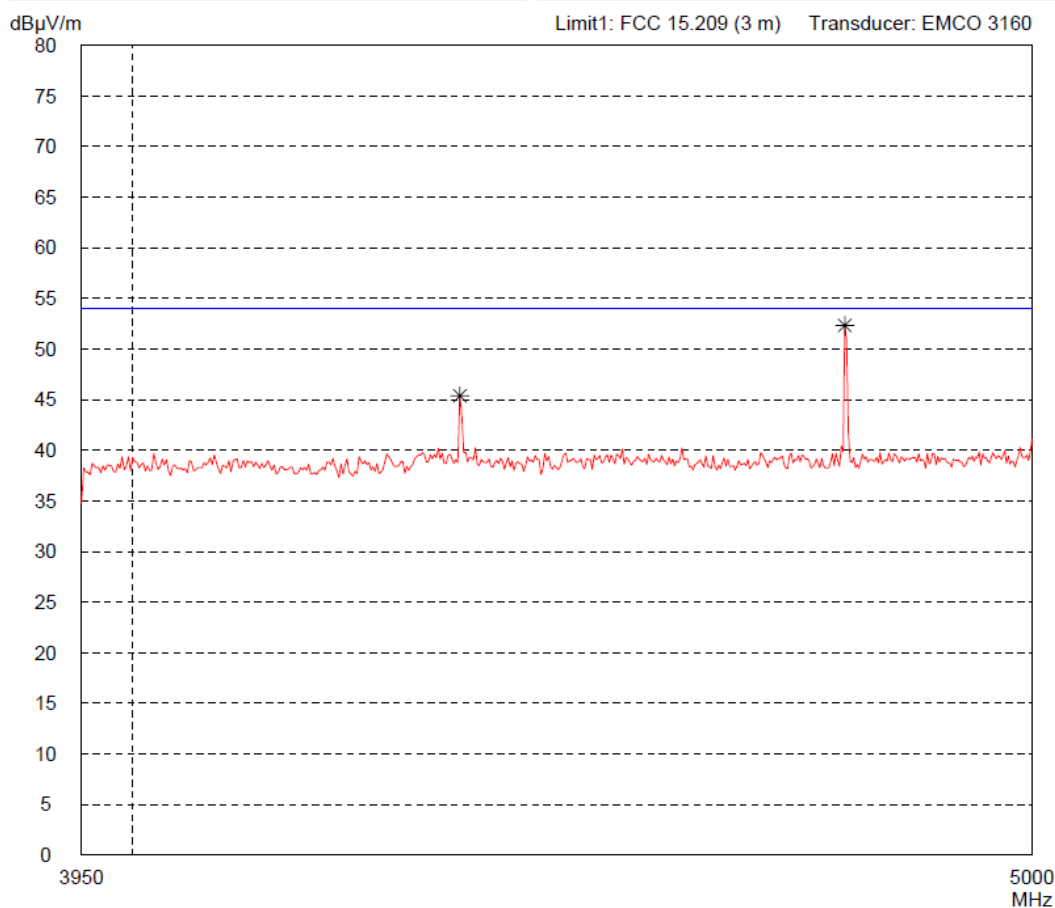


Result: Prescan	Project file: 69861-04467	Page of Pages
--------------------	------------------------------	---------------

**Radiated Emission Test 30 MHz - 1 GHz
 acc. to FCC Part 15 Subpart B (FAR)**

Model: i-Q310 CST	Comment: - Internal battery supply - Receiving mode
Serial no.: 18717467713013	
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 03/07/2012 Operator: M. Steindl	
Test performed: automatically File name: default.emi	

Detector: Peak	List of values: 10 dB Margin 50 Subranges
-------------------	---

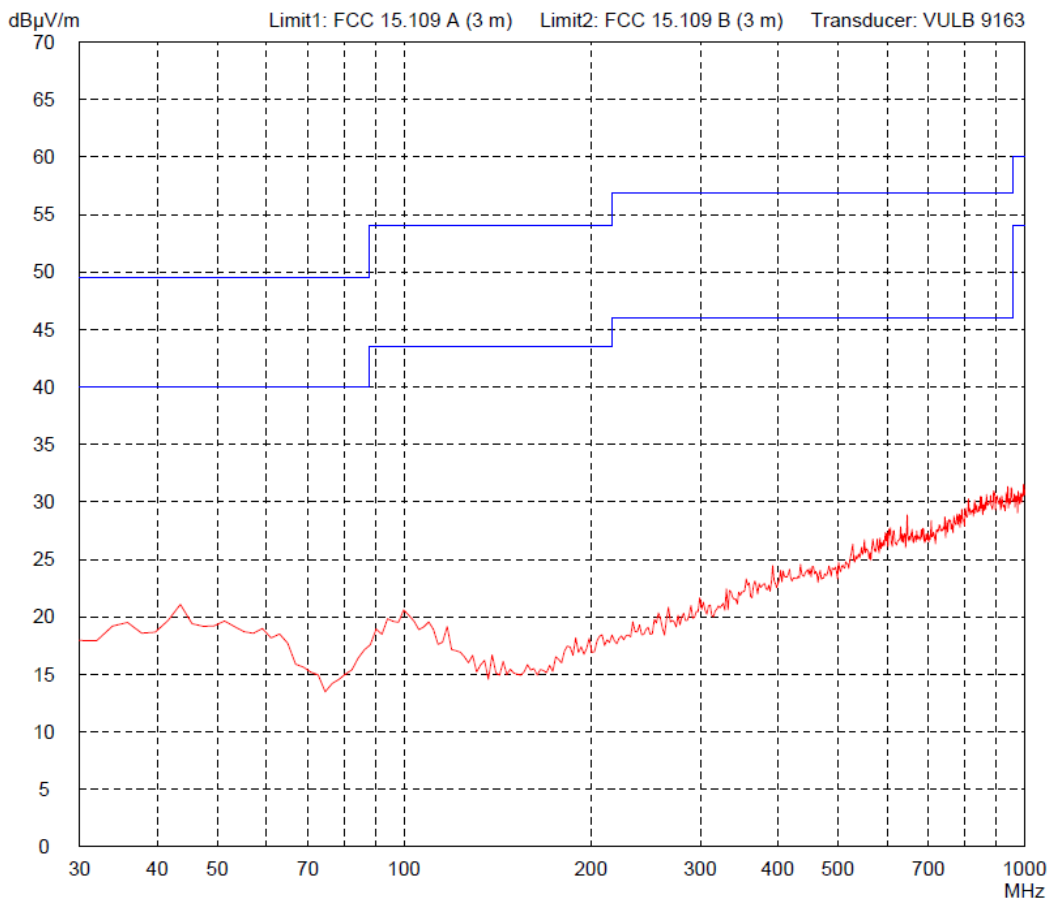


Result: Prescan	Project file: 69861-04467	Page of Pages
--------------------	------------------------------	---------------------


**Radiated Emission Test 30 MHz - 1 GHz
 acc. to FCC Part 15 Subpart B (FAR)**

<p>Model: i-Q310 CST</p> <p>Serial no.: 18717467713013</p> <p>Applicant: Identec Solutions AG</p> <p>Test site: Fully anechoic room, cabin no. 2</p> <p>Tested on: Test distance 3 metres Vertical Polarization</p> <p>Date of test: 03/07/2012 Operator: M. Steindl</p> <p>Test performed: automatically File name: default.emi</p>	<p>Comment: - Internal battery supply - Receiving mode</p>
---	--

Detector: Peak	List of values: 10 dB Margin 50 Subranges
--------------------------	--

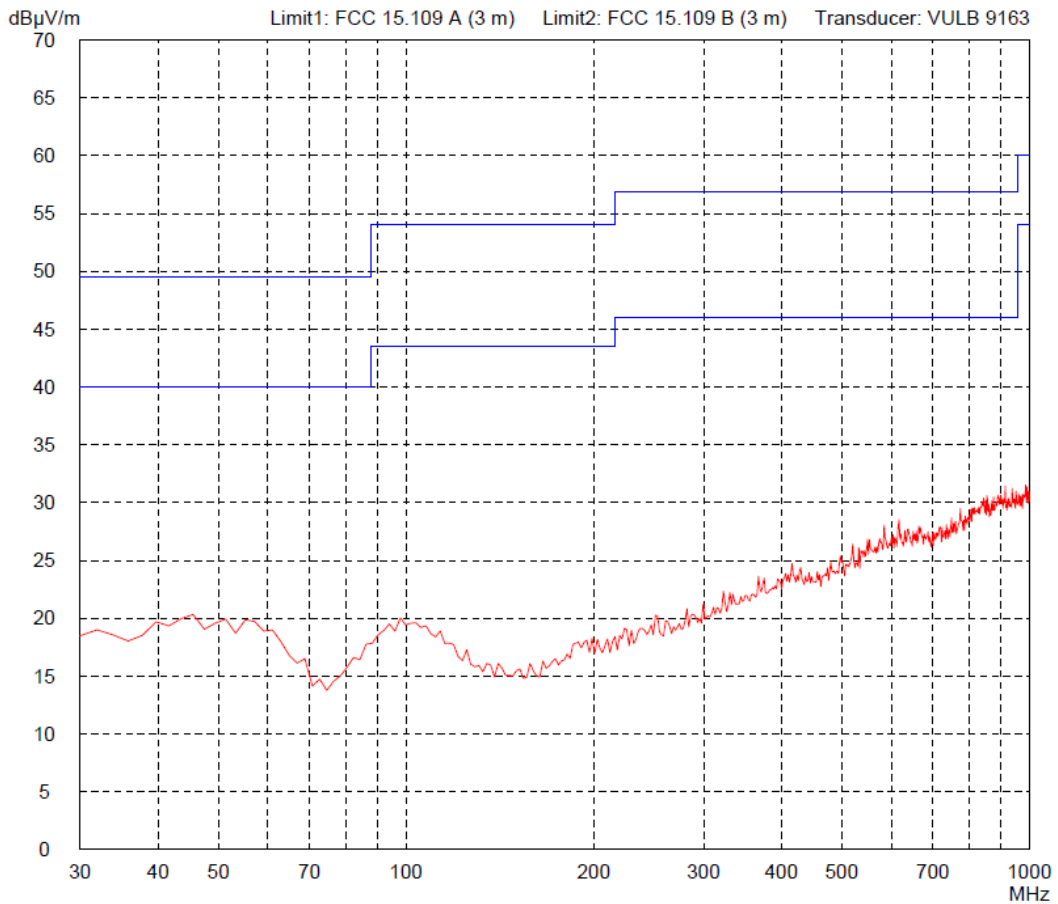

Result: Prescan	Project file: 69861-04467
Page of Pages	

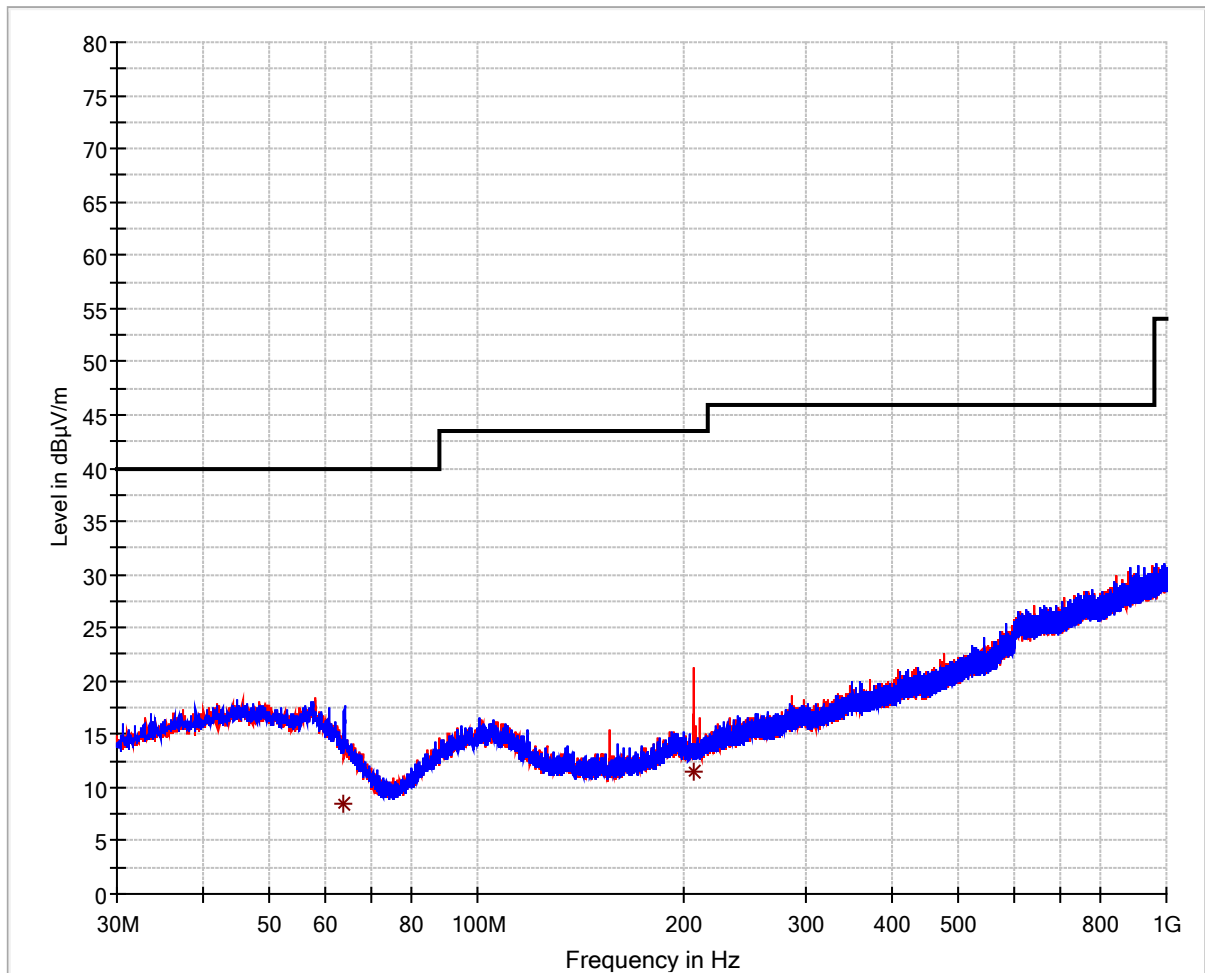

— FCC 15.109 Class B.LimitLine
— Preview Result 1H-PK+
— Preview Result 1V-PK+
* Final Result 1-QPK


Final measurement for receiving mode



**Radiated Emission Test 1 GHz - 2,5 GHz
 acc. to FCC Part 15 Subpart B (FAR)**

Model: i-Q310 CST	Comment: - Internal battery supply - Receiving mode
Serial no.: 18717467713013	
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 03/07/2012 Operator: M. Steindl	
Test performed: automatically File name: default.emi	

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

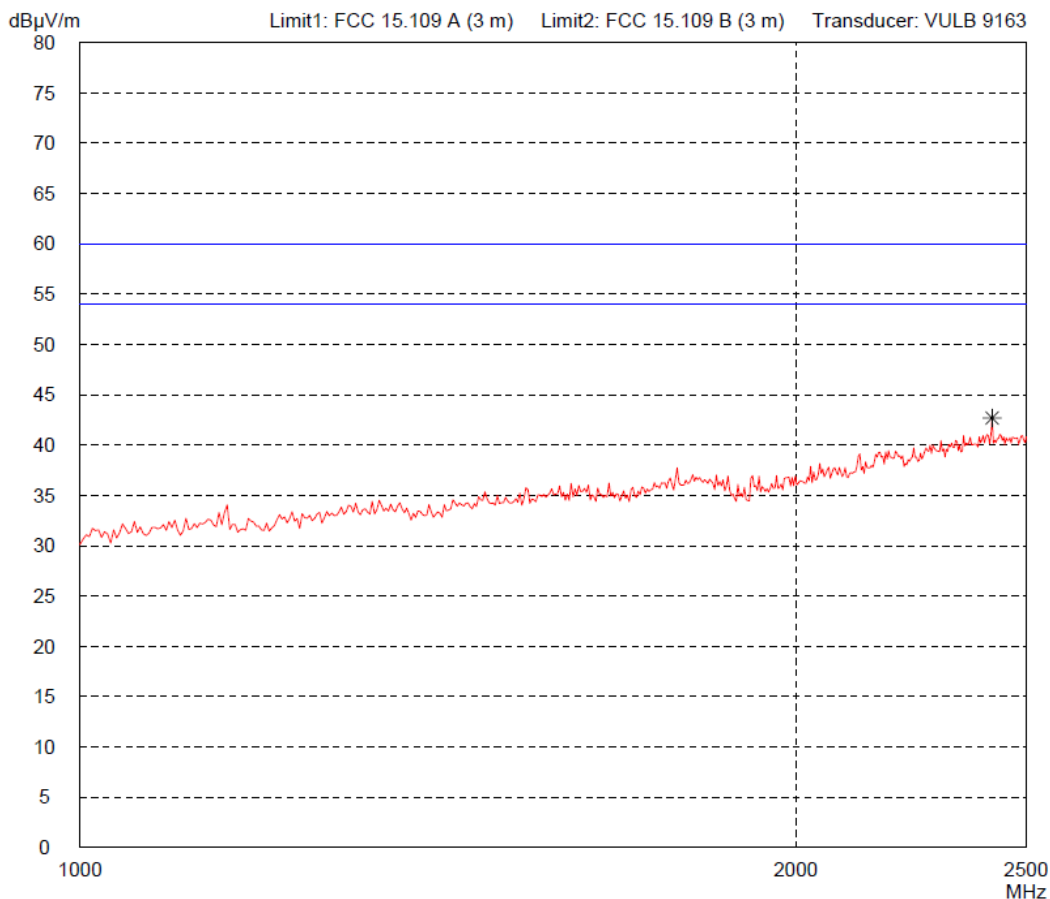


Result: Limit kept	Project file: 69861-04467	Page of Pages
-----------------------	------------------------------	---------------------



**Radiated Emission Test 1 GHz - 2,5 GHz
 acc. to FCC Part 15 Subpart B (FAR)**

Model: i-Q310 CST	Comment: - Internal battery supply - Receiving mode
Serial no.: 18717467713013	
Applicant: Identec Solutions AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 03/07/2012 Operator: M. Steindl	
Test performed: automatically File name: default.emi	

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

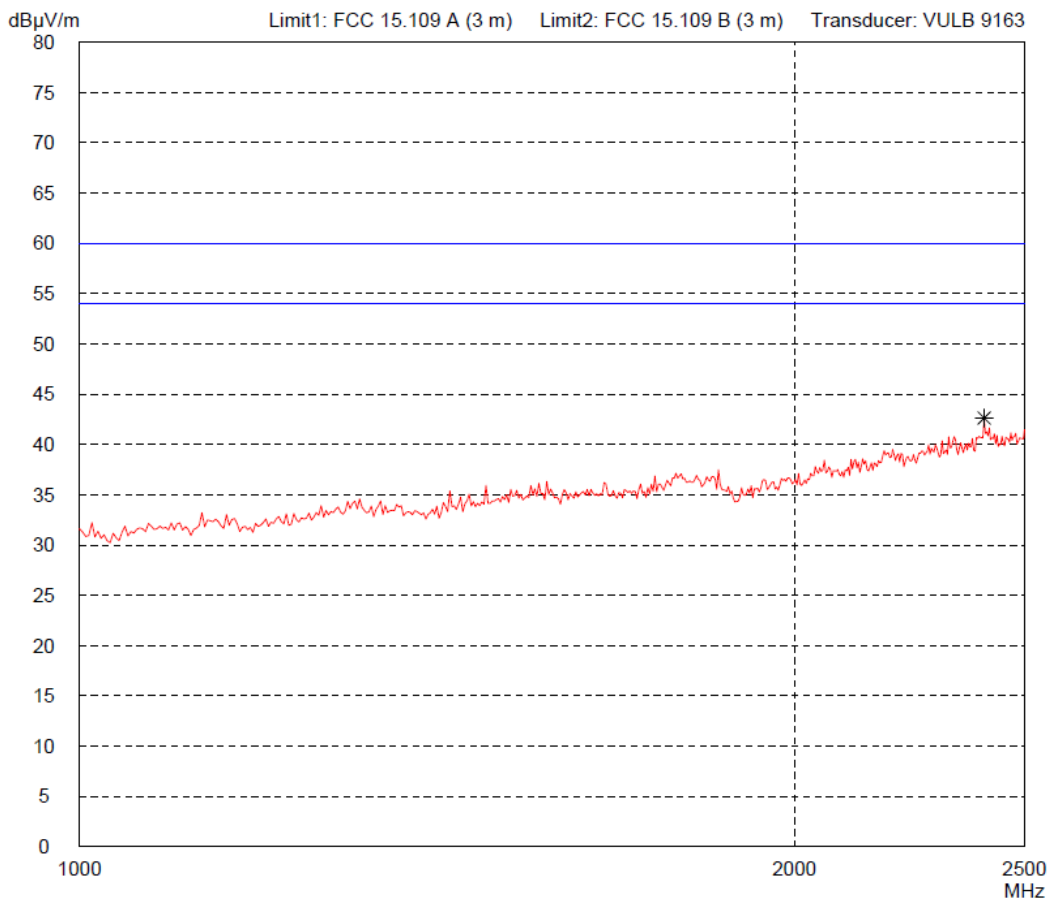

Result: Limit kept	Project file: 69861-04467	Page of Pages
-----------------------	------------------------------	---------------------