

APPLICATION FOR CERTIFICATION  
On Behalf of  
G.Tech Technology. Ltd.  
Wireless Dual Channel Wheel Mouse

Model : DTWM01

Prepared for : G.Tech Technology. Ltd.  
7/F, Dongqu Bld., 7, Hai Hong Rd.,  
Xiang Zhou, Zhuhai Sze,  
Guangdong, China.

Prepared By : Audix Technology (Shenzhen) Co., Ltd.  
No. 6 Ke Feng Rd., 52 Block,  
Shenzhen Science & Industrial Park,  
Nantou, Shenzhen, Guangdong, China

Tel: (0755)663-9496

Report Number : ACS-F01004  
Date of Test : Jan. 13/15, 2001  
Date of Report : Jan. 15, 2001

## TABLE OF CONTENTS

| Description                                           | Page          |
|-------------------------------------------------------|---------------|
| Test Report Certification                             |               |
| <b>1.GENERAL INFORMATION .....</b>                    | <b>1-1</b>    |
| 1.1. Description of Device (EUT).....                 | 1-1           |
| 1.2. Tested Supporting System Details .....           | 1-1           |
| 1.3. Test Facility.....                               | 1-3           |
| 1.4. Measurement Uncertainty .....                    | 1-3           |
| <b>2.POWER LINE CONDUCTED EMISSION TEST .....</b>     | <b>2-1</b>    |
| <b>3.RADIATED EMISSION MEASUREMENT .....</b>          | <b>3-1</b>    |
| 3.1. Test Equipment .....                             | 3-1           |
| 3.2. Block Diagram of Test Setup.....                 | 3-1           |
| 3.3. Radiated Emission Limit (Class B).....           | 3-2           |
| 3.4. EUT Configuration on Measurement.....            | 3-2           |
| 3.5. Operating Condition of EUT.....                  | 3-3           |
| 3.6. Test Procedure.....                              | 3-3           |
| 3.7. Radiated Emission Noise Measurement Result ..... | 3-4           |
| <b>4.PHOTOGRAPH.....</b>                              | <b>4-1</b>    |
| 4.1. Photos of Radiated Measurement.....              | 4-1           |
| <br>APPENDIX I                                        | <br>(9 Pages) |

## TEST REPORT CERTIFICATION

Applicant : G.Tech Technology. Ltd.  
Manufacturer : G.Tech Technology. Ltd.  
EUT Description : Wireless Dual Channel Wheel Mouse  
(A) MODEL NO. : DTWM01  
(B) SERIAL NO. : N/A  
(C) POWER SUPPLY : +3V DC

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C October 1998 & ANSI C63.4-1992

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both radiated and conducted emissions. The measurement results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Date of Test : Dec. 12-13, 2000

Prepared by :

Fanny Yang  
Fanny Yang / Assistant

Reviewer :

Alex Deng  
Alex Deng / Assistant Manager

For and on behalf of  
AUDIX TECHNOLOGY (SHENZHEN) CO.,LTD.

Approved & Authorized Signer :

[Signature]  
\*\*\*\*\*Smart Authorized Signature(s)\*\*\*\*\*

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

Description : Wireless Dual Channel Wheel Mouse (This report is about transmitter and the receiver FCC DOC report please refer to AUDIX Number F01006.)

Model Number : DTWM01

Applicant : G.Tech Technology. Ltd.  
7/F, Dongqu Bld., 7, Hai Hong Rd,  
Xiang Zhou, Zhuhai Sze, Guangdong, China

Manufacturer : G.Tech Technology. Ltd.  
7/F, Dongqu Bld., 7, Hai Hong Rd,  
Xiang Zhou, Zhuhai Sze, Guangdong, China

Date of Test : Jan. 13 / 15, 2001

### 1.2. Tested Supporting System Details

#### 1.2.1. PERSONAL COMPUTER

Model Number : P2L97  
Serial Number : No.1  
FCC : Doc  
Manufacturer : Asus Computer International Co.  
Switching Power : Model FSP300-60GT  
Supply : Sparkle Power Int'l Ltd  
Floppy Driver : Teac Corp  
Model FC-235HF  
Hard Disk Driver : Quantum, Model 7218A2C  
Disk Ctrl Card : Within Mother Board  
Serial/Parallel Card : Within Mother Board  
Power Cord : Nonshielded, Detachable, 1.8m

VGA CARD  
Model Number : DSV3365  
Serial Number : E601604161  
Manufacturer : Dataexpert CO.,LTD  
FCC ID : LUT-DSV3365

1.2.2. MONITOR

|               |   |                                 |
|---------------|---|---------------------------------|
| Model Number  | : | KS-M1421                        |
| Serial Number | : | 120954                          |
| FCC ID        | : | KVCKS-M1421                     |
| Manufacturer  | : | KSAI Electronics Co., Ltd.      |
| Data          | : | Shielded, Undetachable, 1.2m    |
| Power Cord    | : | Nonshielded, Undetachable, 1.2m |

1.2.3. KEYBOARD

|               |   |                              |
|---------------|---|------------------------------|
| Model Number  | : | 2151B                        |
| Serial Number | : | N/A                          |
| FCC ID        | : | FPW2151B-68W                 |
| Manufacturer  | : | Legend                       |
| Data Cable    | : | Shielded, Undetachable, 1.9m |

1.2.4. PRINTER

|               |   |                               |
|---------------|---|-------------------------------|
| Model Number  | : | 2225C+                        |
| Serial Number | : | 22937S56660                   |
| FCC ID        | : | BS46XU2225C                   |
| Manufacturer  | : | Hewlett Packard               |
| Power Adapter | : | Hewlett Packard, Model 82241A |
| Data Cable    | : | Shielded, Detachable, 1.5m    |

1.2.5. MODEM#1

|               |   |                            |
|---------------|---|----------------------------|
| Model Number  | : | MODEM 1414                 |
| Serial Number | : | 980013578                  |
| FCC ID        | : | IFAXDM1414                 |
| Manufacturer  | : | Aceex                      |
| Data Cable    | : | Shielded, Detachable, 1.5m |
| AC Adapter    | : | M/N: SCP41-91000A          |

1.2.6. MODEM#2

|               |   |                            |
|---------------|---|----------------------------|
| Model Number  | : | MODEM 1200AT               |
| Serial Number | : | AT 112153                  |
| FCC ID        | : | EF56A5 1200AT              |
| Manufacturer  | : | Team Technology, Inc.      |
| Data Cable    | : | Shielded, Detachable, 1.5m |
| Power Adapter | : | Team, Model DV-1215A       |

### 1.3. Test Facility

#### Site Description

|                     |   |                                                                                                            |
|---------------------|---|------------------------------------------------------------------------------------------------------------|
| 3m Anechoic Chamber | : | certificated by FCC, USA<br>Aug. 24, 2000                                                                  |
| 3m & 10m Open Site  | : | Certificated by FCC, USA<br>Feb. 13, 1998                                                                  |
| EMC Lab.            |   | Certificated by VCCI, Japan<br>Oct. 29, 1998                                                               |
|                     |   | Certificated by DATech, German<br>Feb. 02, 1999                                                            |
|                     |   | Certificated by NVLAP, USA<br>Until Mar. 03, 2001<br>NVLAP Code: 200372-0                                  |
| Name of Firm        | : | Audix Technology (Shenzhen) Co., Ltd.                                                                      |
| Site Location       | : | No. 6, Ke Feng Rd., 52 Block,<br>Shenzhen Science & Industrial Park,<br>Nantou, Shenzhen, Guangdong, China |

### 1.4. Measurement Uncertainty

|                        |   |                     |
|------------------------|---|---------------------|
| Conduction Uncertainty | = | $\pm 2.66\text{dB}$ |
| Radiation Uncertainty  | = | $\pm 4.26\text{dB}$ |

## **2. POWER LINE CONDUCTED EMISSION TEST**

According to Paragraph (f) of FCC Part 15 section 15.107, Tests to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

### 3. RADIATED EMISSION MEASUREMENT

#### 3.1. Test Equipment


The following test equipments are used during the radiated emission measurement:

##### 3.1.1. For Anechoic Chamber

| Item | Equipment         | Manufacturer    | Model No. | Serial No.      | Last Cal.   | Cal. Interval |
|------|-------------------|-----------------|-----------|-----------------|-------------|---------------|
| 1.   | EMI Test Receiver | HP              | 85422E    | 3625A00181      | Jun. 04, 00 | 1 Year        |
| 2.   | Test Receiver     | Rohde & Schwarz | ESVS20    | 830350/005      | Jun. 04, 00 | 1 Year        |
| 3.   | Amplifier         | HP              | 8447D     | 2944A07794      | Dec. 03, 00 | 1/2 Year      |
| 4.   | Bilog Antenna     | Chase           | CBL6112A  | 2176            | Sep. 25, 00 | 1 Year        |
| 5.   | Computer          | N/A             | N/A       | N/A             | N/A         | N/A           |
| 6.   | Printer           | NEC             | P3800     | 568101448       | N/A         | N/A           |
| 7.   | RF Cable          | MIYAZAKI        | 5D-2W     | 3# Chamber No.1 | Aug. 26, 00 | 1/2 Year      |
| 8.   | RF Cable          | MIYAZAKI        | 5D-2W     | 3# Chamber No.2 | Aug. 26, 00 | 1/2 Year      |
| 9.   | RF Cable          | FUJIKURA        | RG-55/U   | 3# Chamber No.3 | Aug. 26, 00 | 1/2 Year      |
| 10.  | RF Cable          | FUJIKURA        | RG-55/U   | 3# Chamber No.4 | Aug. 26, 00 | 1/2 Year      |
| 11.  | Coaxial Switch    | Anritsu         | MP59B     | M74389          | Dec. 03, 00 | 1/2 Year      |

#### 3.2. Block Diagram of Test Setup

##### 3.2.1. diagram of connection between the EUT and simulators

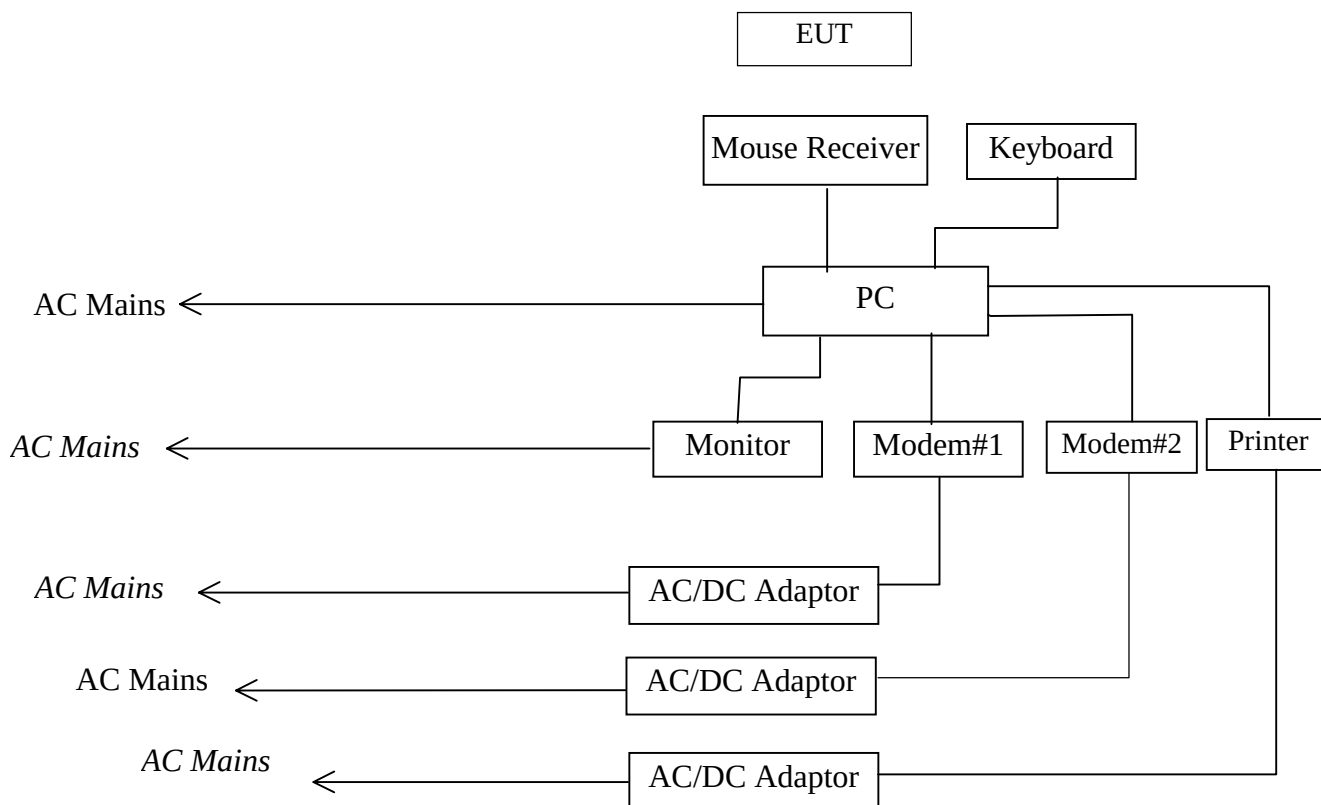


(EUT: Wireless Dual Channel Wheel Mouse)



### 3.2.2. Anechoic Chamber Test Setup Diagram

#### ANTENNA TOWER

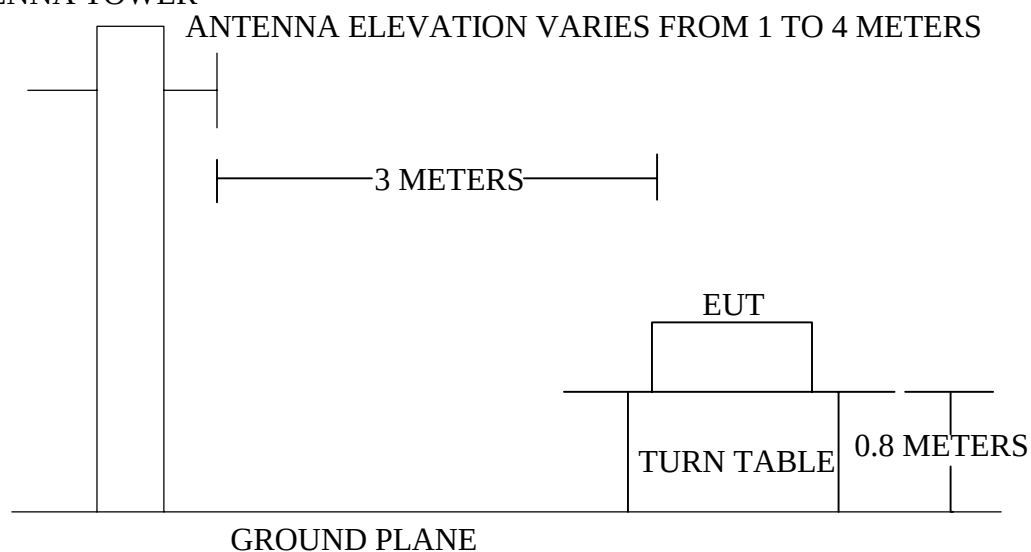

### 3.3. Radiated Emission Limit (Class B)

| FREQUENCY<br>MHz      | DISTANCE<br>Meters | FIELD STRENGTHS LIMIT |                                   |
|-----------------------|--------------------|-----------------------|-----------------------------------|
|                       |                    | $\mu\text{V/m}$       | $\text{dB}(\mu\text{V})/\text{m}$ |
| Fundamental Frequency | 3                  | $50 \times 10^3$      | 94.0                              |
| 30 ~ 88               | 3                  | 100                   | 40.0                              |
| 88 ~ 216              | 3                  | 150                   | 43.5                              |
| 216 ~ 960             | 3                  | 200                   | 46.0                              |
| Above 960             | 3                  | 500                   | 54.0                              |

- Remark :
- (1) Emission level  $(\text{dB})\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
  - (2) The smaller limit shall apply at the cross point between two frequency bands.
  - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

### 3.4. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 3.4.1. Wireless Dual Channel Wheel Mouse (EUT)

Model Number : DTWM01  
 Serial Number : N/A  
 Manufacturer : G.Tech Technology. Ltd.

3.4.2. Support Equipment : As Tested Supporting System Detail, in Section 1.2.

### 3.5. Operating Condition of EUT

1. Setup the EUT as shown in Section 3.2..
2. Let the the EUT work in test mode (Running) and measure it.

### 3.6. Test Procedure

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-1992 on radiated emission measurement.

The bandwidth of the EMI test receiver (R&S ESVS20) is set at 120KHz in the 25-1000MHz and 1MHz had been set in above 1000MHz Range.

The frequency range from 25MHz to 1000MHz is checked.

The test mode (Running) is tested in Anechoic Chamber and all the scanning waveforms are attached in Appendix I.

### 3.7. Radiated Emission Noise Measurement Result

**PASS.**

The frequency range from 25MHz to 1000MHz is investigated.  
Please see the following pages.

|                |                                      |               |             |
|----------------|--------------------------------------|---------------|-------------|
| Date of Test : | Jan 15, 2001                         | Temperature : | 26°C        |
| EUT :          | Wireless Dual Channel<br>Wheel Mouse | Humidity :    | 60%         |
| Model No. :    | DTWM01                               | Test Mode :   | CH1 Running |
| Test Engineer: | Rees Zeng                            |               |             |

| Frequency<br>MHz | Antenna<br>Factor<br>dB/m | Cable<br>Loss<br>dB | Meter Reading<br>Horizontal<br>dBμV | Emission Level<br>Horizontal<br>dBμV/m | Over<br>Limits<br>dB | Limits<br>dBμV/m |
|------------------|---------------------------|---------------------|-------------------------------------|----------------------------------------|----------------------|------------------|
| 27.085           | 21.48                     | 0.79                | 38.32                               | 59.80                                  | -20.2                | 80.00            |
| 41.645           | 13.65                     | 1.31                | 10.15                               | 23.80                                  | -16.20               | 40.00            |
| 56.210           | 8.59                      | 1.76                | 16.21                               | 24.80                                  | -15.20               | 40.00            |
| 109.540          | 14.78                     | 2.76                | 12.12                               | 26.90                                  | -16.60               | 43.50            |
| 135.930          | 15.43                     | 3.08                | 13.57                               | 29.00                                  | -14.50               | 43.50            |
| 193.930          | 13.53                     | 3.62                | 8.37                                | 21.90                                  | -21.60               | 43.50            |

Remark: 1. Above 25-30Mhz is Average value, 30-1000MHz are Quasi-Peak values.  
2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

|                |                                      |               |             |
|----------------|--------------------------------------|---------------|-------------|
| Date of Test : | Jan 15, 2001                         | Temperature : | 26°C        |
| EUT :          | Wireless Dual Channel<br>Wheel Mouse | Humidity :    | 60%         |
| Model No. :    | DTWM01                               | Test Mode :   | CH1 Running |
| Test Engineer: | Rees Zeng                            |               |             |

| Frequency<br>MHz | Antenna<br>Factor<br>dB/m | Cable<br>Loss<br>dB | Meter Reading<br>Vertical<br>dBμV | Emission Level<br>Vertical<br>dBμV/m | Over<br>Limits<br>DB | Limits<br>dBμV/m |
|------------------|---------------------------|---------------------|-----------------------------------|--------------------------------------|----------------------|------------------|
| 27.095           | 21.21                     | 0.79                | 54.99                             | 76.20                                | -3.8                 | 80.00            |
| 41.640           | 10.50                     | 1.31                | 19.90                             | 30.40                                | -9.60                | 40.00            |
| 56.190           | 6.67                      | 1.75                | 20.73                             | 27.40                                | -12.60               | 40.00            |
| 82.380           | 8.64                      | 2.33                | 16.06                             | 24.70                                | -15.30               | 40.00            |
| 109.540          | 14.36                     | 2.76                | 10.04                             | 24.40                                | -19.10               | 43.50            |
| 135.730          | 15.60                     | 3.08                | 8.80                              | 24.40                                | -19.10               | 43.50            |
| 356.890          | 19.00                     | 4.54                | 10.70                             | 29.70                                | -16.30               | 46.00            |

Remark: 1. Above 25-30Mhz is Average value, 30-1000MHz are Quasi-Peak values.  
2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

|                |                       |               |             |
|----------------|-----------------------|---------------|-------------|
| Date of Test : | Jan 15, 2001          | Temperature : | 26°C        |
| EUT :          | Wireless Dual Channel | Humidity :    | 60%         |
|                | Wheel Mouse           |               |             |
| Model No. :    | DTWM01                | Test Mode :   | CH2 Running |
| Test Engineer: | Rees Zeng             |               |             |

| Frequency<br>MHz | Antenna<br>Factor<br>dB/m | Cable<br>Loss<br>dB | Meter Reading<br>Horizontal<br>dBμV | Emission Level<br>Horizontal<br>dBμV/m | Over<br>Limits<br>dB | Limits<br>dBμV/m |
|------------------|---------------------------|---------------------|-------------------------------------|----------------------------------------|----------------------|------------------|
| 27.145           | 21.45                     | 0.79                | 38.65                               | 60.10                                  | -19.90               | 80.00            |
| 56.187           | 8.63                      | 1.75                | 15.77                               | 24.40                                  | -15.60               | 40.00            |
| 138.635          | 15.21                     | 3.12                | 10.29                               | 25.50                                  | -18.00               | 43.50            |
| 339.430          | 19.45                     | 4.46                | 11.35                               | 30.80                                  | -15.20               | 46.00            |
| 361.740          | 20.08                     | 4.56                | 9.32                                | 29.40                                  | -16.60               | 46.00            |

Remark: 1. Above 25-30Mhz is Average value, 30-1000MHz are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

|                |                       |               |             |
|----------------|-----------------------|---------------|-------------|
| Date of Test : | Jan 15, 2001          | Temperature : | 26°C        |
| EUT :          | Wireless Dual Channel | Humidity :    | 60%         |
|                | Wheel Mouse           |               |             |
| Model No. :    | DTWM01                | Test Mode :   | CH2 Running |
| Test Engineer: | Rees Zeng             |               |             |

| Frequency<br>MHz | Antenna<br>Factor<br>dB/m | Cable<br>Loss<br>dB | Meter Reading<br>Vertical<br>dBμV | Emission Level<br>Vertical<br>dBμV/m | Over<br>Limits<br>dB | Limits<br>dBμV/m |
|------------------|---------------------------|---------------------|-----------------------------------|--------------------------------------|----------------------|------------------|
| 27.147           | 21.19                     | 0.79                | 51.21                             | 72.40                                | -7.60                | 80.00            |
| 41.645           | 10.50                     | 1.31                | 15.60                             | 26.10                                | -13.90               | 40.00            |
| 56.210           | 6.68                      | 1.76                | 19.02                             | 25.70                                | -14.30               | 40.00            |
| 104.690          | 14.31                     | 2.69                | 16.79                             | 31.10                                | -12.40               | 43.50            |
| 130.880          | 15.28                     | 3.03                | 9.02                              | 24.30                                | -19.20               | 43.50            |
| 337.485          | 18.59                     | 4.46                | 7.41                              | 26.00                                | -20.00               | 46.00            |
| 363.645          | 19.13                     | 4.57                | 14.27                             | 33.40                                | -12.60               | 46.00            |

Remark: 1. Above 25-30Mhz is Average value, 30-1000MHz are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

# **APPENDIX I**




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park.  
Tel: 0755-6639495~7  
Fax: 0755-6632877

Data#: 61 File#: G-TECH.emi

Date: 2001-01-13 Time: 08:52:33

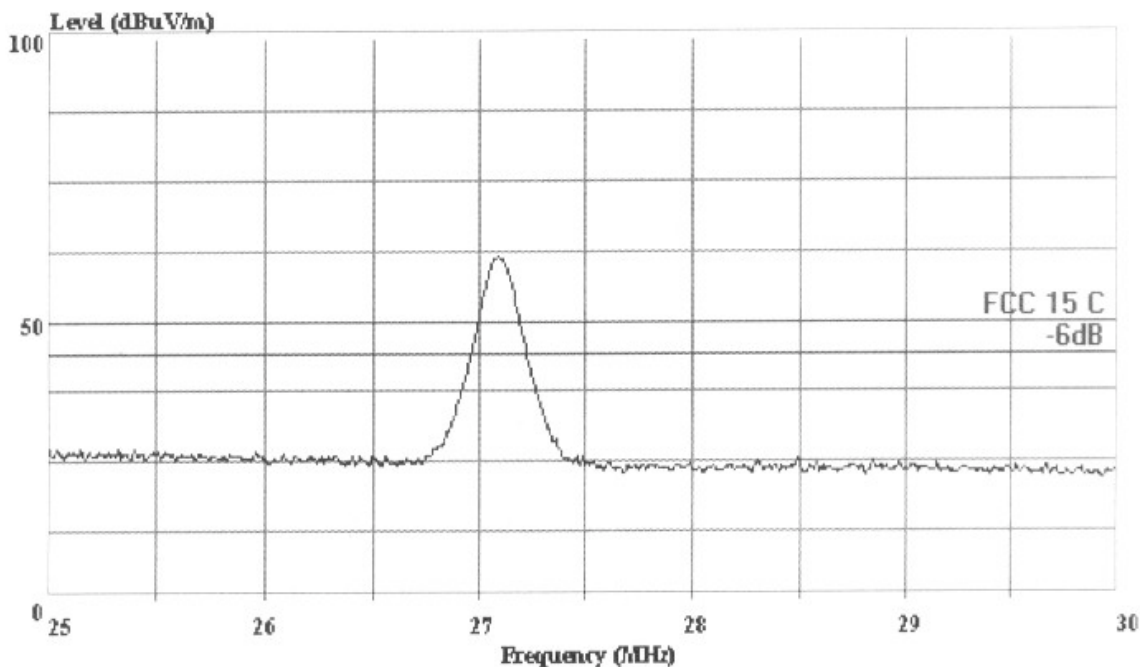

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (#3 Chamber)

Trace:

Ref Trace:

Condition: FCC 15 C 3m 25-30/2176H HORIZONTAL

Eut: : Wireless Dual Channel Wheel Mouse

: M/N:DTWM01

Memo: : Ch.1 Running

Power: : DC 3V Battery




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park.  
Tel: 0755-6639495~7  
Fax: 0755-6632877

Data#: 62 File#: G-TECH.emi

Date: 2001-01-13 Time: 08:54:13

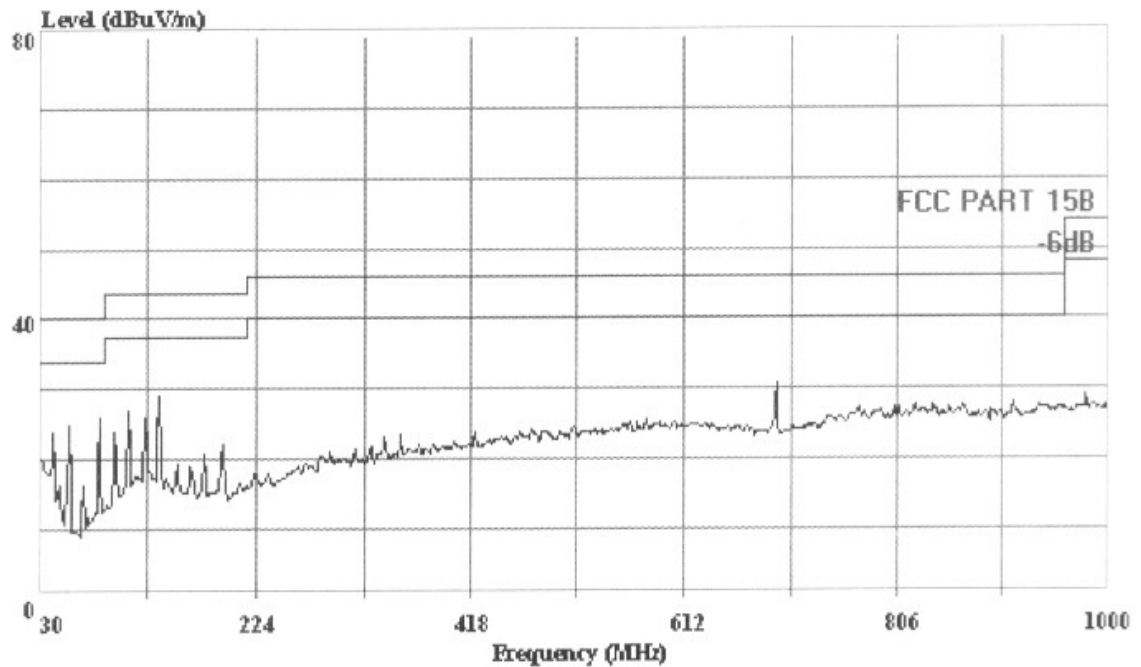

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (#3 Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2176NFACTOR HORIZONTAL

Eut: : Wireless Dual Channel Wheel Mouse

: M/N:DTWM01

Memo: : Ch.1 Running

Power:: DC 3V Battery



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science &amp; Ind. Park.

Tel: 0755-6639495~7

Fax: 0755-6632877

Data#: 60 File#: G-TECH.emi

Date: 2001-01-13 Time: 08:51:04

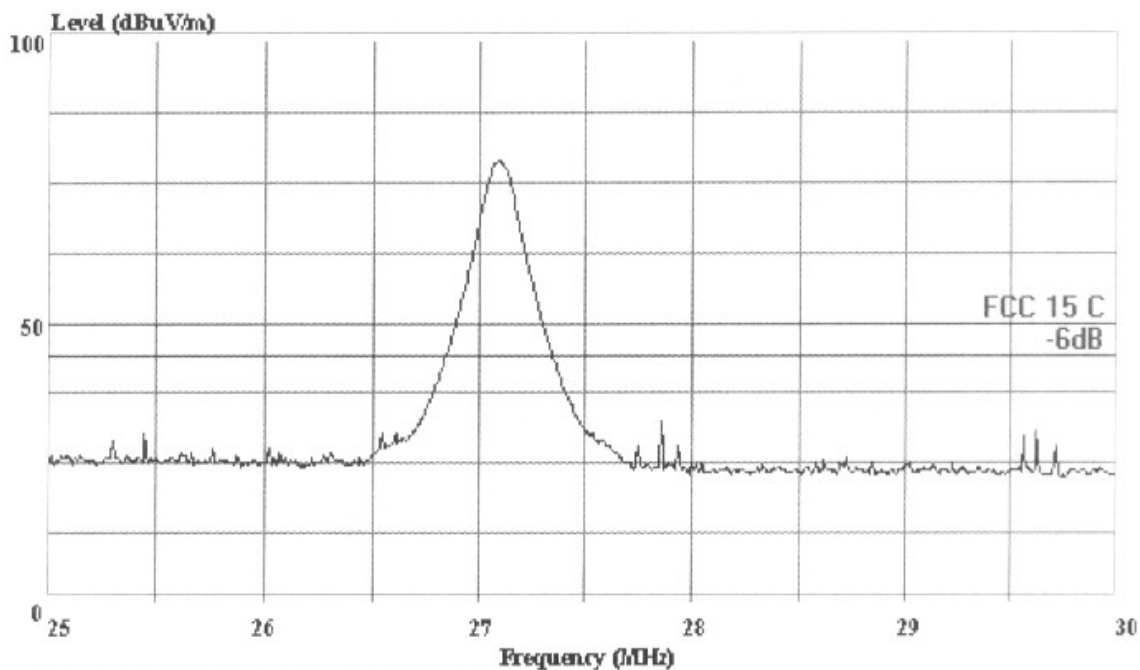

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (#3 Chamber)

Trace:

Ref Trace:

Condition: FCC 15 C 3m 25-30/2176V VERTICAL

Eut: : Wireless Dual Channel Wheel Mouse

: M/N:DTWM01

Memo: : Ch.1 Running

Power:: DC 3V Battery






AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park.  
Tel: 0755-6639495~7  
Fax: 0755-6632877

Data#: 63 File#: G-TECH.emi

Date: 2001-01-13 Time: 08:55:22

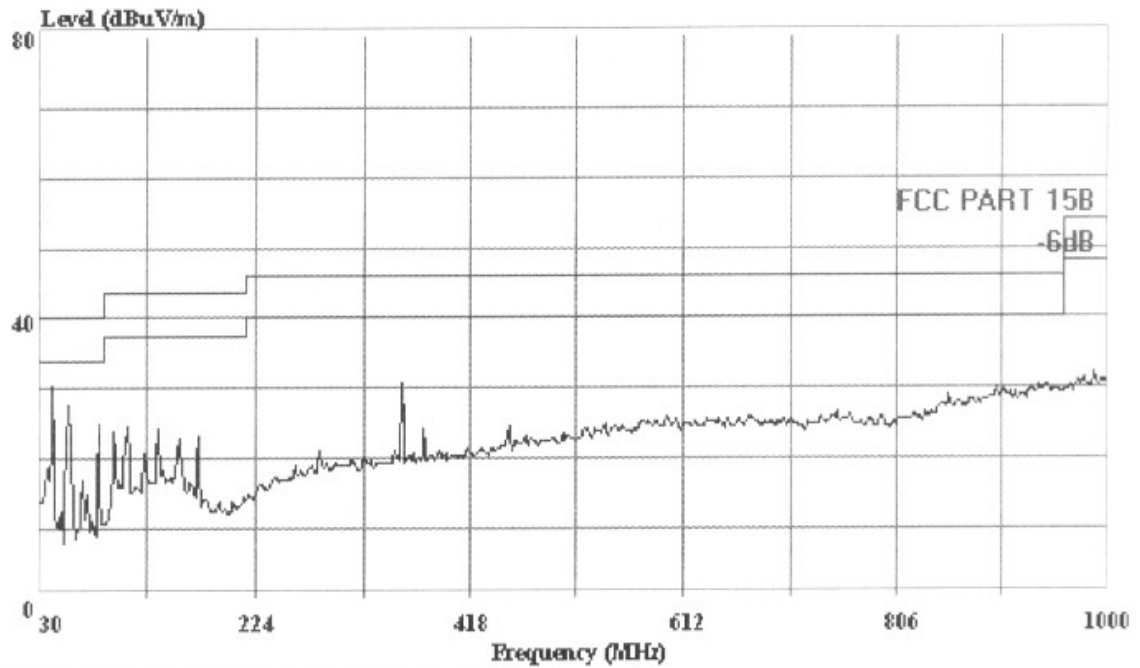

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (#3 Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2176NFACTOR VERTICAL

Ent: : Wireless Dual Channel Wheel Mouse

: M/N:DTWM01

Memo: : Ch.1 Running

Power:: DC 3V Battery




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park.  
Tel: 0755-6639495~7  
Fax: 0755-6632877

Data#: 67 File#: G-TECH.emi

Date: 2001-01-13 Time: 09:05:23

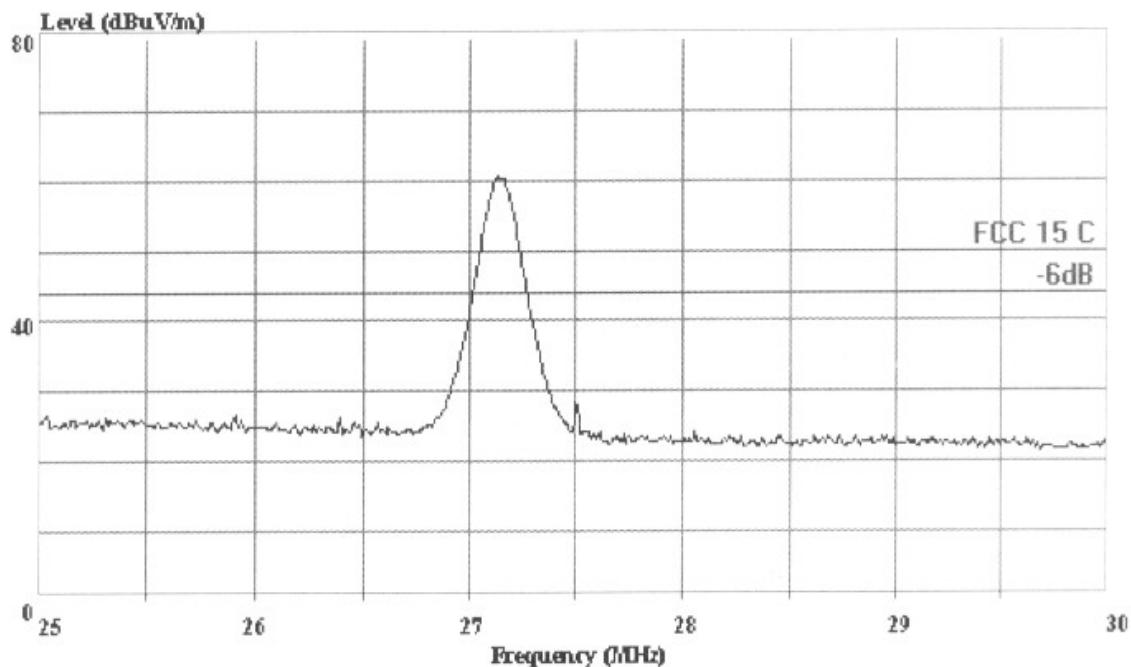

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (#3 Chamber)

Trace:

Ref Trace:

Condition: FCC 15 C 3m 25-30/2176H HORIZONTAL  
Eut: : Wireless Dual Channel Wheel Mouse  
: M/N:DTWM01  
Memo: : Ch.2 Running  
Power: DC 3V Battery



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science &amp; Ind. Park.

Tel: 0755-6639495~7

Fax: 0755-6632877

Data#: 64 File#: G-TECH.emi

Date: 2001-01-13 Time: 08:58:19

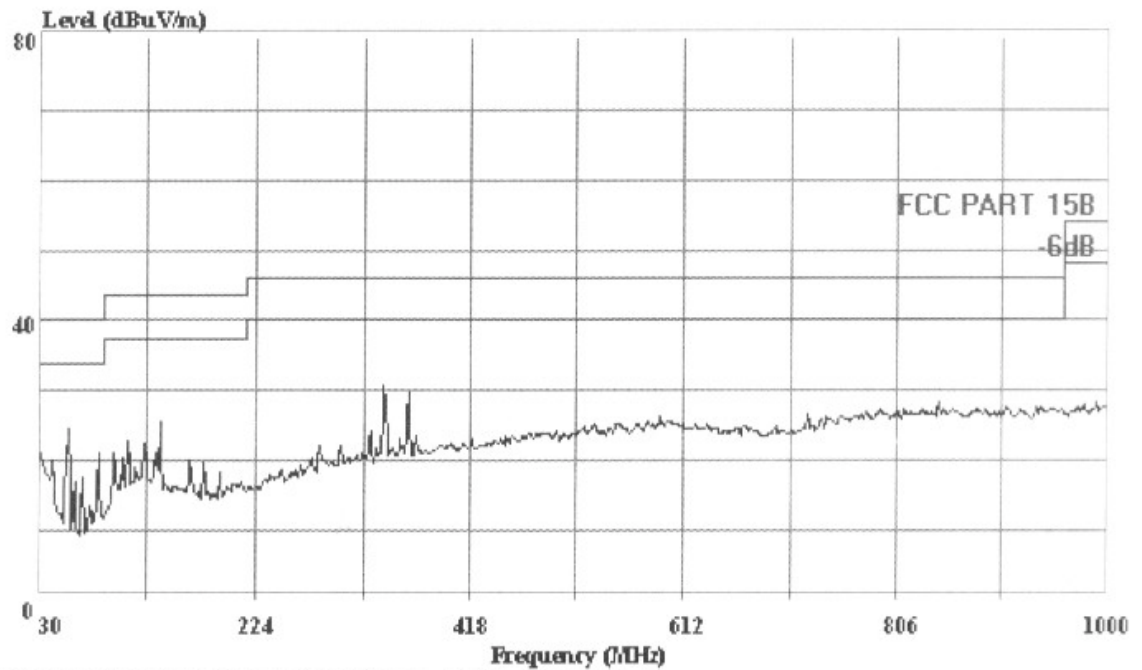

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (#3 Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2176NFACTOR HORIZONTAL

Ent: : Wireless Dual Channel Wheel Mouse

: M/N:DTWM01

Memo: : Ch.2 Running

Power: : DC 3V Battery




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park.  
Tel: 0755-6639495~7  
Fax: 0755-6632877

Data#: 66 File#: G-TECH.emi

Date: 2001-01-13 Time: 09:02:31

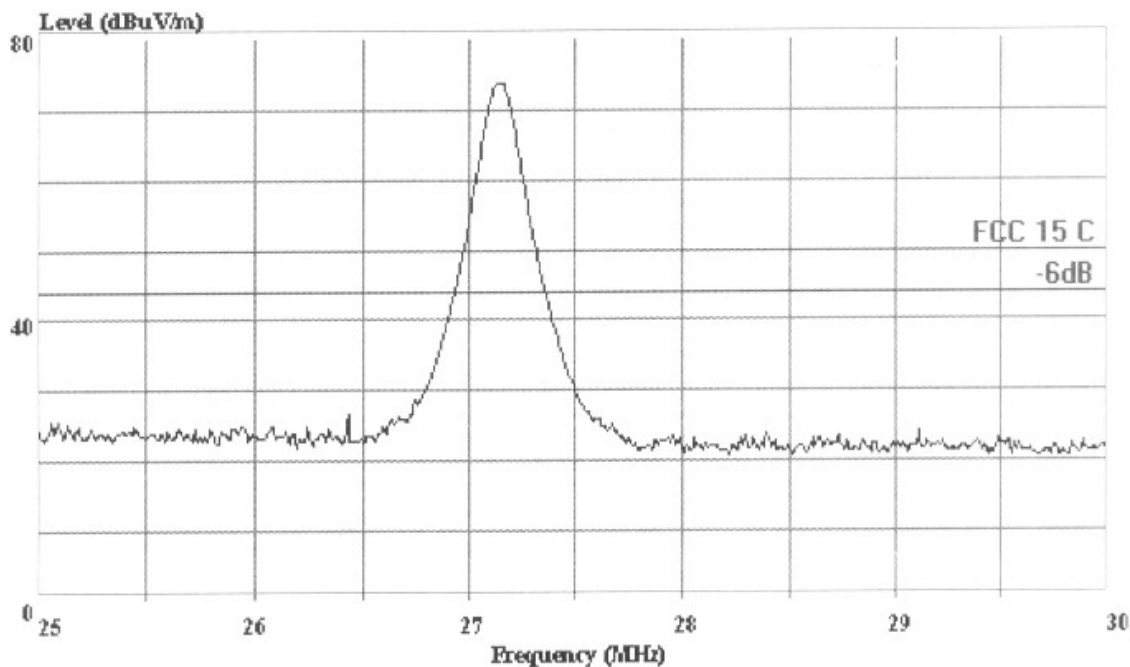

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (#3 Chamber)

Trace:

Ref Trace:

Condition: FCC 15 C 3m 25-30/2176V VERTICAL

Ent: : Wireless Dual Channel Wheel Mouse

: M/N:DTWM01

Memo: : Ch.2 Running

Power:: DC 3V Battery



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science &amp; Ind. Park.

Tel: 0755-6639495~7

Fax: 0755-6632877

Data#: 65 File#: G-TECH.emi

Date: 2001-01-13 Time: 09:00:05

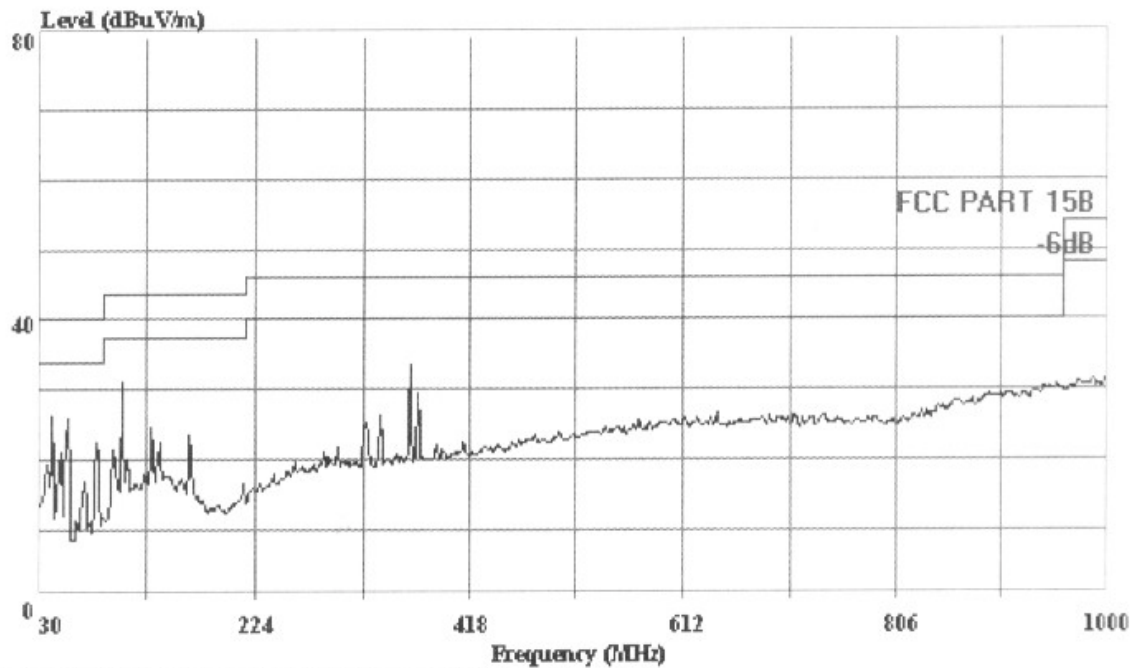

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (#3 Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2176NFACTOR VERTICAL

Eut: : Wireless Dual Channel Wheel Mouse

: M/N:DTWM01

Memo: : Ch.2 Running

Power: : DC 3V Battery