


Murandi
Communications Ltd.
Innovative Radio Frequency Solutions

EUM3006 Antenna Assembly Photographs

The following picture shows the modem card mounted into the metal chassis with the antenna ground plate mounted above it. The antenna connector is visible through the upper hole in the antenna ground board.

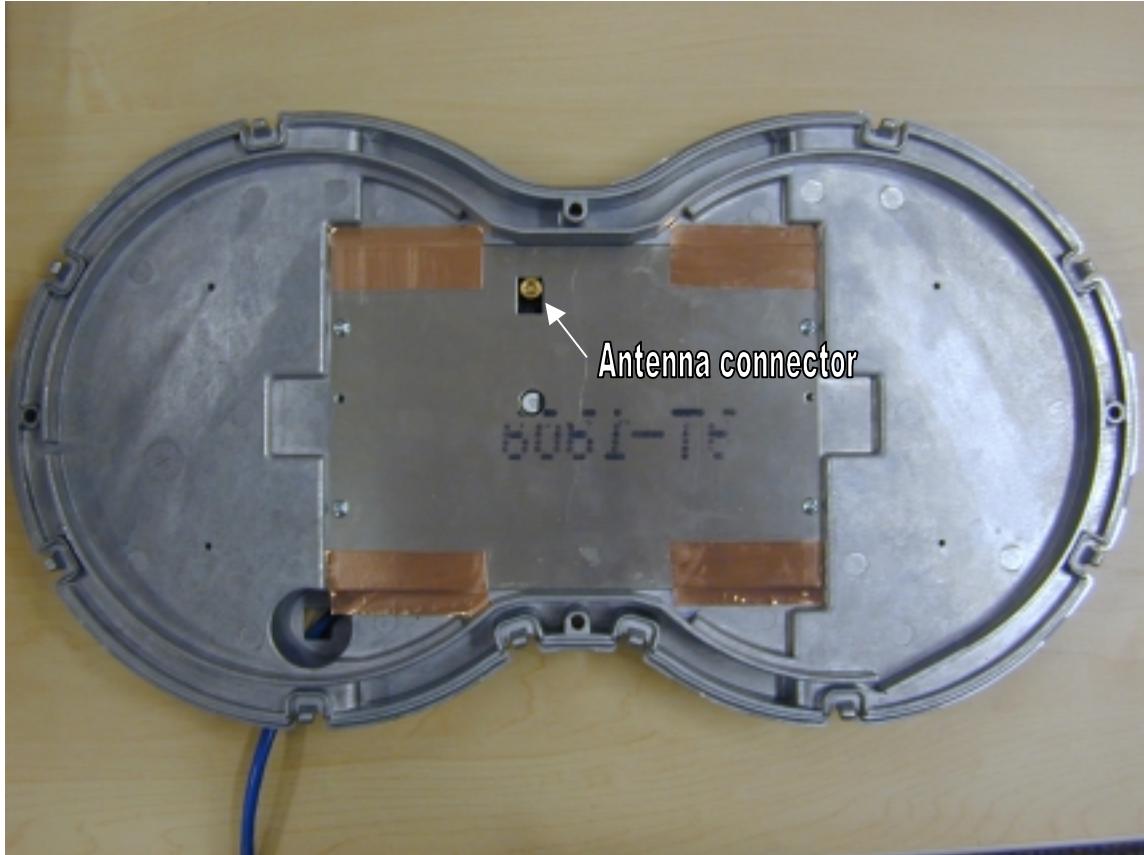

The following picture shows the bottom side of the antenna with the double-sided tape that is used to secure the antenna to the chassis in three locations. The double-sided tape is Rogers Corp. Poron 4790-92-15250-04 with 3M 468MP adhesive on both sides.



The following picture shows the antenna assembled on the modem card. Note that if the antenna is removed from the chassis, the double-sided tape will tear and the antenna cannot be securely installed again.

