

**F C C -**

**TEST REPORT**

REPORT NO.: 42104/5/400F

# FCC – Test Report

Date: 2005-05-20

No. 42104/5/400F

Page 2 of 14

FCC listed testlab  
acc. to Section 2.948 of the FCC - Rules

in compliance with the requirements of  
ANSI C63.4 - 2001

**Product** : USB-OTG with MP3 Music FM  
Transmitter

**Product Class** : Low Power Communication  
Device Transmitter

**Brand Name** : ICS

**Model** : SFM6001

**Applicant** : SOUNDING AUDIO INDUSTRIAL  
LIMITED

# **FCC – Test Report**

**No. 42104/5/400F**

Date: 2005-05-20

Page 3 of 14

## **TABLE OF CONTENTS**

1. **Cover sheet**
2. **Introduction**
3. **Table of Contents**
4. **Laboratory Report**
5. **Summary of Testresults**
6. **Test Equipment List**
7. **Radiated Emission Testprocedure (> 30MHz)**
8. **Radiated Emission Testprocedure (9kHz-30MHz)**
9. **Interference Radiation (Datasheet)**
10. **Interference Radiation (Datasheet)**
11. **Interference Radiation (Datasheet)**
12. **Notes for Radiation Measurement (acc. to ANSI C63.4 - 2001)**
13. **Measurement of Emissions within Band Edges (Band Edges Plot)**
14. **Notes for Measurement of Emissions within Band Edges**

# FCC – Test Report

Date: 2005-05-20

No. 42104/5/400F

Page 4 of 14

## LABORATORY - REPORT

**APPLICANT:** SOUNDING AUDIO INDUSTRIAL LIMITED  
**ADDRESS:** Unit G, 7/F, Stage 2, Wah Fung Industrial Centre  
33-39 Kwai Fung Road  
Kwai Chung, NT  
HONG KONG

**DATE OF SAMPLE RECEIVED:** 2005-05-03

**DATE OF TESTING:** 2005-05-18 to 2005-05-19

### DESCRIPTION OF SAMPLE:

Product: USB-OTG with MP3 Music FM Transmitter  
Product class: Low Power Communication Device Transmitter  
Brand Name: ICS  
Model number: SFM6001  
Rating: DC 12V car battery

**INVESTIGATIONS REQUESTED:** Measurements to the relevant clauses of F.C.C. Rules and Regulations Part 15 Subpart C - Intentional Radiators

**RESULTS:** See the attached test sheets

**CONCLUSIONS** From the measurement data obtained, the tested sample was considered to have COMPLIED with the requirements for the relevant clauses of Federal Communications Commission Rules as specified above.

---

Authorized Signature

- Remark:** 1. Purpose of those tests in this report is to provide the applicant with the necessary test data of their device for the submission to FCC with application for Equipment Authorization under the FCC Equipment Authorization Program. The tests themselves are not Approval Tests.
2. The conducted emissions test (if applicable) has considered the limits in Sections 15.107 and 15.207 adopted under FCC 02-157 (ETDocket 98-80). The product may be marketed after July 11, 2005, and is not affected by the 15.37(j) transition provisions.

# FCC – Test Report

Date: 2005-05-20

No. 42104/5/400F

Page 5 of 14

## Summary of Test Results

### Interference Radiation:

Test result: O.K.  
Test data: See attached data sheet

### Interference Voltage:

Test result: N.A.  
Test data: N.A.

### Measurement of Emissions within Band Edges

Test result: O.K.  
Test data: See attached data sheet

### PHOTOGRAPH OF THE SAMPLE



# FCC – Test Report

Date: 2005-05-20

No. 42104/5/400F

Page 6 of 14

## TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	Serial No.	Remark
Test Receiver	Rohde & Schwarz	ESH 3	863497/015	150KHz – 30MHz
Test Receiver	Rohde & Schwarz	ESH 3	892580/006	9KHz – 30MHz
Test Receiver	Rohde & Schwarz	ESVP	860688/022	25MHz – 1,000 MHz
Test Receiver	Rohde & Schwarz	ESVP	863512/012	25MHz – 1,000 MHz
Test Receiver	Rohde & Schwarz	ESHS30	839667/002	9KHz – 30MHz
Test Receiver	Rohde & Schwarz	ESVS30	828525/006	25MHz – 1000MHz
Spectrum Analyzer with Q. Peak	Advantest	R3132	140101852	9KHz – 3GHz
Spectrum Analyzer with Q. Peak	Tektronix	2712	B023006	0.15MHz – 1000MHz
Interface for Spectrum 2712	Tektronix	TD3F14A	--	--
Impulse Limiter	Rohde & Schwarz	ESH-3-Z2	--	--
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127	8127312	2 x 10A, 50Ω, 50μH 9KHz-30MHz
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127	8127309	2 x 10A, 50Ω, 50μH 9KHz-30MHz
Antenna System	Schwarzbeck	BBA 9106 / UHALP 9107	--	30MHz – 1000MHz
Antenna Mast System	Schwarzbeck	AM9104	--	Max. 4 meters height
Loop Antenna	Rohde & Schwarz	HFH2-Z2	871336/48	9KHz-30MHz
Turntable with Controller	Drehtisch	DT312	--	φ120 cm


# FCC – Test Report

No. 42104/5/400F

Date: 2005-05-20

Page 7 of 14

## Radiated Emission Test Procedure (> 30MHz)

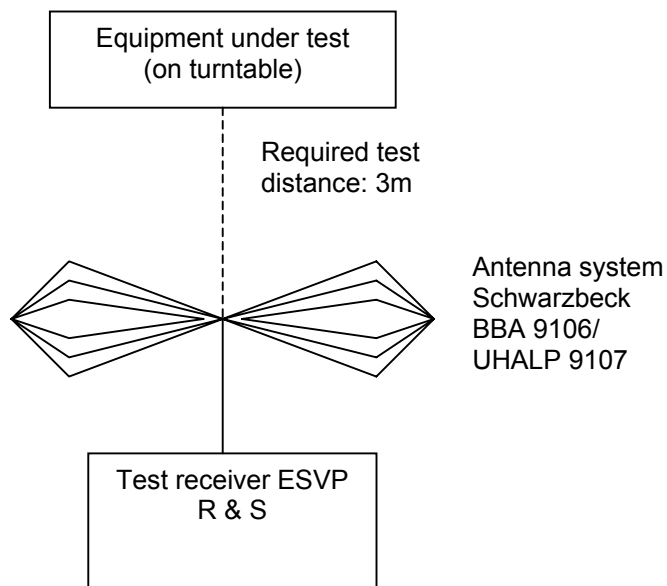


# FCC – Test Report

No. 42104/5/400F

Date: 2005-05-20

Page 8 of 14

## Radiated Emission Test Procedure ( 9kHz – 30MHz)

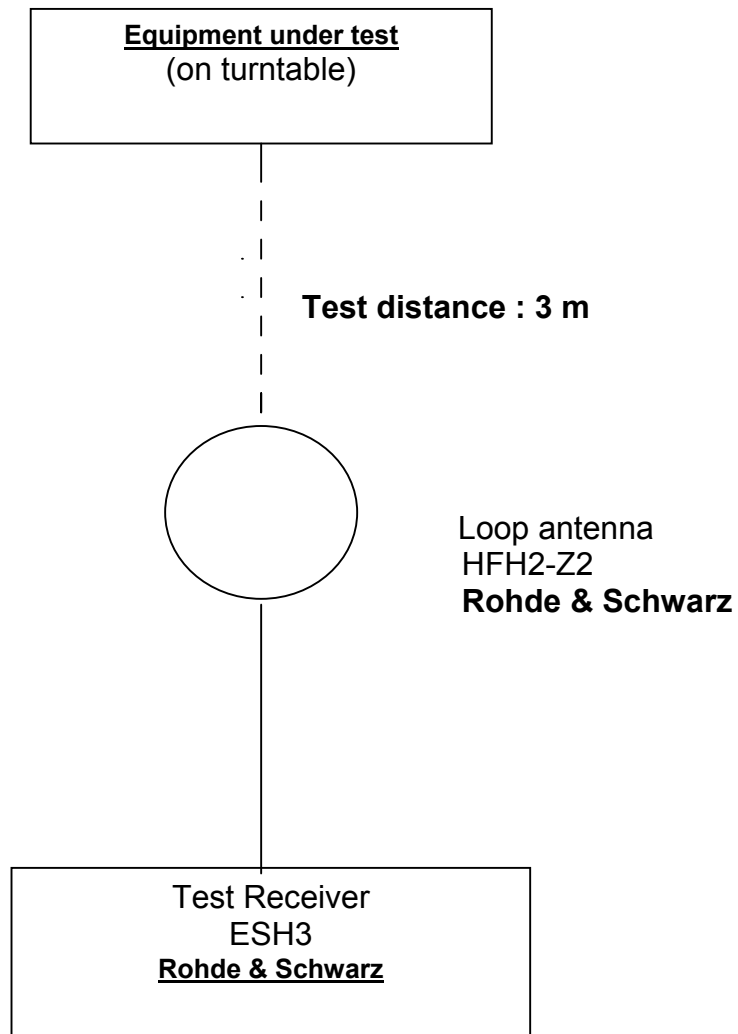



# Intentional Radiators

Date: 2005-05-20

Page 9 of 14

Measurement of Radiated Emissions  
Acc: FCC Part 15 Subpart C (15.239)

**IECC Ref:** 42104/5/400F  
**Model:** SFM6001  
**Applicant:** SOUNDING AUDIO INDUSTRIAL LIMITED  
**Sample No.:** 1  
**Set under test:** USB-OTG with MP3 Music FM Transmitter  
**Connected sets:** -  
**Operating mode:** Operate (High frequency end)

Test Equipment  
Receiver: ESVP Rohde & Schwarz  
Antenna: Schwarzbeck BBA 9106  
and UHALP 9107

## Radiation Measurement

### a. Fundamental Frequency

Frequency (MHz)	Maximum Test Result (dB(μV/m))		FCC Limit (dB(μV/m))	
	Peak	Average	Peak	Average
107.91	36.5	35.5	68	48

### b. Other Frequencies

Frequency (MHz)	Horz. Reading dB(μV)	Vert. Reading dB(μV)	Antenna Factor (dB)	Horiz. Test Result dB(μV/m)	Vert. Test Result dB(μV/m)	Limit dB(μV/m)
30	< 16	< 16	18.4	< 34.4	< 34.4	40.0
215.82	< 16	< 16	16.9	< 32.9	< 32.9	43.5
323.73	< 16	< 16	16.8	< 32.8	< 32.8	46.0
431.64	< 16	< 16	18.8	< 34.8	< 34.8	46.0
539.55	< 16	< 16	20.1	< 36.1	< 36.1	46.0
647.46	< 16	< 16	21.6	< 37.6	< 37.6	46.0
755.37	< 16	< 16	23.1	< 39.1	< 39.1	46.0
863.28	< 16	< 16	24.5	< 40.5	< 40.5	46.0
971.19	< 16	< 16	26.1	< 42.1	< 42.1	54.0
1000	< 16	< 16	26.5	< 42.5	< 42.5	54.0

### Remark:

All frequencies in the required range have been scanned and only those significant and representative readings are reported above. All emissions not reported above are all well below the limit.

The measurement is conducted with the sample placed on the turntable in 3 orthogonal planes.

# Intentional Radiators

Date: 2005-05-20

Page 10 of 14

Measurement of Radiated Emissions  
Acc: FCC Part 15 Subpart C (15.239)

**IECC Ref:** 42104/5/400F  
**Model:** SFM6001  
**Applicant:** SOUNDING AUDIO INDUSTRIAL LIMITED  
**Sample No.:** 1  
**Set under test:** USB-OTG with MP3 Music FM Transmitter  
**Connected sets:** -  
**Operating mode:** Operate (Mid-frequency)

Test Equipment  
Receiver: ESVP Rohde & Schwarz  
Antenna: Schwarzbeck BBA 9106  
and UHALP 9107

## Radiation Measurement

### a. Fundamental Frequency

Frequency (MHz)	Maximum Test Result (dB(μV/m))		FCC Limit (dB(μV/m))	
	Peak	Average	Peak	Average
107.3	35.4	34.4	68	48

### b. Other Frequencies

Frequency (MHz)	Horz. Reading dB(μV)	Vert. Reading dB(μV)	Antenna Factor (dB)	Horiz. Test Result dB(μV/m)	Vert. Test Result dB(μV/m)	Limit dB(μV/m)
30	< 16	< 16	18.4	< 34.4	< 34.4	40.0
214.6	< 16	< 16	16.9	< 32.9	< 32.9	43.5
312.9	< 16	< 16	16.6	< 32.6	< 32.6	46.0
429.2	< 16	< 16	18.7	< 34.7	< 34.7	46.0
536.5	< 16	< 16	20.1	< 36.1	< 36.1	46.0
643.8	< 16	< 16	21.5	< 37.5	< 37.5	46.0
751.1	< 16	< 16	23.1	< 39.1	< 39.1	46.0
858.4	< 16	< 16	24.5	< 40.5	< 40.5	46.0
965.7	< 16	< 16	26.0	< 42.0	< 42.0	54.0
1000	< 16	< 16	26.5	< 42.5	< 42.5	54.0

### Remark:

All frequencies in the required range have been scanned and only those significant and representative readings are reported above.  
All emissions not reported above are all well below the limit.

The measurement is conducted with the sample placed on the turntable in 3 orthogonal planes.

# Intentional Radiators

Date: 2005-05-20

Page 11 of 14

Measurement of Radiated Emissions  
Acc: FCC Part 15 Subpart C (15.239)

**IECC Ref:** 42104/5/400F  
**Model:** SFM6001  
**Applicant:** SOUNDING AUDIO INDUSTRIAL LIMITED  
**Sample No.:** 1  
**Set under test:** USB-OTG with MP3 Music FM Transmitter  
**Connected sets:** -  
**Operating mode:** Operate (Low frequency end)

Test Equipment  
Receiver: ESVP Rohde & Schwarz  
Antenna: Schwarzbeck BBA 9106  
and UHALP 9107

## Radiation Measurement

### a. Fundamental Frequency

Frequency (MHz)	Maximum Test Result (dB(μV/m))		FCC Limit (dB(μV/m))	
	Peak	Average	Peak	Average
106.7	35.3	34.3	68	48

### b. Other Frequencies

Frequency (MHz)	Horz. Reading dB(μV)	Vert. Reading dB(μV)	Antenna Factor (dB)	Horiz. Test Result dB(μV/m)	Vert. Test Result dB(μV/m)	Limit dB(μV/m)
30	< 16	< 16	18.4	< 34.4	< 34.4	40.0
213.4	< 16	< 16	16.8	< 32.8	< 32.8	43.5
320.1	< 16	< 16	16.7	< 32.7	< 32.7	46.0
426.8	< 16	< 16	18.7	< 34.7	< 34.7	46.0
533.5	< 16	< 16	20.0	< 36.0	< 36.0	46.0
640.2	< 16	< 16	21.5	< 37.5	< 37.5	46.0
746.9	< 16	< 16	23.0	< 39.0	< 39.0	46.0
853.6	< 16	< 16	24.4	< 40.4	< 40.4	46.0
960.3	< 16	< 16	25.9	< 41.9	< 41.9	54.0
1000	< 16	< 16	26.5	< 42.5	< 42.5	54.0

### Remark:

All frequencies in the required range have been scanned and only those significant and representative readings are reported above. All emissions not reported above are all well below the limit.

The measurement is conducted with the sample placed on the turntable in 3 orthogonal planes.

## Notes for Radiation Measurement

**1. Measurement facility:**

Measurement facility located at Fanling (Hong Kong), placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.

**2. Distance between the EUT and measuring antenna:**

3 meters.

**3. Measuring instrumentations:**

Rohde & Schwarz ESVP Test Receiver ( 20 - 1300 MHz ) with a CISPR weighting QP detector, 6 dB bandwidth set at 120 KHz.

In the frequency range above 1000 MHz Spectrum Analyzer FMSM26 and Analyzer Display Unit FSA-D are used, bandwidth set at 100 kHz.

**4. Measuring antenna:**

Broad-band antenna for the frequency range 30 - 300 MHz and frequency range 300 - 1000 MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable included in the Antenna Factor for measurement data. The antennas are capable of measuring both horizontal and vertical polarizations.

Loop antenna for the frequency range 9KHz – 30MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable included in the measurement data. The center of the loop 1 m above the ground plane, positioned with its plane vertical at the specified distance and rotated about its vertical axis and placed horizontal for maximum response at each azimuth about the EUT.

In the frequency range above 1 GHz horn-antenna RGA 50/60 is used.

**5. Frequency range scanned:**

The frequency range 30 - 1000 MHz has been scanned. Readings of the highest emissions relating to the limit were reported as above.

**6. Arrangement of EUT:**

During the test, the sample was operated at rated supply voltage and arranged for maximum emissions. To find the maximum emission (30MHz – 1000MHz), the antenna was raised from 1 to 4 meters and was stopped at the maximum emission point.

**7. Measuring Procedure:**

In accordance with the relevant sections of the American National Standards Institute (ANSI) C63.4-2001 'Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz'.


# FCC – Test Report

Date: 2005-05-20

No. 42104/5/400F

Page 13 of 14

## Measurement Data of Emissions within Band Edges

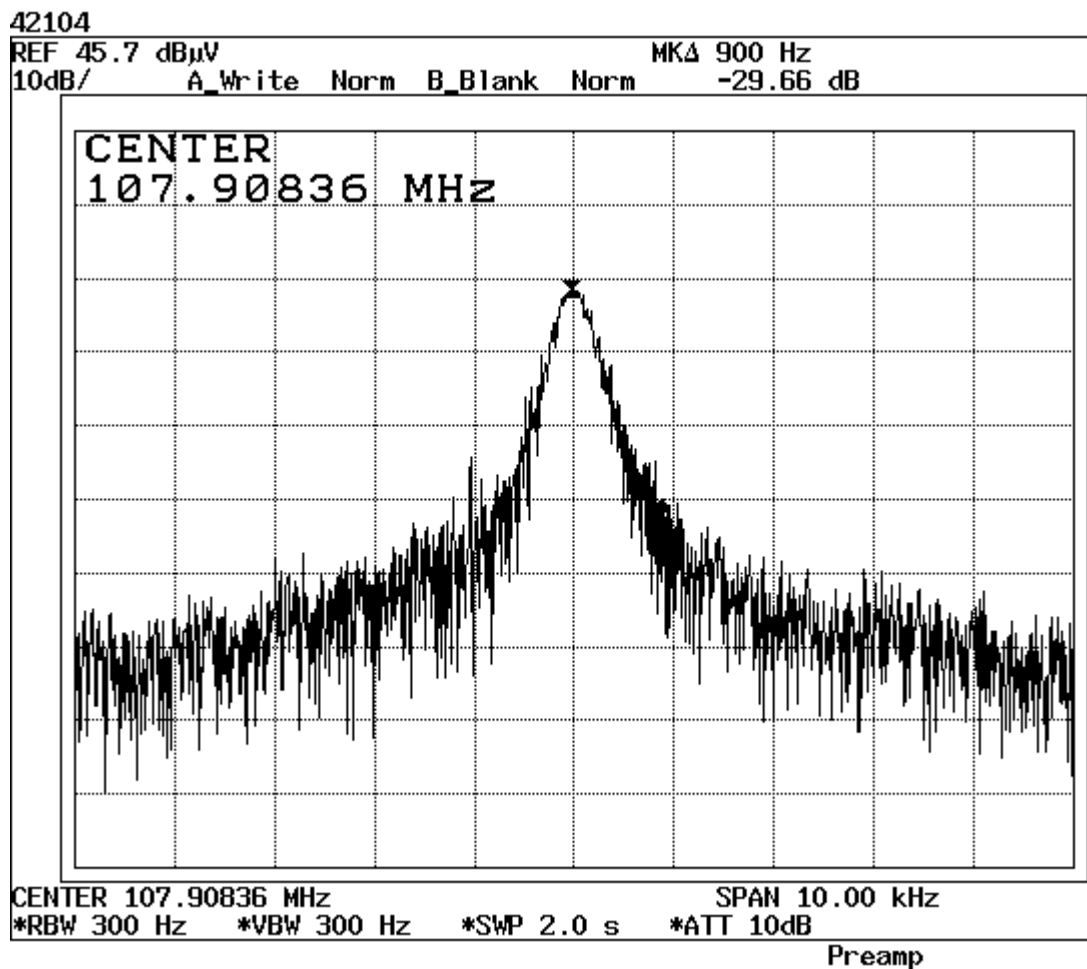

Result : The field strength of any emission within the operation band did not exceed 48 dB( $\mu$ V/m) for average value or 68 dB( $\mu$ V/m) for peak value. Refer to page 9 for the recorded value for the emission at the fundamental frequency.

## **Notes for Measurement of Emissions within Band Edges**

1. **Measurement facility:**  
Measurement facility located at Fanling (Hong Kong) placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.
  
2. **Measuring instrumentations:**  
Spectrum Analyzer: Advantest R3132
  
3. **Frequency range scanned:**  
The frequency range acc. to FCC rules and regulations part 15 subpart C - Intentional Radiators.
  
4. **Arrangement of EUT:**  
During the test, the sample was operated.
  
5. **Measuring Procedure:**  
In accordance with the relevant sections of American National Standards Institute (ANSI) C63.4 - 2001 'Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz'.