

**Advanced
Compliance Laboratory**

6 Randolph Way
Hillsborough, NJ 08844
Tel: (908) 927 9288
Fax: (908) 927 0728

Electromagnetic Emission Compliance Test Report



**Equipment Under Test
(EUT)
Applicant** Quantum EZ
Q5C
U.S. Radar Inc.

In Accordance With FCC Part 15, Subpart F

Tested by Advanced Compliance Laboratory, Inc.
6 Randolph Way
Hillsborough, New Jersey 08844

Authorized by Wei Li
Lab Manager

Signature

Date April 24, 2015

**AC Lab Report
Number** 0048-150121-01



Lab Code:200101-0

**The test result in this report is supported and
covered by the NVLAP accreditation.**

Table of Contents

Section 1. Summary of Test Results 3

Section 2. General Equipment & Test Configuration..... 6

Section 3. Test Methodology & Facilities 8

Section 4. Measurement Data 9

Section 5. FCC ID Labeling..... 49

Section 6. Setup Photos..... 50

Section 7. EUT Photos..... 53

Section 1. Summary of Test Results

Manufacturer: U.S. Radar Inc.
Product Name: Quantum EZ
Model/Parts No. : Q5C
S/N: PT001

General: **All measurements are traceable to national standards**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 15, Sub Part F.

☐ New Submission ☐ Production Unit
☐ Class I Permissive Change ☒ Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

“See Summary of Test Data”



NVLAP LAB CODE: 200101-0

Advanced Compliance Laboratory, Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Advanced Compliance Laboratory, Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

Summary of Test Data

Compliance Requirement	FCC Rule Part	Test No. in Section 4	Result
Cross Reference	15.505	1	Complies
Marketing of UWB Equipment	15.507	2	Complies
Pulse Repetition Frequency(PRF)	15.509	3	Complies
UWB Bandwidth	15.509(a) 15.503(a)	4	Complies
General Operational Requirements for LF Imaging System	15.509(b)	5	Complies
Spurious Radiated Emissions≤960MHz	15.509(d) 15.209	6	Complies
Spurious Radiated Emissions>960MHz	15.509(d)	7	Complies
Radiated Emissions in GPS Bands	15.509(e)	8	Complies
Highest Radiated Emission at f_M	15.509(f)	9	Complies
Technical Requirements Applicable to All UWB Devices	15.521	10	Complies
Coordination Requirement	15.525	11	Complies
Antenna Requirement	15.203	12	Complies
Radio Frequency Exposure	FCC OET Bulletin 65	13	Complies
Conducted Emissions	15.207	14	*
Transmission Duration	15.509(c)	15	**

* NOT APPLICABLE to the EUT as it is a battery-powered device;

** NOT APPLICABLE to the EUT as it is not a handheld device.

The estimated uncertainty of the test result is given as following. The method of uncertainty calculation is provided in Advanced Compliance Lab. Doc. No. 0048-01-01.

	Prob. Dist.	Uncertainty(dB)	Uncertainty(dB)	Uncertainty(dB)
		30-1000MHz	1-6.5GHz	Conducted
Combined Std. Uncertainty u_c	norm.	±2.36	±2.99	±1.83



Wei Li
Lab Manager
Advanced Compliance Lab

Date: April 24, 2015

Section 2. General Equipment & Test Configuration

2.1. EUT Specification

EUT	Quantum EZ, Model No. Q5C, manufactured by U.S. Radar Inc., is an ultra-wide band ground penetrating radar (GPR) intended for geophysical surveying and non-destructive testing.	
Supply Voltage	12V(extended: 13V-17V) DC, provided by Rechargeable Battery	
Operating Frequency	Nominal 500MHz	
UWB Bandwidth	295.6MHz to 767.2MHz (-10dB BW)	
Modulation Type	120ns Impulse, 0.5MHz Pulse Repetition Frequency (PRF)	
Peak Emissions in a 50 MHz Bandwidth	<960MHz	
Antenna	internal, non-user replaceable Dipole Antenna	
Hardware Version	.001	
Software Version	.001	

2.2. Description of Operation

The system performs time domain reflectometry by radiating a radio frequency impulse with a repetition frequency of 1 MHz from a transmitting dipole (TX dipole). Transitions between materials exhibiting different wave impedances through which the electromagnetic wave travels cause the wave to be reflected. These reflections are received by the receiving dipole (RX dipole) and sampled by the instrument. Results may

be displayed in real time on the system screen and recorded on an internal hard disk drive for later analysis. In the field, the system is usually powered from a rechargeable battery.


2.3. System Diagram

See Attachment provided by Applicant.

2.4. General EUT Setup

The EUT is operated at continuous transmission mode with the antenna fitted in a manner typical of normal intended use: mounted on a trolley incorporating a distance encoder; the trolley providing mechanical support and accurate data registration.

All measurements shall be made at room temperature and at nominal DC input voltage (provided by a battery). The EUT is placed directly on the dry sand with no ground plane under it.

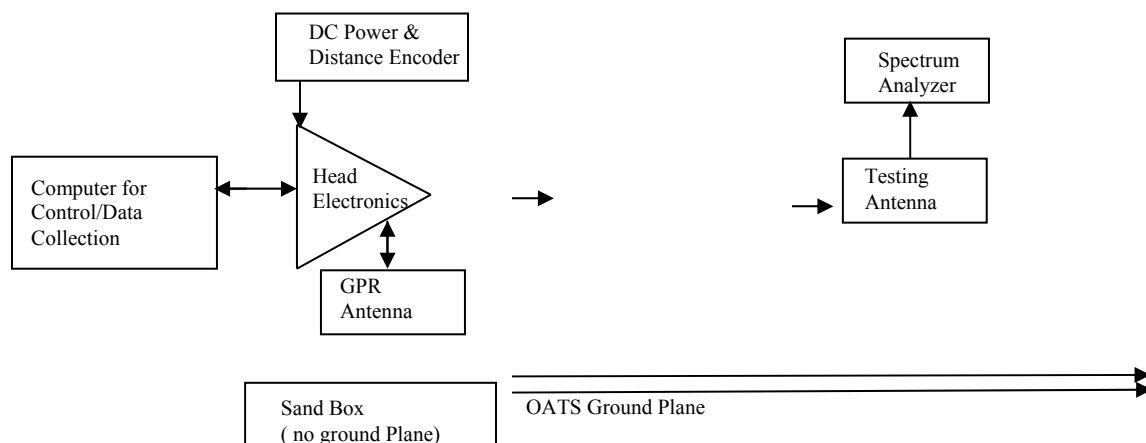

2.5. Operational Frequency channel(s) for testing:

- One CH: 500MHz

Section 3. Test Methodology & Facilities

3.1 Measurement Procedure

The tests documented in this report were performed in accordance with ANSI C63.4 /C63.10, FCC CFR 47 Part 2 & 15 & FCC Order, ET Docket No. 980153(FCC02-08). Test procedure described in FCC “KDB 393764, UWB Compliance Measurements” is used in this report. The test methods used to generate the data in this test report is in accordance with ANSI C63.10:2009, American National Standard for Testing Unlicensed Wireless Devices.

In accordance with ANSI C63.10:2009, Section 7.10.2.2, the device under test was placed on a bed of dry sand and rotated through 16 azimuth angles (Clause 5.4) to determine which produced the highest emission relative to the limit. The azimuth that produced the highest emission relative to the limit was used for all radiated emission measurements.

3.2. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at Hillsborough, New Jersey, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, “Radio Interference Measuring Apparatus and Measurement Methods”.

ACL is accredited by NVLAP, Laboratory Code 200101-0. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.

3.3. Test and Measurement Equipment

The following test and measurement equipment was utilized for the tests documented in this report:

Manufacturer	Model	Serial No.	Description	Cal Due mm/dd/yy
Agilent	E4440A	US40420700	3Hz-26.5GHz Spec. Analyzer	6/06/15
R & S	ESPI	100018	9KHz-7GHz EMI Receiver	8/25/15
HP	HP8546A	3448A00290	9kHz to 6.5GHz EMI Receiver	10/16/15
EMCO	3104C	9307-4396	20-300MHz Biconical Antenna	10/19/15
EMCO	3146	9008-2860	200-1000MHz Log-Periodic Antenna	10/19/15
Electro-Meterics	ALR-25M/30	289	10KHz-30MHz Active Loop Antenna	8/28/15
EMCO	3115	4945	Double Ridge Guide Horn Antenna	10/17/15

All Test Equipment Used is Calibrated, Traceable to NIST Standards. 2 Year Interval.

Section 4. Measurement Data

Test No.1

Name of Test:	<i>Cross Reference</i>	Test Standard:	<i>15.505</i>
Tested By:	WEI LI	Test Date:	4/1/2015-4/24/2015

Minimum 15.505(a)

Standard: Equipment under test complies with all the relevant and applicable requirements of Subpart A, Subpart B and Section 15.201 through 15.204 and Section 15.207 of Subpart C.

15.505(b)

The Digital circuitry portion of the EUT has been tested and verified to comply with 47 CFR Part 15, subpart B.

Method of Measurement: a) Except where specifically stated otherwise within this subpart, the provisions of Subparts A and B and of Sections 15.201 through 15.204 and Section 15.207 of Subpart C of this part apply to unlicensed UWB intentional radiators. The provisions of Sections 15.35(c) and 15.205 do not apply to devices operated under this subpart. The provisions of Footnote US 246 to the Table of Frequency Allocations contained in Section 2.106 of this chapter does not apply to devices operated under this subpart.

b) The requirements of Subpart F apply only to the radio transmitter, i.e., the intentional radiator, contained in the UWB device. Other aspects of the operation of a UWB device may be subject to requirements contained elsewhere in this chapter. In particular, a UWB device that contains digital circuitry not directly associated with the operation of the transmitter also is subject to the requirements for unintentional radiators in Subpart B of this chapter. Similarly, an associated receiver that operates (tunes) within the frequency range 30 MHz to 960 MHz is subject to the requirements in Subpart B of this chapter.

Test Result:

Complies

Test Data:

Data and Plot

Project Number:	0048-150121-01
EUT:	U.S. Radar/ Quantum EZ, Q5C
S/N:	PT001
Tested By:	David Tu
Temperature:	65°F
Humidity:	30%

Spurious Radiated Emissions from Digital Circuitry (RF off) complies with FCC Part 15.109 (Class B), measured per ANSI C63.4 with standard setup.

Freq. (MHz)	H,V	Height (m)	Angle (degree)	SA* Reading (dBuV/m)	Refer to Part 15.109 3m Limit (dBuV/m)	Margin (dB)	Result
36.8	H	1.5	170	29.4	40.0	-10.6	Pass
144.8	H	1.4	190	40.6	43.5	-2.9	
199.2	H	1.2	180	35.2	43.5	-8.3	
204*	H	1.2	180	37.1	43.5	-6.4	
250	H	1.2	220	36.3	46.0	-9.7	
300	H	1.2	230	40.0	46.0	-6	
400	H	1.3	210	37.5	46.0	-8.5	
500	H	1.1	220	41.5	46.0	-4.5	
700	H	1.1	190	41.4	46.0	-4.6	
1100	H	1.1	180	38.8	46.0	-7.2	
38.9**	V	1.2	95	38.8	40.0	-1.2	
96.7	V	1.2	90	38.3	43.5	-5.2	
128.2**	V	1.1	100	42.1	43.5	-1.4	
146.0**	V	1.1	80	40.2	43.5	-3.3	
210**	V	1.0	170	39.3	43.5	-4.2	
300**	V	1.0	180	41.1	46.0	-4.9	
500**	V	1.0	175	44.1	46.0	-1.9	
700**	V	1.1	180	44.9	46.0	-1.1	
900	V	1.2	145	41.7	46.0	-4.3	
1024	V	1.1	180	39.5	54.0	-14.5	
1100	V	1.1	170	40.3	54.0	-13.7	
1330	V	1.1	180	38.5	54.0	-15.5	
1500	V	1.1	170	45.4	54.0	-8.6	
1535	V	1.1	180	38.0	54.0	-16	

*Peak reading. For emissions that have peak values close to (or over) the specification limit (if any) will be also measured in the quasi-peak or average mode to determine the compliance.

** Quasi-peak Reading at this frequency.

Project Number:	0048-150121-01
EUT:	U.S. Radar/ Quantum EZ, Q5C
S/N:	PT001
Tested By:	Wei Li
Temperature:	65°F
Humidity:	30%

Section:	<i>Spurious Radiated Emissions from Digital Circuitry complied to FCC Part 15 Sub Part B</i>
Plot Name:	Radiated Emissions Pre-scan (Anechoic Chamber)
Configuration:	Stand alone, only Digital Circuitry Active



MARKER
704.0 MHz
46.86 dBμV/m


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 704.0 MHz
46.86 dBμV/m

LOG REF 80.0 dBμV/m

10
dB/
ATN
10 dB


VA SB
SC FC
ACORR

CENTER 600.0 MHz SPAN 800.0 MHz
#IF BW 120 kHz AVG BW 300 kHz SWP 750 msec

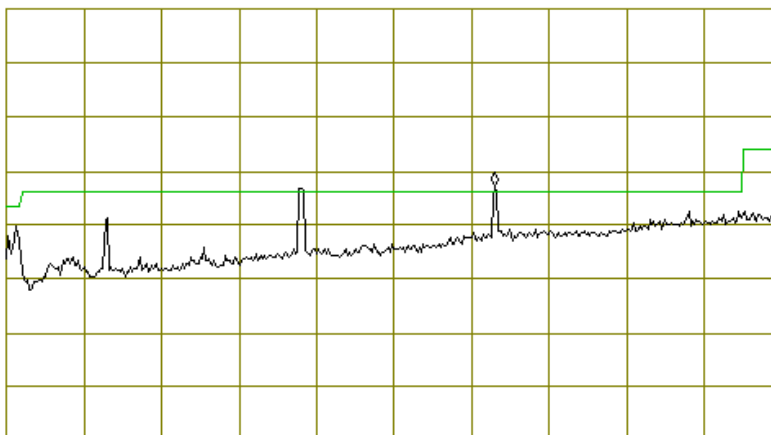

Project Number:	0048-150121-01
EUT:	U.S. Radar/ Quantum EZ, Q5C
S/N:	PT001
Tested By:	Wei Li
Temperature:	65°F
Humidity:	30%

Section:	<i>Spurious Radiated Emissions from Digital Circuitry complied to FCC Part 15 Sub Part B</i>
Plot Name:	Radiated Emissions Pre-scan (Anechoic Chamber)
Configuration:	Stand alone, only Digital Circuitry Active

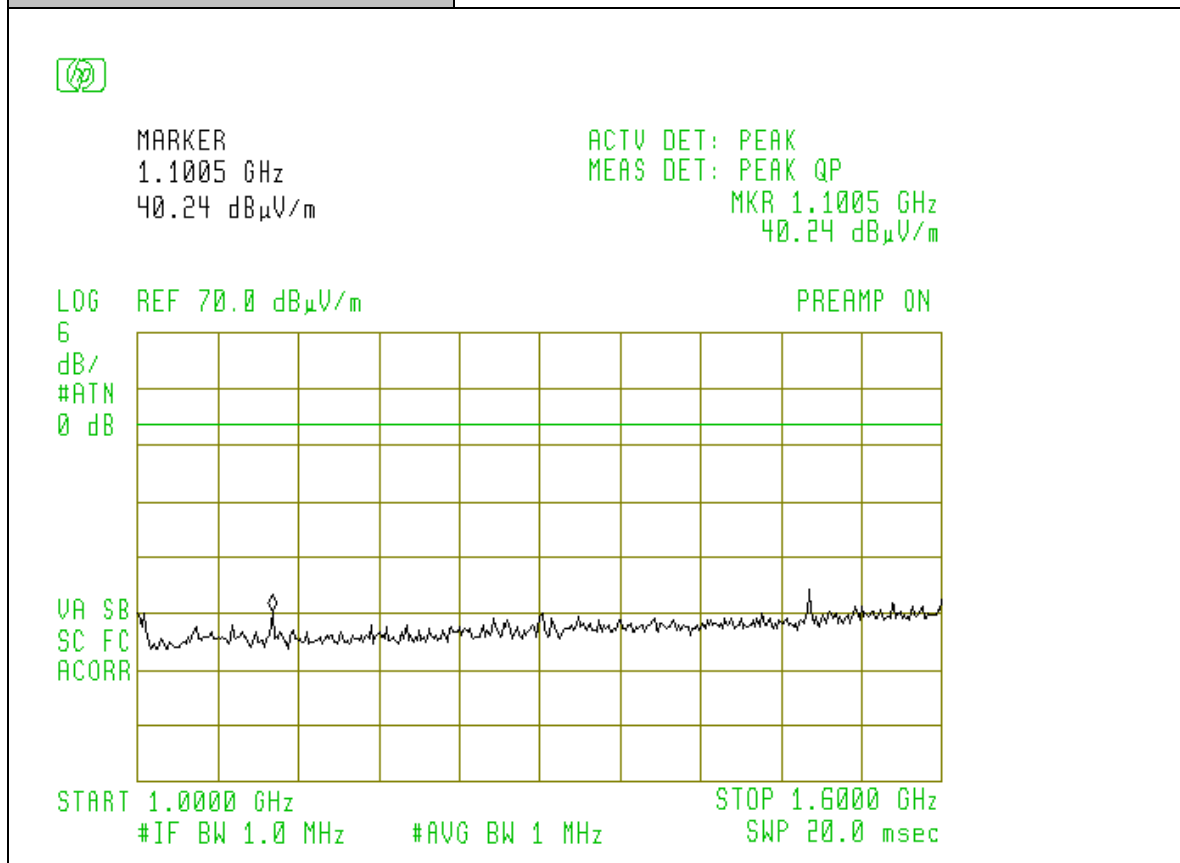

Test No.2

Name of Test:	<i>Marketing of UWB Equipment</i>	Test Standard:	<i>15.507</i>
Tested By:	WEI LI	Test Date:	4/1/2015-4/24/2015

Minimum 15.507/ 2.909

Standard: The responsible party is properly informed about the responsible for ensuring that the equipment is marketed only to eligible parties, and provide correct information on the customers and users.
(See Important note for the US customers of the Installation Guide and User Manual)

Method of Measurement: In some cases, the operation of UWB devices is limited to specific parties, e.g., law enforcement, fire and rescue organizations operating under the auspices of a state or local government. The marketing of UWB devices must be directed solely to parties eligible to operate the equipment. The responsible party, as defined in Section 2.909 of this chapter, is responsible for ensuring that the equipment is marketed only to eligible parties. Marketing of the equipment in any other manner may be considered grounds for revocation of the grant of certification issued for the equipment.

Test Result:

Complies

Test Data:

NA

Test No.3

Name of Test:	<i>Pulse Repetition Frequency (PRF)</i>	Test Standard:	<i>15.509(d)</i> <i>15.209</i>
Tested By:	WEI LI	Test Date:	4/1/2015-4/24/2015

Minimum Definition:
Standard: Pulse Repetition Frequency (PRF) is the trigger repetition frequency.

PRF declared by applicant: 0.5MHz

Method of Tested at 3-meter OATS per ANSI C63.4
Measurement: Spectrum Analyzer Settings:
RBW: 30KHz
VBW: $\geq$ RBW
Detector: Peak
Span: As required
Sweep: Auto

Test Result: **Complies**

Test Data: **PRF measured =0.5MHz**

Test No.4

Name of Test:	<i>UWB Bandwidth</i>	Test Standard:	<i>15.509(a)</i> <i>15.503(a)</i>
Tested By:	WEI LI	Test Date:	4/1/2015-4/24/2015

**Minimum
Standard:**

Definition:

The bandwidth of a UWB emission is defined by the points on the emission spectrum where the amplitude is 10 dB below the maximum emission amplitude (i.e., the -10 dB points), as based on the complete transmission system including the antenna. The upper boundary is designated f_H and the lower boundary is designated f_L . The frequency at which the highest radiated emission occurs is designated f_M . The center frequency f_C , equals $(f_H + f_L) / 2$. The fractional bandwidth equals $2 * (f_H - f_L) / (f_H + f_L)$.

In cases where the measured emission spectrum contains multiple (more than two) -10 dB points, the outermost points define the bandwidth (i.e., the widest bandwidth is assumed).

Limits:

The UWB bandwidth of an imaging system operating under the provisions of this section must be below 10.6 GHz.

Method of Measurement:	Tested at 3-meter OATS per ANSI C63.4 Spectrum Analyzer Settings: RBW: 1MHz VBW: 3MHz Detector: Peak Span: As required (to display a full spectrum of the RF emission) Sweep: Auto Test Procedure: 1) The receiving antenna which varied from 1 to 4 m to find the highest emission is positioned 3 m away from the EUT. 2) Measure the Highest radiated emission at f_M as described in the test No. 9. 3) Recorded the upper and lower frequency that are at the side of the band bounded by the points at 10 dB below the highest radiated UWB emission level. Measuring the bandwidth of a UWB device using a radiated test set-up, it is imperative that appropriate adjustments be made to the measured amplitude levels to account for the frequency-dependent components of the measurement system (e.g., antenna gain or factor, pre-amplifier gain, cable loss, etc). Since UWB emissions can have bandwidths several GHz wide, these frequency-dependent characteristics can vary dramatically over the fundamental emission. According to the nature of the broadband emission characteristics, significant care must be taken to capture the true spectrum of emission, extremely narrow sweep widths is recommended. 4) The UWB bandwidth is the different of the upper and lower frequency recorded.
-------------------------------	---

Test Result: **Complies**

Test Data: **Data and Plots**

Measurement Data (Values in MHz):


f_M	The highest emission peak	494.8
f_L	10 dB below the highest peak	295.6
f_H	10 dB above the highest peak	767.2
f_C	Calculated: $(f_H + f_L)/2$	531.4
Bandwidth	Calculated: $(f_H - f_L)$	461.5
Fractional BW	Calculated: $2*(f_H - f_L)/(f_H + f_L)$	1.737

Note: The Fraction Bandwidth is greater than 0.2 and therefore the minimum UWB Bandwidth of 500 MHz requirement does not need to be met.

Measurement Plots:

Project Number:	0048-150121-01
EUT:	U.S. Radar/ Quantum EZ, Q5C
S/N:	PT001
Tested By:	Wei Li
Temperature:	65°F
Humidity:	30%

Section:	UWB Bandwidth
Plot Name:	10dB UWB Bandwidth in Anechoic Chamber
Configuration:	Stand alone, Continue operation

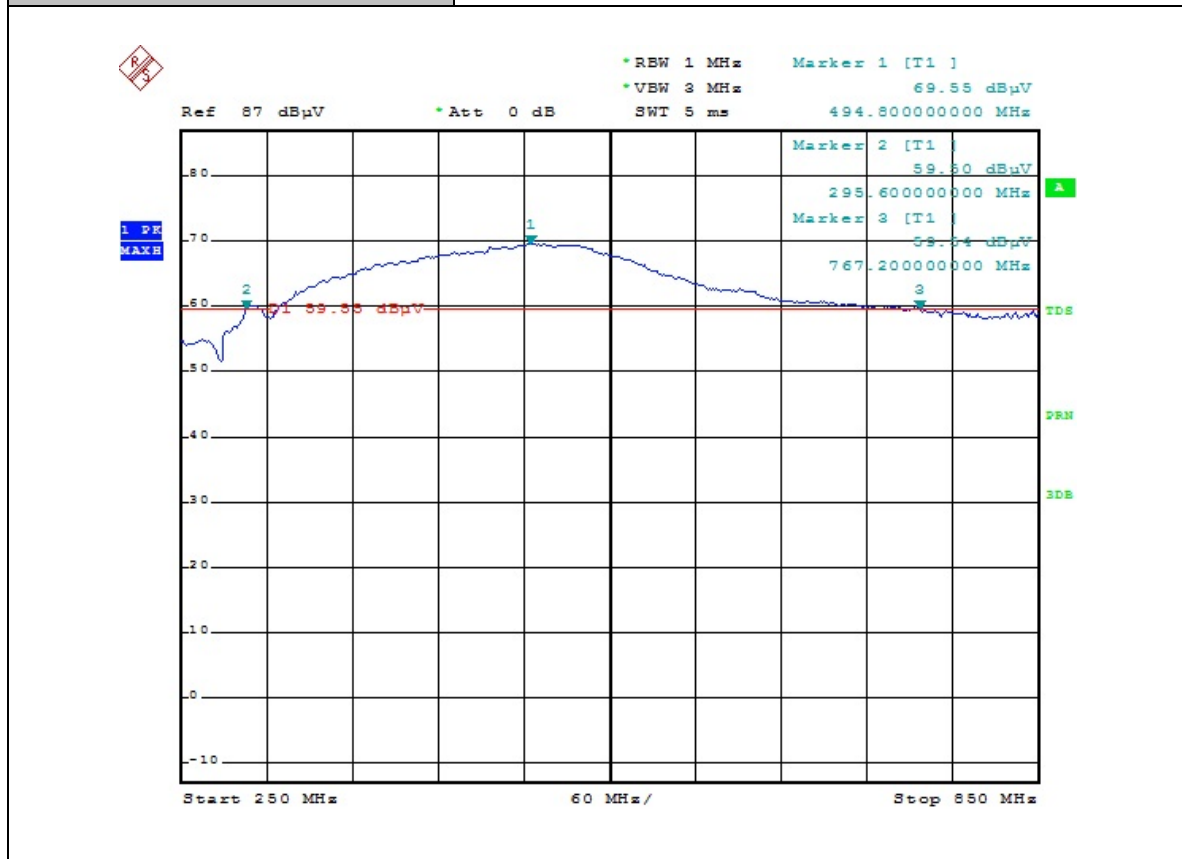

Test No.5

Name of Test:	<i>General Operational Requirements for LFIS</i>	Test Standard:	<i>15.509(b)</i>
Tested By:	WEI LI	Test Date:	4/1/2015-4/24/2015

Minimum 15.509(b)

Standard: Operation under the provisions of this section is limited to GPRs and wall imaging systems operated for the purposes with law enforcement, fire fighting, emergency rescue, scientific research, commercial mining, or construction.

Method of Measurement: The manufacturer Shall state that the device under test complies with the requirements outlined in section FCC Part 15.509 (b).

Test Result:

Complies

Test Data:

NA

Test No.6

Name of Test:	<i>Spurious Radiated Emissions $\leq 960\text{MHz}$</i>	Test Standard:	<i>15.509(d) 15.209</i>
Tested By:	David Tu	Test Date:	4/1/2015-4/24/2015

Minimum Definition:

Standard: The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in Section 15.209.

Limits:

Frequency (MHz)	Field Strengths Limits (dB μ V/m)	Measuring RBW kHz	Distance (meters)
0.009-0.490	67,6-20*Logf(kHz)	1	300
0.490-1.705	87,6-20*Logf(kHz)	9	30
1.705-30	29,5	9	30
30-88	40,0	120	3
88-216	43,5	120	3
216-960	46,0	120	3

Method of Tested at 3-meter OATS per ANSI C63.4
Measurement: Spectrum Analyzer Settings:
RBW: 120KHz
VBW: $\geq 3 \times$ RBW
Detector: Quasi-Peak
Span: As required
Sweep: Auto

Test Procedure:

- 1) The EUT was placed on sandpit area filled with dry sand initially placed in front of the ground plane (0° degree position)
- 2) The receiving antenna which varied from 1 to 4 m to find the highest emission is positioned 3 m away from the EUT.
- 3) The receiving antenna was positioned in horizontal polarization.
- 4) The measurements were made with the detector set to peak with a bandwidth of 120 kHz during monitoring the frequency range below 960 MHz.
- 5) Upon detection of a suspect emission signal, its amplitude and frequency were noted.
- 6) It is recommended to demodulate the received signals for suitable discrimination of the ambient emission from the EUT emission.
- 7) At the worst case combination of the EUT operating mode and antenna height, the field strength measure was recorded. At each of the frequencies where a field strength was recorded the final measurement was performed with a Quasi-Peak detector.
- 8) The receiving antenna was positioned in vertical polarization and the steps 2 to 6 was repeated.
- 9) The EUT was rotating from 0° to 360° degrees with 45° step increment and the steps 4 to 7 was repeated.
- 10) All the worst case combination field strength emissions founded of each EUT position and antenna polarization was recorded in the following table and compared with the applicable limits.

Test Result:

Complies

Test Data:

Data

Project Number:	0048-150121-01
EUT:	U.S. Radar/ Quantum EZ, Q5C
S/N:	PT001
Tested By:	David Tu
Temperature:	65°F
Humidity:	30%

Worst Case Scenario: the worst case combination field strength emissions founded of each EUT position and antenna polarization was recorded in the following table and compared with the applicable limits.

- EUT Position (angle) : 45 ° interval.
- Antenna Polarization : Horizontal & Vertical; Antenna Height : 1-4m


Freq.* (MHz)	H,V	SA QP Reading (dBuV/m)	Height (m)	Angle (degree)		Refer to Part 15.209 3m Limit (dBuV/m)	Margin (dB)	Result
39.4	H	32.5	1.4	180		40.0	-7.5	pass
157.6	H	34.6	1.3	45		43.5	-8.9	
184.5	H	41.2	1.2	45		43.5	-2.3	
196.3	H	40.6	1.2	45		43.5	-2.9	
217.5	H	43.1	1.2	0		46.0	-2.9	
232.0	H	41.6	1.2	0		46.0	-4.4	
296.0	H	39.9	1.1	0		46.0	-6.1	
384.0	H	39.7	1.1	0		46.0	-6.3	
400.0	H	38.5	1.1	0		46.0	-7.5	
413.4	H	41.9	1.1	0		46.0	-4.1	
488.0	H	38.8	1.1	0		46.0	-7.2	
537.6	H	42.5	1.1	0		46.0	-3.5	
564.8	H	44.6	1.1	0		46.0	-1.4	
580.8	H	39.6	1.1	0		46.0	-6.4	
636.3	H	36.8	1.1	0		46.0	-9.2	
662.4	H	35.9	1.1	0		46.0	-10.1	
148.1	V	37.6	1.2	45		43.5	-5.9	
191.3	V	38.9	1.1	45		43.5	-4.6	
204.5	V	39.2	1.2	45		43.5	-4.3	

318.4	V	37.2	1.1	0		46.0	-8.8	
376.0	V	34.5	1.0	0		46.0	-11.5	
380.5	V	37.6	1.0	0		46.0	-8.4	
400.0	V	36.9	1.0	0		46.0	-9.1	
433.6	V	38.3	1.0	0		46.0	-7.7	
452.9	V	39.6	1.0	0		46.0	-6.4	
528.0	V	38.3	1.0	0		46.0	-7.7	
542.1	V	39.9	1.0	0		46.0	-6.1	
606.1	V	41.8	1.0	0		46.0	-4.2	
683.2	V	38.1	1.0	0		46.0	-7.9	

* Emissions from Digital circuitry (identified in Test No.1 for FCC Part 15 B) excluded.


Project Number:	0048-150121-01
EUT:	U.S. Radar/ Quantum EZ, Q5C
S/N:	PT001
Tested By:	Wei Li
Temperature:	65°F
Humidity:	30%

Section:	<i>Spurious Radiated Emissions ≤960MHz</i>
Plot Name:	Radiated Emissions in GPR Site (OATS) H Polarity, 0 Degree
Configuration:	Stand alone, Continue operation

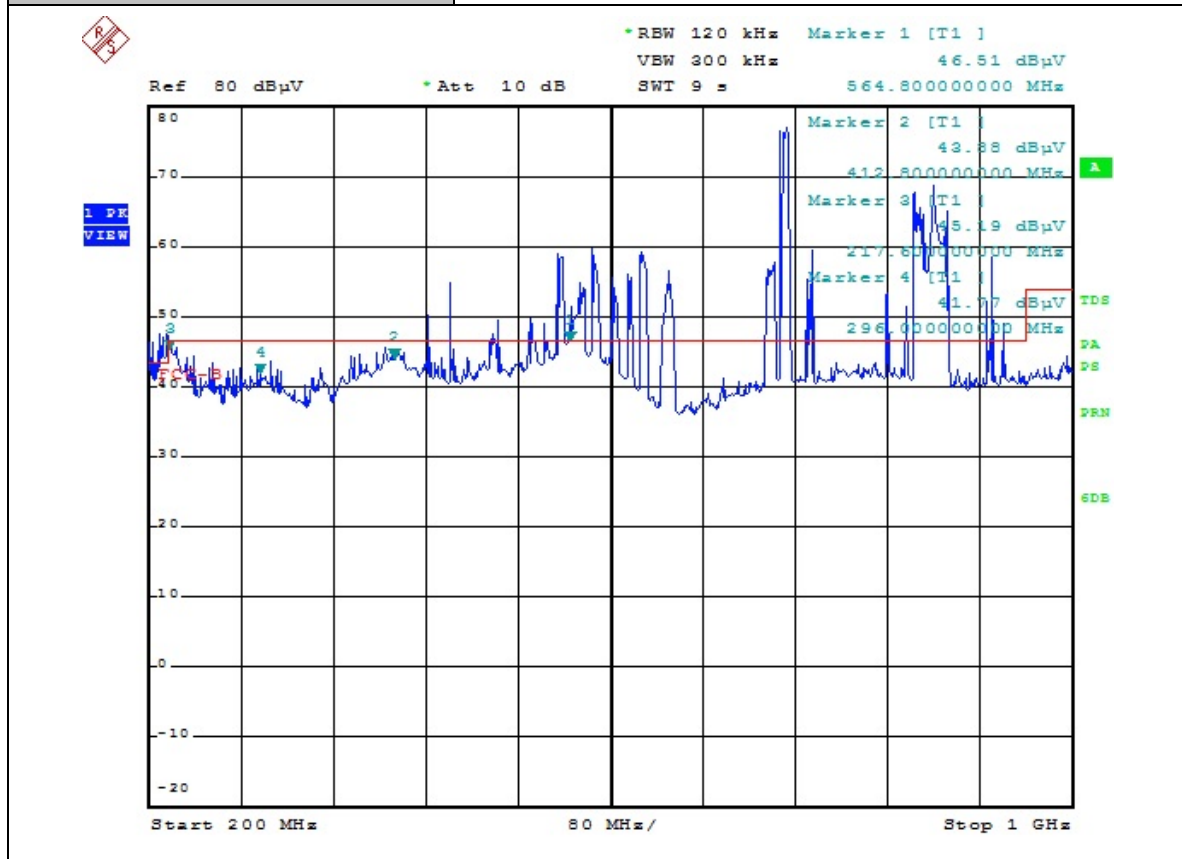

Project Number:	0048-150121-01
EUT:	U.S. Radar/ Quantum EZ, Q5C
S/N:	PT001
Tested By:	Wei Li
Temperature:	65°F
Humidity:	30%

Section:	<i>Spurious Radiated Emissions ≤960MHz</i>
Plot Name:	Radiated Emissions in GPR Site (OATS) V Polarity, 0 Degree
Configuration:	Stand alone, Continue operation

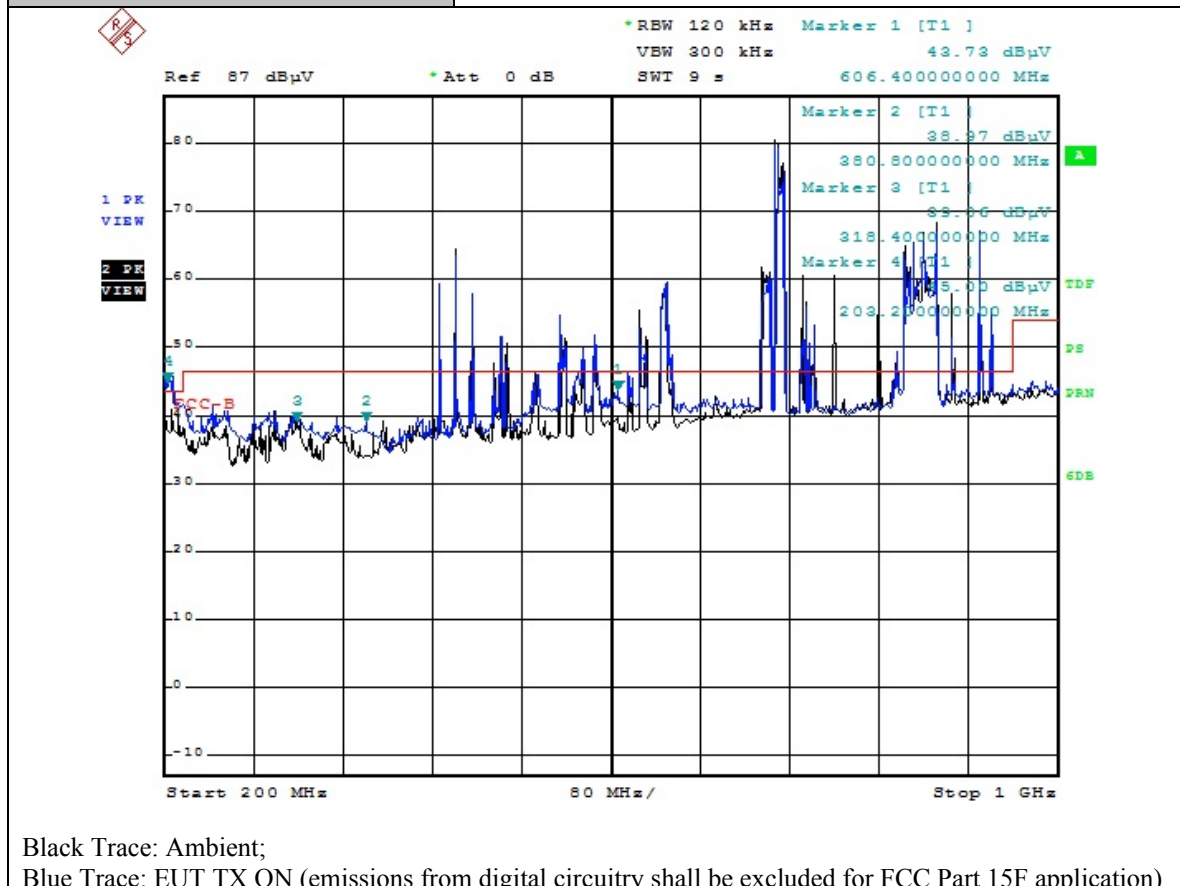

Test No.7

Name of Test:	<i>Spurious Radiated Emissions >960MHz</i>	Test Standard:	<i>15.509(d) 15.209</i>
Tested By:	David Tu	Test Date:	4/1/2015-4/24/2015

Minimum Definition:

Standard: The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz.

Limits:

Frequency (MHz)	EIRP @ 3 meters (1 MHz BW) (dBm)	Field strength @ 3 meters (1 MHz BW) (dBμV/m)	Field strength @ 1 meters (1 MHz BW) (dBμV/m)
960-1610	-	29,9	39,4
1610-1990	-	41,9	51,4
1990-3100	-	43,9	53,4
3100-10600	-	53,9	63,4
Above 10600	-	43,9	53,9

Remark: The limits were converted from EIRP to field strength at 3 and 1 meter according to FCC 15.503(k).

Method of Measurement: Tested at 3-meter OATS per ANSI C63.4
Spectrum Analyzer Settings:
RBW: 1MHz
VBW: $\geq 3 \times$ RBW
Detector: RMS Average Detector
Span: As required
Sweep: Auto

Test Procedure:

- 1) The EUT was placed on sandpit area filled with dry sand initially placed in front of the ground plane (0° degree position)
- 2) The receiving antenna is placed at 1 meter away from the EUT and it is pointed in the direction of the radiating head with an inclination of -10° to find the highest emission.
- 3) The receiving antenna was positioned in horizontal polarization.
- 4) The measurements were made with the detector set to RMS with a bandwidth of 1 MHz during monitoring the frequency range above 960 MHz.
- 5) Upon detection of a suspect emission signal, its amplitude and frequency were noted.
- 6) It is recommended to demodulate the received signals for suitable discrimination of the ambient emission from the EUT emission.
- 7) At the worst case combination of the EUT operating mode and antenna height, the field strength measure was recorded.
- 8) The receiving antenna was positioned in vertical polarization and the steps 2 to 6 was repeated.
- 9) The EUT was rotating from 0° to 360° degrees with 45° step increment and the steps 4 to 7 was repeated.
- 10) All the worst case combination field strength emissions founded of each EUT position and antenna polarization was recorded in the following table and compared with the applicable limits.

Test Result:

Complies

Test Data:

Data

Project Number:	0048-150121-01
EUT:	U.S. Radar/ Quantum EZ, Q5C
S/N:	PT001
Tested By:	David Tu
Temperature:	65°F
Humidity:	30%

Worst Case Scenario: the worst case combination field strength emissions founded of each EUT position and antenna polarization was recorded in the following table and compared with the applicable limits.

- EUT Position (angle) : 45 ° interval.
- Antenna Polarization : Horizontal & Vertical; Antenna Height : 1-4m

Freq. (MHz)	H,V	SA Reading (dBuV/m)	Height (m)	Angle (degree)		Refer to 15.509(d) Limit (dBuV/m)	Margin (dB)	Result
1076	V	26.35	1.1	180		29.9	-3.55	Pass
1385	V	26.10	1.0	180		29.9	-3.8	
1414	V	27.58	1.0	170		29.9	-2.32	
1955	V	33.45	1.0	180		41.9	-8.45	


NOTE:

* Emissions from Digital circuitry (identified in Test No.1 for FCC Part 15B) are excluded.

SA (Spectrum Analyzer) Reading Setup: Average Reading for above 960MHz; 1m/3m distance factor applied.

Project Number:	0048-150121-01
EUT:	U.S. Radar/ Quantum EZ, Q5C
S/N:	PT001
Tested By:	Wei Li
Temperature:	65°F
Humidity:	30%

Section:	<i>Spurious Radiated Emissions >960MHz</i>
Plot Name:	Radiated Emissions in GPR Site (OATS) H Polarity
Configuration:	Stand alone, Continue operation

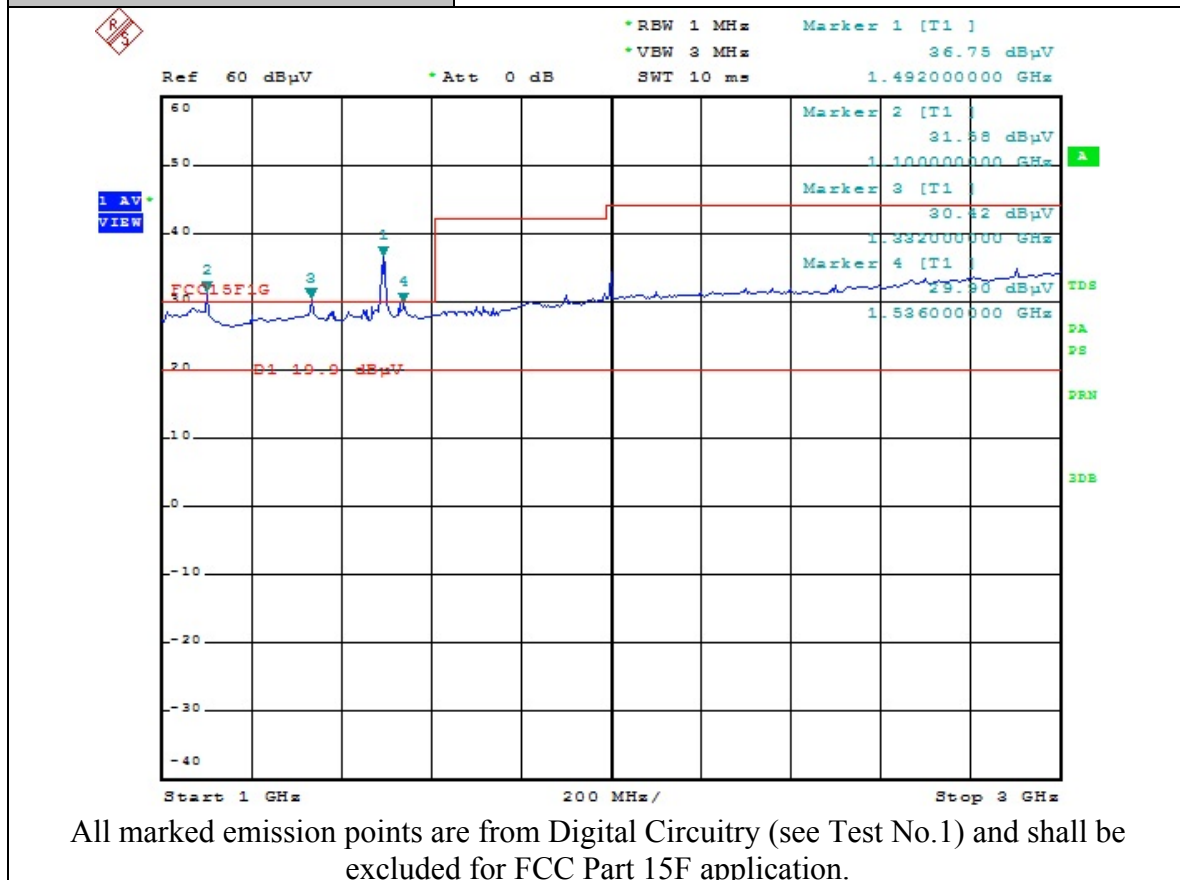

Test No.8

Name of Test:	<i>Radiated Emissions in GPS Bands</i>	Test Standard:	<i>15.509(e)</i>
Tested By:	David Tu	Test Date:	4/1/2015-4/24/2015

Minimum Definition:
Standard: In addition to the radiated emission limits specified for frequency above 960 MHz, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz in the GPS frequency bands.

Limits:

Frequency (MHz)	EIRP @ 3 meters (1 MHz	Field strength @ 3 meters	Field strength @ 1 meters
1164-1240	-75.3	19,9	29,4
1559-1610	-75.3	19,9	29,4

Remark: The limits were converted from EIRP to field strength at 3 and 1 meter according to FCC 15.503(k).

Method of Measurement: Tested at 3-meter OATS per ANSI C63.4
Spectrum Analyzer Settings:
RBW: 1KHz
VBW: 3MHz
Detector: RMS Average Detector
Span: As required
Sweep: Auto

Test Procedure:

- 1) The EUT was placed on sandpit area filled with dry sand initially placed in front of the ground plane (0° degree position)
- 2) The receiving antenna is placed at 1 meter away from the EUT and it is pointed in the direction of the radiating head with an inclination of -10° to find the highest emission.
- 3) The receiving antenna was positioned in horizontal polarization.
- 4) The measurements were made with the detector set to RMS with a bandwidth of 1 MHz during monitoring the frequency range above 960 MHz.
- 5) Upon detection of a suspect emission signal, its amplitude and frequency were noted.
- 6) It is recommended to demodulate the received signals for suitable discrimination of the ambient emission from the EUT emission.
- 7) At the worst case combination of the EUT operating mode and antenna height, the field strength measure was recorded.
- 8) The receiving antenna was positioned in vertical polarization and the steps 2 to 6 was repeated.
- 9) The EUT was rotating from 0° to 360° degrees with 45° step increment and the steps 4 to 7 was repeated.
- 10) All the worst case combination field strength emissions founded of each EUT position and antenna polarization was recorded in the following table and compared with the applicable limits.

Test Result:

Complies

Test Data:

Data and Plot

Project Number:	0048-150121-01
EUT:	U.S. Radar/ Quantum EZ, Q5C
S/N:	PT001
Tested By:	David Tu
Temperature:	65°F
Humidity:	30%


Worst Case Scenario: All maximum Field strength emission are found at the following test set-up conditions:

Freq. (MHz)	H,V	SA Reading (dBuV/m)	Height (m)	Angle (degree)		1m Limit (dBuV/m)	Margin (dB)	Result
1179.96	H	8.85	1.0	180		29.40	-20.55	Pass
1169.17	V	9.74	1.0	180		29.40	-19.66	
1600.00	H	10.24	1.0	180		29.40	-19.16	
1600.00	V	12.75	1.0	180		29.40	-16.65	

There were no broadband emissions related to the UWB transmitter. Measured signals were narrowband and related to the microprocessor / clocks and do not fall under the requirements of this section.


Project Number:	0048-150121-01
EUT:	U.S. Radar/ Quantum EZ, Q5C
S/N:	PT001
Tested By:	Wei Li
Temperature:	65°F
Humidity:	30%

Section:	<i>Radiated Emissions in GPS Bands</i>
Plot Name:	Radiated Emissions in 1164-1240MHz Band H Polarity
Configuration:	Stand alone, Continue operation

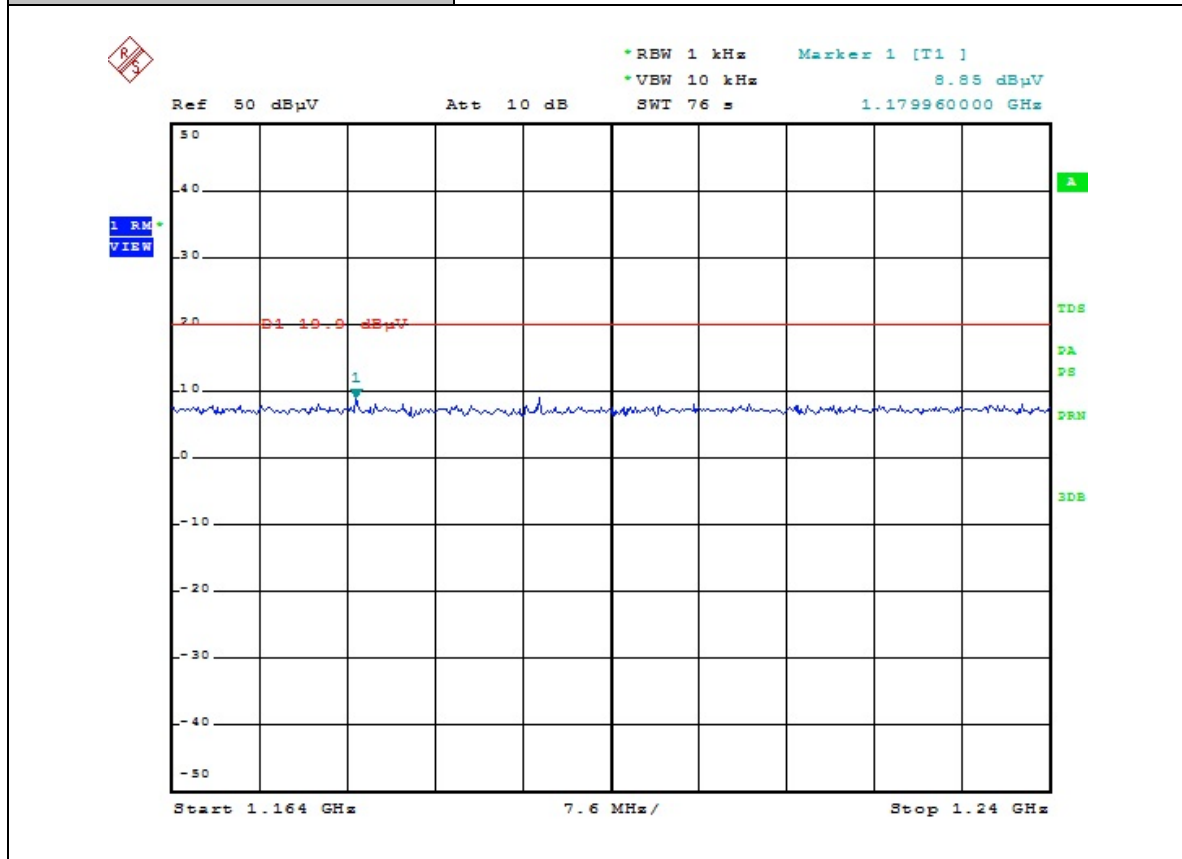


Project Number:	0048-150121-01
EUT:	U.S. Radar/ Quantum EZ, Q5C
S/N:	PT001
Tested By:	Wei Li
Temperature:	65°F
Humidity:	30%

Section:	<i>Radiated Emissions in GPS Bands</i>
Plot Name:	Radiated Emissions in 1164-1240MHz Band V Polarity
Configuration:	Stand alone, Continue operation

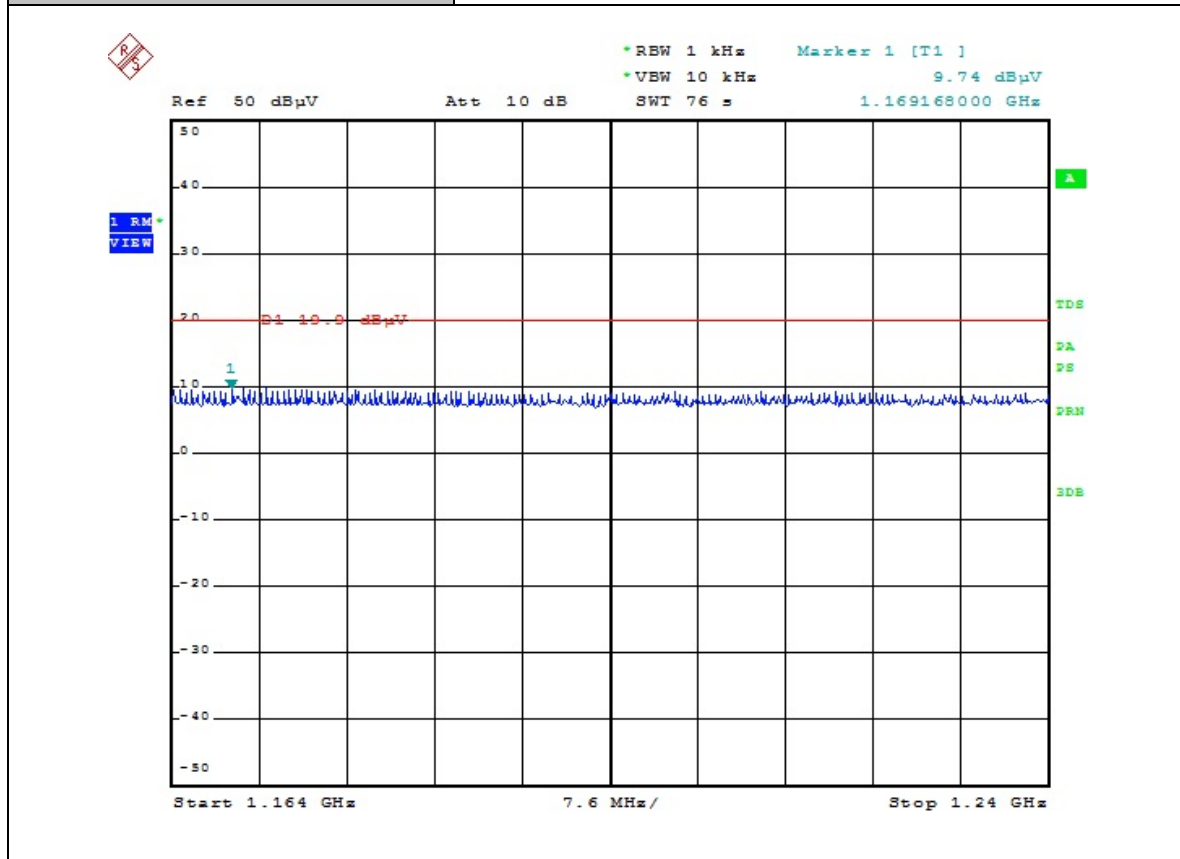


Project Number:	0048-150121-01
EUT:	U.S. Radar/ Quantum EZ, Q5C
S/N:	PT001
Tested By:	Wei Li
Temperature:	65°F
Humidity:	30%

Section:	<i>Radiated Emissions in GPS Bands</i>
Plot Name:	Radiated Emissions in 1559-1610MHz Band H Polarity
Configuration:	Stand alone, Continue operation

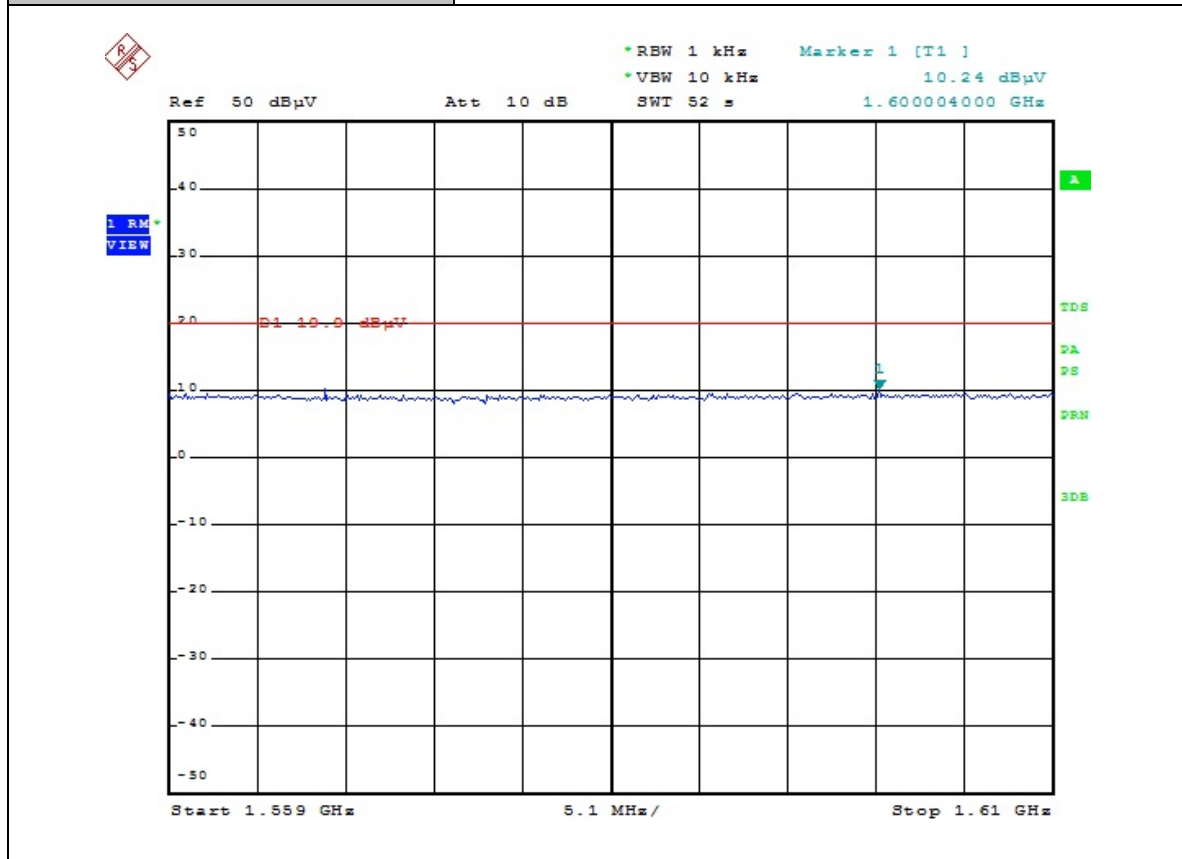

Project Number:	0048-150121-01
EUT:	U.S. Radar/ Quantum EZ, Q5C
S/N:	PT001
Tested By:	Wei Li
Temperature:	65°F
Humidity:	30%

Section:	<i>Radiated Emissions in GPS Bands</i>
Plot Name:	Radiated Emissions in 1559-1610MHz Band V Polarity
Configuration:	Stand alone, Continue operation

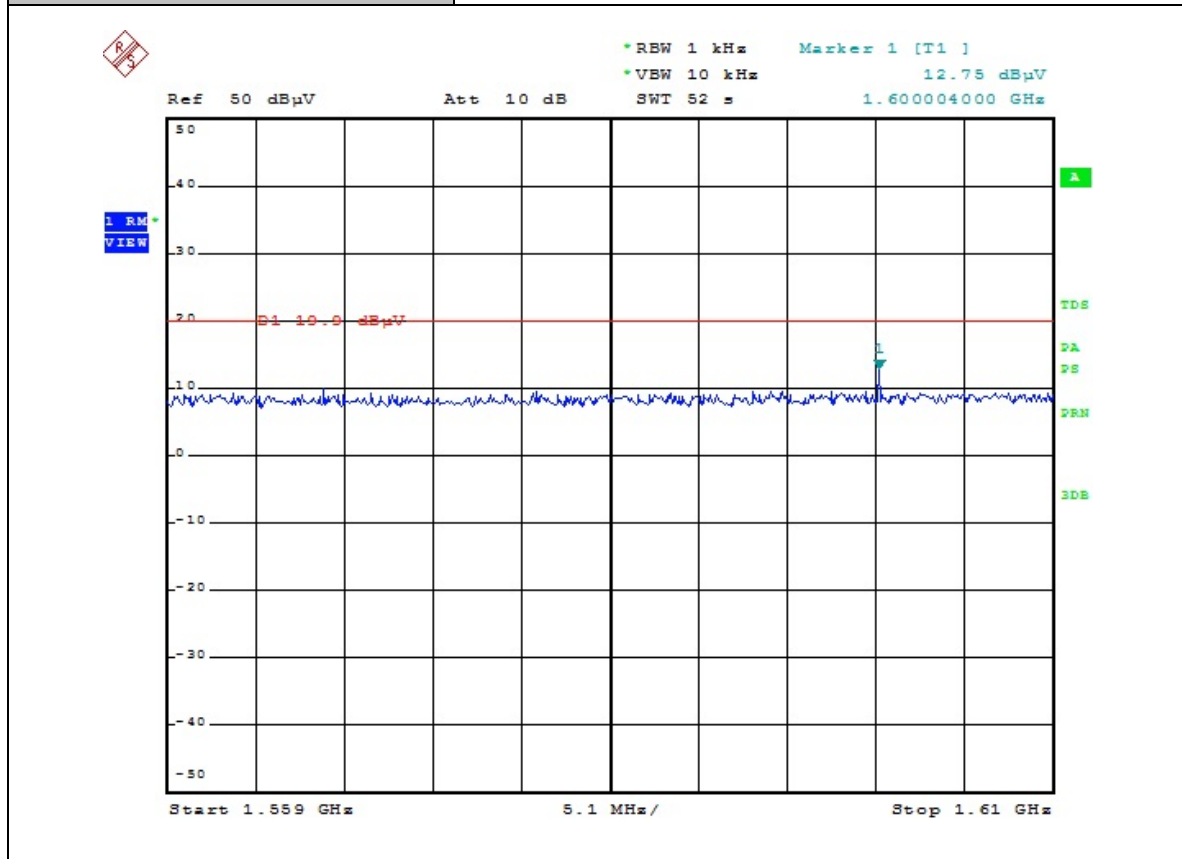

Test No.9

Name of Test:	<i>Highest Radiated Emission at f</i>	Test Standard:	<i>15.509(f)</i> <i>15.209</i>
Tested By:	David Tu	Test Date:	4/1/2015-4/24/2015

Minimum Definition:

Standard: For UWB devices where the frequency at which the highest radiated emission occurs, f_M , is above 960 MHz, there is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on f_M .

Limits:

The peak emission level contained within a 50 MHz bandwidth centered on f_M must be limited to a maximum of 0 dBm EIRP.

EIRP limit	Field strength limit @ 3 meters	Field strength limit @ 3 meters (measured with 1 MHz RBW)
(dBm)	(dB μ V/m)	(dB μ V/m)
0	95,2	61,2

The limits were converted from EIRP to field strength at 3 meter according to FCC 15.503(k).

As the measurement was employed with a 1 MHz resolution bandwidth the applicable limit is adjusted with a $20\log(1/50)$ dB factor.

Method of Tested at 3-meter OATS per ANSI C63.4
Measurement: Spectrum Analyzer Settings:
RBW: 1MHz
VBW: $\geq 3 \times$ RBW
Detector: Peak
Span: As required
Sweep: Auto

Test Procedure:

- 1) The EUT was placed on sandpit area filled with dry sand initially placed in front of the ground plane (0° degree position).
- 2) The receiving antenna which varied from 1 to 4 m to find the highest emission is positioned 3 m away from the EUT.
- 3) The receiving antenna was positioned in horizontal polarization.
- 4) The measurements were made with the detector set to peak with a bandwidth of 1 MHz during monitoring the frequency range inside the UWB of the EUT.
- 5) At the worst case combination of the EUT operating mode and antenna height, the field strength measure was recorded.
- 6) The receiving antenna was positioned in vertical polarization and the steps 4 to 6 was repeated.
- 7) The EUT was rotating from 0° to 360° degrees with 45° step increment and the steps 4 to 7 was repeated.
- 8) Record the peak emission from the EUT.

Test Result:

Complies

Test Data:

Data

Project Number:	0048-150121-01
EUT:	U.S. Radar/ Quantum EZ, Q5C
S/N:	PT001
Tested By:	David Tu
Temperature:	65°F
Humidity:	30%


Worst Case Scenario: The maximum peak level of emission is found at the following test set-up conditions:

Freq. (MHz)	H,V	SA Peak Reading (dBuV/m)	Height (m)	Angle (degree)		Limit (dBuV/m)	Margin (dB)	Result
564.8	H	46.5	1.1	0		61.2	-14.7	Pass*

*Since the f_M is under 960MHz, the requirement in this section is not applicable to this EUT.

Project Number:	0048-150121-01
EUT:	U.S. Radar/ Quantum EZ, Q5C
S/N:	PT001
Tested By:	Wei Li
Temperature:	65°F
Humidity:	30%

Section:	<i>Highest Radiated Emissions at f_M</i>
Plot Name:	Highest Radiated Emissions @564.8MHz (OATS) H Polarity
Configuration:	Stand alone, Continue operation

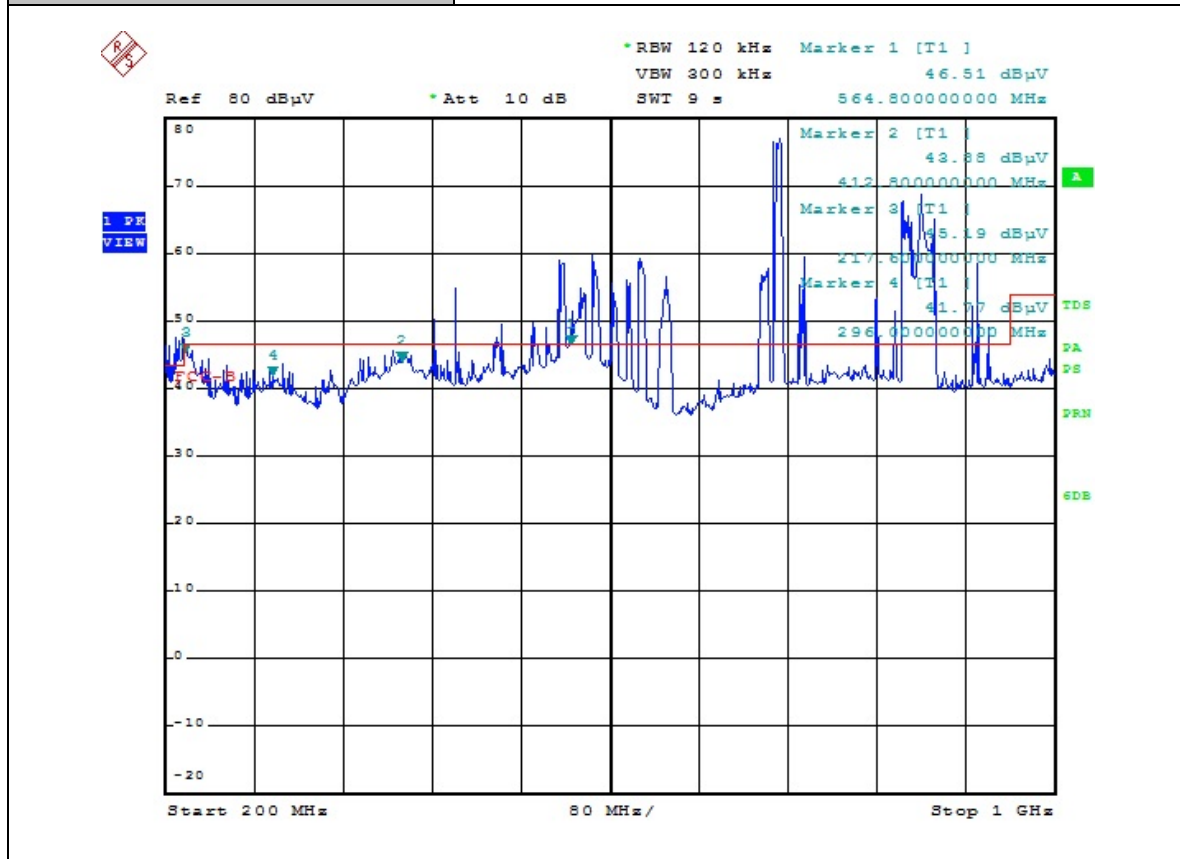

Test No.10

Name of Test:	<i>Technical Requirements Applicable to ALL UWB Devices</i>	Test Standard:	<i>15.521</i>
Tested By:	WEI LI	Test Date:	4/1/2015-4/24/2015

Requirement **Description**

15.521(a)	The EUT is not employed for the operation of toys, operation onboard an aircraft, ship and satellite.
15.521(b)	Permanent attached antenna, no External radio frequency power amplifiers and antenna modifications are permitted.
15.521(c)	The Digital circuitry portion of the EUT has been tested and verified to comply with 47 CFR Part 15, subpart B.
15.521(d)	Considered
15.521(e)	The f_m , frequency at which the highest radiated emission occurs is contained within the measured UWB bandwidth.
15.521(f)	The EUT is not intended to detection of tags or the transfer or data or voice information.
15.521(g)	Considered
15.521(h)	Considered
15.521(i)	Prohibition in Sections 2.201(f) and 15.5(d) of this chapter against Class B (damped wave) emissions is not applied.
15.521(j)	Battery operating device not connected to AC power lines.
15.521(a)	The EUT is not employed for the operation of toys, operation onboard an aircraft, ship and satellite.

Test Result:

Complies

Test Data:

NA

Test No.11

Name of Test:	<i>Coordination Requirement</i>	Test Standard:	<i>15.525</i>
Tested By:	Wei Li	Test Date:	4/1/2015-4/24/2015

Minimum Standard: The responsible party is properly informed about the required coordination requirement and provide correct information to the customers and users about their specific care and legislative obligations.

(See Important note for the US customers of the Installation Guide and User Manual)

Method of Measurement: (a) UWB imaging systems require coordination through the FCC before the equipment may be used. The operator shall comply with any constraints on equipment usage resulting from this coordination.

(b) The users of UWB imaging devices shall supply operational areas to the FCC Office of Engineering and Technology, which shall coordinate this information with the Federal Government through the National Telecommunications and Information Administration.

(c) The manufacturers, or their authorized sales agents, must inform purchasers and users of their systems of the requirement to undertake detailed coordination of operational areas with the FCC prior to the equipment being operated.

(d) Users of authorized, coordinated UWB systems may transfer them to other qualified users and to different locations upon coordination of change of ownership or location to the FCC and coordination with existing authorized operations.

(e) The FCC/NTIA coordination report shall identify those geographical areas within which the operation of an imaging system requires additional coordination or within which the operation of an imaging system is prohibited.

(f) The coordination of routine UWB operations shall not take longer than 15 business days from the receipt of the coordination request by NTIA.

Test Result:

Complies

Test Data:

NA

Test No. 12

Name of Test:	<i>Antenna Requirement</i>	Test Standard:	<i>15.207</i>
Tested By:	WEI LI	Test Date:	4/1/2015-4/24/2015

Minimum Standard: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply.

Method of Measurement: The antenna utilized by the device under test is an internal, non user replaceable unit.

Test Result:

Complies

Test Data:

NA

Test No.13

Name of Test:	<i>Radio Frequency Exposure</i>	Test Standard:	<i>FCC OET Bulletin 65</i>
Tested By:	WEI LI	Test Date:	4/1/2015-4/24/2015

Minimum Standard: Public Exposure to Radio Frequency Energy Levels (1.1307 (b)(1)) Limits:

From §1.1310 Table 1 (B),
for Public $S = 1.0 \text{ mW/cm}^2$
for Professional, $S = 5.0 \text{ mW/cm}^2$

Method of Measurement:

$$d = 0.282 * 10^{((P + G) / 20) / \sqrt{S}}$$

$$S = 0.0795 * 10^{((P + G) / 10) / d^2}$$

Equation (1)

Equation (2)

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm^2

Equation (1) and the measured peak power is used to calculate the MPE distance.

Equation (2) and the measured peak power is used to calculate the Power density.

Test Result:

Complies

Test Data:

NA

Calculation:

For this EUT, max emission level is under the limit set in Section 15.209. No RF hazard need to be concerned .

- Reference CFR 1.1310, Table 1: Limits for Maximum Permissible Exposure (MPE), Section (B): Limits for General Population/Uncontrolled Exposure

Test No.14

Name of Test:	<i>Conducted Emissions</i>	Test Standard:	<i>15.207</i>
Tested By:	-	Test Date:	-

Minimum 15.207
Standard:
Limit

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-Peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5.0	56	46
5.0 to 30.0	60	50
* Decreases with the logarithm of the frequency.		

Method of Measurement: Test measurements were made in accordance with ANSI C63.4-2003, Standard Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronics Equipment in the Range of 9 kHz to 40 GHz.

Spectrum Analyzer Setting:
Frequency Range: 150KHz to 30MHz
RBW: 9KHz
VBW: 30KHz
Detector: Peak/QP/Average

Test Result: **NA**
(The EUT is only powered via a lithium-ion battery which is remotely recharged)

Test Data: **NA**

Test No.15

Name of Test:	<i>Transmission Duration</i>	Test Standard:	<i>15.509(c)</i>
Tested By:	-	Test Date:	-

Minimum 15.509 (c)

Standard: A GPR that is designed to be operated while being hand held and a wall imaging system shall contain a manually operated switch that causes the transmitter to cease operation within 10 seconds of being released by the operator. In lieu of a switch located on the imaging system, it is permissible to operate an imaging system by remote control provided the imaging system ceases transmission within 10 seconds of the remote switch being released by the operator.

Method of NA
Measurement:

Test Result: NA
(The EUT is only a hand-held device)

Test Data: NA