



# 焊接天线 Welding antenna

## 技术指标 Technical specifications


电气性能 Electrical performance	
型号 Models	BT-4
频率范围( MHz) Frequency Range (MHz)	902--928
极化方式 Polarization mode	垂直 Vertical
增益(dBi)Gain (DBI)	-2
驻波比 Standing Bobby	$\leq 1.5$
输入阻抗( $\Omega$ ) Input impedance ( $\Omega$ )	50
水平面波束宽度( $^{\circ}$ ) Horizontal beam width ( $^{\circ}$ )	360
垂直面波束宽度( $^{\circ}$ ) Vertical beam width ( $^{\circ}$ )	78
功率容量( W) Power capacity (W)	10
机械性能 Mechanical properties	
尺寸(直径 $\times$ 高度) Size (diameter $\times$ height)	$\varnothing 2.5 \times 100$ mm
重量( g)Weight (g)	2
天线罩材料 Radome material	橡胶 Rubber
天线罩颜色 Color of radome	Black
工作温度( $^{\circ}\text{C}$ ) Operating temperature ( $^{\circ}\text{C}$ )	-40~+70
湿度 Humidity	5~95%
生产商 Manufacturers	ENBAO ELECTRONIC CO.,LTD
地址 Address	Add.: B3,3Zone , Enping park of Jiangmen Industrial park , Enping , Guangdong , China .

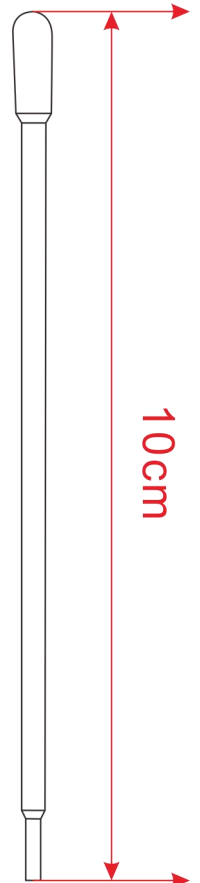


Total-3D-H-900MHZ

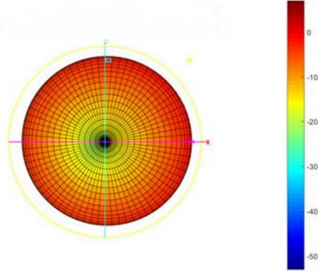


Total-3D-E1-902MHZ

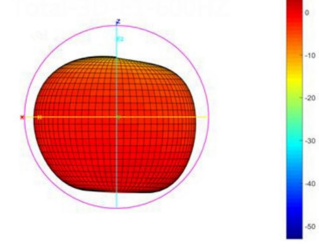


Total-3D-E2-902MHZ

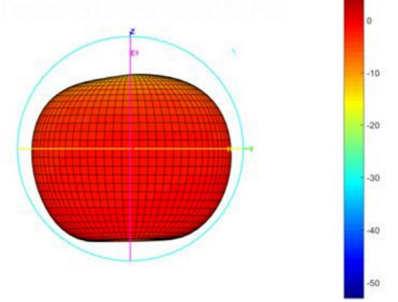


Total-Polar-H-902MHZ

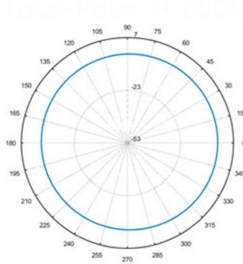


Total-Polar-E1-902MHZ

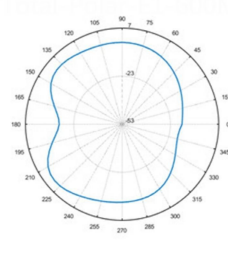


Total-Polar-E2-902MHZ

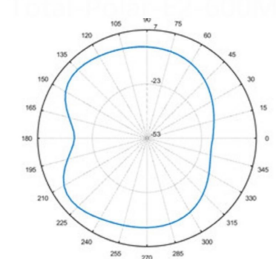


Total-3D-H-920MHZ

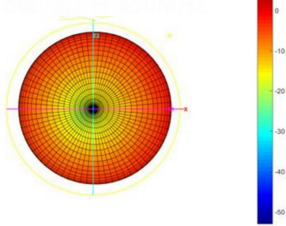


Total-3D-E1-920MHZ

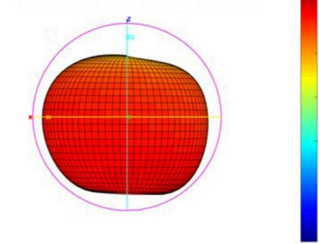


Total-3D-E2-920MHZ

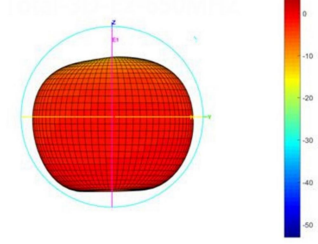


Total-Polar-H-920MHZ




Total-Polar-E1-920MHZ




Total-Polar-E2-920MHZ



Total-3D-H-930MHZ

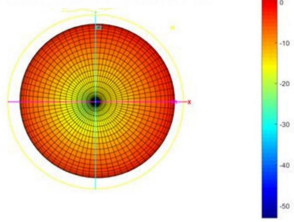

Total-3D-E1-930MHZ



Total-3D-E2-930MHZ

