
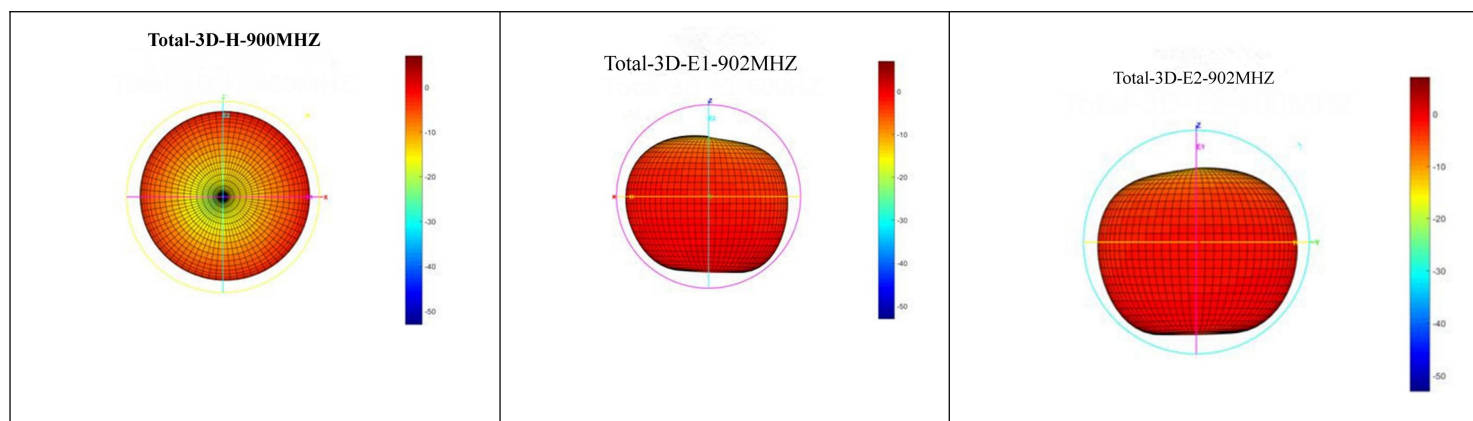
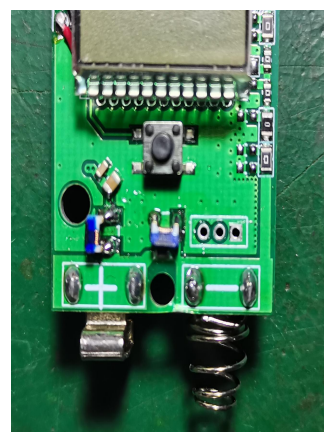



PCB 型天线 PCB type antenna

技术指标 Technical specifications


电气性能 Electrical performance	
型号 Models	PCB type antenna
频率范围(MHz) Frequency Range (MHz)	902--928
极化方式 Polarization mode	垂直 Vertical
增益(dBi)Gain (DBI)	-2
驻波比 Standing Bobby	≤ 1.5
输入阻抗(Ω) Input impedance (Ω)	50
水平面波束宽度($^{\circ}$) Horizontal beam width ($^{\circ}$)	360
垂直面波束宽度($^{\circ}$) Vertical beam width ($^{\circ}$)	78
功率容量(W)Power capacity (W)	10
机械性能 Mechanical properties	
尺寸(直径 \times 高度) Size (diameter \times height)	$\varnothing 13.5 \times 26$ mm
重量(g)Weight (g)	5
工作温度($^{\circ}\text{C}$) Operating temperature ($^{\circ}\text{C}$)	-40~+70
湿度 Humidity	5~95%
生产商 Manufacturers	ENBAO ELECTRONIC CO.,LTD
地址 Address	Add.: B3,3Zone , Enping park of Jiangmen Industrial park , Enping , Guangdong , China .

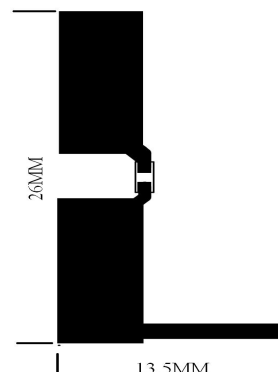


Total-Polar-H-902MHZ




Total-Polar-E1-902MHZ




Total-Polar-E2-902MHZ

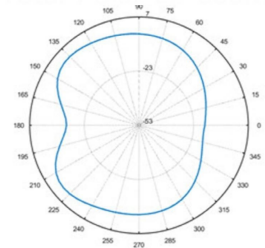


Total-3D-H-920MHZ

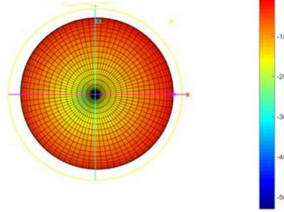


Total-3D-E1-920MHZ

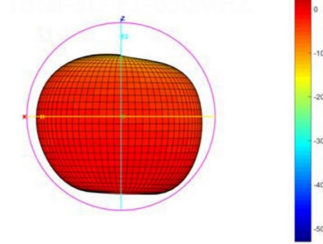


Total-3D-E2-920MHZ

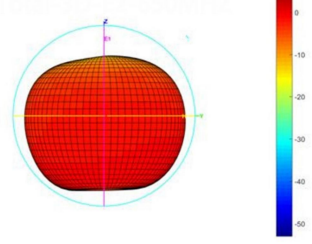


Total-Polar-H-920MHZ




Total-Polar-E1-920MHZ




Total-Polar-E2-920MHZ




Total-3D-H-930MHZ

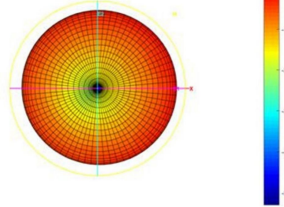


Total-3D-E1-930MHZ




Total-3D-E2-930MHZ

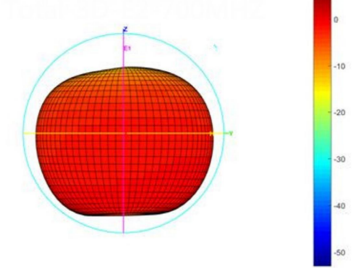

Total-3D-H-930MHZ



Total-Polar-E1-930MHZ



Total-Polar-E2-930MHZ

