

FCC

RF

TEST REPORT

ISSUED BY  
Shenzhen BALUN Technology Co., Ltd.



FOR  
HANDHELD TRANSMITTER

ISSUED TO  
CAD AUDIO LLC

6573 Cochran Road, Building I, Solon, Ohio, USA 44139



Tested by: *Zhengmuyi*  
Zheng Muyi  
(Engineer)

Date *Jul. 8. 2016*

Approved by: *Liao Jianming*  
Liao Jianming  
(Technical Director)

Date *Jul. 8. 2016*

Report No.: BL-SZ1650380-601  
EUT Type: HANDHELD TRANSMITTER  
Model Name: TX3000S  
Brand Name: CAD AUDIO  
Test Standard: 47 CFR Part 74 Subpart H  
FCC ID: OQ5-WX3000S

Test conclusion: Pass  
Test Date: Jun. 20, 2016 ~ Jul. 28, 2016  
Date of Issue: Jul. 8, 2016

*NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please visit BALUN website.*

**Revision History**

Version	Issue Date	Revisions Content
Rev. 01	Jul. 1, 2016	Initial Issue
Rev. 02	Jul. 4, 2016	Added test data of mask and max. deviation (Hz)
Rev. 03	Jul. 8, 2016	Updated the model name

**TABLE OF CONTENTS**

1 ADMINISTRATIVE DATA (GENERAL INFORMATION) .....5

    1.1 Identification of the Testing Laboratory .....5

    1.2 Identification of the Responsible Testing Location .....5

    1.3 Laboratory Condition .....5

    1.4 Announce .....5

2 PRODUCT INFORMATION .....7

    2.1 Applicant Information .....7

    2.2 Manufacturer Information .....7

    2.3 Factory Information .....7

    2.4 General Description for Equipment under Test (EUT) .....7

    2.5 Ancillary Equipment .....7

    2.6 Technical Information .....7

    2.7 Additional Instructions .....8

3 SUMMARY OF TEST RESULTS.....9

    3.1 Test Standards .....9

    3.2 Verdict .....9

4 GENERAL TEST CONFIGURATIONS .....10

    4.1 Test Environments .....10

    4.2 Test Equipment List .....10

    4.3 Description of Test Setup .....11

        4.3.1 For Antenna Port Test .....11

        4.3.2 For Radiated Test (30 MHz-1 GHz) .....11

        4.3.3 For Radiated Test (Above 1 GHz).....12

        4.3.4 Modulation Characteristics .....12

5	TEST ITEMS.....	13
5.1	Output Power .....	13
5.1.1	Test Limit.....	13
5.1.2	Test Setup .....	13
5.1.3	Test Procedure.....	13
5.1.4	Test Result .....	14
5.2	Modulation Characteristics .....	15
5.2.1	Limit.....	15
5.2.2	Test Setup .....	15
5.2.3	Test Procedure.....	15
5.2.4	Test Result .....	15
5.3	Emission Bandwidth and Emission Mask.....	16
5.3.1	Limit.....	16
5.3.2	Test Setup .....	16
5.3.3	Test Procedure.....	16
5.3.4	Test Result .....	16
5.4	Spurious Emissions at Antenna Terminals .....	17
5.4.1	Limit.....	17
5.4.2	Test Setup .....	17
5.4.3	Test Procedure.....	17
5.4.4	Test Result .....	17
5.5	Field Strength of Spurious Radiation .....	18
5.5.1	Limit.....	18
5.5.2	Test Setup .....	18
5.5.3	Test Procedure.....	18
5.5.4	Test Result .....	18
5.6	Frequency Stability.....	19
5.6.1	Limit.....	19
5.6.2	Test Setup .....	19
5.6.3	Test Procedure.....	19
5.6.4	Test Result .....	19

ANNEX A	TEST RESULT .....	20
A.1	Output Power .....	20
A.2	Modulation Characteristics .....	21
A.3	Emission Bandwidth and Emission Mask .....	28
A.4	Spurious Emissions at Antenna Terminals .....	31
A.5	Field Strength of Spurious Radiation .....	32
A.6	Frequency Stability .....	38
ANNEX B	TEST SETUP PHOTOS .....	40
ANNEX C	EUT EXTERNAL PHOTOS .....	40
ANNEX D	EUT INTERNAL PHOTOS .....	40

# 1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

## 1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100
Fax Number	+86 755 6182 4271

## 1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory has been listed by US Federal Communications Commission to perform electromagnetic emission measurements. The recognition numbers of test site are 832625.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

## 1.3 Laboratory Condition

Ambient Temperature	20 to 25°C
Ambient Relative Humidity	45% - 55%
Ambient Pressure	100 kPa - 102 kPa

## 1.4 Announce

- (1) The test report reference to the report template version v1.0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without

prior written approval from the laboratory.

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

Applicant	CAD AUDIO LLC
Address	6573 Cochran Road, Building I, Solon, Ohio, USA 44139

### 2.2 Manufacturer Information

Manufacturer	CAD AUDIO LLC
Address	6573 Cochran Road, Building I, Solon, Ohio, USA 44139

### 2.3 Factory Information

Factory	CAD AUDIO LLC
Address	6573 Cochran Road, Building I, Solon, Ohio, USA 44139

### 2.4 General Description for Equipment under Test (EUT)

EUT Type	HANDHELD TRANSMITTER
Model Name	TX3000S
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A
Network and Wireless connectivity	FM

### 2.5 Ancillary Equipment

N/A

### 2.6 Technical Information

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FM
Frequency Range	655 MHz – 679 MHz
Tested Channel	Low( 655.4 MHz), Middle (667.5 MHz), High (678.2 MHz)
Antenna Type	Dipole Antenna
Antenna Gain	2.5 dBi
About the Product	The equipment is HANDHELD TRANSMITTER, it contains FM module.

Channel list

No.	Frequency				
	Group 1	Group 2	Group 3	Group 4	Group 5
1	655.400	656.250	655.200	656.775	656.100
2	658.500	675.500	659.500	659.500	657.225
3	660.575	659.225	657.800	661.200	659.550
4	662.050	661.725	659.450	662.600	661.575
5	664.425	663.350	660.750	663.700	663.900
6	666.200	664.550	663.230	665.250	667.500
7	669.450	667.800	665.325	666.500	668.750
8	670.650	669.575	669.225	670.100	670.300
9	672.275	671.950	671.525	672.425	671.400
10	674.775	673.425	673.575	674.450	672.800
11	676.500	675.500	676.600	675.775	674.500
12	677.750	678.600	678.575	677.900	677.225
No.	Frequency				
	Group 6	Group 7	Group 8	Group 9	Group 10
1	655.425	655.700	656.550	655.500	657.075
2	657.400	658.800	657.800	656.975	659.800
3	660.425	660.875	659.825	658.100	661.500
4	662.475	662.350	662.025	659.750	662.900
5	664.775	664.725	663.650	660.050	664.000
6	668.675	666.500	664.850	663.500	665.550
7	670.800	669.750	668.100	665.525	666.800
8	673.250	670.950	669.875	669.525	670.400
9	674.550	672.575	672.250	671.825	672.725
10	676.200	675.075	673.725	673.875	674.750
11	677.325	676.800	675.800	676.900	676.075
12	678.800	678.050	678.900	678.875	678.200

## 2.7 Additional Instructions

EUT Software Settings: TX LEVEL is built-in set parameters and cannot be changed and selected.



### 3 SUMMARY OF TEST RESULTS

#### 3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 74, Subpart H	Part 74 – Experimental radio, auxiliary, special broadcast and other program distributional services. Subpart H – Low power auxiliary stations.
2	TIA-603-D 2010	Land Mobile FM or PM communications equipment measurement and performance standards.
3	ANSI C63.4-2014	American National Standard for Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

#### 3.2 Verdict

No.	Description	FCC Part No.	Test Result	Verdict
1	Output Power	74.861(e)(1)	ANNEX A.1	Pass
2	Modulation Characteristics	74.861(e) (3)	ANNEX A.2	Pass
3	Emission Bandwidth and Emission Mask	74.861(e) (5) (6)	ANNEX A.3	Pass
4	Spurious Emissions at Antenna Terminals	74.861(e) (6)	ANNEX A.4	Pass
5	Field Strength of Spurious Radiation	74.861(e) (6)	ANNEX A.5	Pass
6	Frequency Stability	74.861(e) (4)	ANNEX A.6	Pass

## 4 GENERAL TEST CONFIGURATIONS

### 4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% - 55%	
Atmospheric Pressure	100 kPa - 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
	LT (Low Temperature)	-10°C
	HT (High Temperature)	+45°C
Working Voltage of the EUT	NV (Normal Voltage)	3.0 V


### 4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2015.07.16	2016.07.15
Vector Signal Generator	ROHDE&SCHWARZ	SMBV100A	177746	2015.07.16	2016.07.15
Analyzer, Modulation	HP	8901A	2026A00934	2015.07.16	2016.07.15
Signal Generator	ROHDE&SCHWARZ	SMB100A	260592	2015.07.01	2017.06.30
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2015.07.16	2016.07.15
Spectrum Analyzer	AGILENT	E4440A	MY45304434	2015.10.15	2016.10.14
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2015.07.14	2016.07.13
LISN	SCHWARZBECK	NSLK 8127	8127-687	2015.07.14	2016.07.13
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2015.07.16	2016.07.15
Power Splitter	KMW	DCPD-LDC	1305003215	2015.07.01	2017.06.30
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2015.07.21	2016.07.20
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2015.07.17	2016.07.16
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2015.08.07	2016.08.06
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2015.07.22	2017.07.21
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2015.07.22	2017.07.21
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2015.07.22	2017.07.21
Test Antenna-Horn(15-26.5 GHz)	SCHWARZBECK	BBHA 9170	9170-305	2015.07.22	2017.07.21
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2015.02.28	2017.02.27
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Audio Analyzer	Agilent	U8903B	MRTSUE061 43	2015.08.12	2016.08.11

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Modulation Analyzer	HP	8901A	MRTSUE062 10	2015.12.09	2016.12.08
Temperature/Humidity Meter	Yuhuaze	HTC-2	MRTSUE061 80	2015.12.21	2016.12.20


### 4.3 Description of Test Setup

#### 4.3.1 For Antenna Port Test

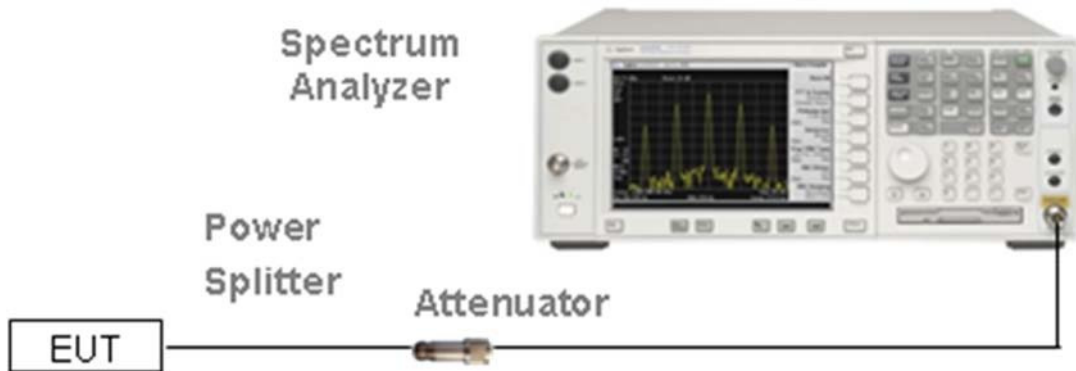


(Diagram 1)

#### 4.3.2 For Radiated Test (30 MHz-1 GHz)

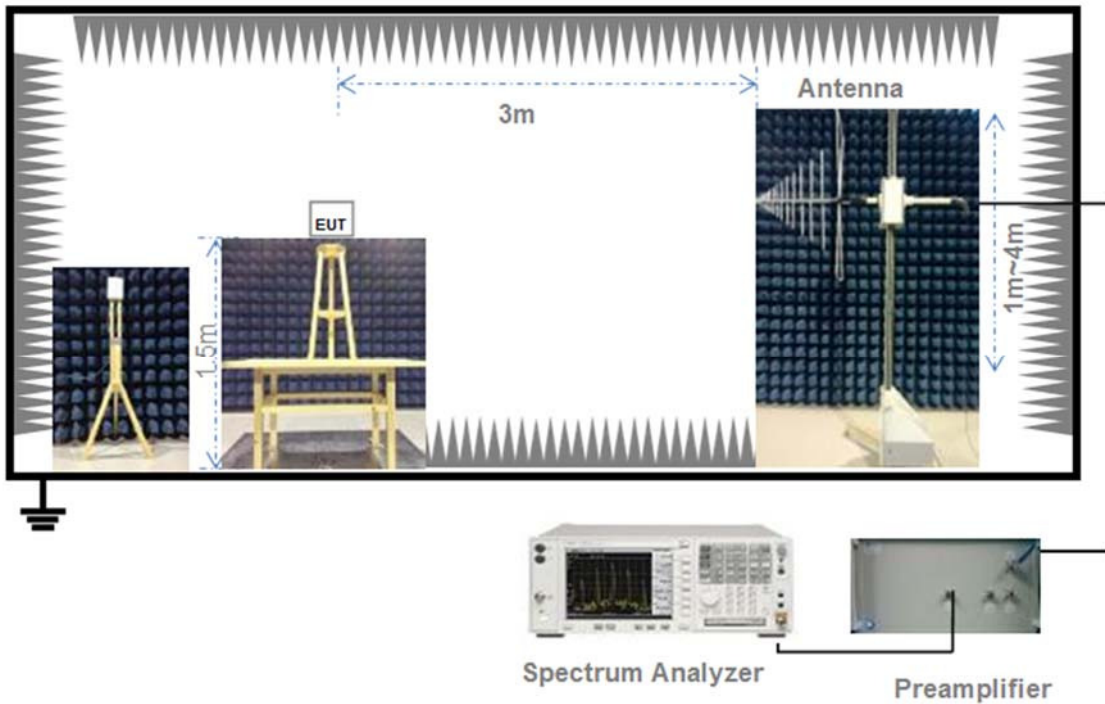


(Diagram 2)

### 4.3.3 For Radiated Test (Above 1 GHz)

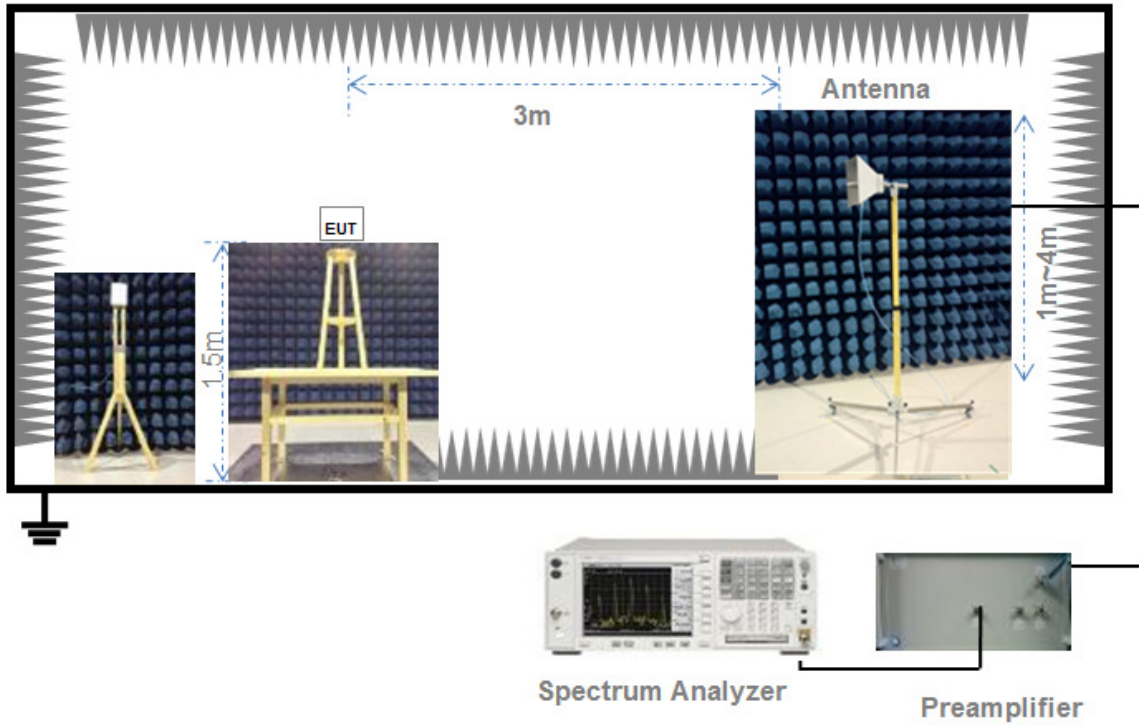

(Diagram 3)

### 4.3.4 Modulation Characteristics

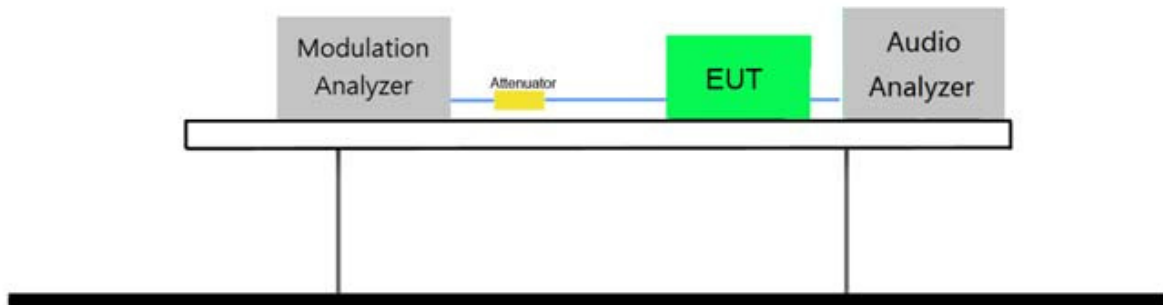

(Diagram 4)

## 5 TEST ITEMS

### 5.1 Output Power

#### 5.1.1 Test Limit

FCC §74.861(e) (1)

The power of the measured unmodulated carrier power at the output of the transmitter power amplifier (antenna input power) may not exceed the following:

Frequency Band (MHz)	Limit
54-72,76-88, and 174-216 MHz	50 mW EIRP
470-608 and 614-698 MHz	250 mW conducted power
600 MHz duplex gap	20 mW EIRP

#### 5.1.2 Test Setup

See section 4.3.1 (Diagram 1) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

#### 5.1.3 Test Procedure

Connect the EUT to spectrum analyzer and set the spectrum analyzer as following:

Center frequency: channel frequency under test;

RBW: 100 kHz;

VBW: 300 kHz;

Detector mode: peak;

Span: 1MHz

Max-hold the trace and record the peak value once the trace stabilized.

In many cases, the RF output power limits for licensed digital transmission devices is specified in terms of effective radiated power (ERP) or equivalent isotropic radiated power (EIRP). Typically, ERP is specified when the operating frequency is less than or equal to 1 GHz and EIRP is specified when the operating frequency is greater than 1 GHz. Both are determined by adding the transmit antenna gain to the conducted RF output power with the primary difference between the two being that when determining the ERP, the transmit antenna gain is referenced to a dipole antenna (i.e., dBd) whereas when determining the EIRP, the transmit antenna gain is referenced to an isotropic antenna (dBi).

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP/EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

$\text{dBd (ERP)} = \text{dBi} - 2.15$

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

#### 5.1.4 Test Result

Please refer to ANNEX A.1.

## 5.2 Modulation Characteristics

### 5.2.1 Limit

FCC §2.1047(a) & 74.861(e) (3)

For Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

Any form of modulation may be used. A maximum deviation of  $\pm 75$  kHz is permitted when frequency modulation is employed.

### 5.2.2 Test Setup

See section 4.3.4 (Diagram 4) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.2.3 Test Procedure

#### Modulation Limit

- (i) Configure the EUT as shown in next figure, adjust the audio input for 60% of rated system deviation at 1KHz using this level as a reference (0dB) and vary the input level from  $-20$  to  $+20$ dB. Record the frequency deviation obtained as a function of the input level.
- (ii) Repeat step (i) with input frequency changing to 100, 500, 2500, 10000, and 15000 Hz in sequence.

#### Audio Frequency Response

- (i) Configure the EUT as shown in next figure.
- (ii) Adjust the audio input for 20% of rated system deviation at 1 KHz using this level as a reference (0 dB).
- (iii) Vary the Audio frequency from 100 Hz to 30 KHz and record the frequency deviation.
- (iv) Audio Frequency Response =  $20\log_{10}$  (Deviation of test frequency/Deviation of 1 KHz reference).

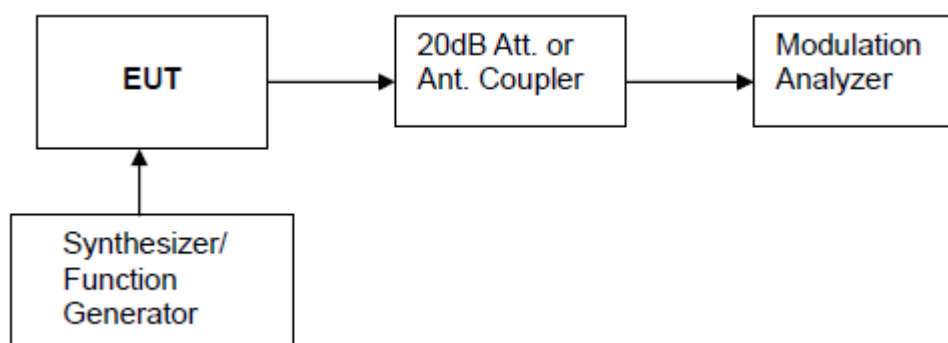


Figure: Modulation Characteristic Measurement Configuration

### 5.2.4 Test Result

Please refer to ANNEX A.2.

## 5.3 Emission Bandwidth and Emission Mask

### 5.3.1 Limit

FCC §74.861(e) (5) (6)

The operating bandwidth shall not exceed 200 kHz.

The mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- (i) On any frequency removed from the operating frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth : at least 25 dB;
- (ii) On any frequency removed from the operating frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth : at least 35 dB;
- (iii) On any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth : at least  $43+10\log(\text{mean output power in watts})$  dB;

### 5.3.2 Test Setup

See section 4.3.1 (Diagram 1) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.3.3 Test Procedure

The transmitter shall be operated at its maximum carrier power measured under normal test condition. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual.

The trace data points are recovered and directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between two recorded frequencies is the occupied bandwidth.

### 5.3.4 Test Result

Please refer to ANNEX A.2.



## 5.4 Spurious Emissions at Antenna Terminals

### 5.4.1 Limit

FCC §74.861(e) (6) (iii)

On any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth: at least  $43+10\log$  (mean output power in watts) dB;

### 5.4.2 Test Setup

See section 4.3.1 (Diagram 1) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.4.3 Test Procedure

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

### 5.4.4 Test Result

Please refer to ANNEX A.5.

## 5.5 Field Strength of Spurious Radiation

### 5.5.1 Limit

FCC §2.1055(a)(1) & 2.1055(d)(2) & 74.861(e) (6) (iii)

The frequency stability shall be measured with variation of ambient temperature from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  centigrade.

For hand carried battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacture.

On any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth: at least  $43+10\log$  (mean output power in watts) dB;

### 5.5.2 Test Setup

See section 4.3.2, 4.3.3 (Diagram 2, 3) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.5.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from  $0^{\circ}$  to  $360^{\circ}$ , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1 \text{ GHz}$ , 100 kHz for  $f < 1 \text{ GHz}$

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

### 5.5.4 Test Result

Please refer to ANNEX A.6.

## 5.6 Frequency Stability

### 5.6.1 Limit

FCC §74.861(e) (4)

The frequency tolerance of the transmitter shall be 0.005 percent.

### 5.6.2 Test Setup

See section 4.3.1 (Diagram 1) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.6.3 Test Procedure

#### FREQUENCY STABILITY VERSUS ENVIRONMENTAL TEMPERATURE

- (i) Setup the configuration for frequencies measurement inside an environment chamber.
- (ii) Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1 KHz and Frequency Span to 50KHz. Record this frequency as reference frequency.
- (iii) Set the temperature of chamber to 50°C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- (iv) Repeat step (ii) with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measured frequencies on each temperature step.

#### FREQUENCY STABILITY VERSUS INPUT VOLTAGE

- (i) Setup the configuration for frequencies measured at temperature if it is within 15°C to 25°C. Otherwise, an environment chamber set for a temperature of 20°C shall be used.
- (ii) Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1KHz. Record this frequency as reference frequency.
- (iii) For battery operated only device, supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

### 5.6.4 Test Result

Please refer to ANNEX A.7.

# ANNEX A TEST RESULT


## A.1 Output Power

### Peak Power Test Data

Channel	Output Peak Power dBm	Limit		Verdict
		dBm	mW	
Low	11.60	24	250	Pass
Middle	11.79			Pass
High	11.90			Pass


### Test Plots

#### LOW CHANNEL

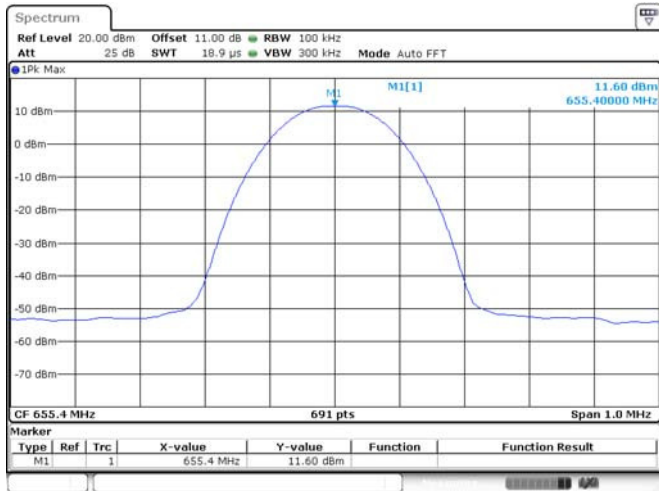


Date: 13 JUN 2016 16:41:24

#### MIDDLE CHANNEL

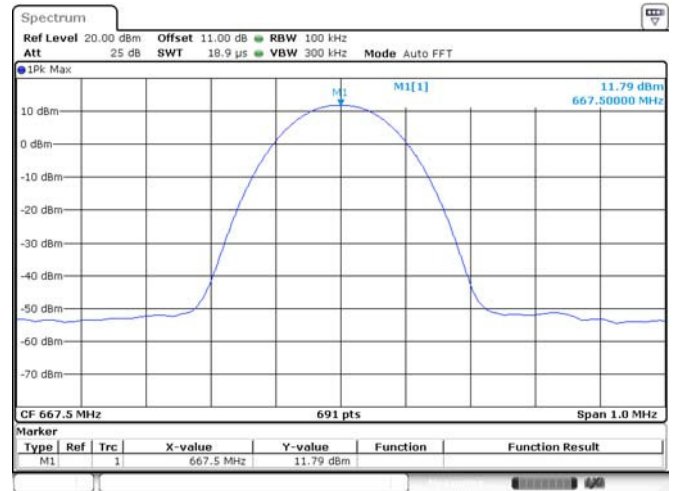

Date: 13 JUN 2016 16:34:34

#### HIGH CHANNEL

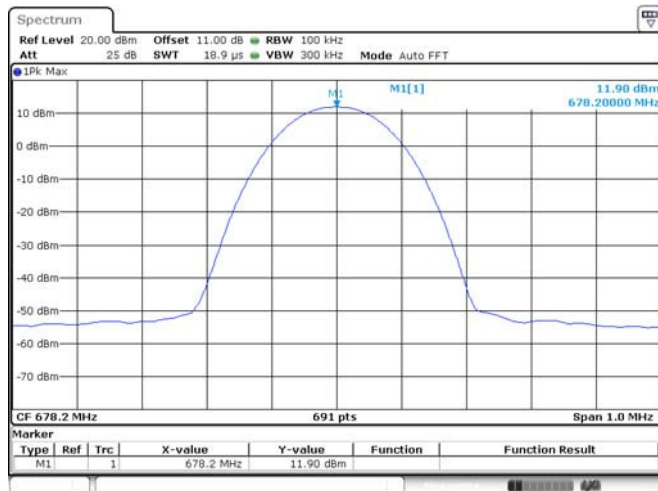

Date: 13 JUN 2016 16:37:17

## A.2 Modulation Characteristics

### Test Data of Modulation Limit

#### Low Channel

Modulation Level (dB)	Peak Freq. Deviation At 100 Hz (KHz)	Peak Freq. Deviation At 500 Hz (KHz)	Peak Freq. Deviation At 2500 Hz (KHz)	Peak Freq. Deviation At 10000 Hz (KHz)	Limit (kHz)	Verdict
-20	9.01	9.35	10.89	12.40	±75	Pass
-15	9.79	10.25	12.26	14.34		
-10	10.81	11.40	14.11	16.87		
-5	12.18	12.96	16.57	20.20		
0	14.00	15.02	19.86	24.68		
+5	16.44	17.93	24.29	30.73		
+10	19.73	21.77	30.21	38.67		
+15	24.21	26.88	38.19	49.50		
+20	30.12	33.73	49.00	64.10		

#### Middle Channel


Modulation Level (dB)	Peak Freq. Deviation At 100 Hz (KHz)	Peak Freq. Deviation At 500 Hz (KHz)	Peak Freq. Deviation At 2500 Hz (KHz)	Peak Freq. Deviation At 10000 Hz (KHz)	Limit (kHz)	Verdict
-20	8.9	9.2	10.73	12.25	±75	Pass
-15	9.7	10.12	12.07	14.14		
-10	10.67	11.21	13.89	16.55		
-5	12.00	13.68	16.39	19.93		
0	13.84	14.85	19.51	24.36		
+5	16.30	17.57	23.92	30.23		
+10	19.65	21.33	29.79	38.17		
+15	24.04	26.36	37.60	48.90		
+20	29.93	33.13	48.20	63.20		

High Channel


Modulation Level (dB)	Peak Freq. Deviation At 100 Hz (KHz)	Peak Freq. Deviation At 500 Hz (KHz)	Peak Freq. Deviation At 2500 Hz (KHz)	Peak Freq. Deviation At 10000 Hz (KHz)	Limit (kHz)	Verdict
-20	8.8	9.18	10.67	12.14	±75	Pass
-15	9.6	9.99	11.99	14.01		
-10	10.63	11.2	13.83	16.50		
-5	12.01	12.7	16.24	19.77		
0	13.86	14.77	19.48	24.18		
+5	16.33	17.46	23.75	30.02		
+10	19.64	21.15	29.59	37.90		
+15	24.06	26.13	37.72	48.50		
+20	29.93	32.85	47.50	64.30		

Test Plots of Modulation Limit


LOW CHANNEL MODULATION LIMIT

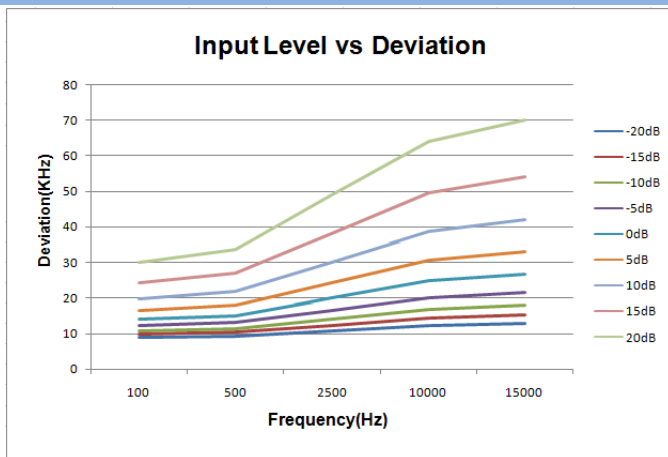

MIDDLE CHANNEL MODULATION LIMIT

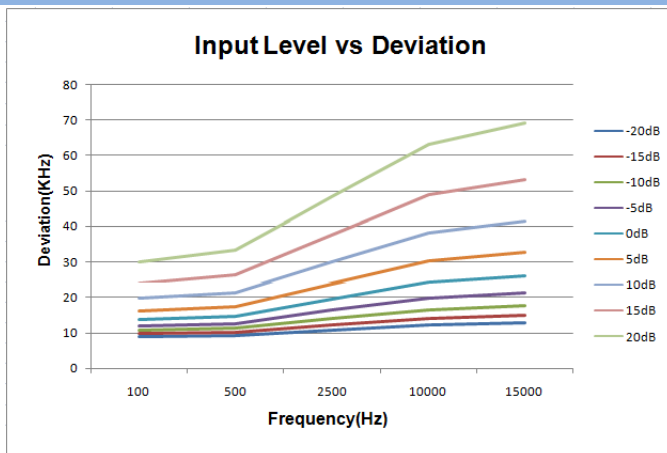

HIGH CHANNEL MODULATION LIMIT

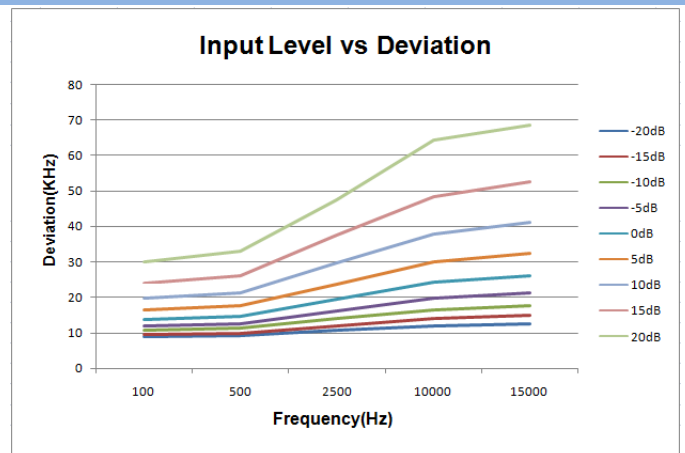

Test Data of Audio Frequency Response

## Low Channel

Frequency (Hz)	Deviation (KHz)	
	+ Peak	- Peak
20	8.54	8.39
30	10.17	10.01
40	11.82	11.68
50	13.09	12.91
100	14.85	14.68
200	15.08	15.01
520	16.16	16.19
1020	18.02	18.07
1520	19.51	19.54
2020	20.62	21.49
2520	21.49	21.49
3020	22.15	22.21
3520	22.78	22.79
4020	23.28	23.30
4520	23.68	23.75
5020	24.09	24.14
5520	24.48	24.50
6020	24.79	24.75
6520	26.05	25.11
7020	25.38	25.38
7520	25.61	25.63
8020	25.87	25.89
8520	26.10	26.11
9020	26.31	26.37
9520	26.59	26.53
10020	26.79	26.80
10520	26.96	27.02
11020	27.18	27.22
11520	27.42	27.45
12020	27.62	27.82
12520	27.83	27.82
13020	28.02	28.02
13520	28.22	28.25
14020	28.44	27.43
14520	28.65	28.62
15020	28.80	28.80
15520	29.02	28.99
16020	29.22	29.20
16520	29.38	29.34
17020	29.60	29.59

Frequency (Hz)	Deviation (KHz)	
	+ Peak	- Peak
17520	29.82	29.81
18020	30.04	30.02
18520	30.22	30.21
19020	30.40	30.44
19520	30.61	30.59
20000	30.76	30.75

## Middle Channel

Frequency (Hz)	Deviation (KHz)	
	+ Peak	- Peak
20	9.36	9.03
30	11.78	11.63
40	14.27	14.38
50	16.08	15.88
100	18.11	17.74
200	18.21	18.08
520	19.72	19.75
1020	22.40	22.37
1520	24.39	24.41
2020	25.30	25.45
2520	26.78	26.73
3020	27.50	27.34
3520	28.98	28.95
4020	29.06	29.23
4520	30.57	30.45
5020	31.07	31.03
5520	31.34	31.36
6020	31.66	31.68
6520	31.95	31.95
7020	32.45	32.65
7520	32.92	32.90
8020	33.12	33.10
8520	33.63	33.65
9020	33.95	33.90
9520	34.22	34.24
10020	34.63	34.65
10520	35.04	35.06
11020	35.06	35.07
11520	35.46	35.47
12020	35.86	35.87
12520	36.26	36.25
13020	36.48	36.50



Frequency (Hz)	Deviation (KHz)	
	+ Peak	- Peak
13520	36.57	36.61
14020	36.86	36.92
14520	37.15	37.13
15020	37.47	37.45
15520	37.70	37.71
16020	38.00	38.32
16520	38.32	38.32
17020	38.59	38.59
17520	38.85	38.80
18020	39.14	39.12
18520	39.43	39.44
19020	39.75	39.74
19520	39.92	39.90
20000	40.30	40.20


## High Channel

Frequency (Hz)	Deviation (KHz)	
	+ Peak	- Peak
20	9.45	9.07
30	12.10	11.74
40	14.64	14.43
50	16.46	16.00
100	17.75	17.68
200	18.10	18.00
520	19.59	19.57
1020	22.18	22.23
1520	24.18	24.23
2020	25.73	25.79
2520	26.92	27.02
3020	27.38	27.37
3520	28.03	28.00
4020	29.36	29.36
4520	30.12	30.16
5020	30.50	30.51
5520	31.05	31.06
6020	31.58	31.62
6520	32.00	32.02
7020	32.38	32.40
7520	32.75	32.80
8020	33.04	33.10
8520	33.38	33.45
9020	33.50	33.56



Frequency (Hz)	Deviation (KHz)	
	+ Peak	- Peak
9520	34.04	34.10
10020	34.35	34.38
10520	34.70	34.65
11020	34.97	35.00
11520	35.19	35.20
12020	35.48	35.51
12520	35.79	35.84
13020	36.00	36.02
13520	36.48	36.51
14020	36.78	36.80
14520	36.92	36.90
15020	37.14	37.12
15520	37.40	37.40
16020	37.75	37.78
16520	38.04	38.02
17020	38.36	38.35
17520	38.67	38.67
18020	38.91	38.90
18520	39.18	39.07
19020	39.35	39.37
19520	39.67	39.65
20000	39.96	39.98

Test Plots of Audio Frequency Response

LOW CHANNEL MODULATION LIMIT

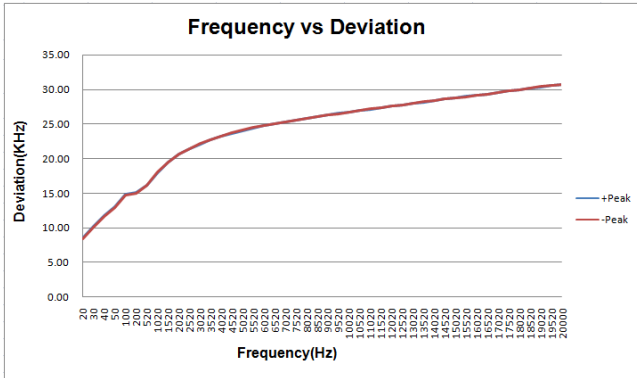

MIDDLE CHANNEL MODULATION LIMIT HIGH CHANNEL MODULATION LIMIT

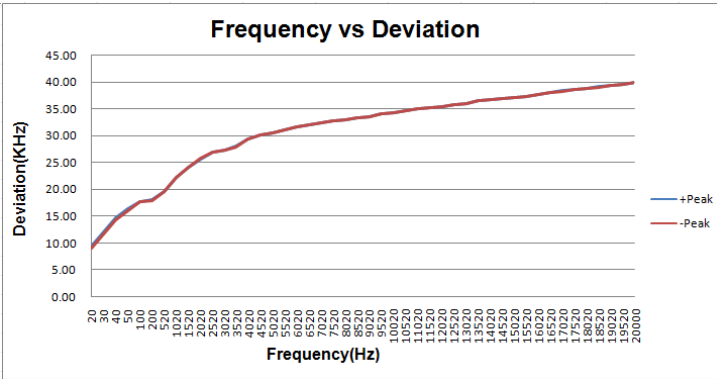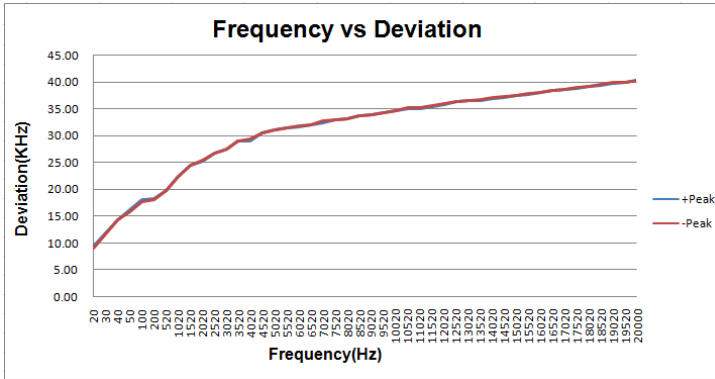


## A.3 Emission Bandwidth and Emission Mask

### Test Data

Channel	26 dB Bandwidth (kHz)	99% Bandwidth (kHz)	Limits (kHz)	Verdict
Low Channel	60.78	60.78	200	Pass
Middle Channel	60.06	60.06	200	Pass
High Channel	60.78	58.61	200	Pass


### Test plots (26 dB Bandwidth)

#### A.3.1 LOW CHANNEL

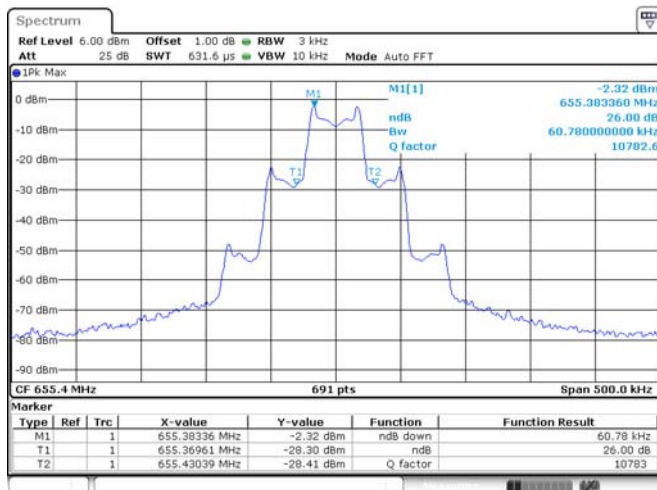


Date: 29 JUN 2016 16:10:09

#### A.3.2 MIDDLE CHANNEL

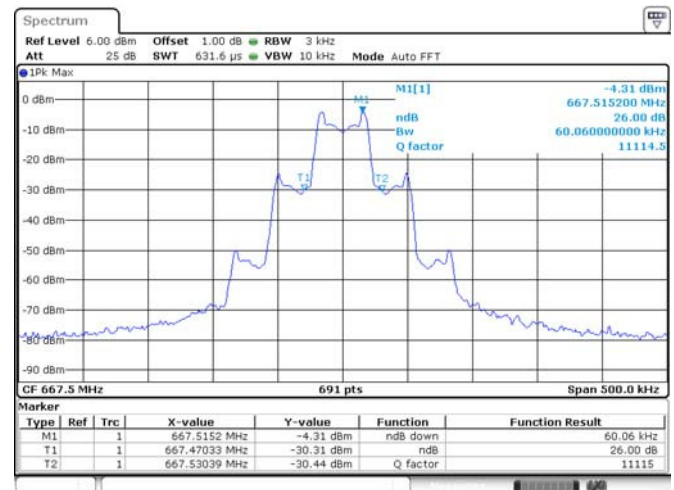

Date: 29 JUN 2016 16:14:20


#### A.3.3 HIGH CHANNEL

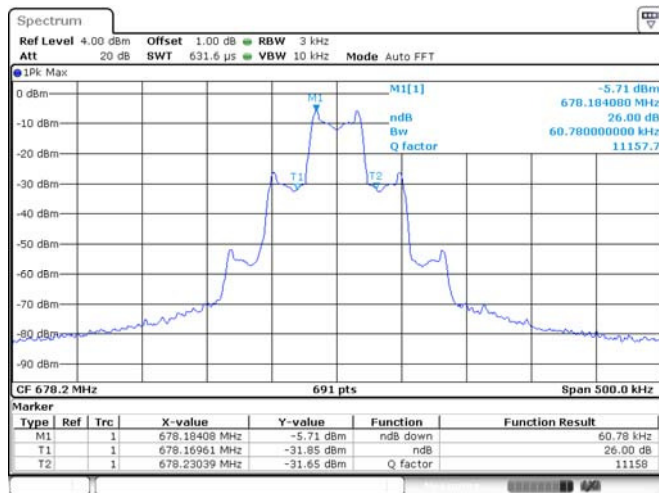

Date: 29 JUN 2016 16:36:53


Test plots (99% Bandwidth)

A.3.4 LOW CHANNEL

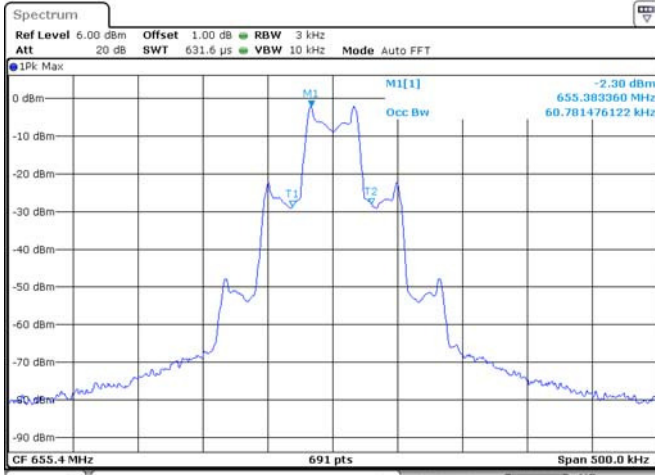


Date: 28 JUN 2016 16 10 32

A.3.5 MIDDLE CHANNEL

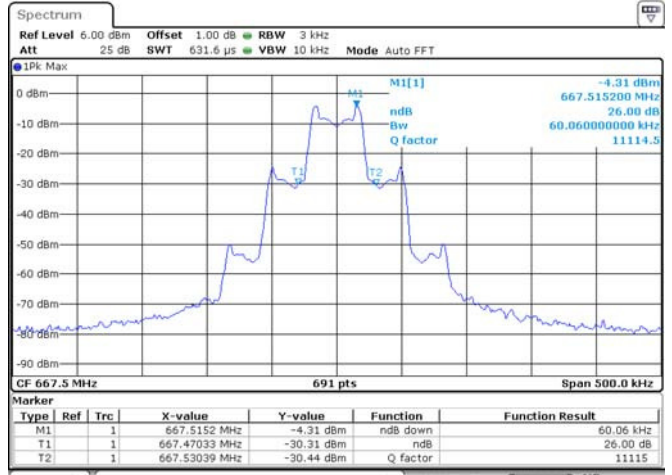

Date: 29 JUN 2016 16 14 20

A.3.6 HIGH CHANNEL

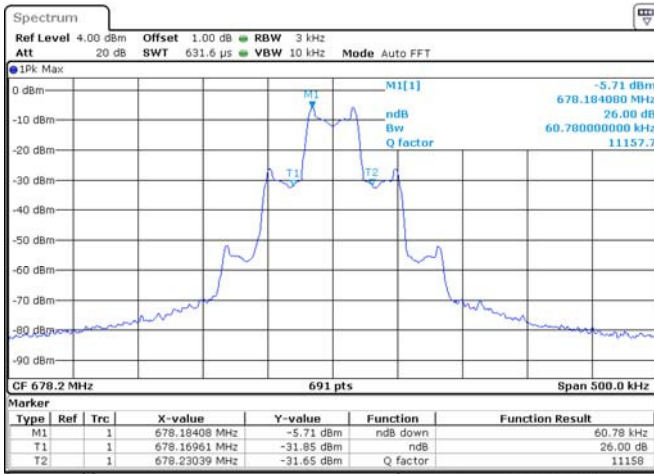


Date: 29 JUN 2016 16 36 53

## Test Data of Mask


Channel	Refer to Plot	Verdict
Low Channel	A.3.7	Pass
Middle Channel	A.3.8	Pass
High Channel	A.3.9	Pass

## A.3.7 LOW CHANNEL

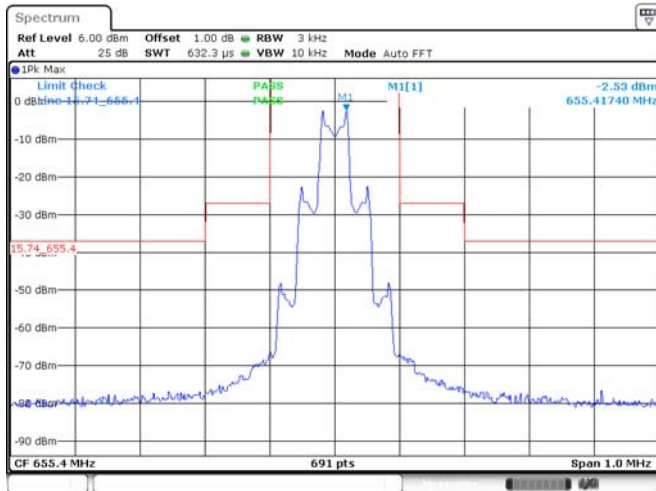


Date: 29 JUN 2016 16:17:13

## A.3.8 MIDDLE CHANNEL

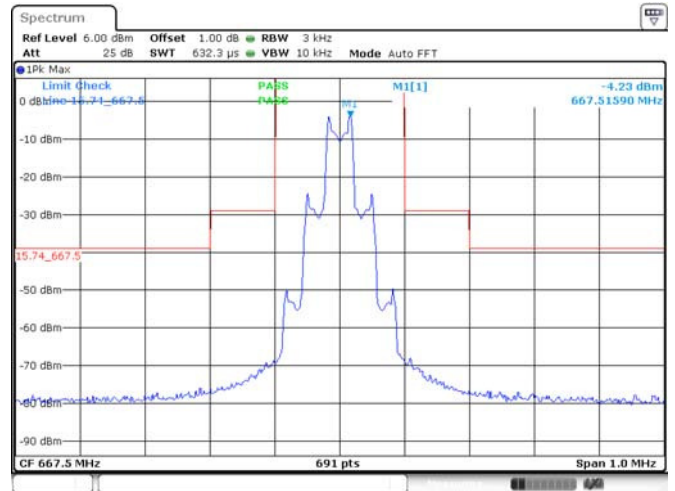

Date: 29 JUN 2016 16:15:58

## A.3.9 HIGH CHANNEL

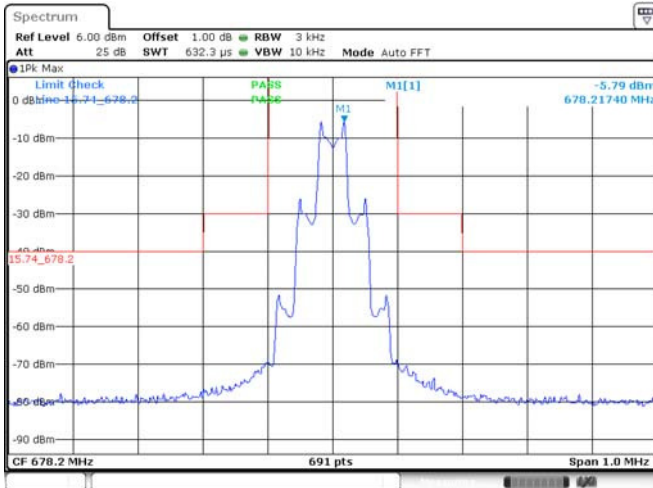


Date: 29 JUN 2016 16:20:54

## A.4 Spurious Emissions at Antenna Terminals

Test Channel	Max Spurious Emission (GHz)	Value(dBm)	Limits (dBm)	Verdict
Low Channel	1306	-32.43	-13	Pass
Middle Channel	1336	-30.99	-13	Pass
High Channel	1356	-29.39	-13	Pass


### Test Plots

LOW CHANNEL 30 MHz -7 GHz

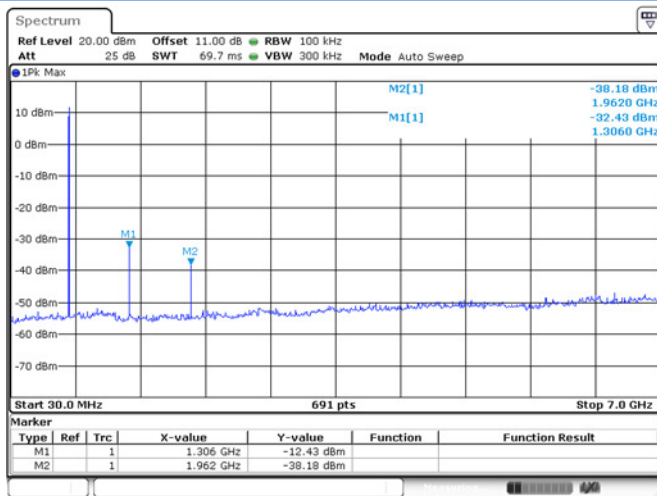


Date: 13 JUN 2016 16:42:15

MIDDLE CHANNEL 30 MHz -7 GHz

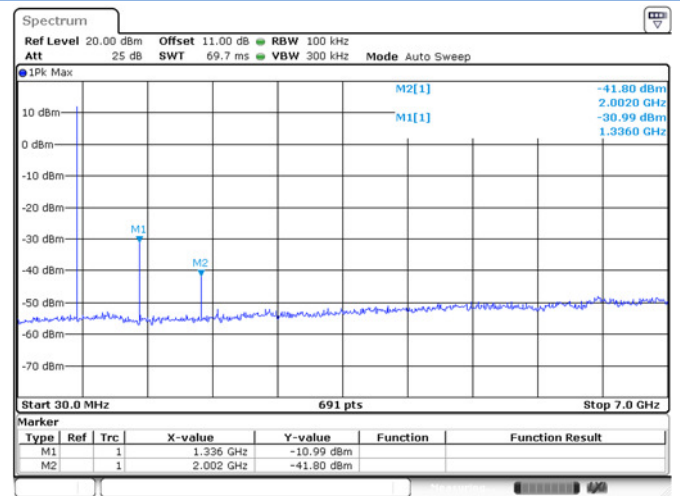

Date: 13 JUN 2016 16:35:38

HIGH CHANNEL 30 MHz -7 GHz

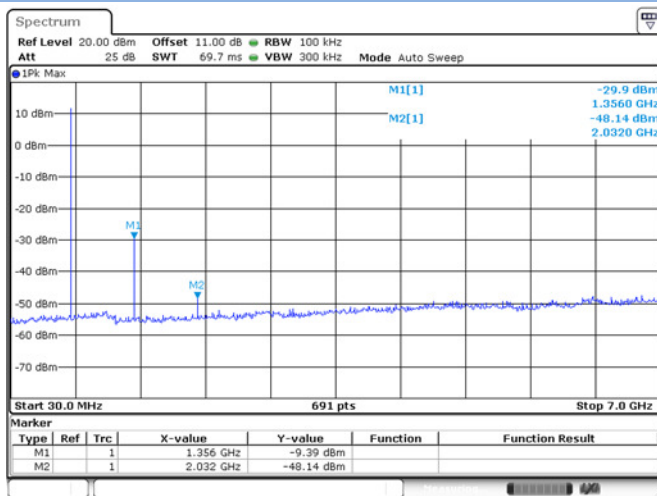


Date: 13 JUN 2016 16:36:53

## A.5 Field Strength of Spurious Radiation

Note 1: The marked spike "N/A" should be ignored because they are Fundamental signal.


Low Channel 30 MHz to 7 GHz, ANT V

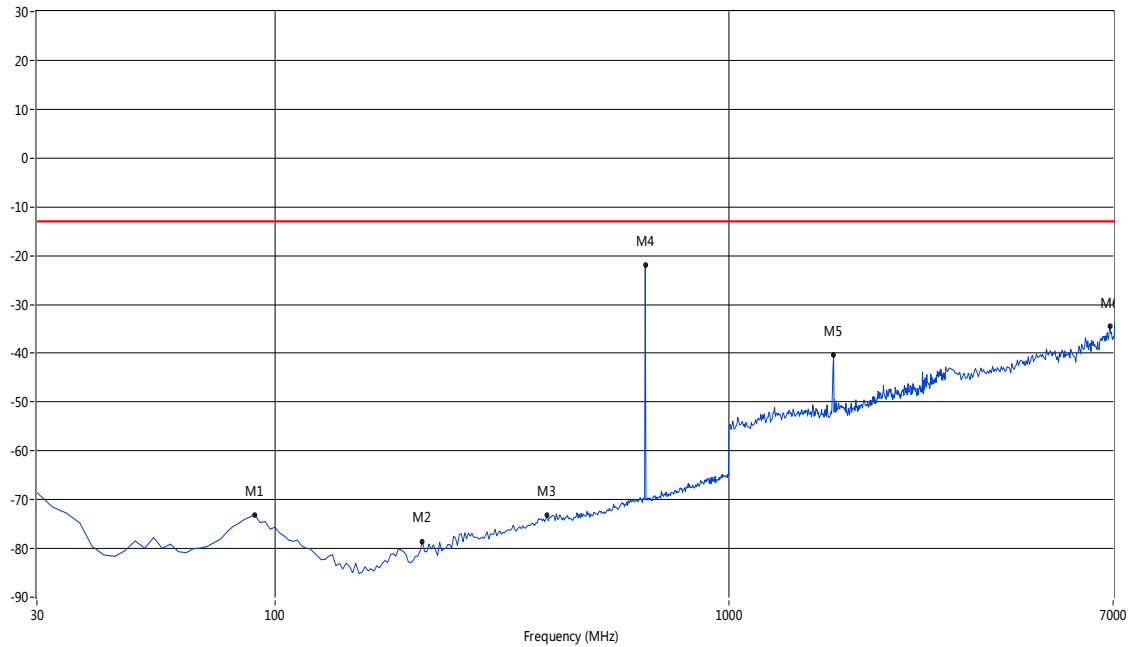

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	90.47	-73.08	-2.24	-13.0	60.08	Peak	232.00	100	Vertical	Pass
2	211.42	-78.56	-11.66	-13.0	65.56	Peak	270.00	100	Vertical	Pass
3	397.68	-73.21	-2.64	-13.0	60.21	Peak	72.00	100	Vertical	Pass
4	655.09	-21.87	1.44	-13.0	8.87	Peak	216.00	100	Vertical	N/A
5	1698.25	-40.37	9.88	-13.0	27.37	Peak	240.00	100	Vertical	Pass
6	6890.27	-34.39	32.92	-13.0	21.39	Peak	24.00	100	Vertical	Pass




Low Channel 30 MHz to 7 GHz, ANT H

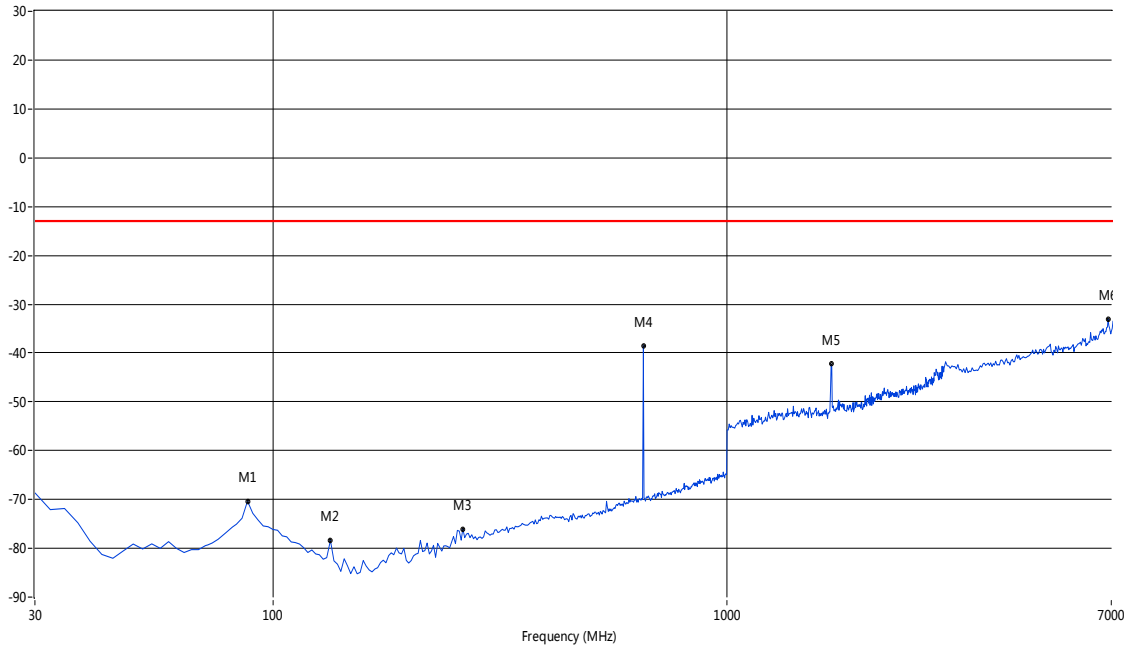


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	88.06	-70.34	-2.77	-13.0	57.34	Peak	73.00	100	Horizontal	Pass
2	134.01	-78.38	-12.17	-13.0	65.38	Peak	184.00	100	Horizontal	Pass
3	262.22	-76.04	-8.16	-13.0	63.04	Peak	324.00	100	Horizontal	Pass
4	655.09	-38.52	1.44	-13.0	25.52	Peak	246.00	100	Horizontal	N/A
5	1693.27	-42.29	9.45	-13.0	29.29	Peak	325.00	100	Horizontal	Pass
6	6890.27	-33.04	32.92	-13.0	20.04	Peak	28.00	100	Horizontal	Pass

Middle Channel 30 MHz to 7 GHz, ANT V

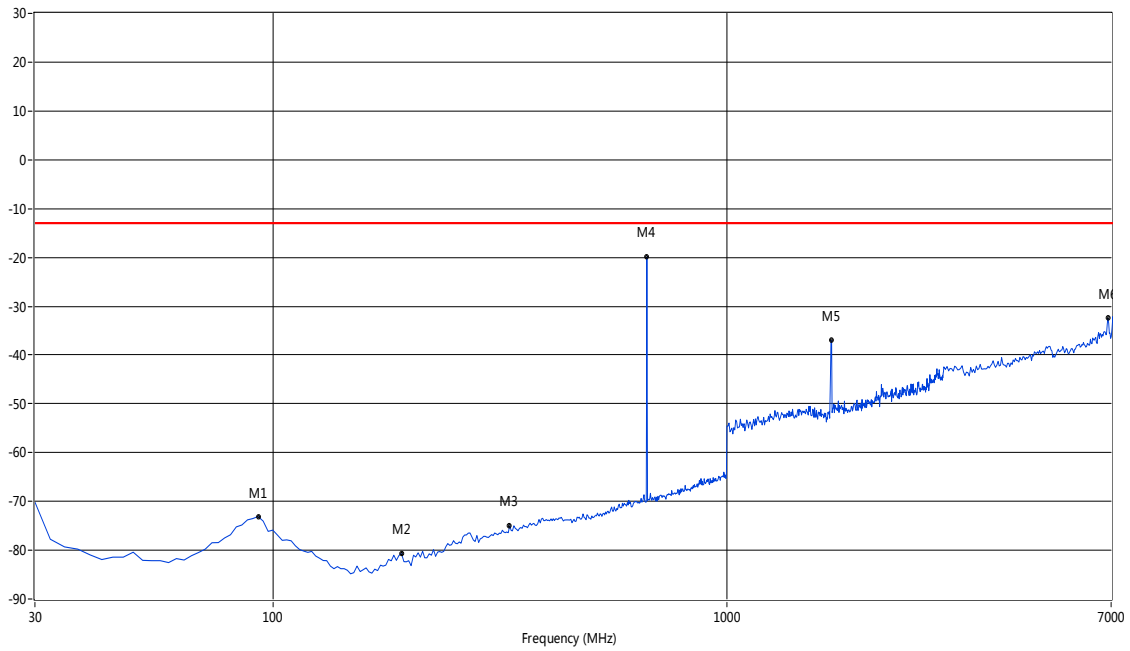


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	92.89	-73.11	-2.87	-13.0	60.11	Peak	269.00	100	Vertical	Pass
2	192.07	-80.71	-11.72	-13.0	67.71	Peak	47.00	100	Vertical	Pass
3	332.37	-75.00	-4.78	-13.0	62.00	Peak	104.00	100	Vertical	Pass
4	667.18	-19.91	1.61	-13.0	6.91	Peak	289.00	100	Vertical	N/A
5	1698.25	-37.03	9.88	-13.0	24.03	Peak	104.00	100	Vertical	Pass
6	6890.27	-32.48	32.92	-13.0	19.48	Peak	264.00	100	Vertical	Pass

Middle Channel 30 MHz to 7 GHz, ANT H

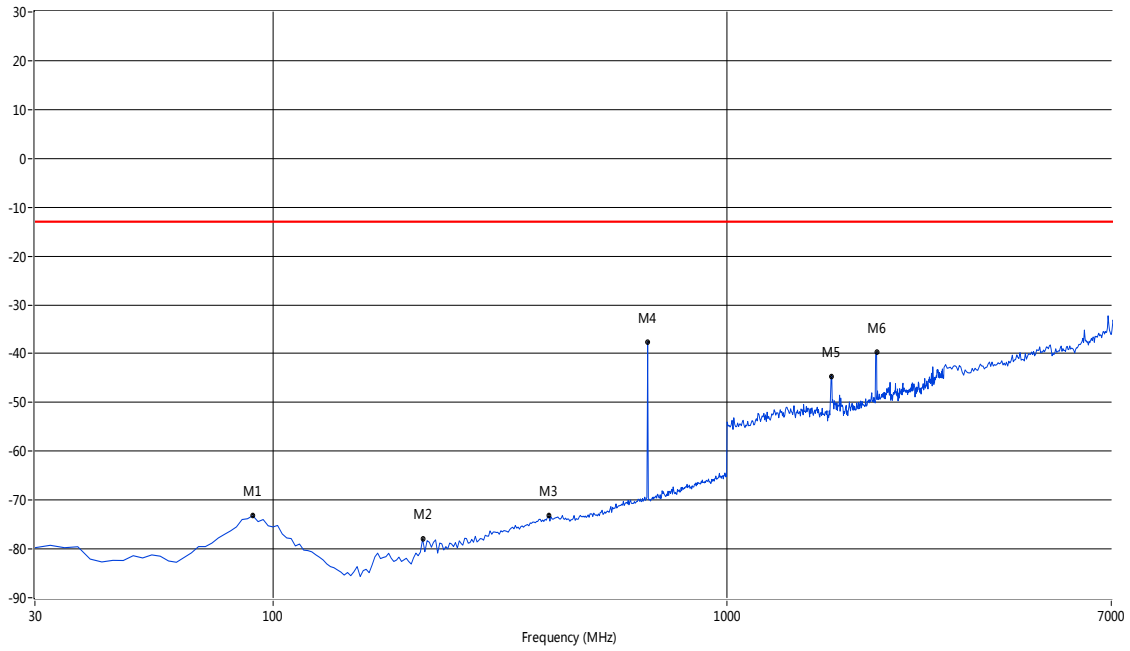


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	90.47	-73.21	-2.24	-13.0	60.21	Peak	159.00	100	Horizontal	Pass
2	213.84	-77.99	-11.48	-13.0	64.99	Peak	340.00	100	Horizontal	Pass
3	404.94	-73.24	-2.53	-13.0	60.24	Peak	335.00	100	Horizontal	Pass
4	667.60	-37.57	1.65	-13.0	24.57	Peak	290.00	100	Horizontal	N/A
5	1693.27	-44.60	9.45	-13.0	31.60	Peak	50.00	100	Horizontal	Pass
6	2132.17	-39.74	11.81	-13.0	26.74	Peak	179.00	100	Horizontal	Pass

High Channel 30 MHz to 1 GHz, ANT V

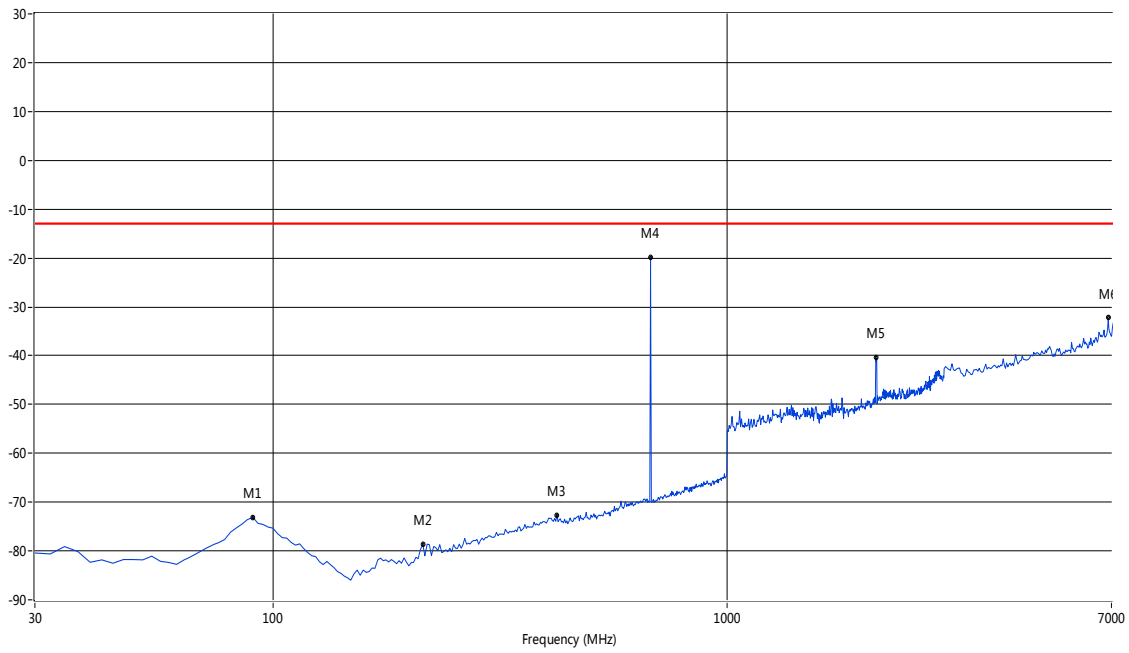

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	90.47	-73.16	-2.24	-13.0	60.16	Peak	187.00	100	Vertical	Pass
2	213.84	-78.60	-11.48	-13.0	65.60	Peak	164.00	100	Vertical	Pass
3	421.87	-72.63	-2.51	-13.0	59.63	Peak	286.00	100	Vertical	Pass
4	678.28	-19.77	1.77	-13.0	6.77	Peak	340.00	100	Vertical	N/A
5	2122.20	-40.45	11.40	-13.0	27.45	Peak	291.00	100	Vertical	Pass
6	6890.27	-32.27	32.92	-13.0	19.27	Peak	261.00	100	Vertical	Pass

High Channel 1 GHz to 7 GHz, ANT V

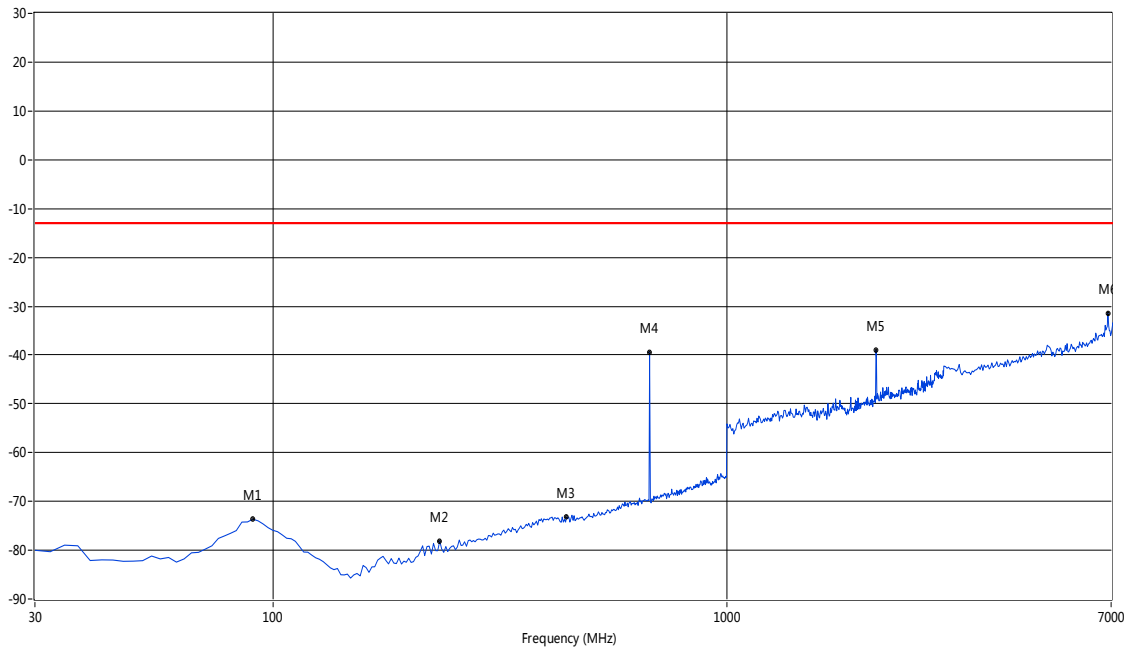

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	90.47	-73.68	-2.24	-13.0	60.68	Peak	49.00	100	Horizontal	Pass
2	233.19	-78.17	-9.91	-13.0	65.17	Peak	301.00	100	Horizontal	Pass
3	443.64	-73.17	-2.56	-13.0	60.17	Peak	194.00	100	Horizontal	Pass
4	678.86	-39.54	1.69	-13.0	26.54	Peak	250.00	100	Horizontal	N/A
5	2127.18	-38.99	11.61	-13.0	25.99	Peak	68.00	100	Horizontal	Pass
6	6890.27	-31.39	32.92	-13.0	18.39	Peak	302.00	100	Horizontal	Pass

## A.6 Frequency Stability

### Voltage vs. Frequency Stability (LOW CHANNEL)

Test Conditions		Test Frequency (MHz)	Measurement Frequency (MHz)	Max. Deviation (Hz)	Max. Deviation (ppm)	Limit (ppm)
Temperature (°C)	Voltage (VDC)					
20	3.3	655.4	655.394031	-5969	-9.11	50
	3.0	655.4	655.417297	17297	26.39	50
	2.0	655.4	655.400959	959	1.46	50

### Temperature vs. Frequency Stability (LOW CHANNEL)

Test Conditions		Test Frequency (MHz)	Measurement Frequency (MHz)	Max. Deviation (Hz)	Max. Deviation (ppm)	Limit (ppm)
Voltage (VDC)	Temperature (°C)					
3.0	-10	655.4	655.377821	-22179	-33.84	50
	-5	655.4	655.419278	19278	29.41	50
	0	655.4	655.425639	25639	39.12	50
	10	655.4	655.400433	433	0.66	50
	20	655.4	655.355690	-44310	-47.61	50
	30	655.4	655.411950	11950	18.23	50
	40	655.4	655.410897	10897	16.63	50
	50	655.4	655.403000	3000	4.58	50
	55	655.4	655.409016	9016	13.76	50

### Voltage vs. Frequency Stability (MIDDLE CHANNEL)

Test Conditions		Test Frequency (MHz)	Measurement Frequency (MHz)	Max. Deviation (Hz)	Max. Deviation (ppm)	Limit (ppm)
Temperature (°C)	Voltage (VDC)					
20	3.3	677.5	677.493522	-6478	-9.56	50
	3.0	677.5	677.517954	17954	26.50	50
	2.0	677.5	677.526452	26452	39.04	50

### Temperature vs. Frequency Stability (MIDDLE CHANNEL)

Test Conditions		Test Frequency (MHz)	Measurement Frequency (MHz)	Max. Deviation (Hz)	Max. Deviation (ppm)	Limit (ppm)
Voltage (VDC)	Temperature (°C)					
3.0	-10	677.5	677.487595	-12405	-18.31	50
	-5	677.5	677.546963	46963	39.32	50
	0	677.5	677.504715	4715	6.96	50
	10	677.5	677.528306	28306	41.78	50
	20	677.5	677.477220	-2278	-33.62	50
	30	677.5	677.508850	8850	13.06	50
	40	677.5	677.516696	16696	24.64	50
	50	677.5	677.549451	49451	42.99	50
	55	677.5	677.504060	4060	5.99	50

**Voltage vs. Frequency Stability (HIGH CHANNEL)**

Test Conditions		Test Frequency (MHz)	Measurement Frequency (MHz)	Max. Deviation (Hz)	Max. Deviation (ppm)	Limit (ppm)
Temperature (°C)	Voltage (VDC)					
20	3.3	678.2	678.196424	-3576	-5.27	50
	3.0	678.2	678.207384	7384	10.89	50
	2.0	678.2	678.229446	29446	33.42	50

**Temperature vs. Frequency Stability (HIGH CHANNEL)**

Test Conditions		Test Frequency (MHz)	Measurement Frequency (MHz)	Max. Deviation (Hz)	Max. Deviation (ppm)	Limit (ppm)
Voltage (VDC)	Temperature (°C)					
3.0	-10	678.2	678.192804	-7196	-10.61	50
	-5	678.2	678.215445	15445	22.77	50
	0	678.2	678.238904	38904	37.36	50
	10	678.2	678.205524	5524	8.15	50
	20	678.2	678.162974	-37026	-44.59	50
	30	678.2	678.239994	39994	48.97	50
	40	678.2	678.231272	31272	46.11	50
	50	678.2	678.233895	33895	49.98	50
	55	678.2	678.204623	4623	6.82	50

## **ANNEX B TEST SETUP PHOTOS**

Please refer the document "BL-SZ1650380-AR.PDF".

## **ANNEX C EUT EXTERNAL PHOTOS**

Please refer the document "BL-SZ1650380-AW.PDF".

## **ANNEX D EUT INTERNAL PHOTOS**

Please refer the document "BL-SZ1650380-AI.PDF".

--END OF REPORT--