


Gandini 180831016-Vert-Tx Fmid

CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	300 MHz	27.23	-18.78
1 Quasi Peak	428.48 MHz	27.15	-18.86
1 Quasi Peak	515.76 MHz	29.30	-16.71
1 Quasi Peak	622.96 MHz	32.39	-13.62
1 Quasi Peak	795.8 MHz	33.98	-12.03
1 Quasi Peak	921.44 MHz	96.77	50.75
1 Quasi Peak	941.28 MHz	35.76	-10.25

Gandini 180831016-Vert-Tx Fmid

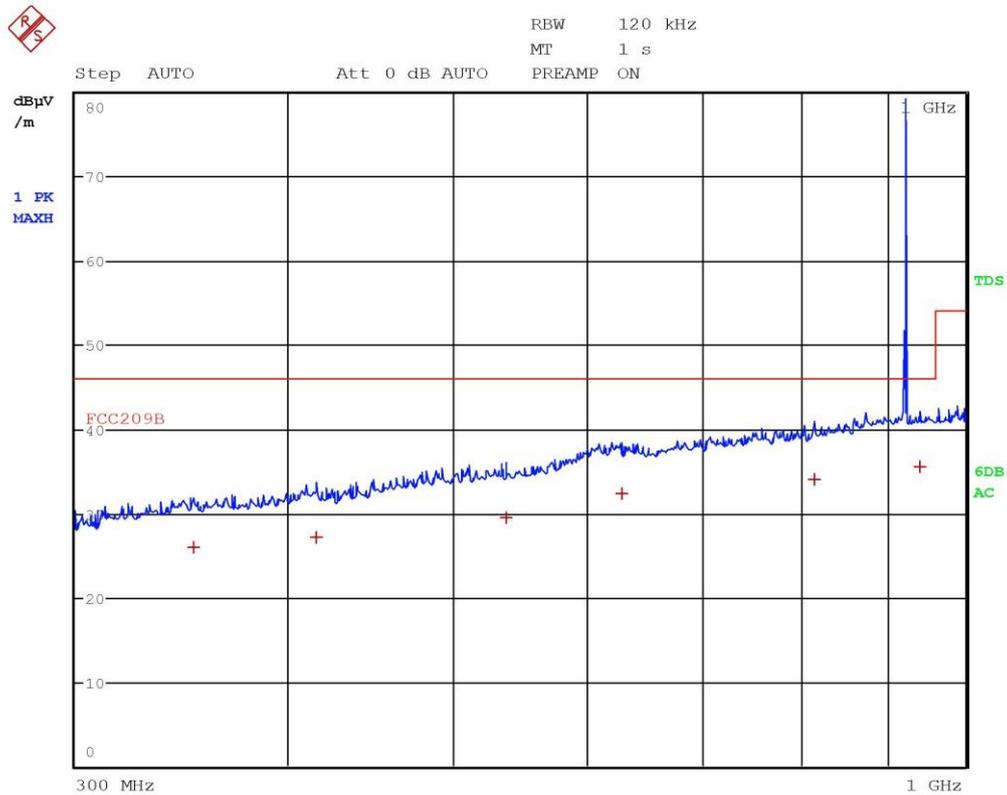


Gandini 180831017-Horiz-Tx Fmid

CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL d μ V/m	DELTA LIMIT dB
1 Quasi Peak	352.08 MHz	25.96	-20.05
1 Quasi Peak	415.28 MHz	27.20	-18.81
1 Quasi Peak	537.64 MHz	29.53	-16.49
1 Quasi Peak	628.44 MHz	32.39	-13.62
1 Quasi Peak	814.64 MHz	34.11	-11.90
1 Quasi Peak	940.2 MHz	35.61	-10.40

Gandini 180831017-Horiz-Tx Fmid

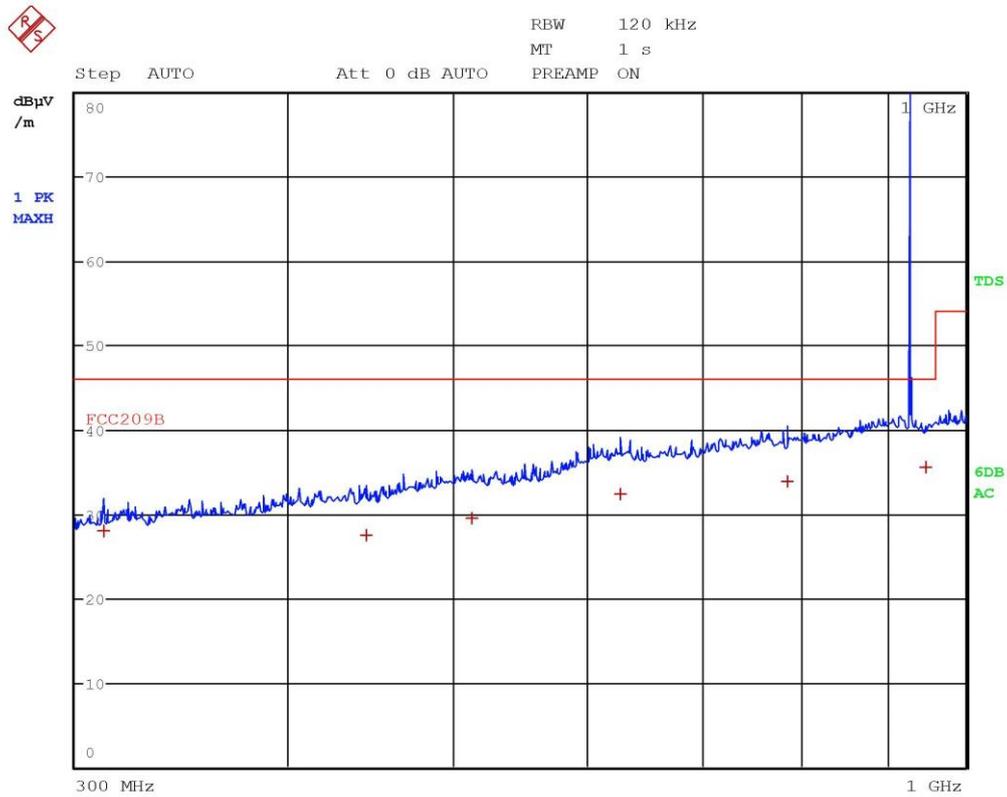


Gandini 180831018-Horiz-Tx Fmax

CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL d μ V/m	DELTA LIMIT dB
1 Quasi Peak	312 MHz	27.94	-18.07
1 Quasi Peak	444.88 MHz	27.51	-18.50
1 Quasi Peak	513.32 MHz	29.42	-16.59
1 Quasi Peak	626.4 MHz	32.40	-13.61
1 Quasi Peak	785.08 MHz	33.92	-12.10
1 Quasi Peak	947.32 MHz	35.52	-10.50

Gandini 180831018-Horiz-Tx Fmax

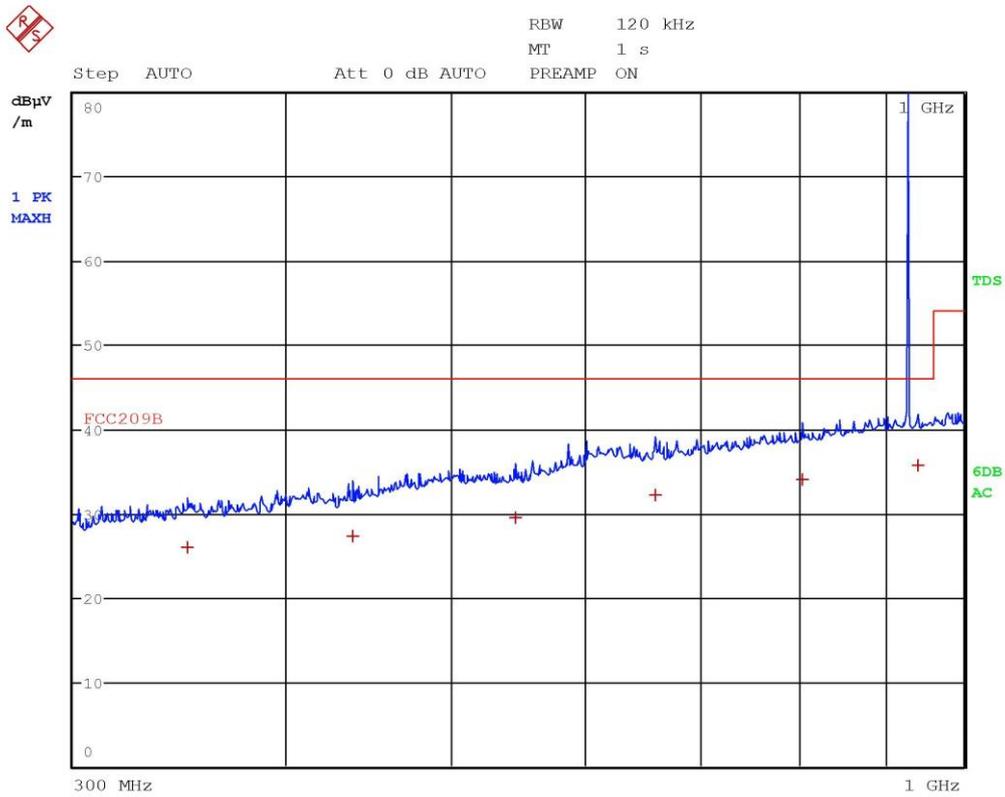

Gandini 180831018-Vert-Tx Fmax


CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL d μ V/m	DELTA LIMIT dB
1 Quasi Peak	349.84 MHz	25.94	-20.07
1 Quasi Peak	438.04 MHz	27.29	-18.72
1 Quasi Peak	545.84 MHz	29.57	-16.44
1 Quasi Peak	658.68 MHz	32.13	-13.89
1 Quasi Peak	803.32 MHz	34.08	-11.93
1 Quasi Peak	939.2 MHz	35.63	-10.38

Gandini 180831018-Vert-Tx Fmax

CMC Centro Misure Compatibilità S.r.l.

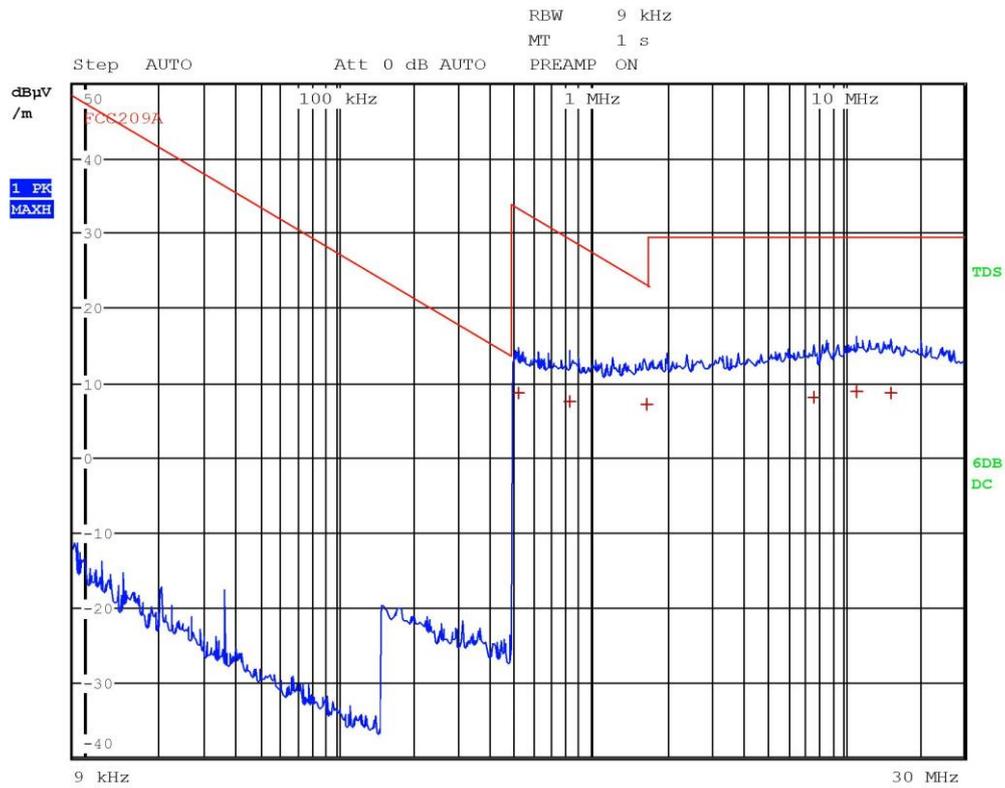

Gandini 18083120-Loop-Tx

CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209A		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	518 kHz	8.63	-24.67
1 Quasi Peak	826 kHz	7.55	-21.71
1 Quasi Peak	1.67 MHz	7.08	-16.06
1 Quasi Peak	7.67 MHz	8.03	-21.50
1 Quasi Peak	11.302 MHz	8.93	-20.60
1 Quasi Peak	15.47 MHz	8.65	-20.88

Gandini 18083120-Loop-Tx

Result: The requirements are met

CMC Centro Misure Compatibilità S.r.l.



11.3 20 dB bandwidth

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.247
- ANSI C63.10 cl. 7.8.7
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
 Laboratory

Auxiliary equipment:
 See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S295
 Measurement uncertainty: See clause 7 of this test report

Test specification


See FCC Part 15.247

Environmental conditions

<i>Temperature (°C)</i>	<i>Atmospheric pressure (kPa)</i>	<i>Relative humidity (%)</i>
22	100	45

Acceptance limits: The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz

Setup

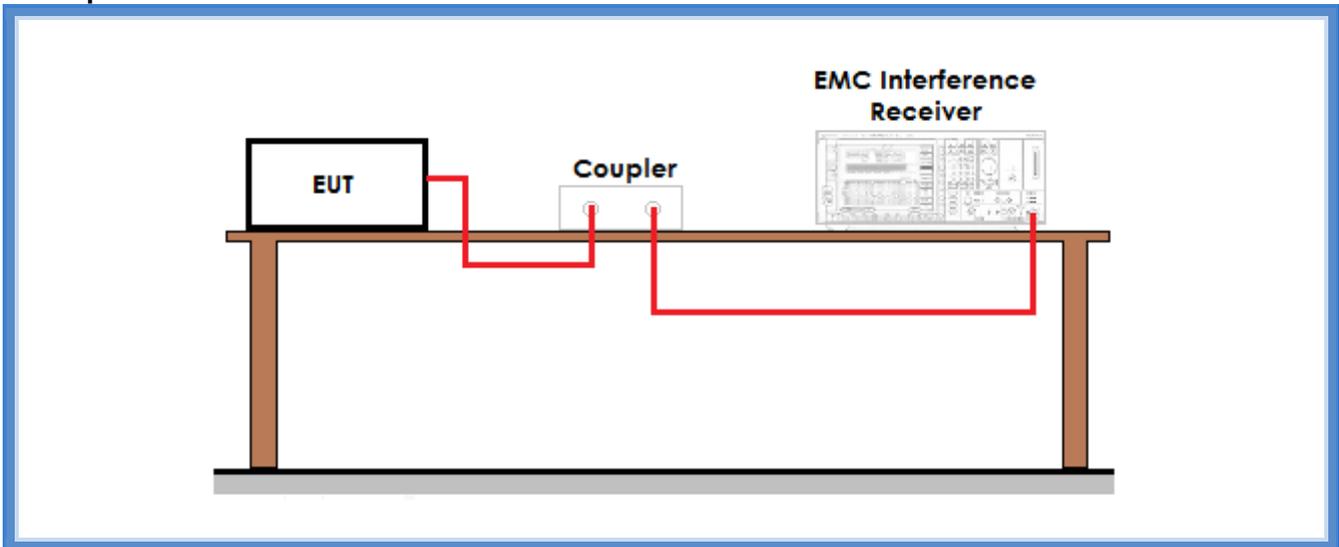

Result

Frequency (MHz)	Graphs	20 dB bandwidth (kHz)	Maximum 20 dB bandwidth allowed (kHz)	Results
915,075	G17049169	23,80	500	Complies
921,425	G17049173	23,69	500	Complies
927,825	G17049175	23,78	500	Complies



Graphs

Gandini 17049169



Gandini 17049173





Gandini 17049175



Result: The requirements are met



11.4 Channel separation

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.247
- ANSI C63.10 cl. 7.8.2
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
 Laboratory

Auxiliary equipment:
 See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S295
 Measurement uncertainty: See clause 7 of this test report

Test specification


See FCC Part 15.247

Environmental conditions

<i>Temperature (°C)</i>	<i>Atmospheric pressure (kPa)</i>	<i>Relative humidity (%)</i>
20	100	42

Acceptance limits: frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483,5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW

Setup

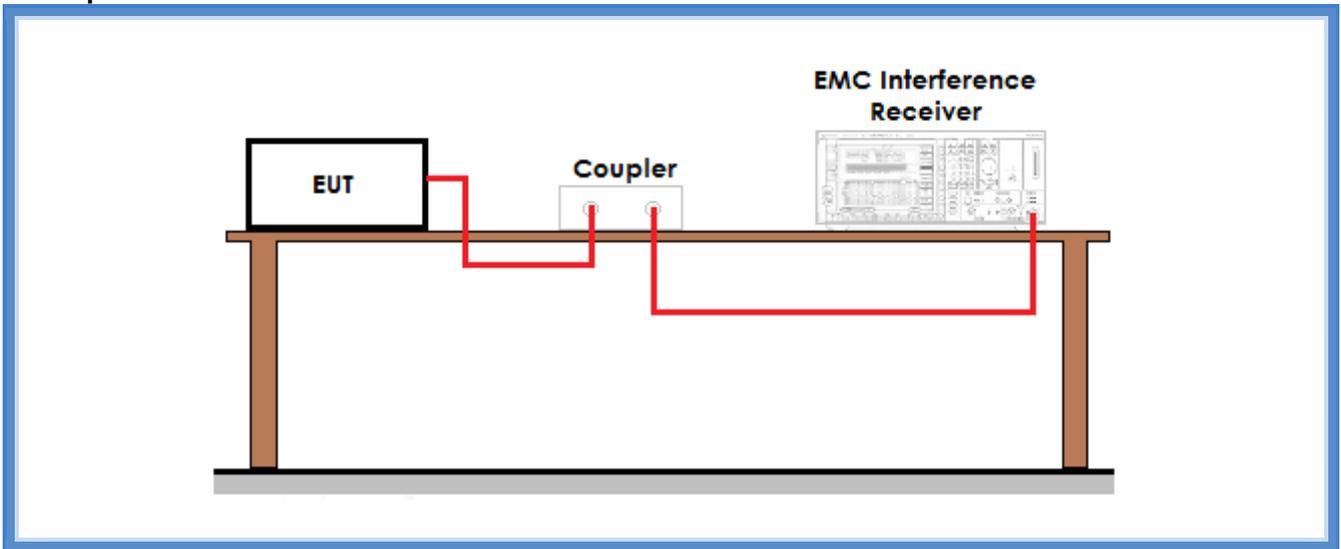


Result

Frequency band (MHz)	Graphs	Channel separation (kHz)	Minimum channel separation required (kHz)	Results
902 – 928	G17049141	200,06	25	Complies



Graphs

Gandini 17049141

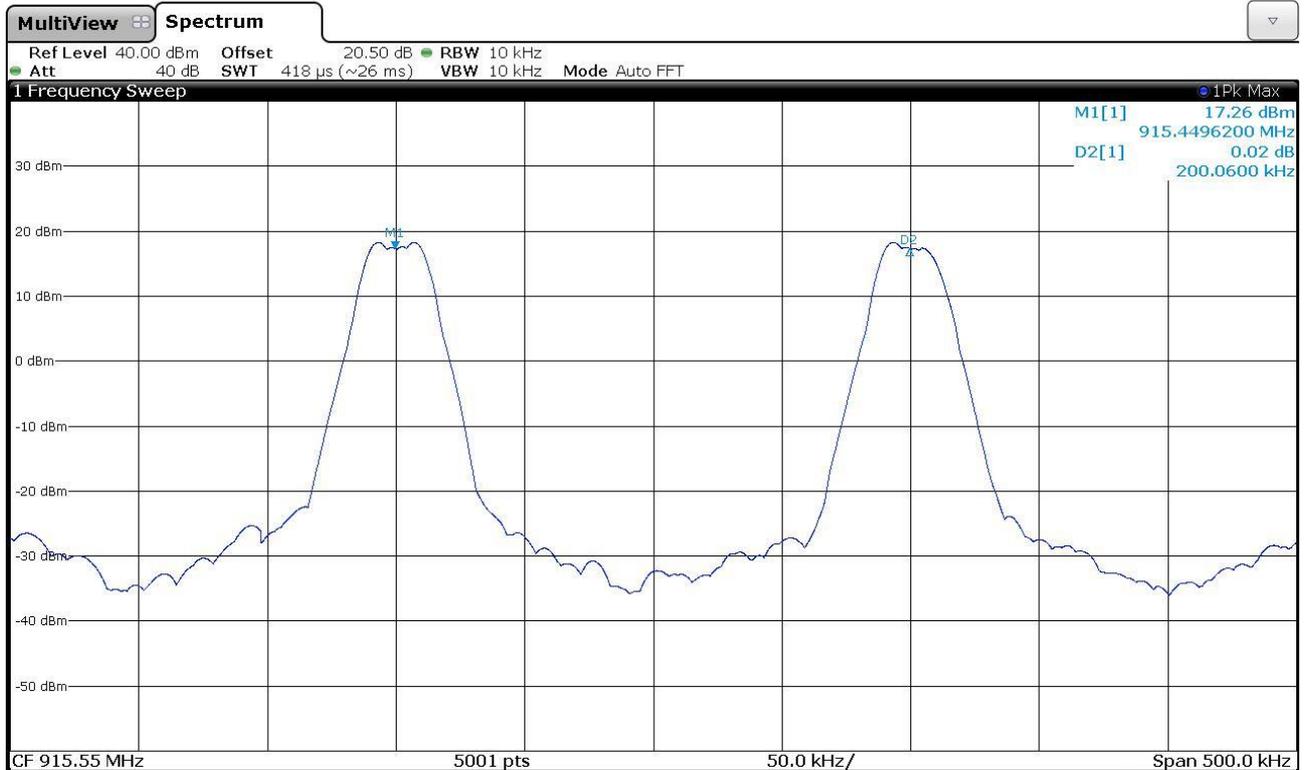

Result: The requirements are met

CMC Centro Misure Compatibilità S.r.l.



11.5 Number of hopping channels

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.247
- ANSI C63.10 cl. 7.8.3
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
 Laboratory

Auxiliary equipment:
 See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S295
 Measurement uncertainty: See clause 7 of this test report

Test specification


See FCC Part 15.247

Environmental conditions

<i>Temperature (°C)</i>	<i>Atmospheric pressure (kPa)</i>	<i>Relative humidity (%)</i>
20	100	42

Acceptance limits: for frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies. If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies. Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

Setup

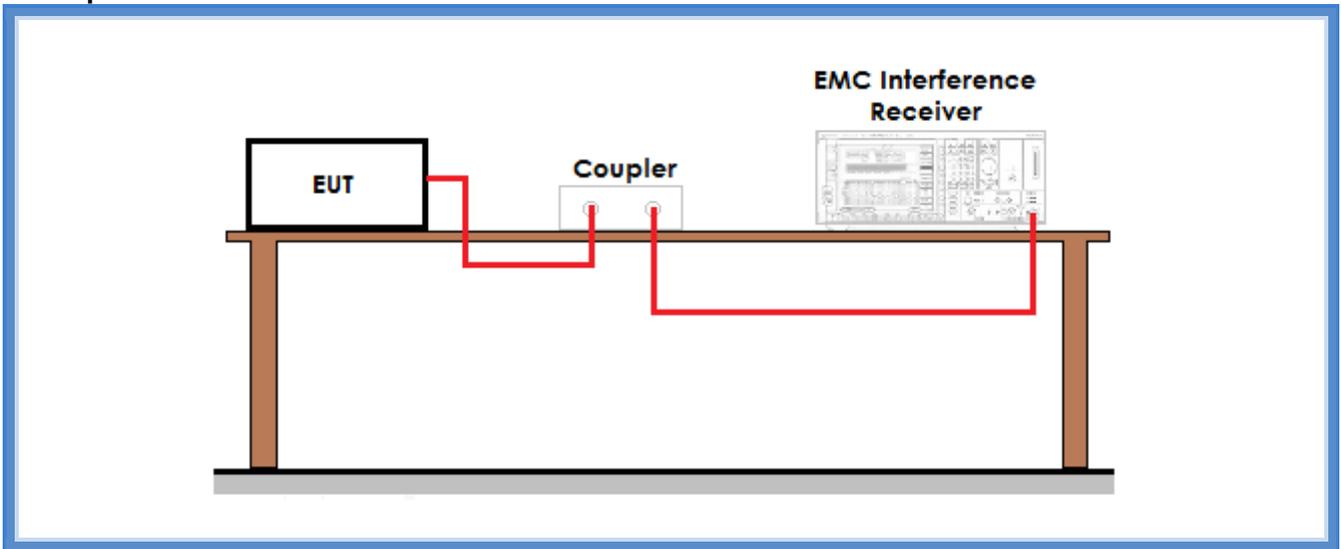


Result

Frequency band (MHz)	Graphs	Number of hopping channels	Minimum number of hopping channels required	Results
902 – 928	G17049164 and G17049165	64	50	Complies




Graphs

Gandini 17049164

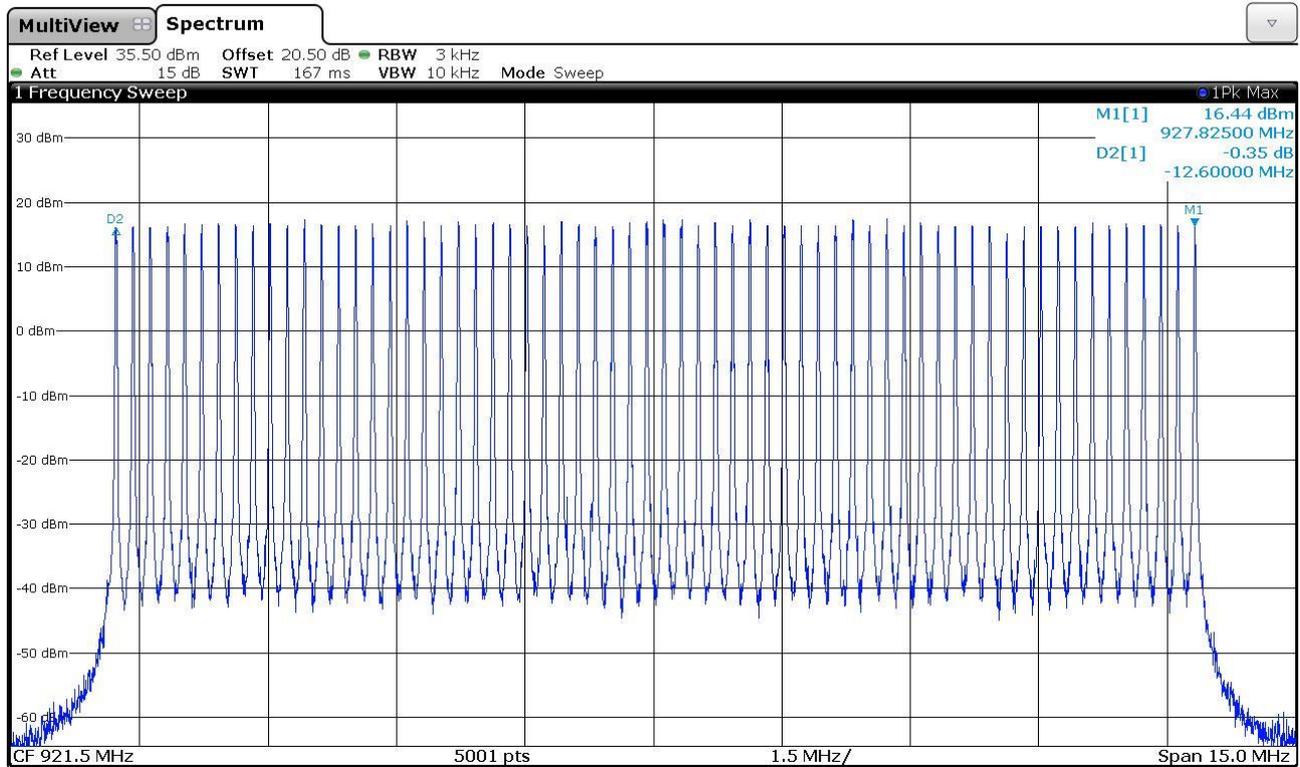



Gandini 17049165

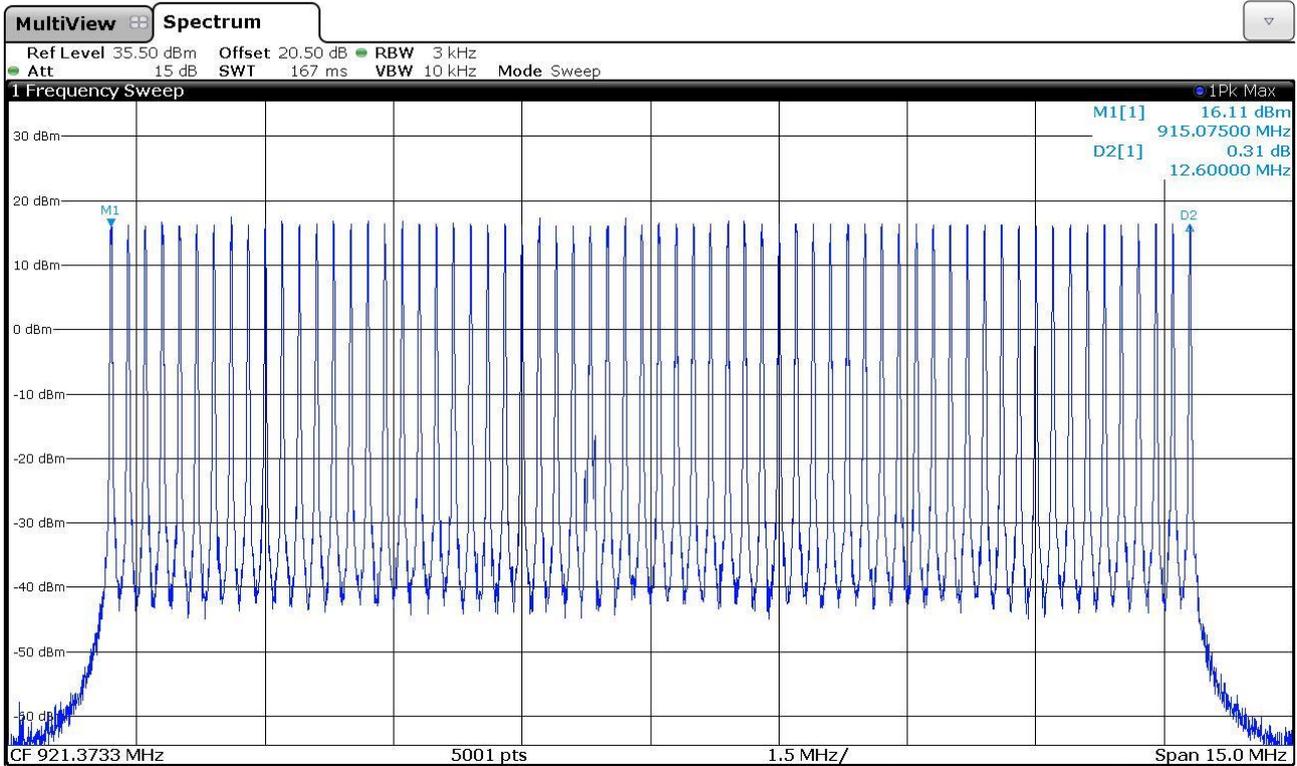

Result: The requirements are met



11.6 Time of occupancy

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.247
- ANSI C63.10 cl. 7.8.4
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
 Laboratory

Auxiliary equipment:
 See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S295
 Measurement uncertainty: See clause 7 of this test report

Test specification

See FCC Part 15.247


Environmental conditions

<i>Temperature (°C)</i>	<i>Atmospheric pressure (kPa)</i>	<i>Relative humidity (%)</i>
22	100	42

Acceptance limits:

For frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0,4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0,4 seconds within a 10 second period

Setup

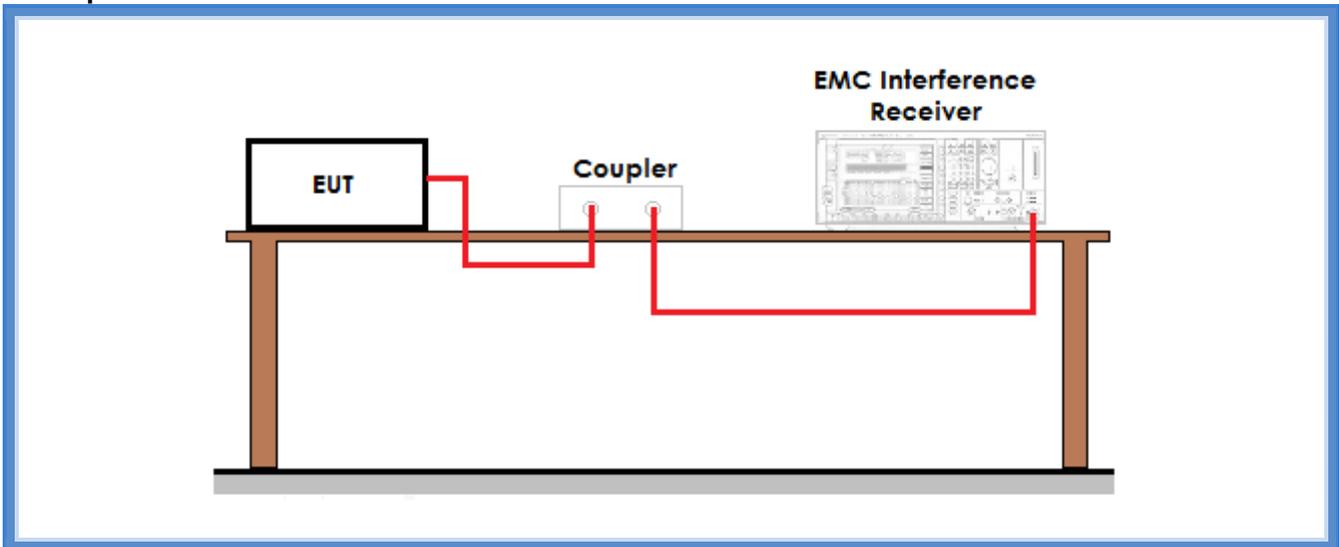

Result

Frequency (MHz)	Graphs	Dwell time (ms)
921,675	G17049166	20,79


Frequency (MHz)	Graphs	Number of transmissions
921,675	G17049167 and G17049168	8

Time of occupancy (Dwell time x Nr. transmissions)	Maximum allowed time of occupancy	Results
166,32 ms	400 ms	Complies




Graphs

Gandini 17049166

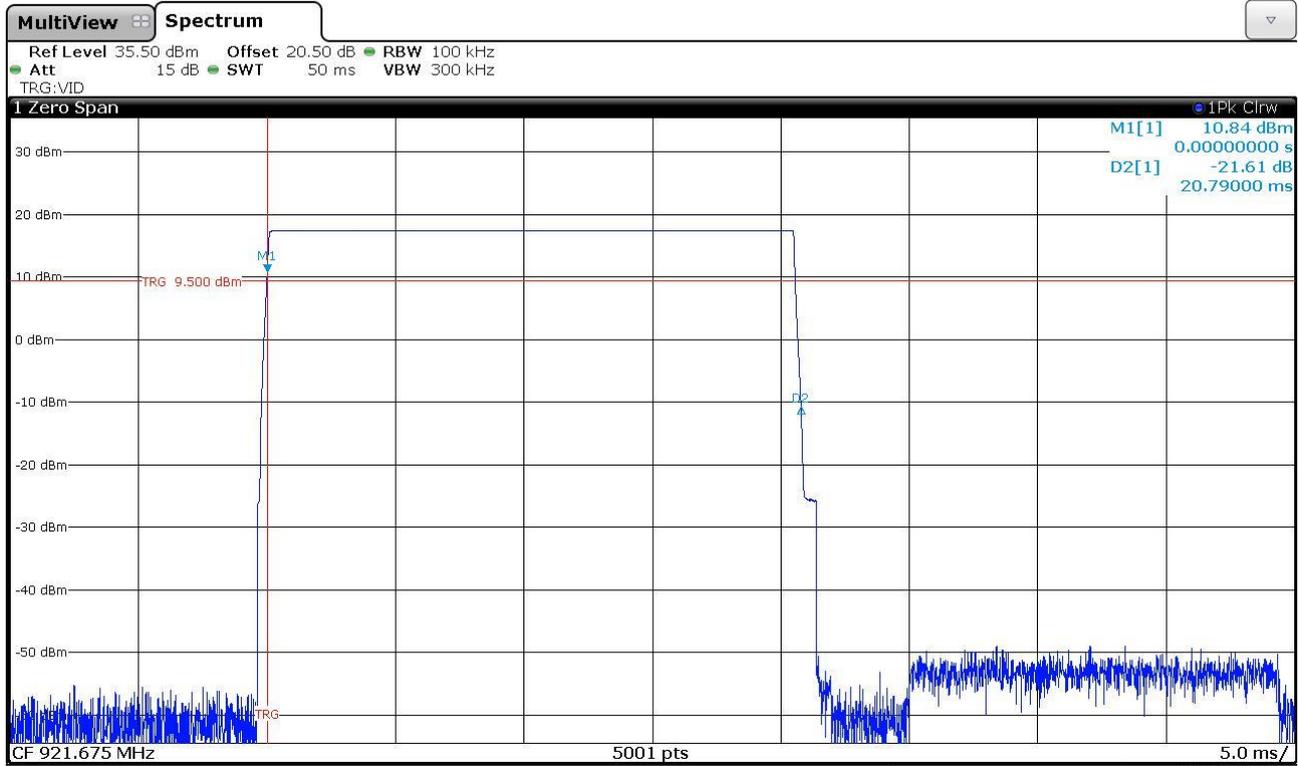


Gandini 17049167

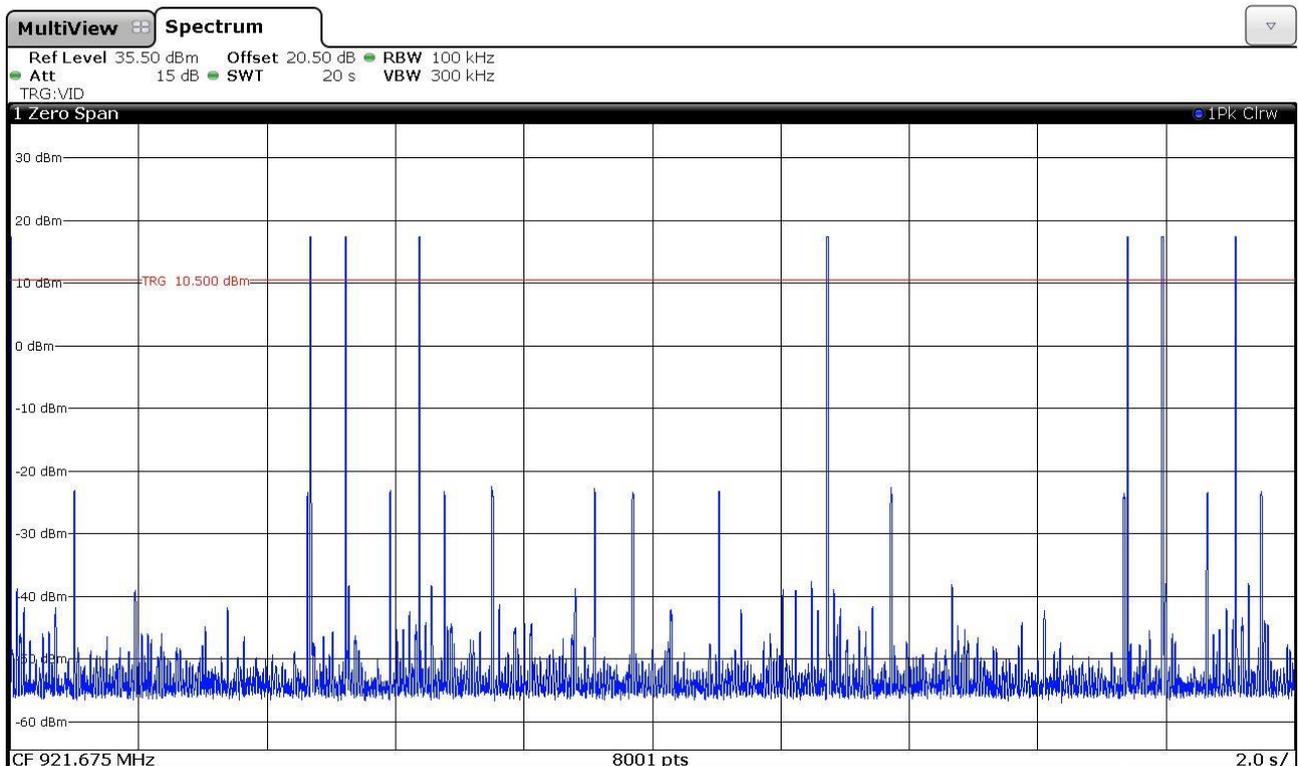



Gandini 17049168

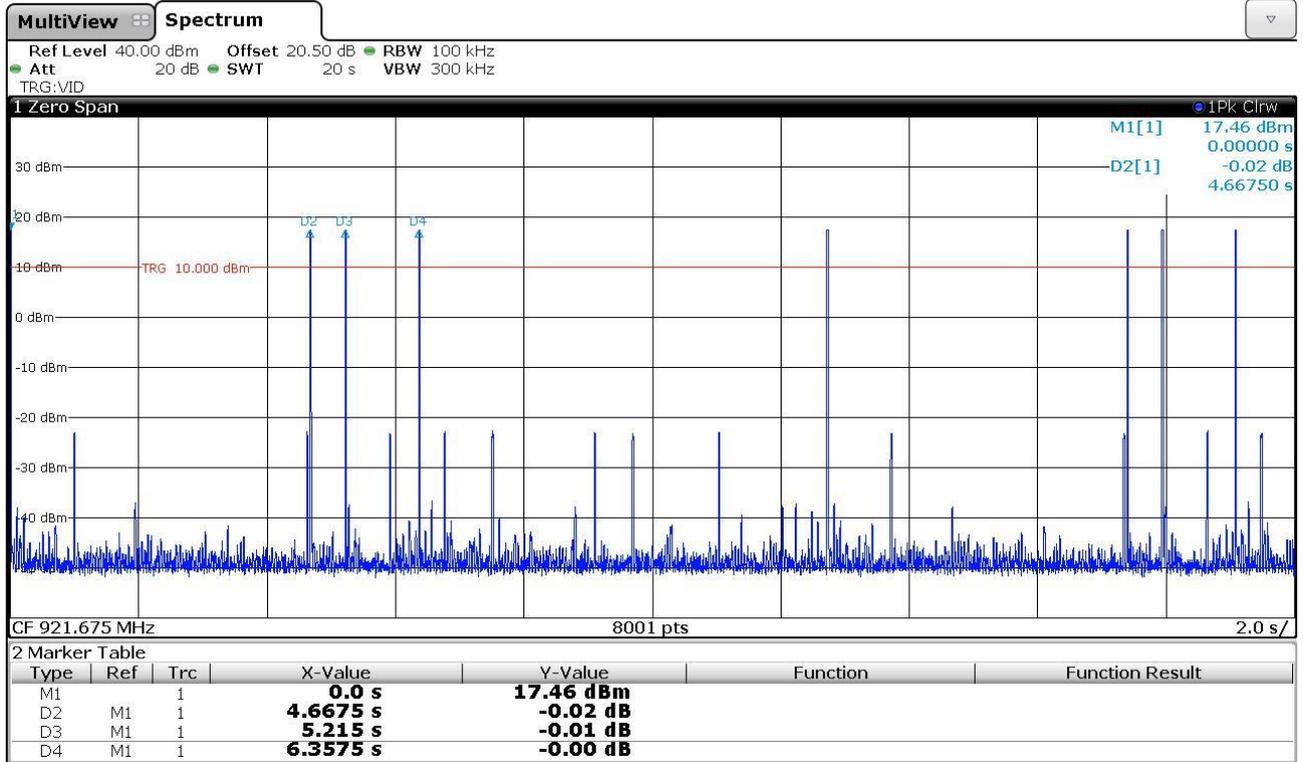

Result: The requirements are met

CMC Centro Misure Compatibilità S.r.l.



11.7 Band edge

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.247
- ANSI C63.10 cl. 7.8.6
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
 Laboratory

Auxiliary equipment:
 See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S295
 Measurement uncertainty: See clause 7 of this test report

Test specification

See FCC Part 15.247


Environmental conditions

<i>Temperature (°C)</i>	<i>Atmospheric pressure (kPa)</i>	<i>Relative humidity (%)</i>
22	100	45

Acceptance limits: operation within the band 902 – 928 MHz

CMC Centro Misure Compatibilità S.r.l.

Setup

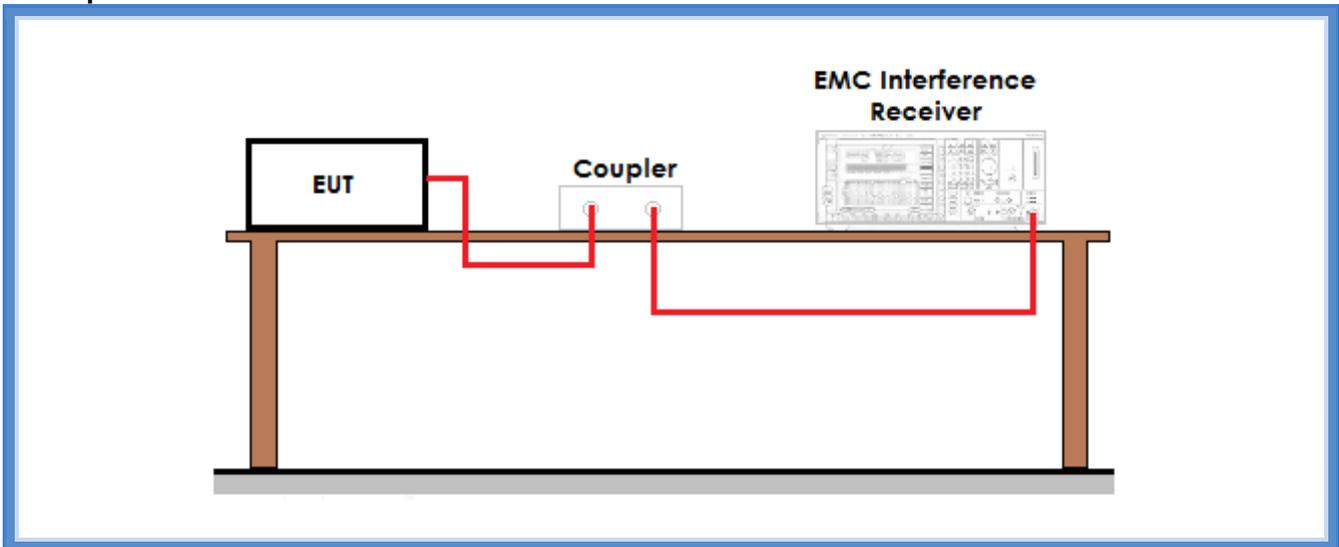

Result


Frequency (MHz)	Graph(s) – Hopping	Results	
915,075	G17049163	F _L : 915,05000 MHz	Complies
	G17049160		
927,825	G17049156	F _H : 927,89755 MHz	Complies
	G17049159		

Frequency (MHz)	Graph(s) – No hopping	Results	
915,075	G17049162	F _L : 915,04510 MHz	Complies
	G17049161		
927,825	G17049157	F _H : 927,84807 MHz	Complies
	G17049158		




Graphs

Bertezzo 17049156

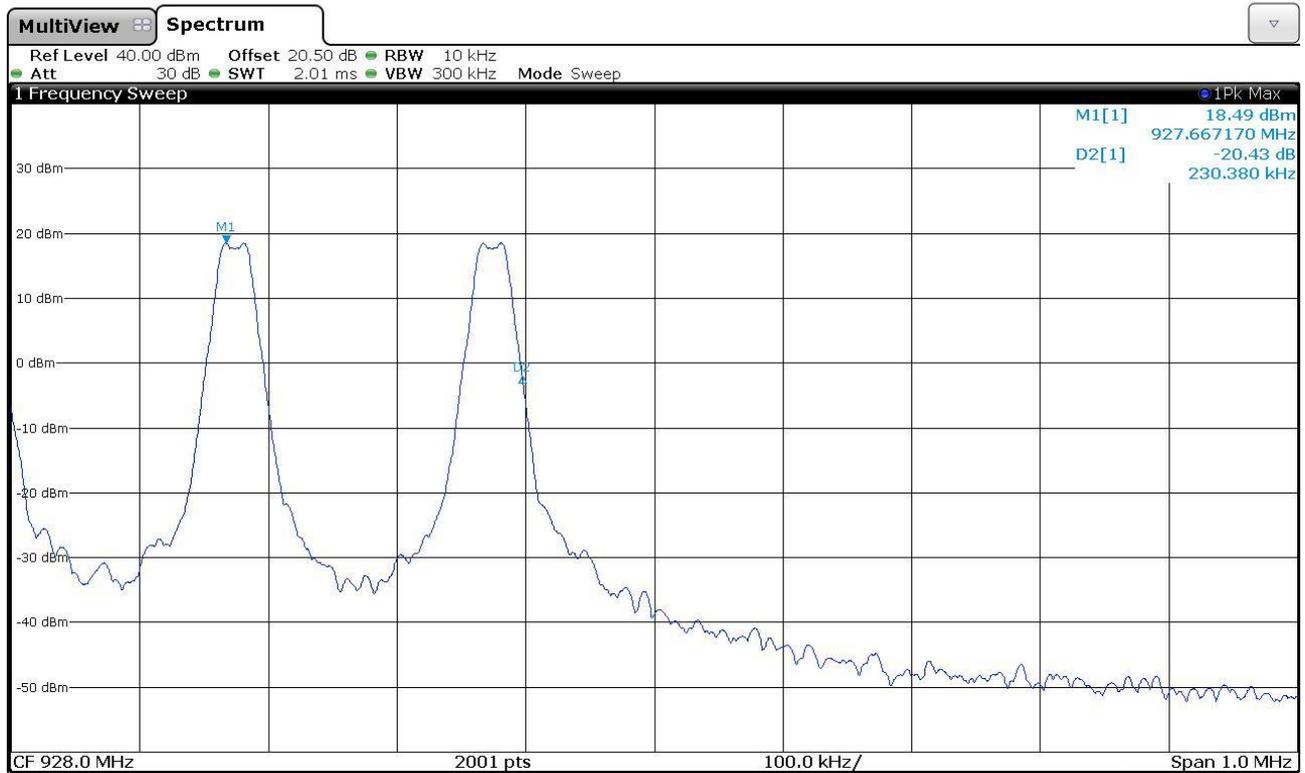




Bertezzo 17049157

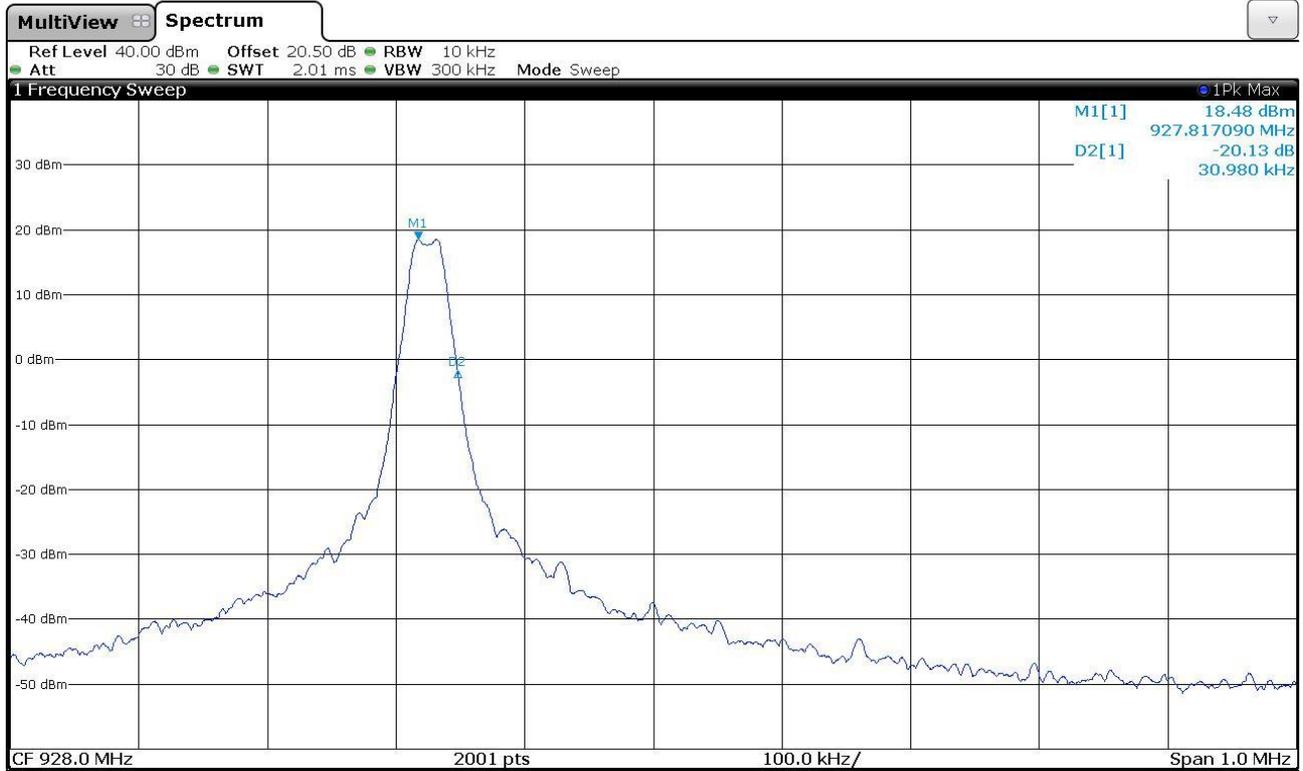

CMC Centro Misure Compatibilità S.r.l.




Bertezzo 17049158

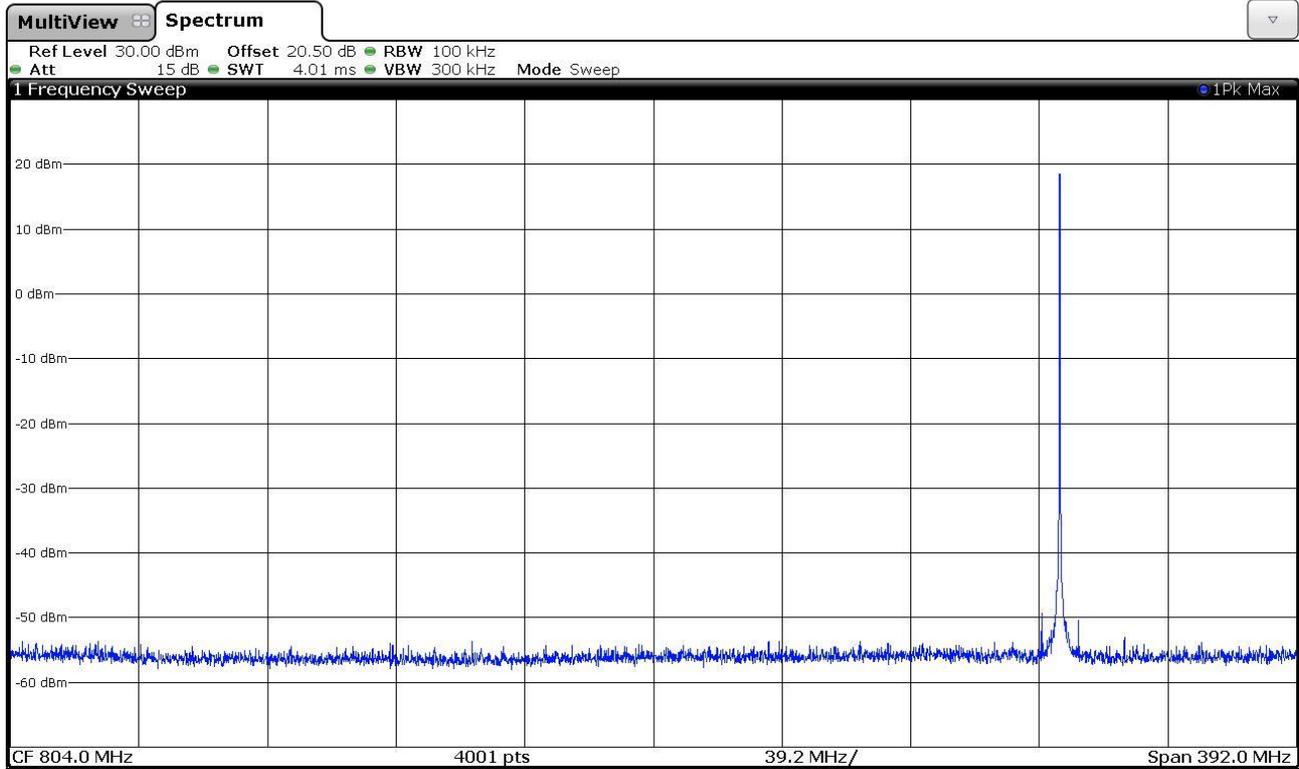

CMC Centro Misure Compatibilità S.r.l.




Bertezzo 17049159

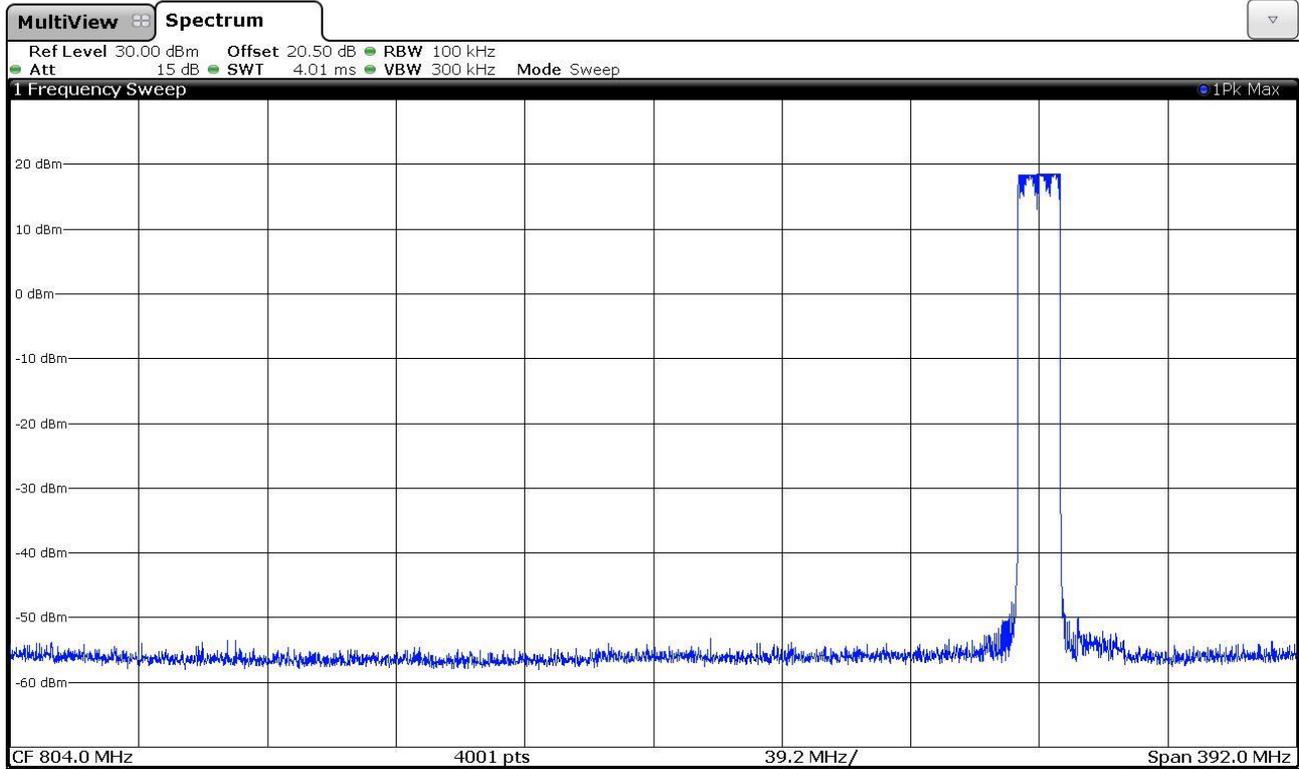




Bertezzo 17049160

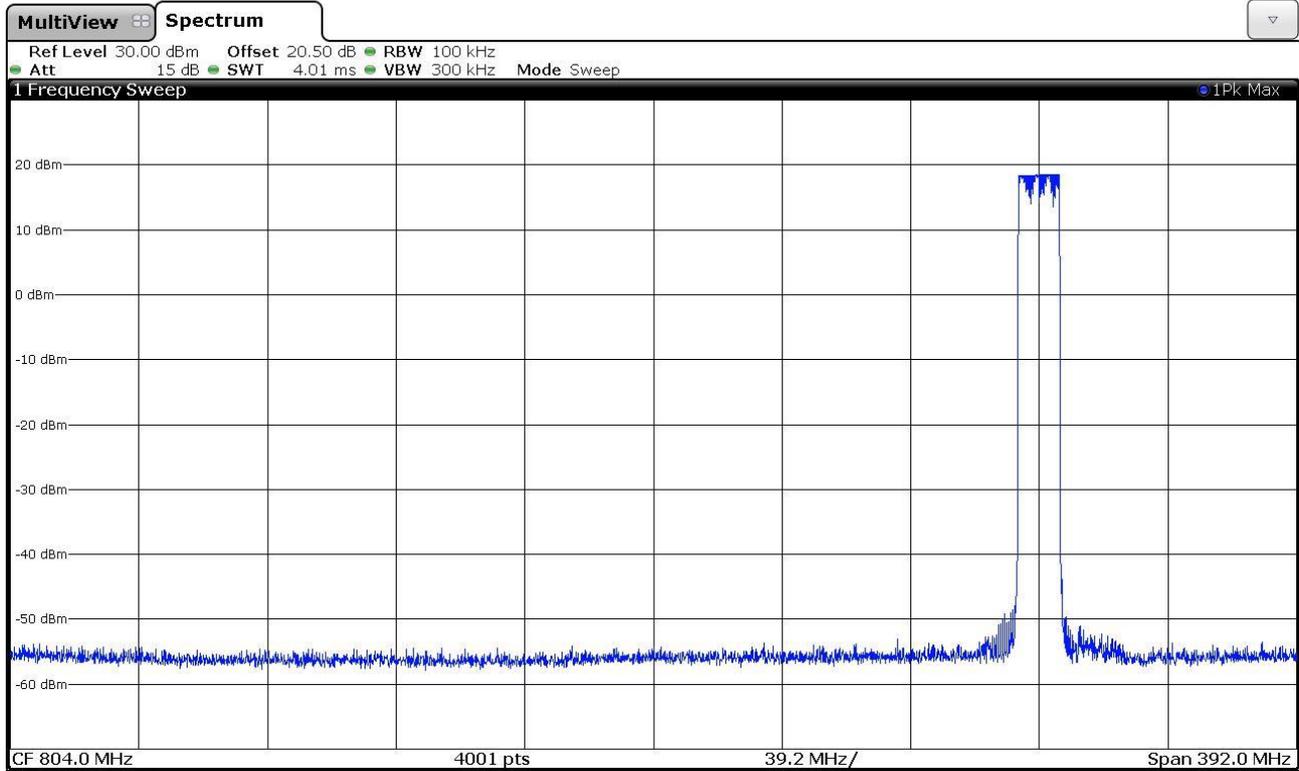




Bertezzo 17049161

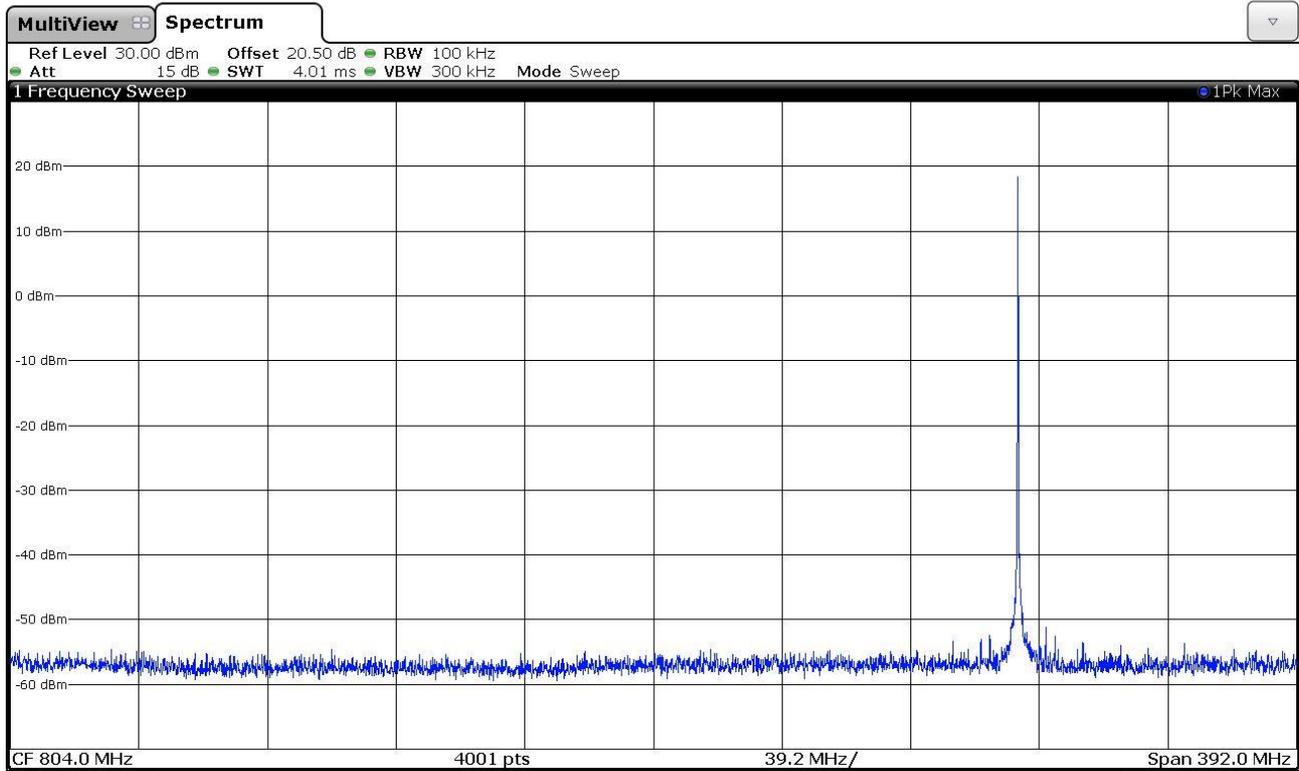




Bertezolo 17049162

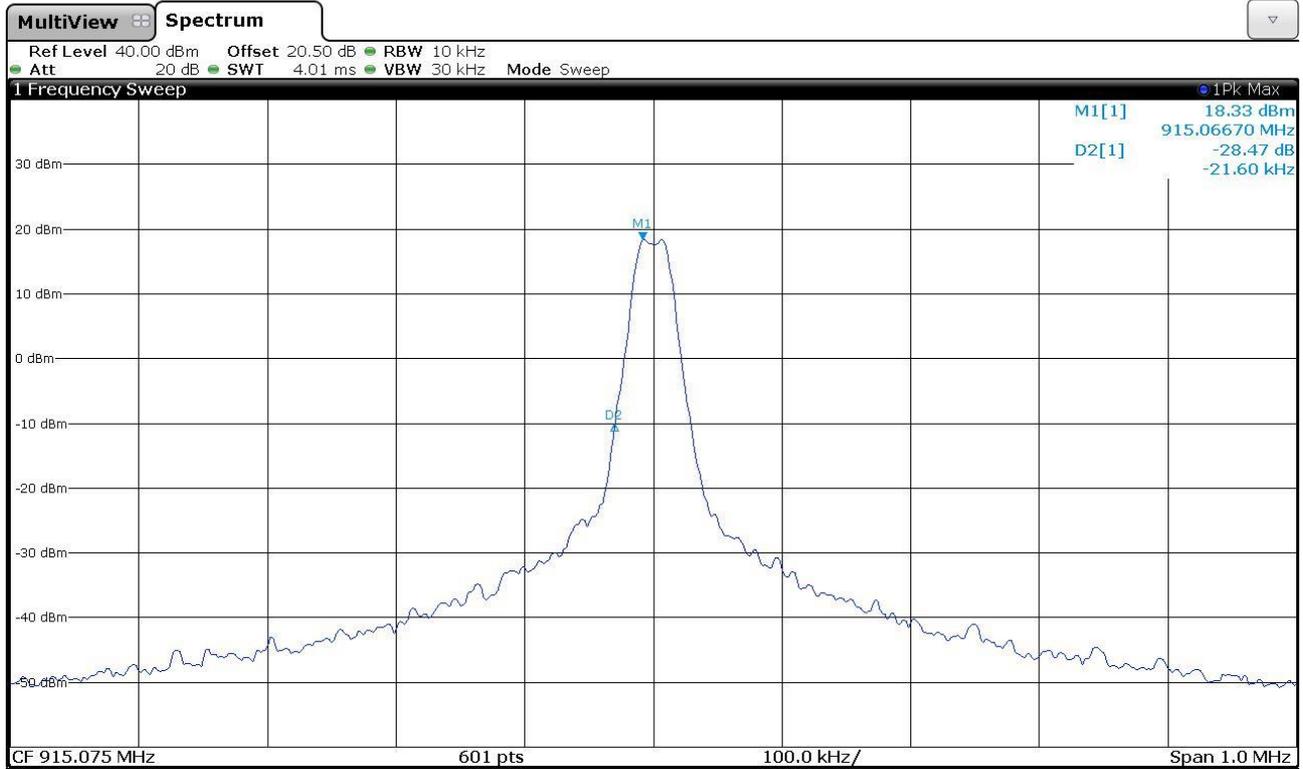



Bertezzo 17049163

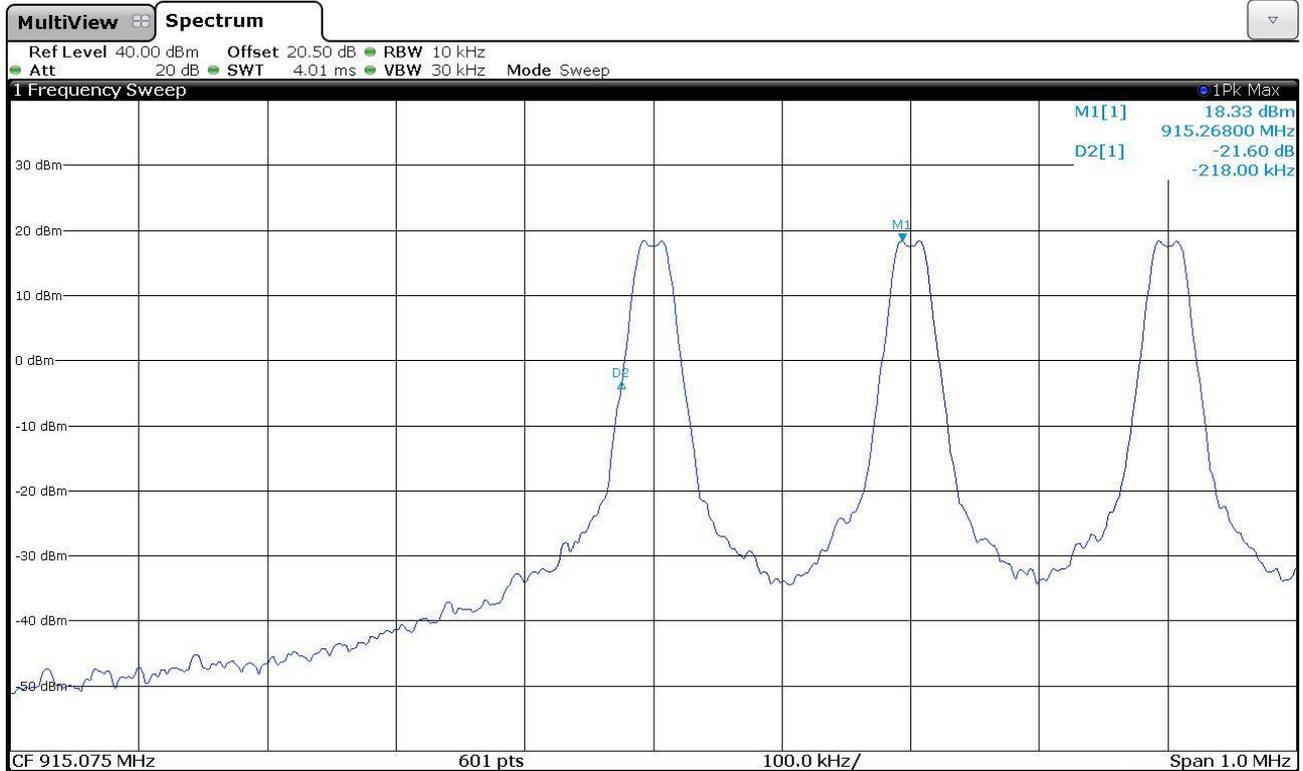

Result: The requirements are met

CMC Centro Misure Compatibilità S.r.l.



11.8 Peak Output Power

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.247
- ANSI C63.10 cl. 7.8.5
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
 Laboratory

Auxiliary equipment:
 See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S295
 Measurement uncertainty: See clause 7 of this test report

Test specification


Port: Antenna

Environmental conditions

<i>Temperature (°C)</i>	<i>Atmospheric pressure (kPa)</i>	<i>Relative humidity (%)</i>
20	100	45

For frequency hopping systems operating in the 2400–2483,5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483,5 MHz band: 0,125 watts. For frequency hopping systems operating in the 902–928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0,25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels.

Setup

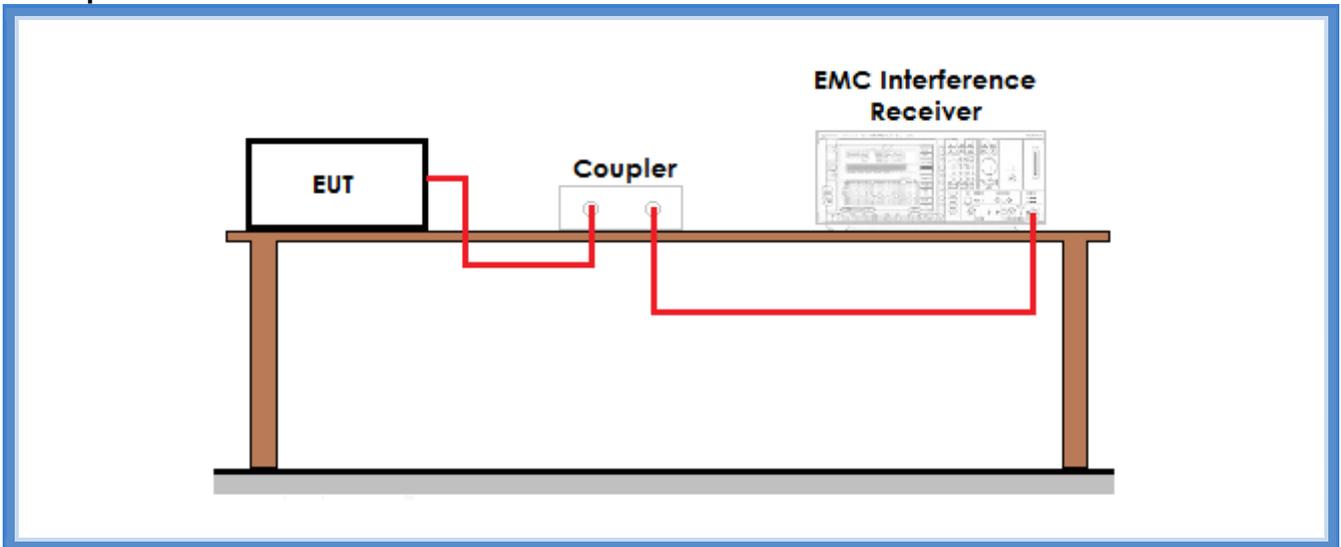


Result

Frequency (MHz)	Graphs	Conducted measured level (dBm)	Conducted power level (mW)	Calculated radiated level (dB μ V/m)
915,0706	G17049171	17,43	55,34	114,66
921,4182	G17049172	17,50	56,23	114,73
927,8186	G17049177	17,57	57,15	114,80




Graphs

Gandini 17049171

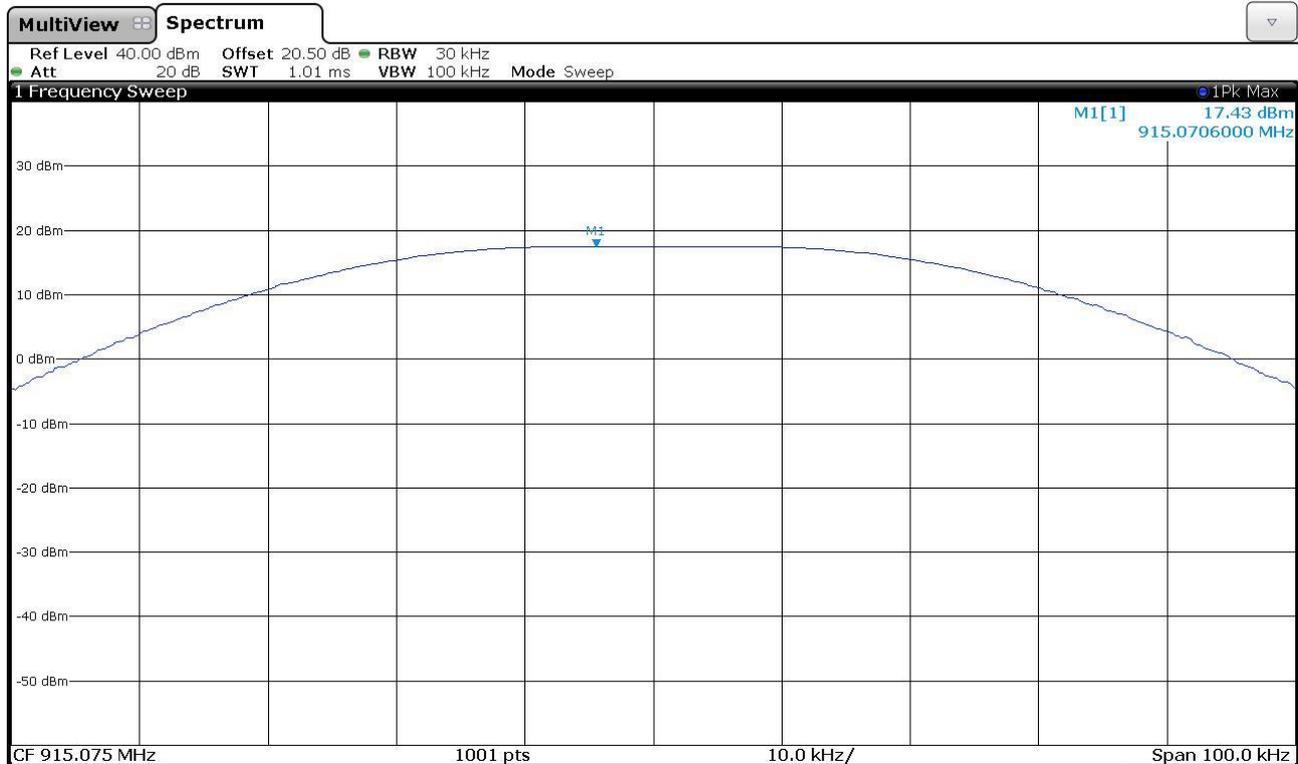


Gandini 17049172

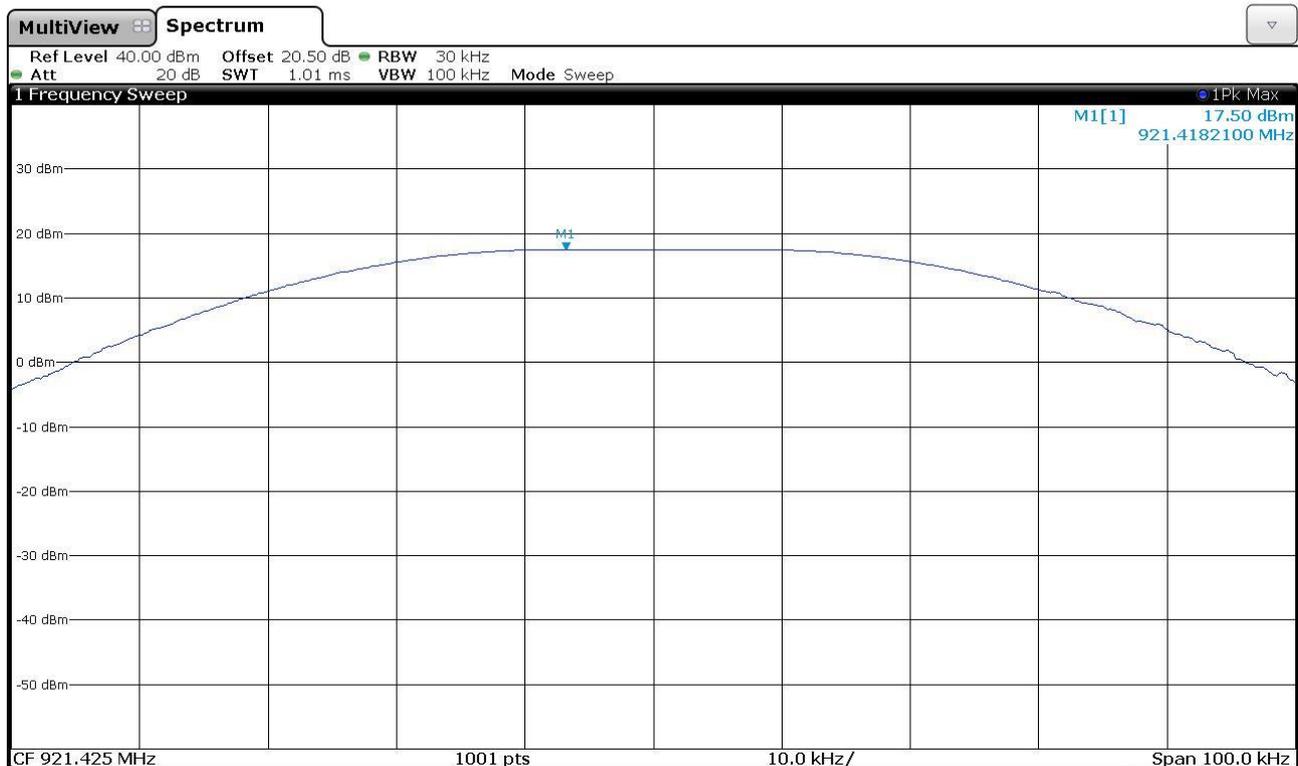



Gandini 17049177

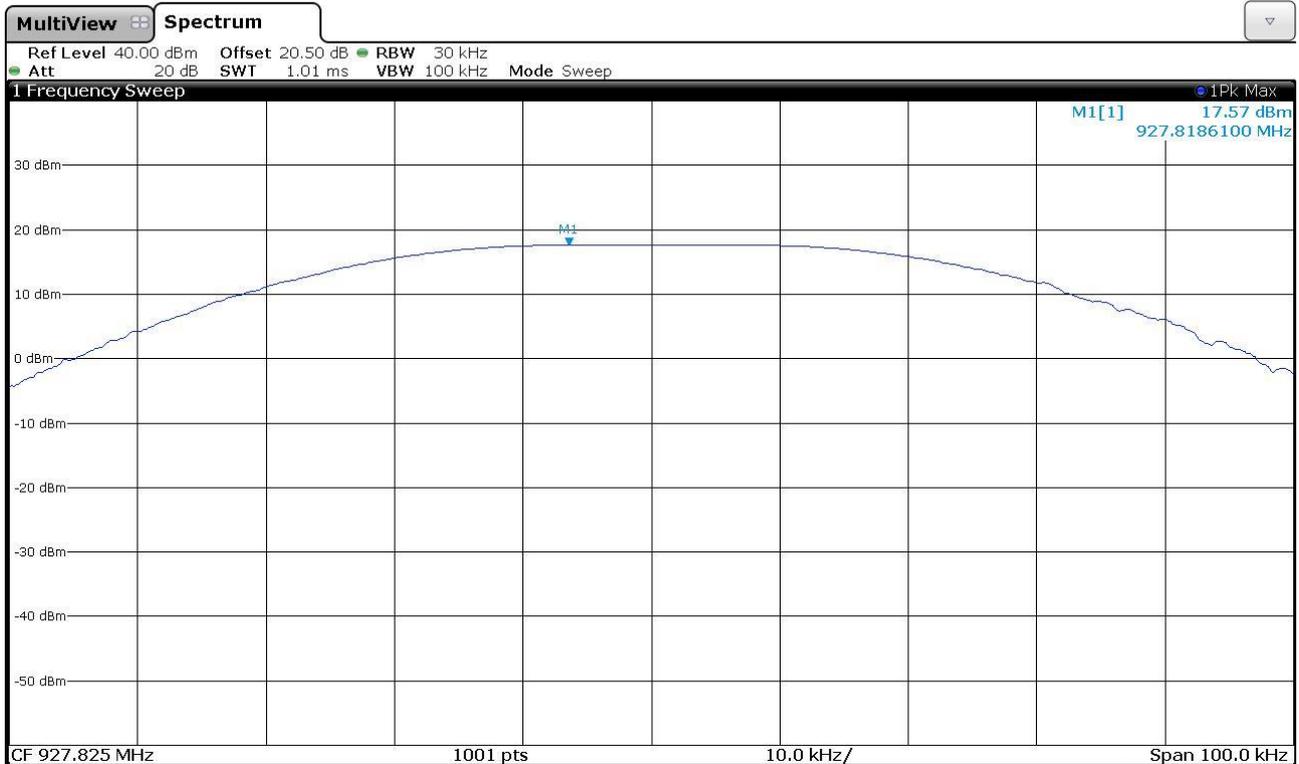

Result: The requirements are met

CMC Centro Misure Compatibilità S.r.l.



11.9 Spurious Emission

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.209
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
Semi-anechoic chamber

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S108, CMC S136, CMC S164
Measurement uncertainty: See clause 7 of this test report

Test specification

Port: Enclosure
Frequency range: 0,009 MHz – 10000 MHz
Antenna polarization: Horizontal (H) – Vertical (V)
10 m for frequencies ≤ 30 MHz
3 m for frequencies > 30 MHz

Environmental conditions

Temperature (°C)	Atmospheric pressure (kPa)	Relative humidity (%)
22	100	45

Acceptance limits

Acceptance limits for emissions in restricted frequency bands		
Frequency (MHz)	AV limits [dB(μV/m)]	Peak limits [dB(μV/m)]
> 1000	54	74



The restricted frequency bands are listed in the following table


MHz	MHz	MHz	GHz
0,090 – 0,110	16,42 – 16,423	399,9 – 410	4,5 – 5,15
0,495 – 0,505	16,69475 – 16,69525	608 – 614	5,35 – 5,46
2,1735 – 2,1905	16,80425 – 16,80475	960 – 1240	7,25 – 7,75
4,125 – 4,128	25,5 – 25,67	1300 – 1427	8,025 – 8,5
4,17725 – 4,17775	37,5 – 38,25	1435 – 1626,5	9,0 – 9,2
4,20725 – 4,20775	73 – 74,6	1645,5 – 1646,5	9,3 – 9,5
6,215 – 6,218	74,8 – 75,2	1660 – 1710	10,6 – 12,7
6,26775 – 6,26825	108 – 121,94	1718,8 – 1722,2	13,25 – 13,4
6,31175 – 6,31225	123 – 138	2200 – 2300	14,47 – 14,5
8,291 – 8,294	149,9 – 150,05	2310 – 2390	15,35 – 16,2
8,362 – 8,366	156,52475 – 156,52525	2483,5 – 2500	17,7 – 21,4
8,37625 – 8,38675	156,7 – 156,9	2690 – 2900	22,01 – 23,12
8,41425 – 8,41475	162,0125 – 167,17	3260 – 3267	23,6 – 24,0
12,29 – 12,293	167,72 – 173,2	3332 – 3339	31,2 – 31,8
12,51975 – 12,52025	240 – 285	3345,8 – 3358	36,43 – 36,5
12,57675 – 12,57725	322 – 335,4	3600 – 4400	Above 38,6
13,36 – 13,41			

Acceptance limits for emissions in non-restricted frequency bands

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.



Setup

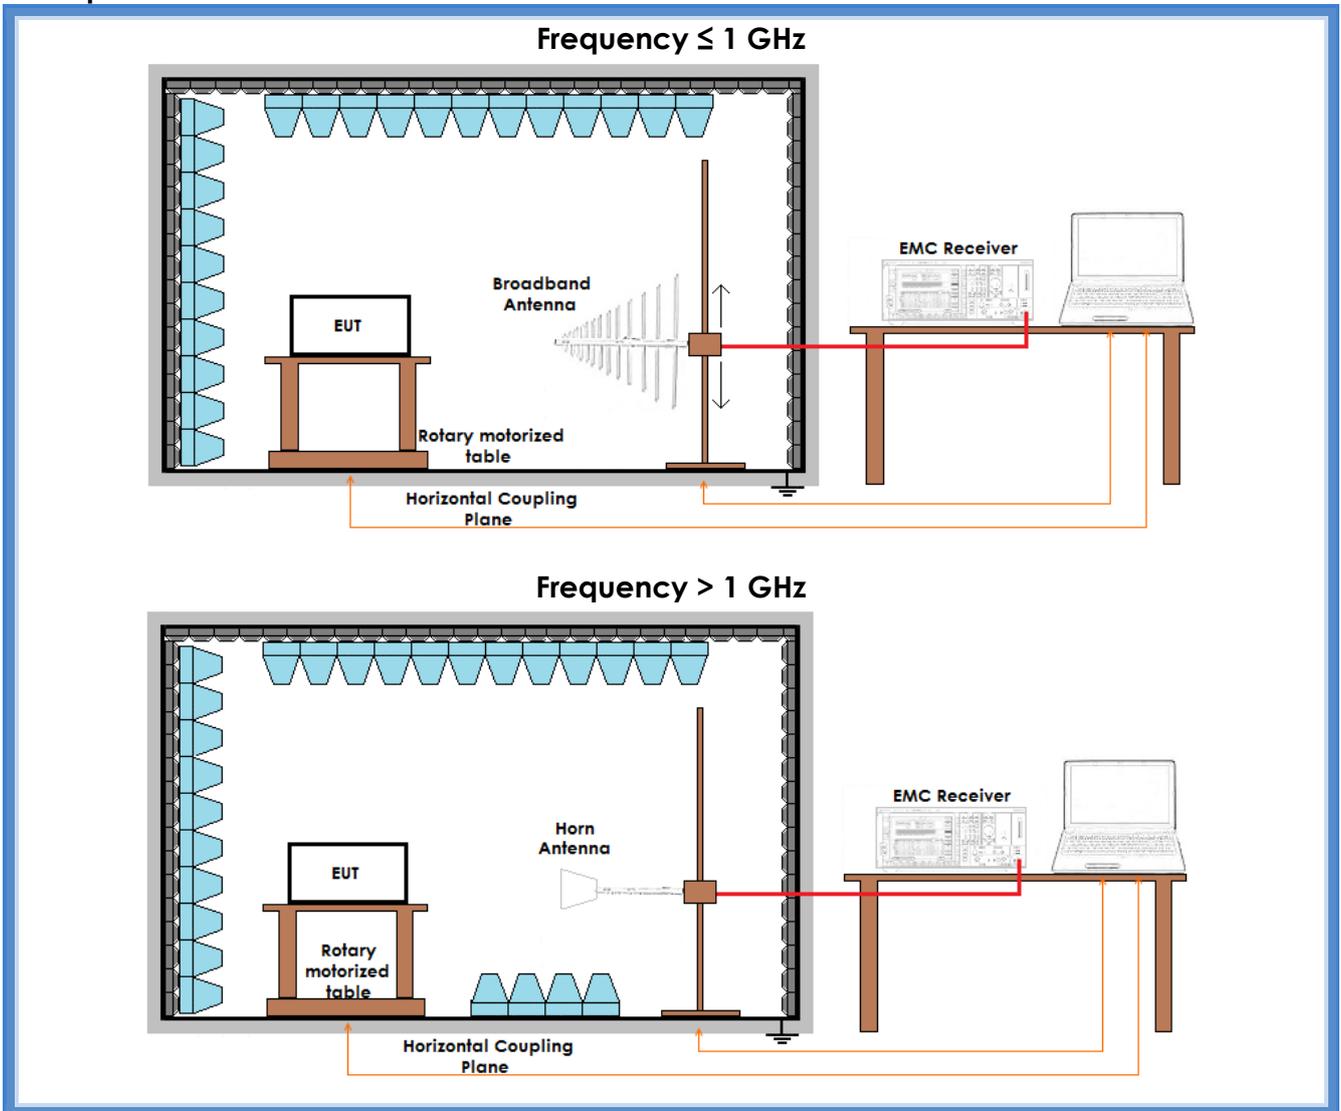



Result – AV detector

Harmonic	Lowest channel		Medium channel		Highest channel		Results
	Level (dB μ V/m)	Limits (dB μ V/m)	Level (dB μ V/m)	Limits (dB μ V/m)	Level (dB μ V/m)	Limits (dB μ V/m)	
II	49,43	54,00	47,74	54,00	48,16	54,00	Complies
III	43,26	54,00	41,49	54,00	41,84	54,00	Complies
IV	39,19	54,00	39,56	54,00	43,97	54,00	Complies
V	39,49	54,00	38,76	54,00	38,72	54,00	Complies
VI	46,13	54,00	41,62	54,00	41,79	54,00	Complies
VII	More than 20 dB below limit	54,00	More than 20 dB below limit	54,00	More than 20 dB below limit	54,00	Complies
VIII	48,45	54,00	52,91	54,00	48,34	54,00	Complies
IX	More than 20 dB below limit	54,00	More than 20 dB below limit	54,00	More than 20 dB below limit	54,00	Complies
X	More than 20 dB below limit	54,00	More than 20 dB below limit	54,00	More than 20 dB below limit	54,00	Complies

Remarks: EUT was tested in 3 orthogonal planes. The results in this table show the highest values. No spurious other than harmonics have been found. The results have been extrapolated to the specified distance using an extrapolation factor. For all harmonics it was considered the limit of 54 dB μ V/m as a worse case.



Result – Peak detector

Harmonic	Lowest channel		Medium channel		Highest channel		Results
	Level (dB μ V/m)	Limits (dB μ V/m)	Level (dB μ V/m)	Limits (dB μ V/m)	Level (dB μ V/m)	Limits (dB μ V/m)	
II	51,55	74,00	50,98	74,00	50,89	74,00	Complies
III	52,14	74,00	More than 20 dB below limit	74,00	More than 20 dB below limit	74,00	Complies
IV	More than 20 dB below limit	74,00	47,53	74,00	48,52	74,00	Complies
V	More than 20 dB below limit	74,00	More than 20 dB below limit	74,00	More than 20 dB below limit	74,00	Complies
VI	More than 20 dB below limit	74,00	50,53	74,00	52,72	74,00	Complies
VII	More than 20 dB below limit	74,00	More than 20 dB below limit	74,00	More than 20 dB below limit	74,00	Complies
VIII	53,66	74,00	56,43	74,00	53,30	74,00	Complies
IX	More than 20 dB below limit	74,00	More than 20 dB below limit	74,00	More than 20 dB below limit	74,00	Complies
X	More than 20 dB below limit	74,00	More than 20 dB below limit	74,00	More than 20 dB below limit	74,00	Complies

Remarks: EUT was tested in 3 orthogonal planes. The results in this table show the highest values. No spurious other than harmonics have been found. The results have been extrapolated to the specified distance using an extrapolation factor. For all harmonics it was considered the limit of 74 dB μ V/m as a worse case.

Result: The requirements are met