



TEST REPORT nr. R10145201

Federal Communication Commission (FCC)

Industry Canada (IC)

Test item

Description..... : Transceiver Unit
Trademark..... : AUTECH
Model/Type..... : Model FJL Type NF022



Test Specification

Standard..... : FCC Rules & Regulations, Title 47 (2005) - Part 15 paragraph(s) : 247(a), 247(b),
247(c), 209 and 207
RSS-210 (2007) – Annex 8

Client's name..... : AUTECH S.r.l.
Address : Via Pomaroli, 65 - 36030 Caldogno (VI) - ITALY

Manufacturer's name : Same as client
Address :

Report

Tested by..... : G. Gandini - *Technician* 
Approved by..... : R. Beghetto - *Laboratory Manager* 
Date of issue..... : 26.11.10
Contents..... : 47 pages

This test report shall not be reproduced except in full without the written approval of CMC.
The test results presented in this report relate only to the item tested.

CMC Centro Misura Compatibilità S.r.l.



Index

1. SUMMARY	3
2. DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	4
2.1 TEST SITE	4
3. TESTING AND SAMPLING	4
4. OPERATIVE CONDITIONS	4
5. PHOTOGRAPH(S) OF EUT	5
6. EQUIPMENT LIST	6
7. MEASUREMENT UNCERTAINTY	7
8. REFERENCE DOCUMENTS	8
9. DEVIATION FROM TEST SPECIFICATION	9
10. TEST CASE VERDICTS	9
11. RESULTS	9
11.1 ANTENNA REQUIREMENTS.....	10
11.2 BANDWIDTH.....	11
11.3 CHANNEL SEPARATION	12
11.4 TIME OF OCCUPANCY	13
11.5 NUMBER OF HOPPING CHANNELS.....	14
11.6 PEAK OUTPUT POWER	15
11.7 BAND EDGE.....	17
11.8 RADIATED SPURIOUS (TRANSMITTER).....	18
11.9 RADIATED SPURIOUS (RECEIVER)	21
12. GRAPHS AND TABLES	22



1. Summary			
Standard: FCC Rules & Regulations, Title 47 RSS-210 (2007)			
Test specifications	Environmental Phenomena	Tests sequence	Result
FCC – Title 47 Part 15.203 and 15.204 IC – RSS-210	Antenna Requirement	8	Complies
FCC – Title 47 Part 15.247 IC – RSS-210 Annex 8	Bandwidth	4	Complies
FCC – Title 47 Part 15.247 IC – RSS-210 Annex 8	Channel Separation	2	Complies
FCC – Title 47 Part 15.247 IC – RSS-210 Annex 8	Time of Occupancy	3	Complies
FCC – Title 47 Part 15.247 IC – RSS-210 Annex 8	Number of Hopping Frequency	1	Complies
FCC – Title 47 Part 15.247 IC – RSS-210 Annex 8	Peak Output Power	6	Complies
FCC – Title 47 Part 15.247 IC – RSS-210 Annex 8	Band Edge	5	Complies
FCC – Title 47 Part 15.247 FCC – Title 47 Part 15.209 IC – RSS-210 Annex 8	Radiated Spurious	7	Complies

The Test Report was given to the Client representatives for necessary documentation of ratification of the tested equipment and it is valid for the FCC and IC certification.



5. Photograph(s) of EUT





6. Equipment list

<i>Id. number</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Description</i>	<i>Serial number</i>	<i>Last calibration</i>	<i>Due date calibration</i>
CMC S001	Rohde & Schwarz	ESHS30	EMC interference receiver	862024/003	January '10	January '11
CMC S108	Emco	3115	Horn antenna	9811-5622	April '10	April '13
CMC S124	Spin	AMTP42-20	Horn Antenna 18-26GHz	103	May '10	May '13
CMC S127	SCHAFFNER	HLA6120	Loop Antenna	1191	January '10	January '13
CMC S129	Rohde & Schwarz	ESPI7	Receiver	836.914/004	January '10	January '11
CMC S136	Schwarzbeck	VULB 9163	Broadband Antenna	9136-205	May '10	May '13
CMC S164	Rohde & Schwarz	ESU26	EMC interference receiver	100052	January '10	January '11



7. Measurement uncertainty

Test	Expanded Uncertainty	note
Conducted Emission		
(50Ω/50μH AMN) - (9 kHz – 150 kHz)	±3.8 dB	1
(50Ω/50μH AMN) - (150 kHz – 30 MHz)	±3.4 dB	1
(Voltage probe) - (150 kHz – 30 MHz)	±3.0 dB	1
(50Ω/5μH AMN) - (150 kHz – 108 MHz)	±3.2 dB	1
Discontinuous Conducted Emission		
Conducted Emission (50Ω/50μH AMN) - (9 kHz – 150 kHz)	±3.8 dB	1
Conducted Emission (50Ω/50μH AMN) - (150 kHz – 30 MHz)	±3.4 dB	1
Disturbance Power (30 MHz – 300 MHz)		
	±3.2 dB	1
Radiated Emission		
(0,150 MHz – 30 MHz)	±4.5 dB	1
(30 MHz – 1000 MHz)	±4.8 dB	1
(1 GHz – 6 GHz)	±4.4 dB	1
Electromagnetic field EMF		
	±18.8 dB	1
Harmonic current emissions test		
	±2.4 %	1
Voltage fluctuation and flicker test		
	±6.0 %	1
Insertion loss test		
	±2.6 %	1
Radiated electromagnetic disturbance test (loop antenna)		
	±2.5 %	1
Radiated electromagnetic field immunity test		
	0.9 V/m at 3V/m	1
Pulse modulated radiated electromagnetic field immunity test		
	0.9 V/m at 3V/m	1
Injected currents immunity test		
	0.6 V at 3V	1
Bulk current		
	9 mA at 60 mA	1
Power frequency magnetic field immunity test		
	0.3 A/m at 3 A/m	1
Electrostatic discharge immunity test		
		2
Electrical fast transients / burst immunity test		
		2
Surge immunity test		
		2
Short interruption immunity test		
		2
Voltage transient emission test		
	±5 %	1
Transient immunity test		
		2

Notes

Note 1:

The expanded uncertainty reported according to EN55016-4-2(2004-10) is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of $p = 95\%$

Note 2:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence, covering factor $k = 2$.



8. Reference documents

<i>Reference no.</i>	<i>Description</i>
FCC Rules and Regulation Title 47 part 15 (2009) RSS-210 Issue 7 – June 2007	-- Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment
ANSI C63.4	American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz – 40GHz
Internal Procedure PM001 rev. 2.0 (Quality Manual)	Measure Procedure
Internal procedure INC_M rev. 8.0 (Quality Manual)	Measurement uncertainty calculation



9. Deviation from test specification

In agreement with the client, emission tests were performed with peak detector .
At the frequencies where the measures exceed the limit or within 6dB from it, the test was repeated with quasi-peak detector and/or average detector.

10. Test case verdicts

Test case does not apply to the test object : N / N.A.
Test item does meet the requirement : P / Pass / Complies
Test item does not meet the requirement : F / Fail / Does not comply
Test not performed : NE / Not Executed

11. Results

In this clause tests results are reported.
All measurements are done in accordance with the Filling and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems DA-705
Measurement uncertainty is in accordance with document CMC INC_M rev. 8.0.



11.1 Antenna Requirements

Test configuration and test method

Test site Laboratory
 Auxiliary equipment See clause 4 of this test report

Environmental conditions

Temperature 22 °C Atmospheric pressure 100 kPa Relative humidity 49 %

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.203 and 15.204
- RSS-210
- Internal Procedure PM001
- See clause 4 of this test report

Test Requirements

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The use of a permanently attached antenna or of an antenna that uses unique coupling to the intentional radiator shall be considered sufficient comply with the provisions of this section.

The manufacturer may design the unit so that a broken antenna can replaced by the user, but the use of standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Test specification

Port: Antenna.

EUT exercising

See clause 4 of this test report

Result

<i>Antenna Type</i>	<i>Gain</i>	<i>Remarks</i>	<i>Results</i>
Embedded	2 dBi	--	Complies

Remarks

//////////

Reference documents

See clause 8 of this test report

Result

The requirements are met



11.2 Bandwidth

Test configuration and test method

Test site
 Auxiliary equipment

Laboratory
 See clause 4 of this test report

Environmental conditions

Temperature 21 °C Atmospheric pressure 98 kPa Relative humidity 50 %

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.247
- RSS-210 Annex 8
- DA 00-705, march 30, 2000
- Internal Procedure PM001
- See clause 4 of this test report

Test specification

Port: Antenna;

EUT exercising

See clause 4 of this test report

Result

Frequency	Graph(s)	Bandwidth	Remark
915,05 MHz	G10145204	38,7 kHz	--
921,50 MHz	G10145205	38,7 kHz	--
927,95 MHz	G10145206	38,7 kHz	--
Measurement uncertainty: ±1 kHz			

Remarks

//////////

Reference documents

See clause 8 of this test report

Test equipment used (Id number – see clause 6 of this test report)

CMC S129

Result

The requirements are met



11.3 Channel Separation

Test configuration and test method

Test site Laboratory
 Auxiliary equipment See clause 4 of this test report

Environmental conditions

Temperature 20 °C Atmospheric pressure 100 kPa Relative humidity 49 %

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.247
- DA 00-705, march 30, 2000
- RSS-210 Annex 8
- Internal Procedure PM001
- See clause 4 of this test report

Test specification

Port: Antenna;

EUT exercising

See clause 4 of this test report

Acceptance limits

Limit: Minimum 25kHz or the 20dB Bandwidth of the hopping system

Result

Port	Graph(s)	Channel Separation	Remark
Enclosure	G10145202	202,00 kHz	--
Measurement uncertainty: ±1kHz			

Remarks

//////////

Reference documents

See clause 8 of this test report

Test equipment used (Id number – see clause 6 of this test report)

CMC S129

Result

The requirements are met



11.4 Time of Occupancy

Test configuration and test method

Test site Laboratory
 Auxiliary equipment See clause 4 of this test report

Environmental conditions

Temperature 20 °C Atmospheric pressure 100 kPa Relative humidity 49 %

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.247
- DA 00-705, march 30, 2000
- RSS-210 Annex 8
- Internal Procedure PM001
- See clause 4 of this test report

Test specification

Port: Antenna;

EUT exercising

See clause 4 of this test report

Acceptance limits

The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.

Result

Frequency (MHz)	Graph(s)	Dwell time	Remark
921,5	G10145203	20,2 ms	--

Frequency (MHz)	Time between two transmission	Nr. of hopping frequency	Nr. of transmission for channel	Time of Occupancy	Remarks
921,5	47,80 ms	64	$20s/0,04780/64 = 6,54$	$6,54 \times 20,2 = 132,11$ ms	--

Remarks //////////////

Reference documents See clause 8 of this test report

Test equipment used (Id number – see clause 6 of this test report)

CMC S129

Result The requirements are met



11.5 Number of Hopping Channels

Test configuration and test method

Test site Laboratory
 Auxiliary equipment See clause 4 of this test report

Environmental conditions

Temperature 20 °C Atmospheric pressure 100 kPa Relative humidity 49 %

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.247
- DA 00-705, march 30, 2000
- RSS-210 Annex 8
- Internal Procedure PM001
- See clause 4 of this test report

Test specification

Port: Antenna;

EUT exercising

See clause 4 of this test report

Result

Port	Graph(s)	Number of Hopping Frequency	Remark
Enclosure	G10145201	64	--

Remarks

//////////

Reference documents

See clause 8 of this test report

Test equipment used (Id number – see clause 6 of this test report)

CMC S129

Result

The requirements are met



11.6 Peak Output Power

Test configuration and test method

Test site

Laboratory

Auxiliary equipment

See clause 4 of this test report

Environmental conditions

Temperature 22 °C Atmospheric pressure 99 kPa Relative humidity 48 %

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.247
- DA 00-705, march 30, 2000
- RSS-210 Annex 8
- Internal Procedure PM001
- See clause 4 of this test report

Test specification

Port: Antenna;

EUT exercising

See clause 4 of this test report

Acceptance limits

Frequency range	RF power output
915 – 928 MHz	1,0 W / 30dBm

Result

Frequency (MHz)	Polarization	Graphs	E (dB μ V/m)	Peak Output Power (mW)	Remark
915,05	Horizontal	G10145210	109,95	18,7	--
915,05	Vertical	G10145211	109,60	17,3	--
921,50	Horizontal	G10145212	109,74	17,9	--
921,50	Vertical	G10145213	110,25	20,1	--
927,95	Horizontal	G10145214	109,84	18,2	--
927,95	Vertical	G10145215	108,4	13,1	--

Measurement uncertainty: ± 3 dBm



Remarks

$$P = (E \times d)^2 / (30 \times G)$$

Where:

E = the measured maximum fundamental field strength in V/m

G = the numeric gain of the transmitting antenna with reference to an isotropic radiator (1,58)

d = the distance in meters from which the field strength was measured (3m)

P = the power in watts

Reference documents


See clause 8 of this test report

Test equipment used (Id number – see clause 6 of this test report)

CMC S164

Result

The requirements are met

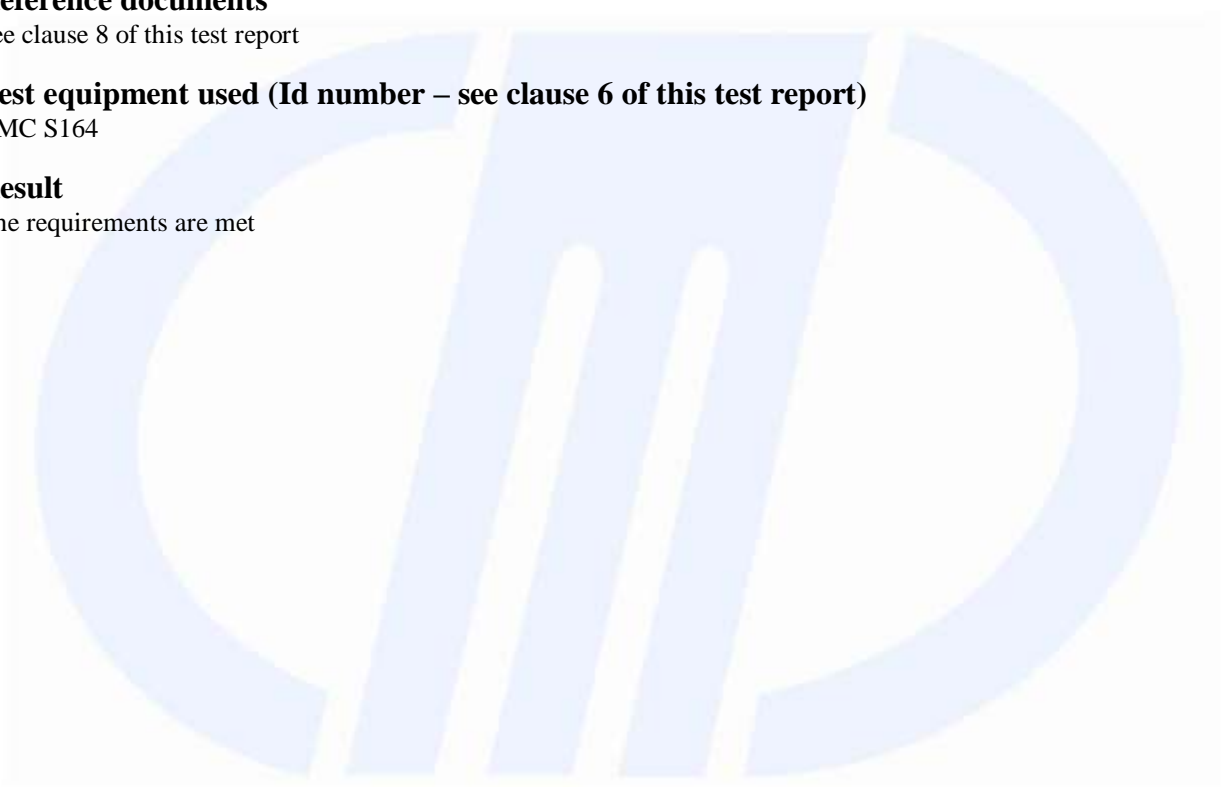



11.7 Band Edge

Test configuration and test method

Test site Laboratory
 Auxiliary equipment See clause 4 of this test report

Environmental conditions

Temperature 22 °C Atmospheric pressure 99 kPa Relative humidity 48 %

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.247
- DA 00-705, march 30, 2000
- RSS-210 Annex 8
- Internal Procedure PM001
- See clause 4 of this test report

Test specification

Port: Antenna;

EUT exercising

See clause 4 of this test report

Acceptance limits

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (see section 15.205(c)).

Result

Graph(s)	Attenuation Band Edge	Remark
G10145207	> 20dBc	--
G10145208	> 20dBc	--
G10145209	> 20dBc	--

Remarks

//////////

Reference documents

See clause 8 of this test report

Test equipment used (Id number – see clause 6 of this test report)

CMC S129

Result

The requirements are met



11.8 Radiated Spurious (Transmitter)

Test configuration and test method

Test site Semi-anechoic chamber
 Auxiliary equipment See clause 4 of this test report

Environmental conditions

Temperature 22 °C Atmospheric pressure 99 kPa Relative humidity 48 %

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.247(c) and Part 15.209
- DA 00-705, march 30, 2000
- RSS-210 Annex 8
- Internal Procedure PM001
- See clause 4 of this test report

Test specification

Port: Antenna;

EUT exercising

See clause 4 of this test report

Acceptance limits

In any 100kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in cl. 15.205(a), must also comply with the radiated emission limits specified in cl. 15.209(a) (see cl.15.205(c)).

Result

Frequency (MHz)	Polarization	Frequency Range (MHz)	Graph(s)	Remarks	Result
915,05	Vertical	30 – 1000	G10145217	--	Complies
915,05	Horizontal	30 – 1000	G10145218	--	Complies
921,50	Horizontal	30 – 1000	G10145219	--	Complies
921,50	Vertical	30 – 1000	G10145220	--	Complies
927,95	Vertical	30 – 1000	G10145221	--	Complies
927,95	Horizontal	30 – 1000	G10145222	--	Complies

Antenna	Frequency Range (MHz)	Graph(s)	Remarks	Result
Loop Antenna	9kHz – 30MHz	G10145216	--	Complies



Nr. Harmonics	AV level (dB μ V/m)						AV Limits (dB μ V/m)	Remark
	915,05 MHz		921,50 MHz		927,95 MHz			
	Frequency	(dB μ V/m)	Frequency	(dB μ V/m)	Frequency	(dB μ V/m)		
II Harmonic	1830,12	48,0	1842,77	47,8	1855,74	46,9	54,00	--
III Harmonic	2754,24	49,4	2764,24	50,2	2783,85	50,0	54,00	--
IV Harmonic	3660,32	47,2	3685,81	46,9	3711,75	46,1	54,00	--
V Harmonic	4575,14	46,0	4607,50	45,8	4639,74	46,9	54,00	--
VI Harmonic	5490,36	49,3	5529,27	49,0	5567,61	49,1	54,00	--
VII Harmonic	--	More than 15 dB below limit	--	More than 15 dB below limit	--	More than 15 dB below limit	54,00	--
VIII Harmonic	--	More than 15 dB below limit	--	More than 15 dB below limit	--	More than 15 dB below limit	54,00	--
IX Harmonic	--	More than 15 dB below limit	--	More than 15 dB below limit	--	More than 15 dB below limit	54,00	--
X Harmonic	--	More than 15 dB below limit	--	More than 15 dB below limit	--	More than 15 dB below limit	54,00	--

Measurement Uncertainty: ± 4 dB

Nr. Harmonics	PK level (dB μ V/m)						PK Limits (dB μ V/m)	Remark
	915,05 MHz		921,50 MHz		927,95 MHz			
	Frequency	(dB μ V/m)	Frequency	(dB μ V/m)	Frequency	(dB μ V/m)		
II Harmonic	1830,12	48,1	1842,77	48,0	1855,74	47,9	74,00	--
III Harmonic	2754,24	49,6	2764,24	51,2	2783,85	51,8	74,00	--
IV Harmonic	3660,32	47,2	3685,81	47,3	3711,75	46,3	74,00	--
V Harmonic	4575,14	46,2	4607,50	46,1	4639,74	47,1	74,00	--
VI Harmonic	5490,36	49,9	5529,27	49,2	5567,61	49,5	74,00	--
VII Harmonic	--	More than 15 dB below limit	--	More than 15 dB below limit	--	More than 15 dB below limit	74,00	--
VIII Harmonic	--	More than 15 dB below limit	--	More than 15 dB below limit	--	More than 15 dB below limit	74,00	--
IX Harmonic	--	More than 15 dB below limit	--	More than 15 dB below limit	--	More than 15 dB below limit	74,00	--
X Harmonic	--	More than 15 dB below limit	--	More than 15 dB below limit	--	More than 15 dB below limit	74,00	--

Measurement Uncertainty: ± 4 dB



Remarks

EUT was tested in 3 orthogonal planes. In results table are reported the worst case.

Reference documents

See clause 8 of this test report

Test equipment used (Id number – see clause 6 of this test report)

CMC S108, CMC S124, CMC S127, CMC S136, CMC S164

Measurement uncertainty: See clause 7 of this test report

Result

The requirements are met





11.9 Radiated Spurious (Receiver)

Test configuration and test method

Test site Semi-anechoic chamber
Auxiliary equipment See clause 4 of this test report

Environmental conditions

Temperature 19 °C Atmospheric pressure 97 kPa Relative humidity 48 %

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.209
- DA 00-705, march 30, 2000
- RSS-210 Annex 8
- Internal Procedure PM001
- See clause 4 of this test report

Test specification

Port: Antenna;

EUT exercising

See clause 4 of this test report

Acceptance limits

In any 100kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in cl. 15.205(a), must also comply with the radiated emission limits specified in cl. 15.209(a) (see cl.15.205(c)).

Result

Polarization	Frequency Range (MHz)	Graph(s)	Remarks	Result
Vertical	30 – 1000	G10145225	--	Complies
Horizontal	30 – 1000	G10145226	--	Complies
Vertical	1000 – 6000	G10145223	--	Complies
Horizontal	1000 – 6000	G10145224	--	Complies

Remarks

EUT was tested in 3 orthogonal planes. In results table are reported the worst case.

Reference documents

See clause 8 of this test report

Test equipment used (Id number – see clause 6 of this test report)

CMC S108, CMC S124, CMC S127, CMC S136, CMC S164

Measurement uncertainty: See clause 7 of this test report

Result

The requirements are met



12. Graphs and Tables

G10145201


* RBW 300 kHz

* VBW 300 kHz

SWT 2.5 ms

Ref 30 dBm

* Att 40 dB

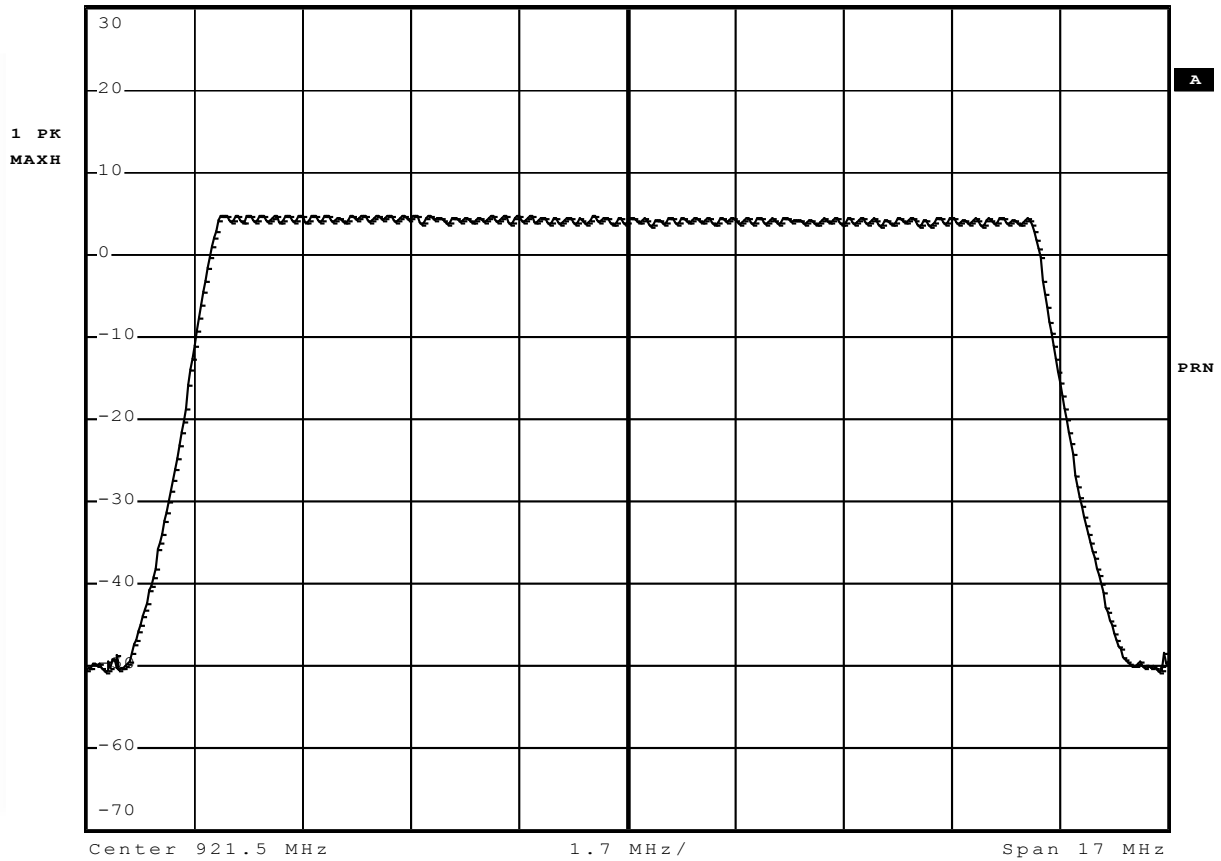




G10145202


*RBW 30 kHz Marker 1 [T1]
*VBW 100 kHz 3.86 dBm

Ref 30 dBm *Att 40 dB SWT 2.5 ms 921.351000000 MHz

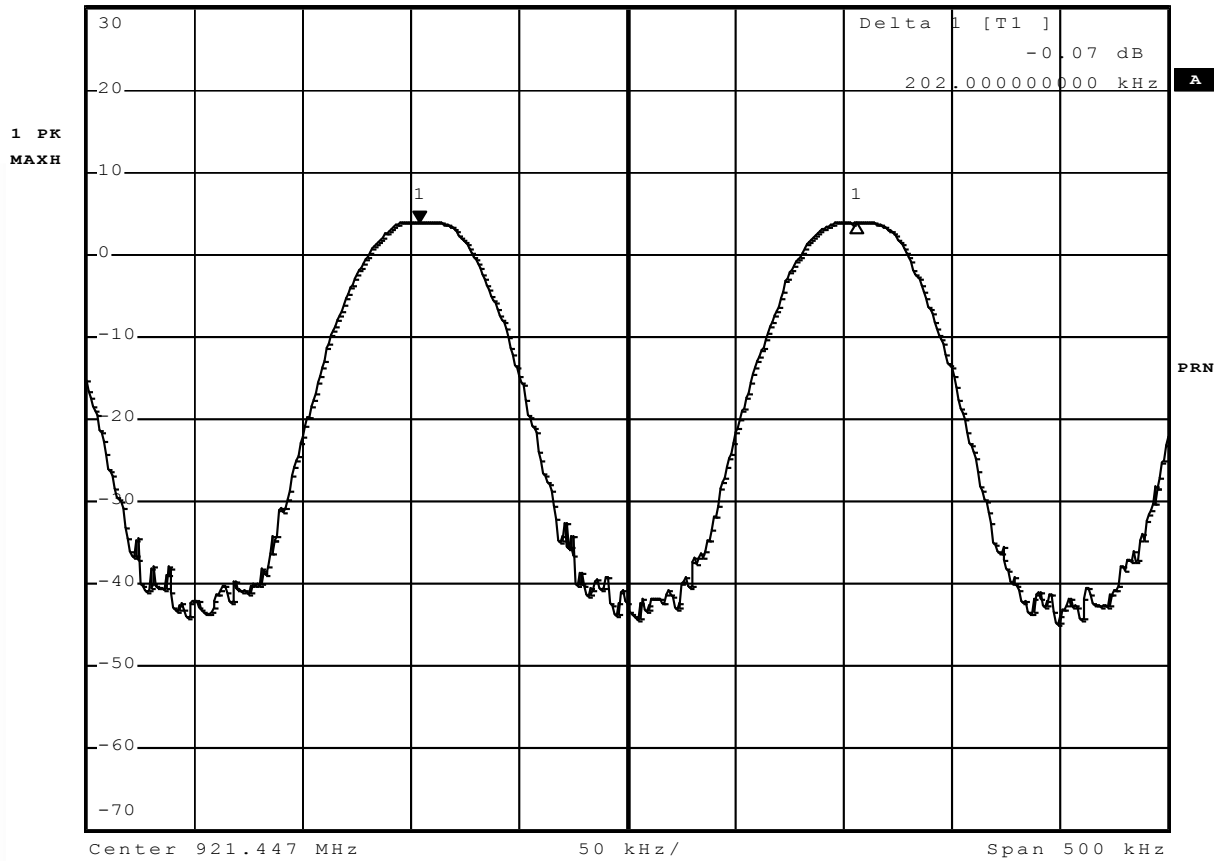




G10145203

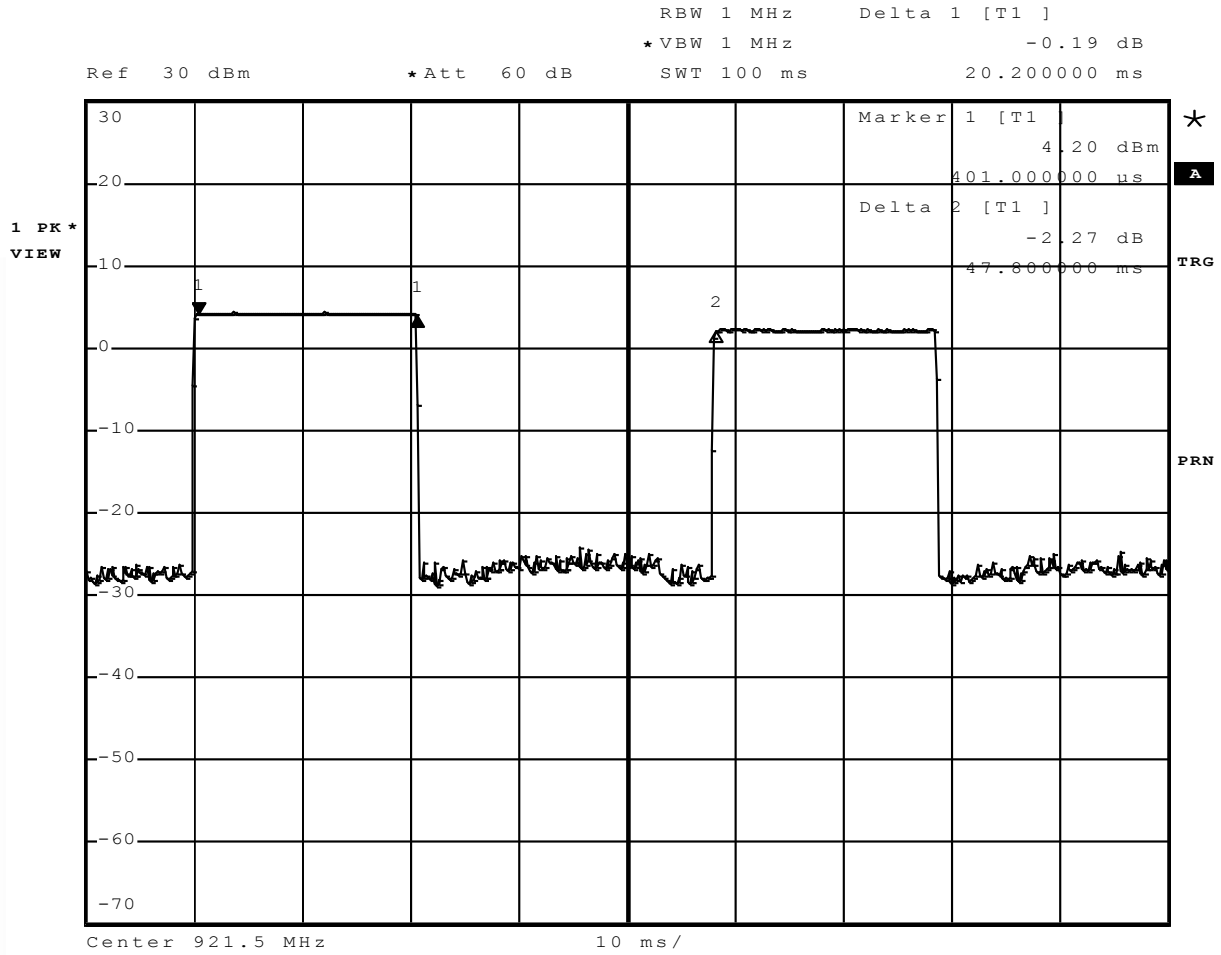

CMC Centro Misure Compatibilità S.r.l.




G10145204

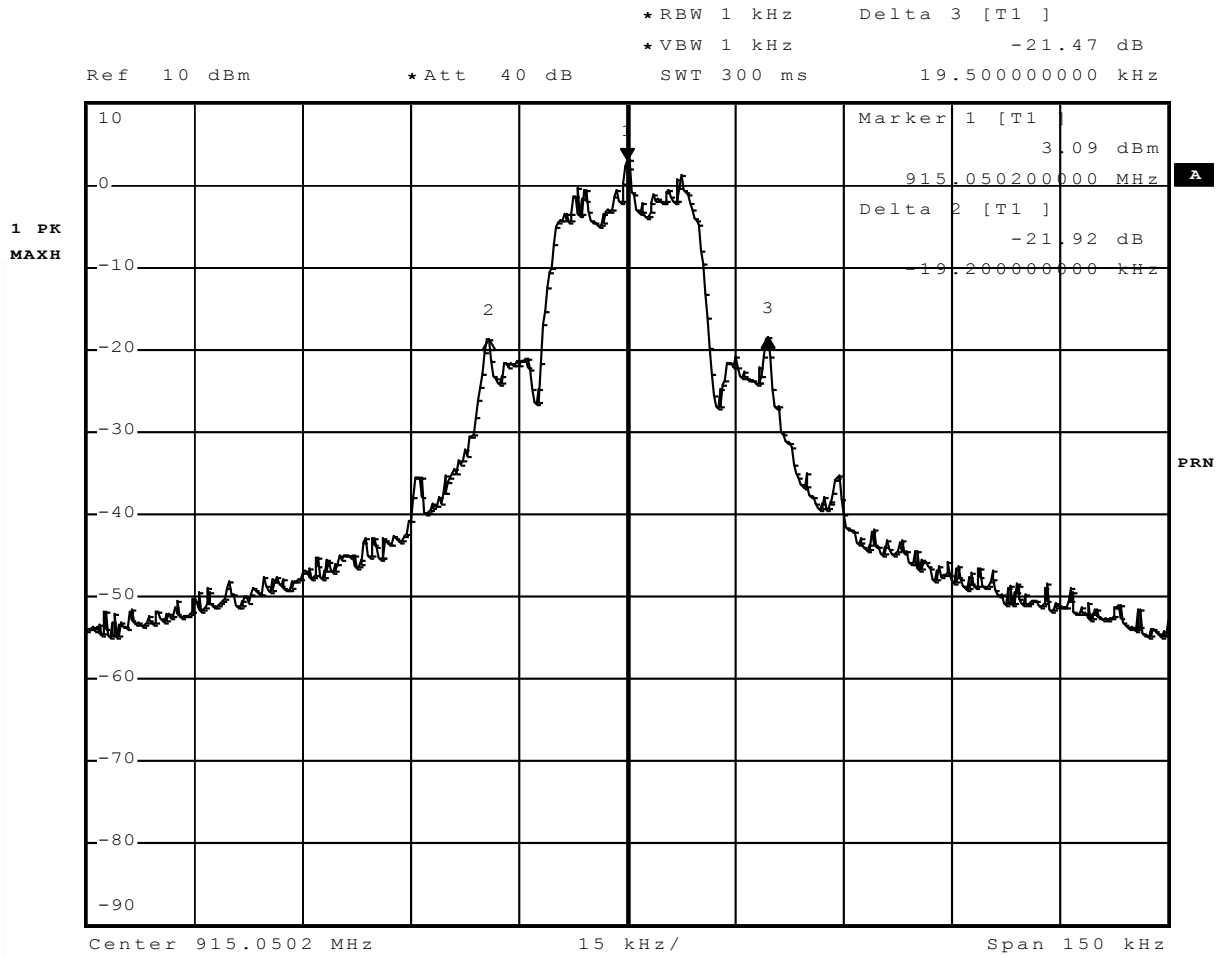

CMC Centro Misure Compatibilità S.r.l.




G10145205

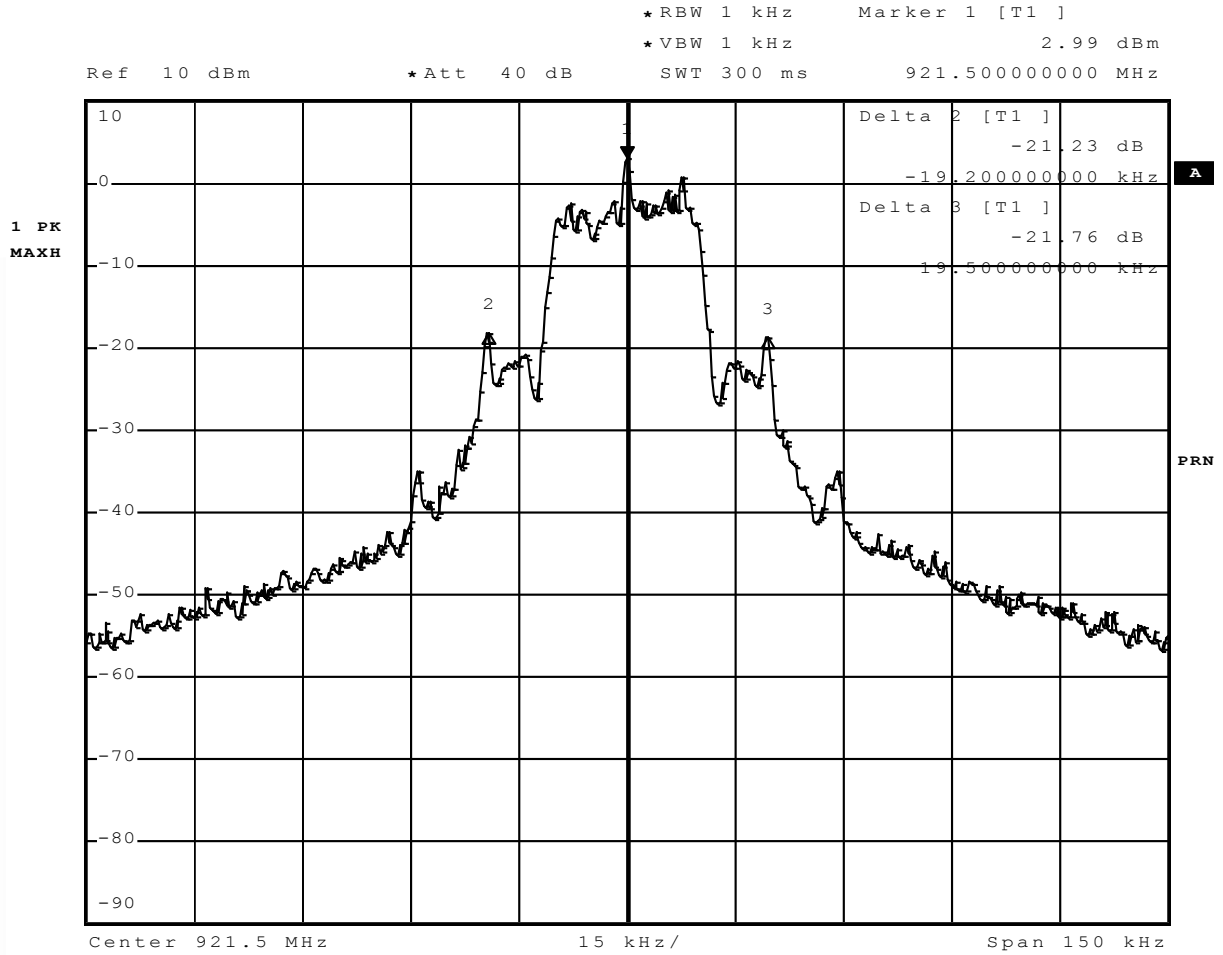

CMC Centro Misure Compatibilità S.r.l.




G10145206

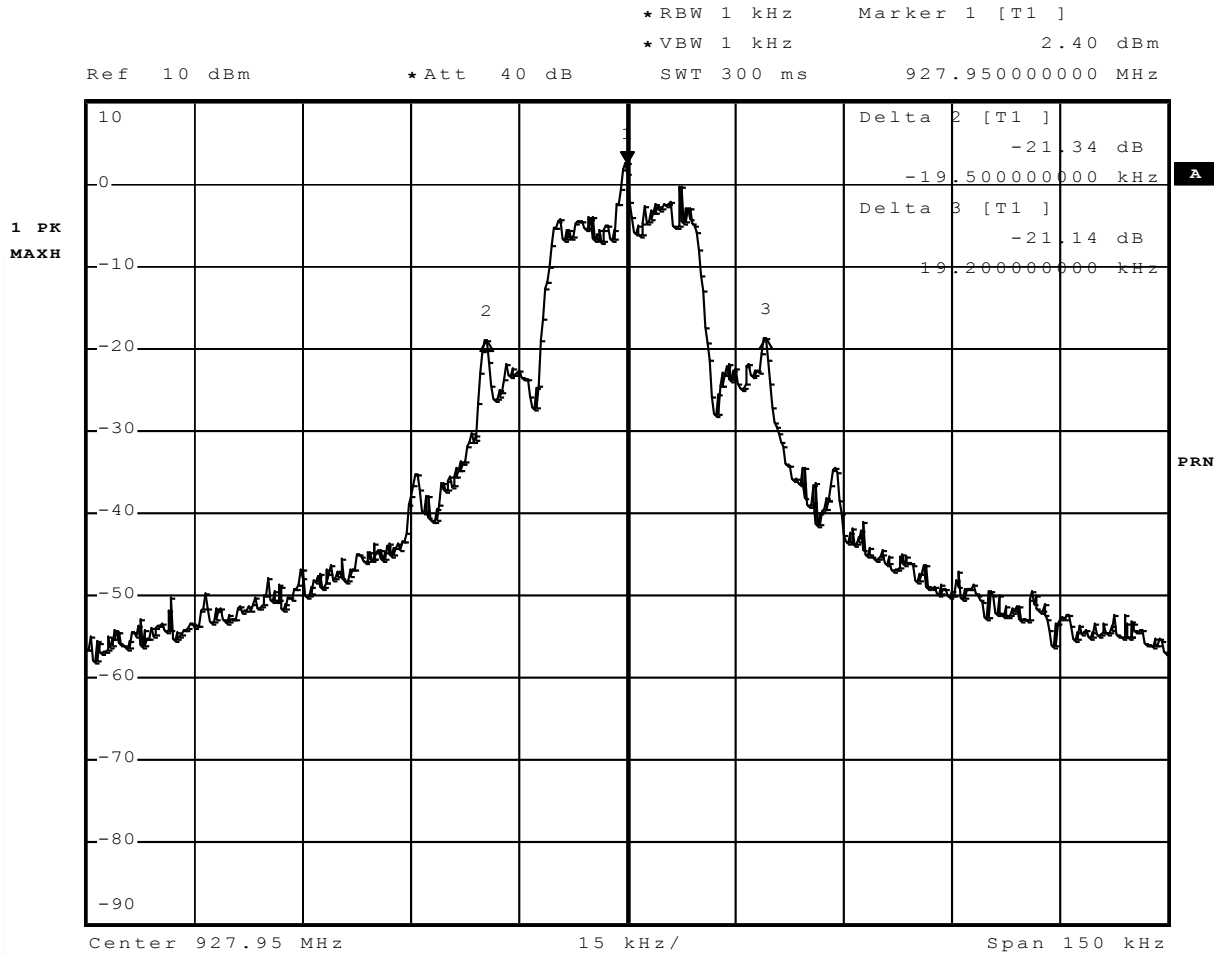

CMC Centro Misure Compatibilità S.r.l.




G10145207

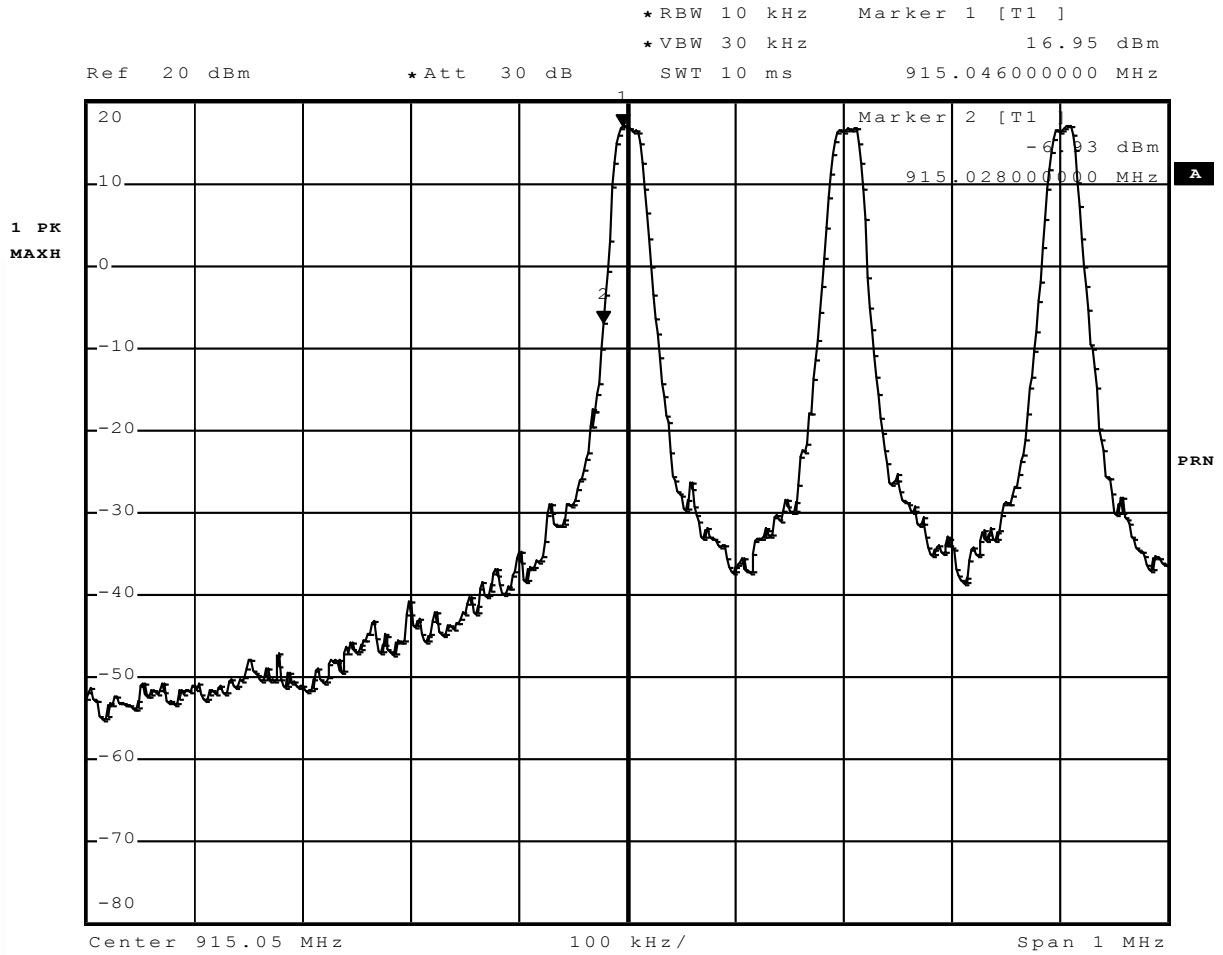

CMC Centro Misure Compatibilità S.r.l.




G10145208

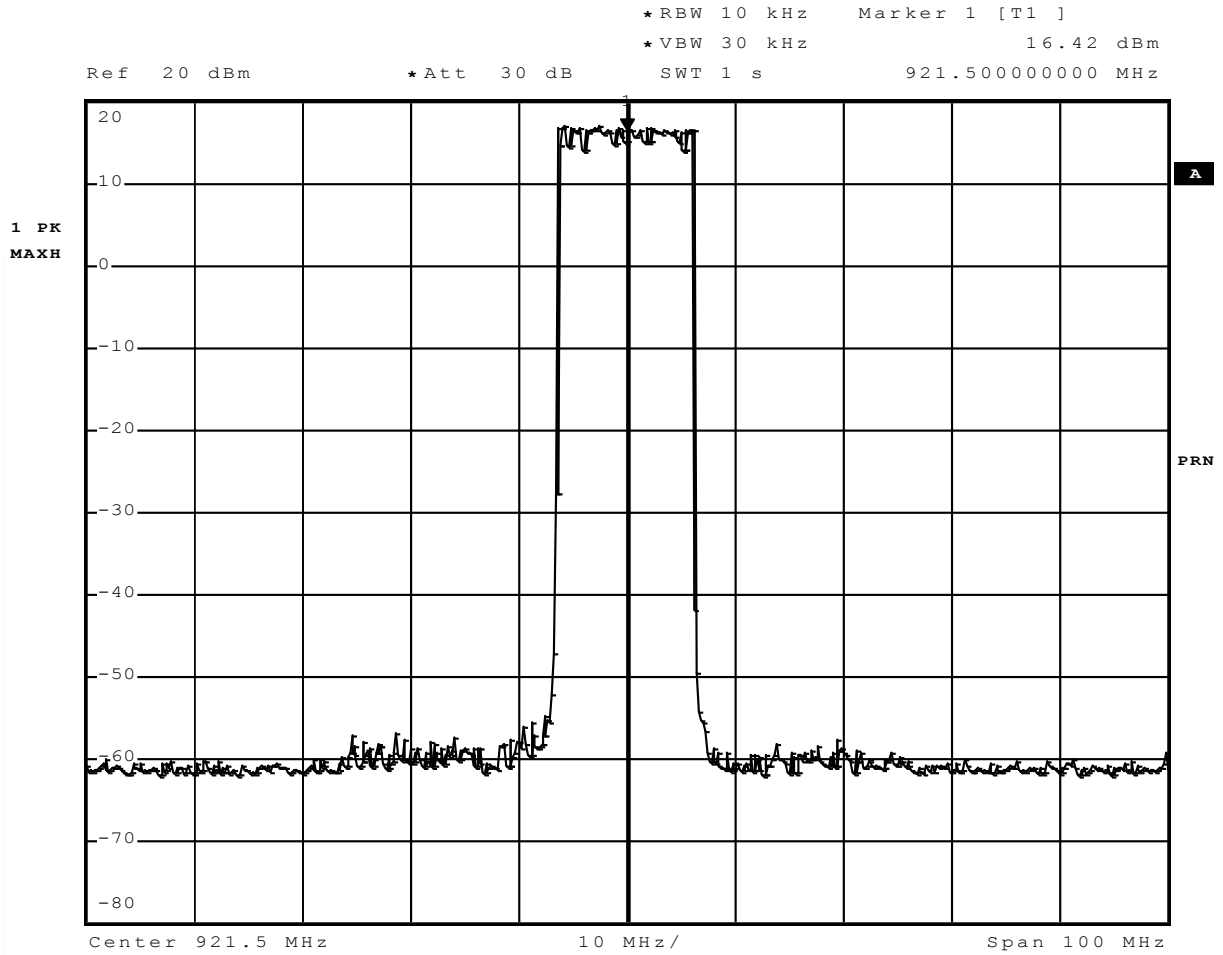

CMC Centro Misure Compatibilità S.r.l.



G10145209

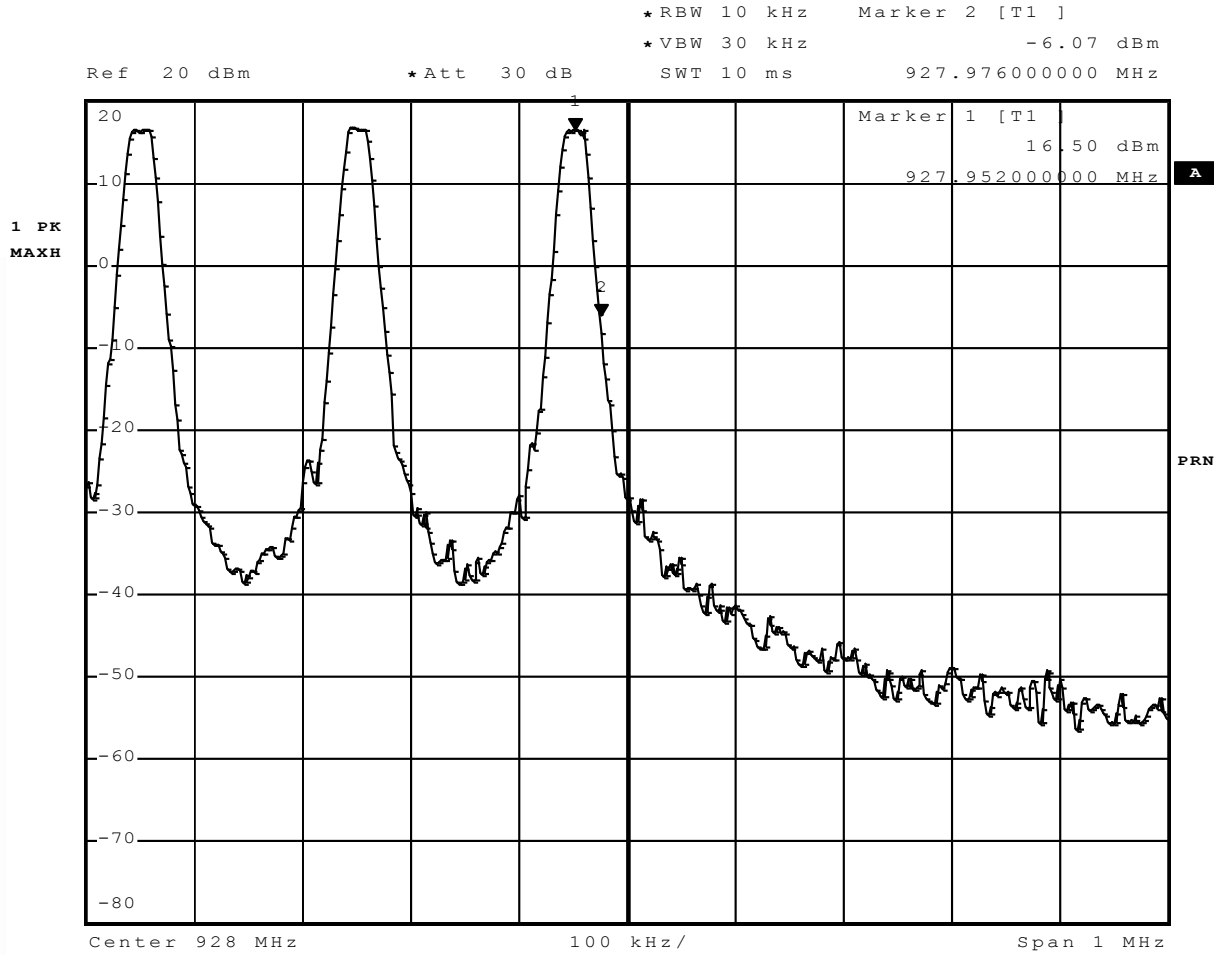


CMC Centro Misure Compatibilità S.r.l.



G10145210

Meas Type
Equipment under Test
Manufacturer
OP Condition
Operator Gandini 10145210
Test Spec
Horiz

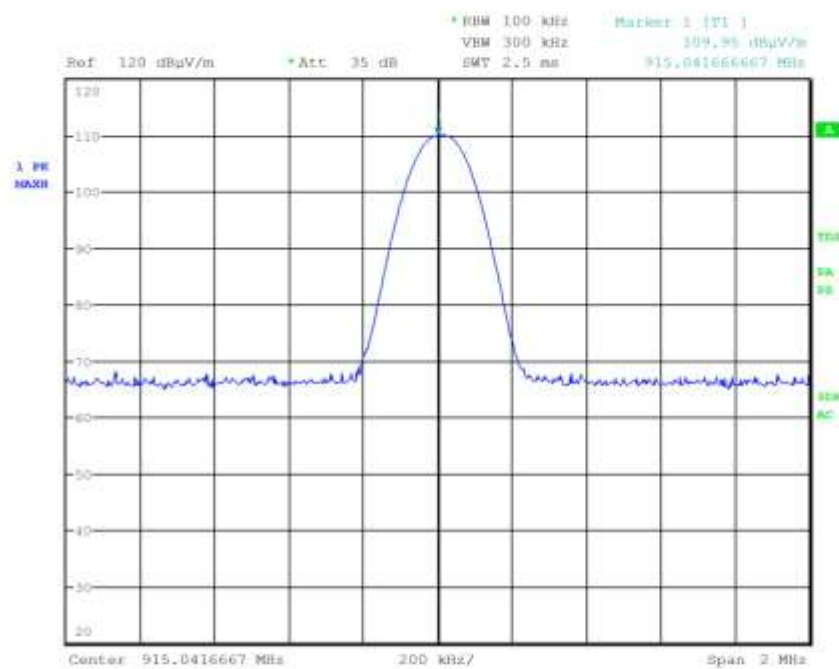


CMC Centro Misure Compatibilità S.r.l.



G10145211

Meas Type
Equipment under Test
Manufacturer
OP Condition
Operator Gandini 10145211
Test Spec
Vert

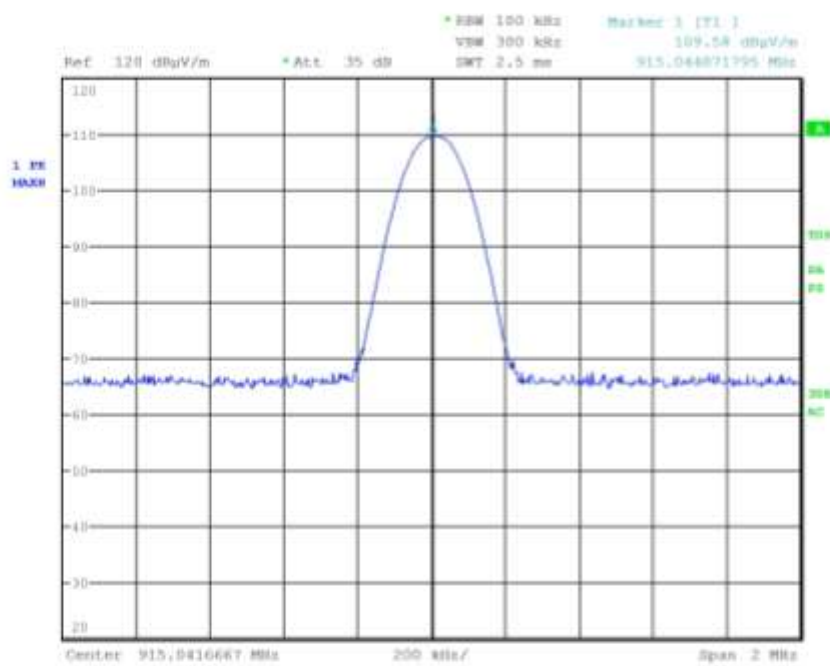


CMC Centro Misure Compatibilità S.r.l.



G10145212

Meas Type
Equipment under Test
Manufacturer
OP Condition
Operator Gandini 10145212
Test Spec
Horiz

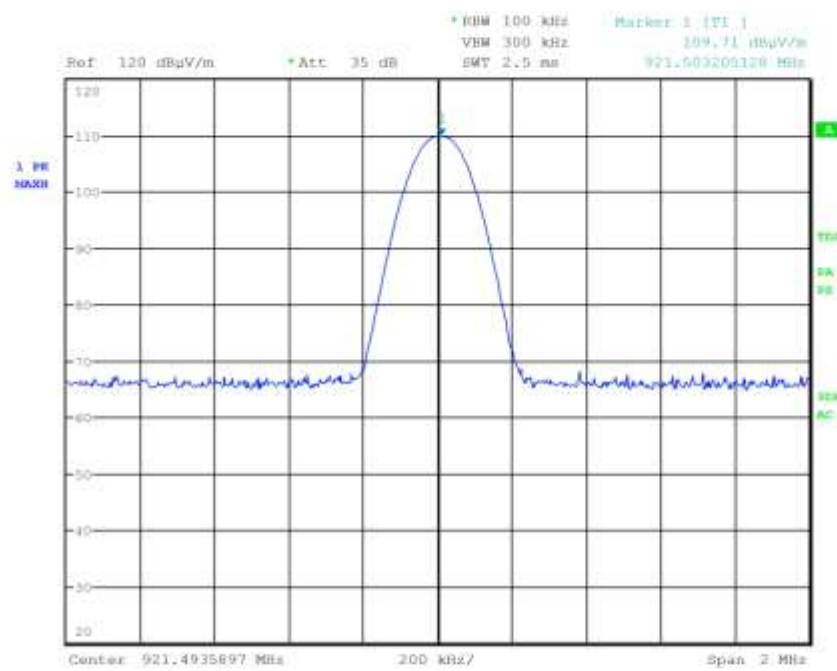


CMC Centro Misure Compatibilità S.r.l.



G10145213

Meas Type
Equipment under Test
Manufacturer
OP Condition
Operator Gandini 10145213
Test Spec
Vert

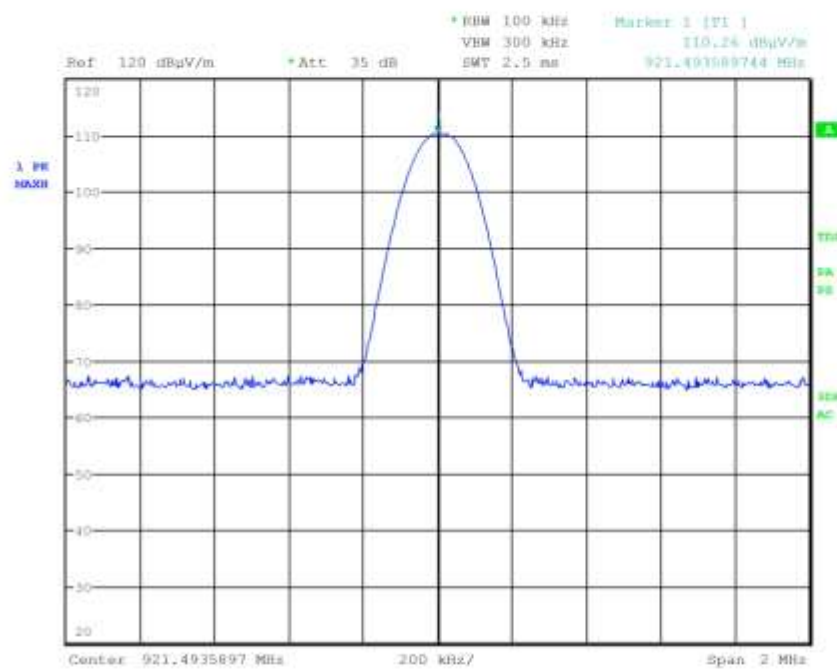


CMC Centro Misure Compatibilità S.r.l.



G10145214

Meas Type
Equipment under Test
Manufacturer
OP Condition
Operator Gandini 10145214
Test Spec
Horiz

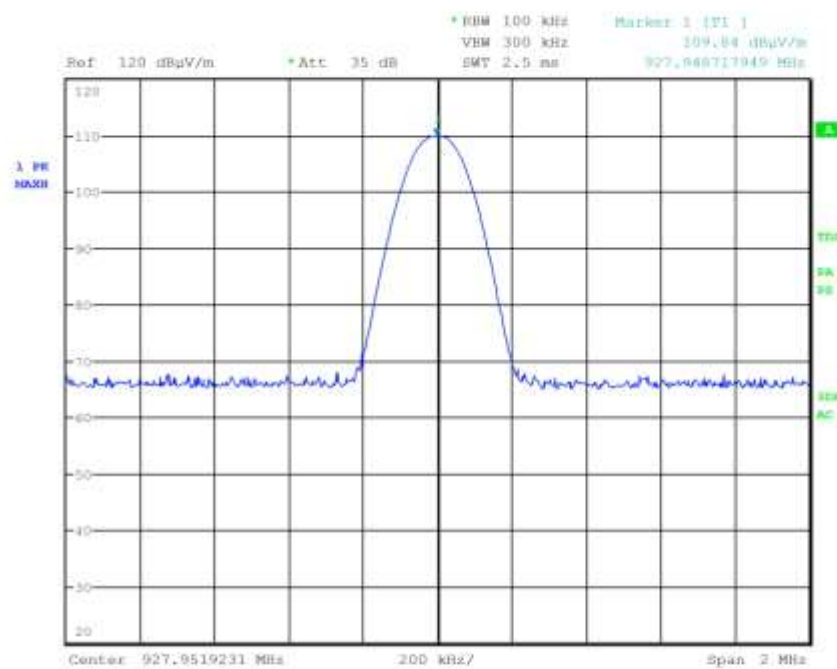


CMC Centro Misure Compatibilità S.r.l.



G10145215

Meas Type
Equipment under Test
Manufacturer
OP Condition
Operator Gandini 10145215
Test Spec
Vert

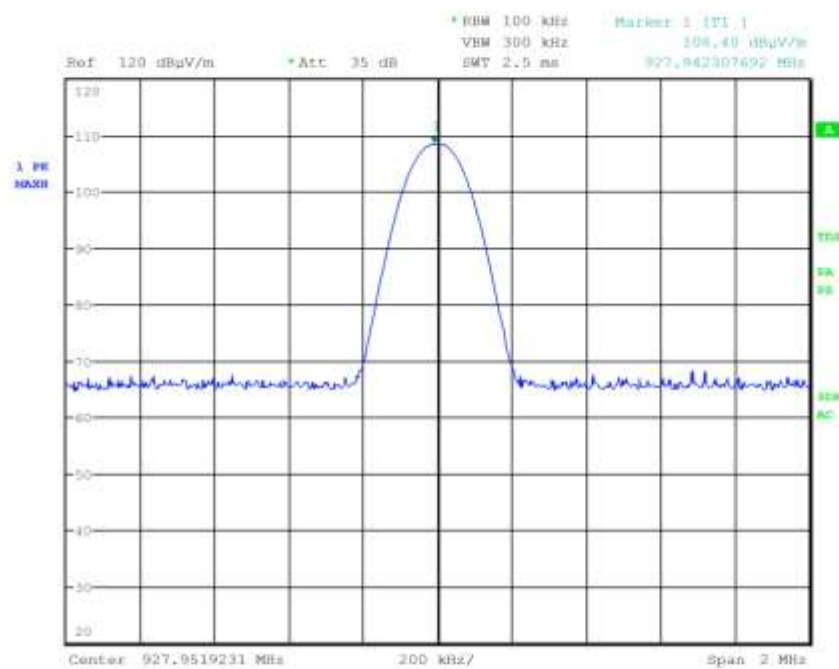


CMC Centro Misure Compatibilità S.r.l.



G10145216

Meas Type Emission 0.009-30MHz
Equipment under Test
Manufacturer
OP Condition
Operator Bertezolo 10145216
Test Spec
Loop

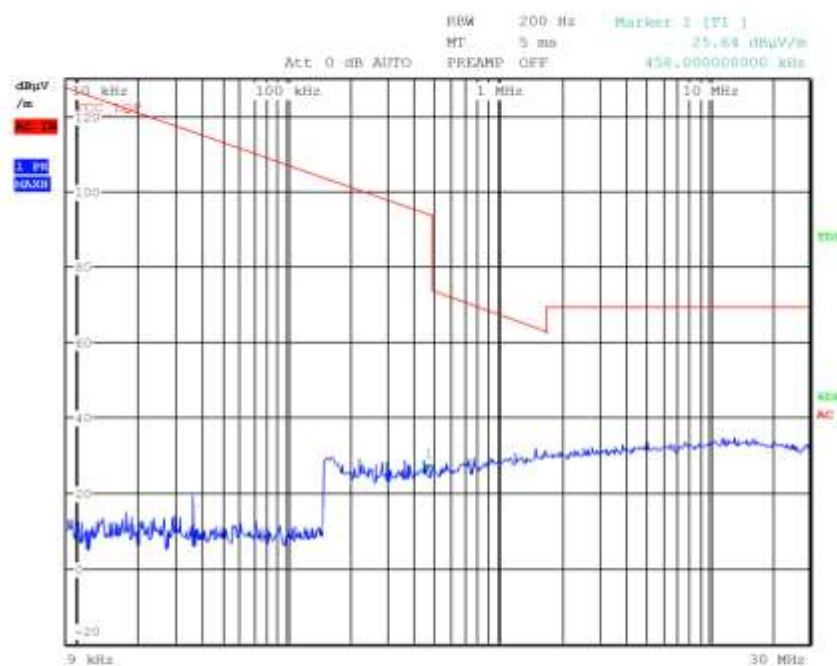

Final Measurement


Meas Time: 1 s
Margin: 6 dB
Subranges: 0

CMC Centro Misure Compatibilità S.r.l.



G10145217

Meas Type Emission 30-1000MHz
Equipment under Test
Manufacturer
OP Condition TX f min
Operator Bertezolo 10145217
Test Spec
Vert

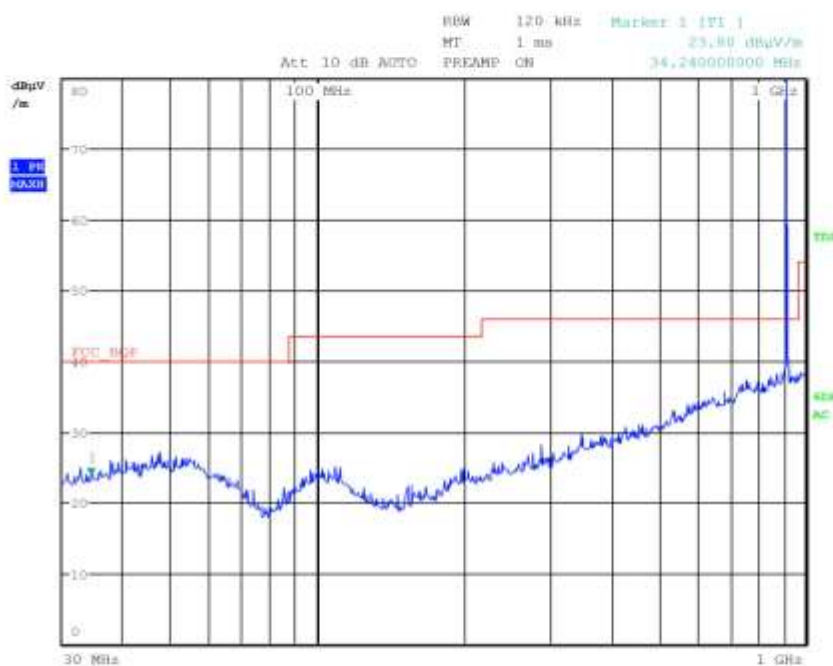

Final Measurement


Meas Time: 1 s
Margin: 6 dB
Subranges: 0

CMC Centro Misure Compatibilità S.r.l.



G10145218

Meas Type Emission 30-1000MHz
Equipment under Test
Manufacturer
OP Condition TX f min
Operator Bertezolo 10145218
Test Spec
Horiz

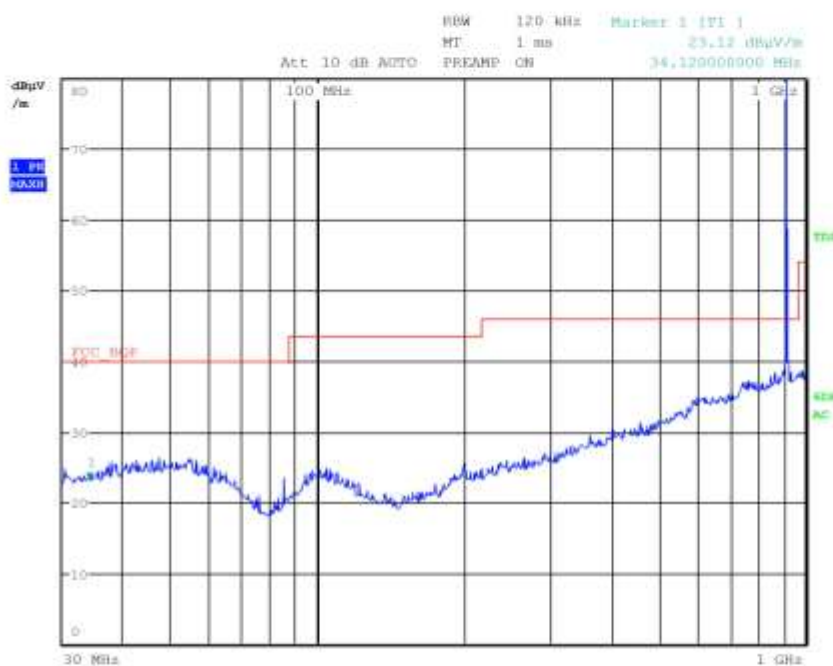

Final Measurement


Meas Time: 1 s
Margin: 6 dB
Subranges: 0

CMC Centro Misure Compatibilità S.r.l.



G10145219

Meas Type Emission 30-1000MHz
Equipment under Test
Manufacturer
OP Condition TX f med
Operator Bertezolo 10145219
Test Spec
Horiz

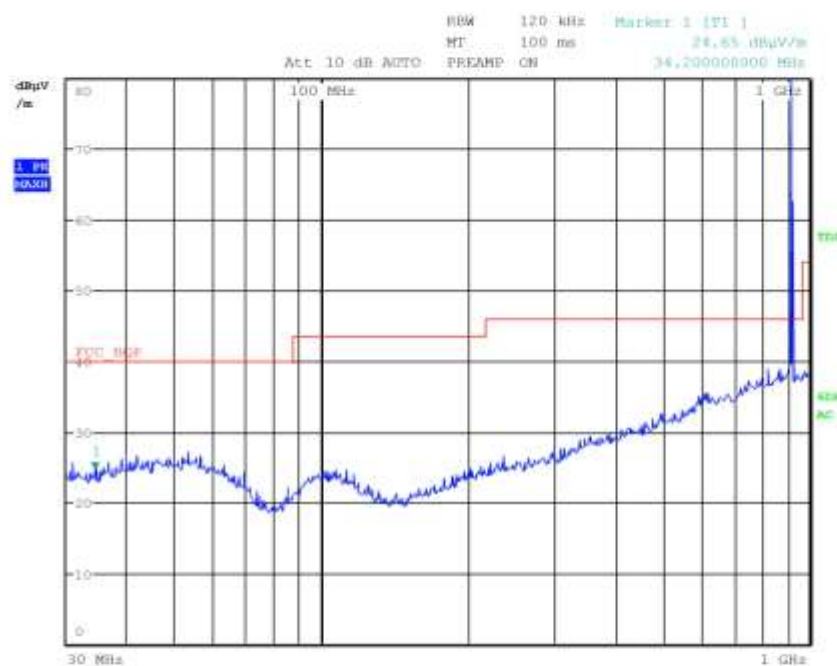

Final Measurement


Meas Time: 1 s
Margin: 6 dB
Subranges: 0

CMC Centro Misure Compatibilità S.r.l.



G10145220

Meas Type Emission 30-1000MHz
Equipment under Test
Manufacturer
OP Condition TX f med
Operator Bertezolo 10145220
Test Spec
Vert

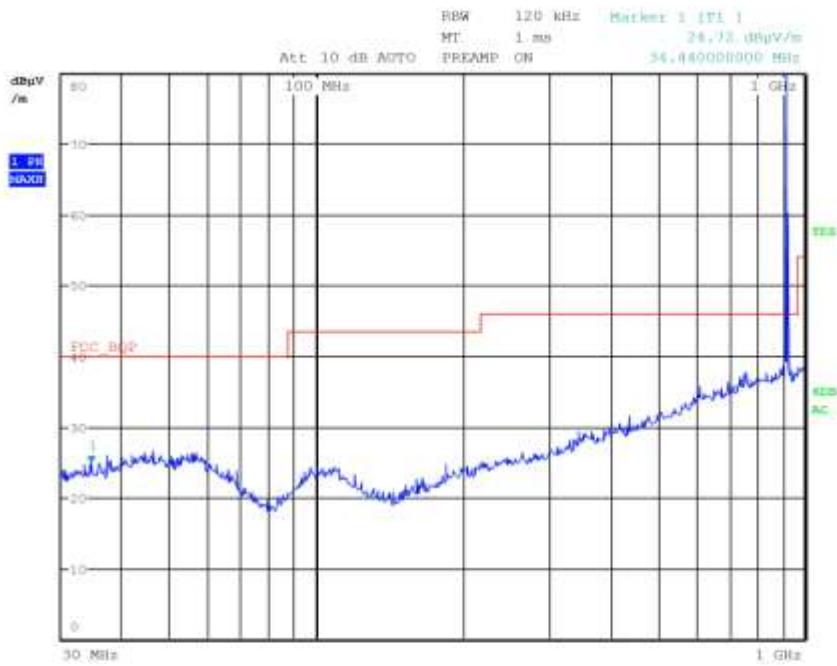

Final Measurement


Meas Time: 1 s
Margin: 6 dB
Subranges: 0

CMC Centro Misure Compatibilità S.r.l.



G10145221

Meas Type Emission 30-1000MHz
Equipment under Test
Manufacturer
OP Condition TX f max
Operator Bertezolo 10145221
Test Spec
Vert

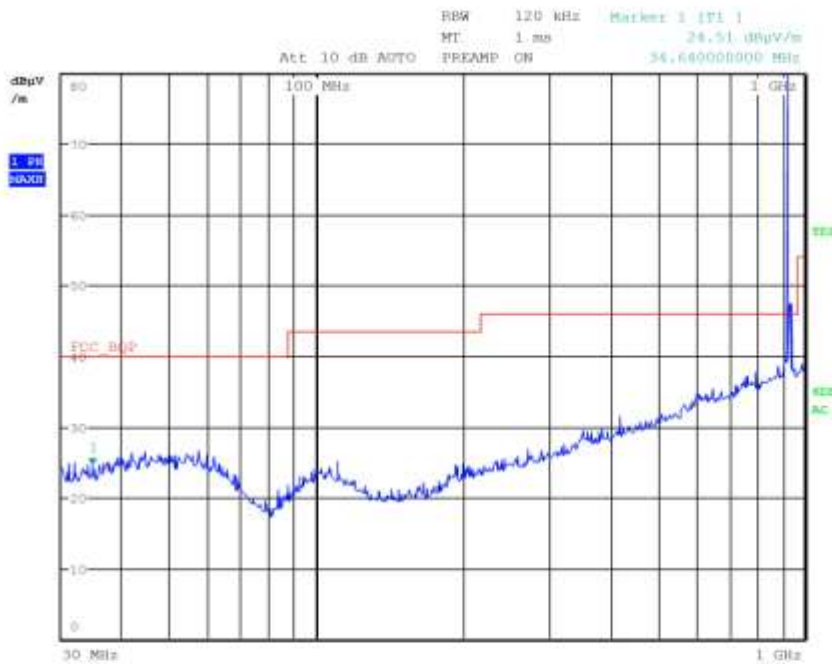

Final Measurement


Meas Time: 1 s
Margin: 6 dB
Subranges: 0

CMC Centro Misure Compatibilità S.r.l.



G10145222

Meas Type Emission 30-1000MHz
Equipment under Test
Manufacturer
OP Condition TX f max
Operator Bertezolo 10145222
Test Spec
Horiz

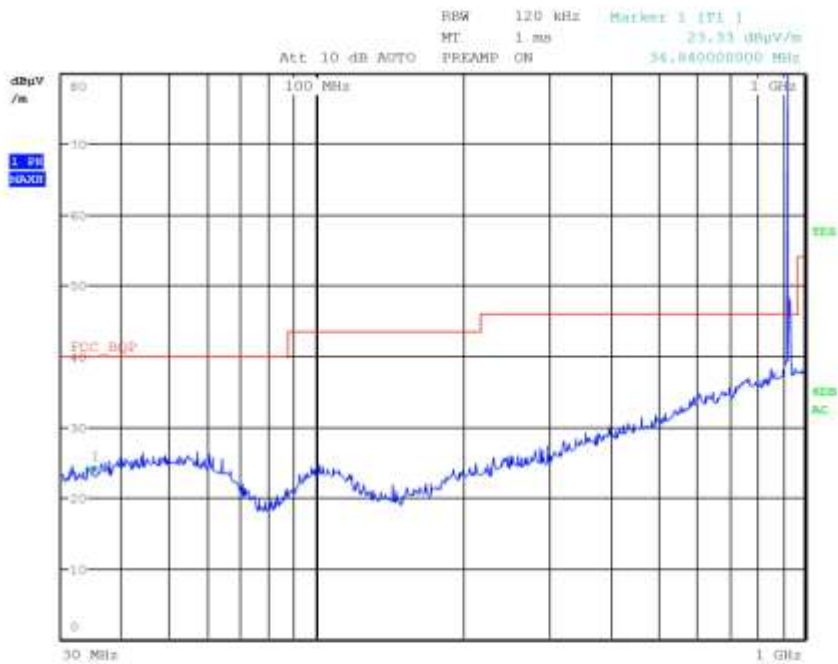

Final Measurement


Meas Time: 1 s
Margin: 6 dB
Subranges: 0

CMC Centro Misure Compatibilità S.r.l.



G10145223

Meas Type Emission 1000-6000MHz
Equipment under Test
Manufacturer
OP Condition in RX
Operator Bertezolo 10145223
Test Spec
Vert

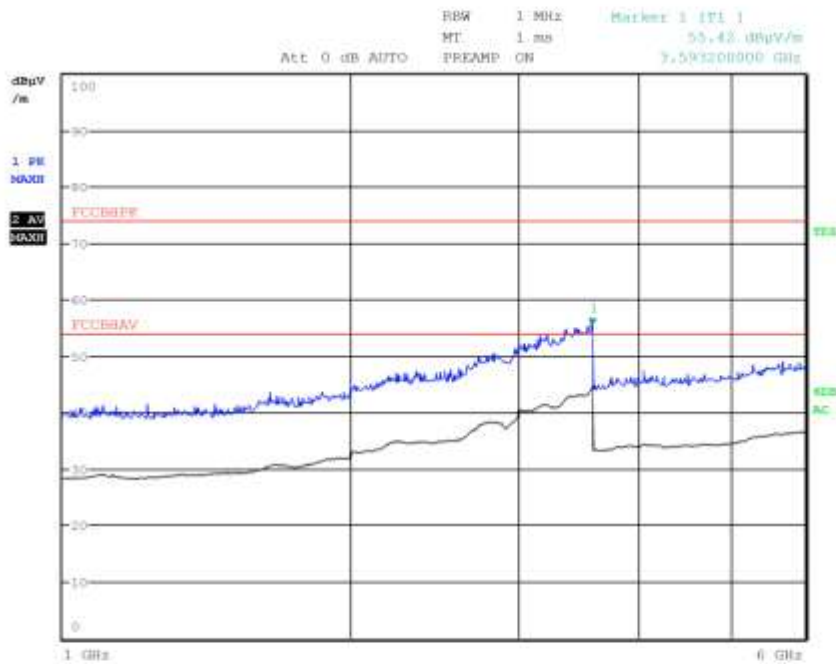

Final Measurement


Meas Time: 1 s
Margin: 6 dB
Subranges: 0

CMC Centro Misure Compatibilità S.r.l.



G10145224

Meas Type Emission 1000-6000MHz
Equipment under Test
Manufacturer
OP Condition in RX
Operator Bertezolo 10145224
Test Spec
Horiz

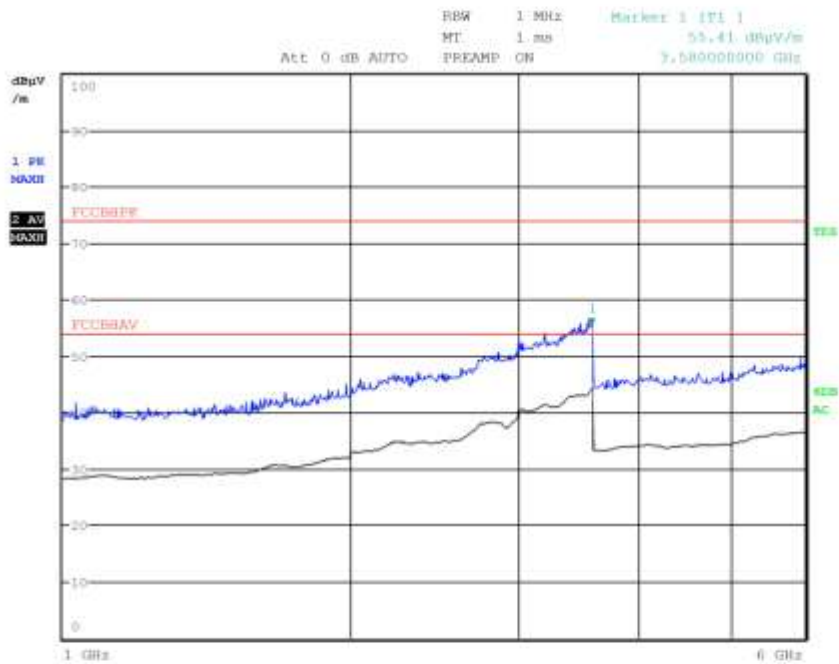

Final Measurement


Meas Time: 1 s
Margin: 6 dB
Subranges: 0

CMC Centro Misure Compatibilità S.r.l.



G10145225

Meas Type Emission 30-1000MHz
Equipment under Test
Manufacturer
OP Condition in RX
Operator Bertezolo 10145225
Test Spec
Vert

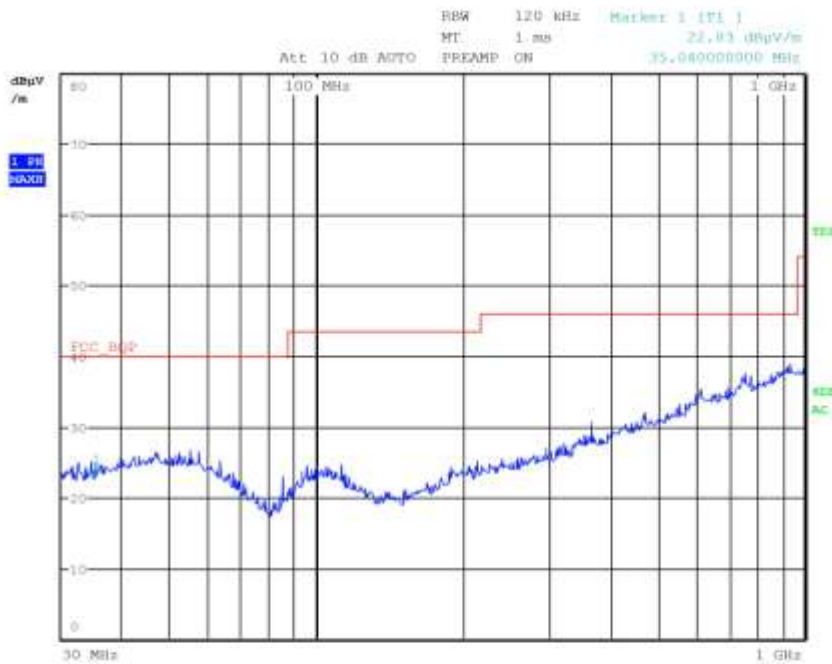

Final Measurement


Meas Time: 1 s
Margin: 6 dB
Subranges: 0

CMC Centro Misure Compatibilità S.r.l.



G10145226

Meas Type Emission 30-1000MHz
Equipment under Test
Manufacturer
OP Condition in RX
Operator Bertezolo 10145226
Test Spec
Horiz

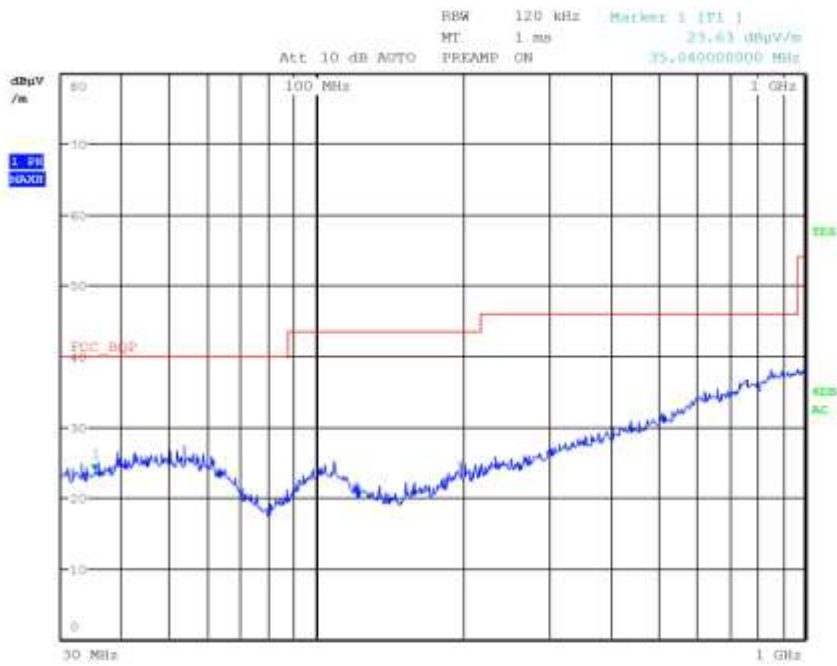

Final Measurement

Meas Time: 1 s
Margin: 6 dB
Subranges: 0

CMC Centro Misure Compatibilità S.r.l.