


Gandini 21162813

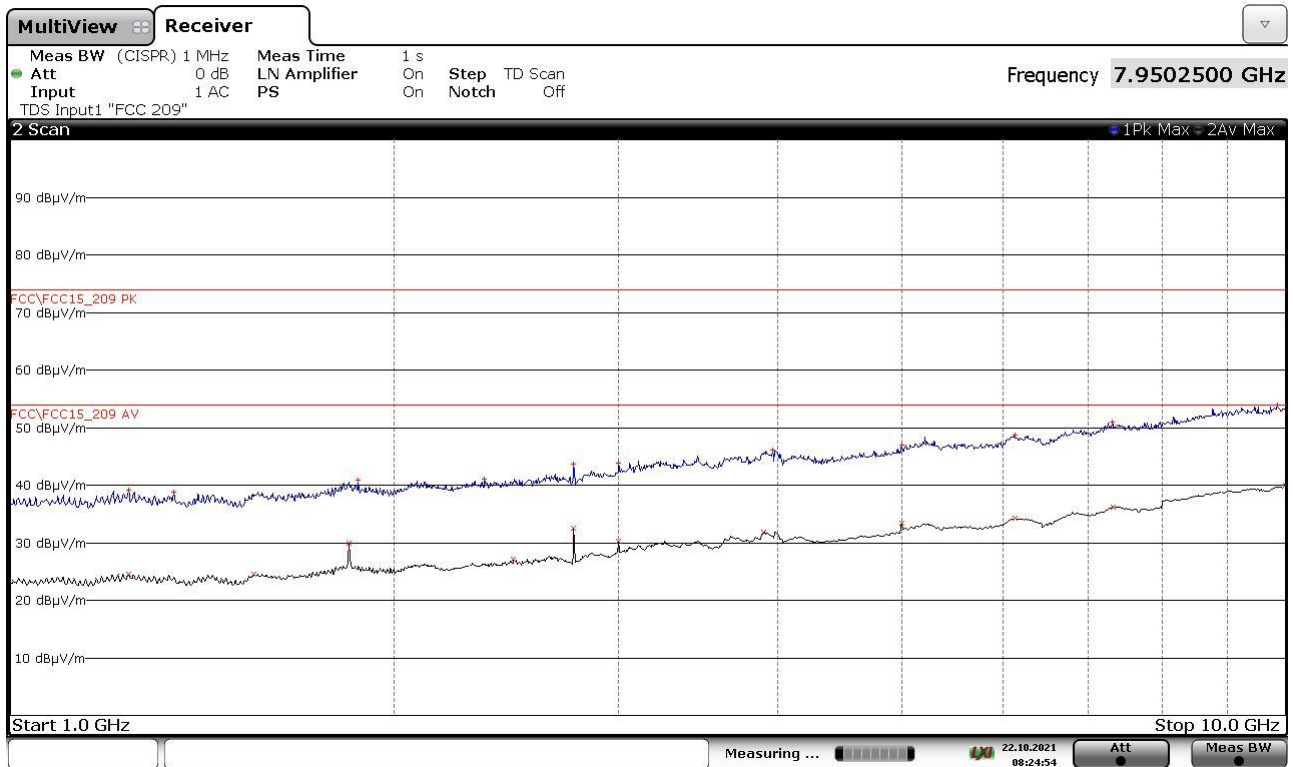


FINAL RESULT TABLE

| MAX PEAK | | | AVERAGE | | |
|------------|------------|-----------|------------|------------|-----------|
| Freq Hz | Lev dBuV/m | Margin dB | Freq Hz | Lev dBuV/m | Margin dB |
| 1238000000 | +39,18 | -34,80 | 1237000000 | +24,59 | -29,39 |
| 1343000000 | +38,77 | -35,21 | 1551250000 | +24,59 | -29,39 |
| 1872000000 | +40,89 | -33,09 | 1842750000 | +29,85 | -24,13 |
| 2353500000 | +41,06 | -32,92 | 2481250000 | +27,05 | -26,93 |
| 2764250000 | +43,62 | -30,36 | 2764250000 | +32,58 | -21,40 |
| 2998500000 | +43,87 | -30,11 | 2998250000 | +30,20 | -23,78 |
| 3963750000 | +46,13 | -27,85 | 3899750000 | +31,86 | -22,12 |
| 4999500000 | +46,95 | -27,03 | 4999750000 | +33,40 | -20,58 |
| 6133500000 | +48,78 | -25,20 | 6132500000 | +34,23 | -19,75 |
| 7315500000 | +50,87 | -23,11 | 7322000000 | +36,21 | -17,77 |
| 9850000000 | +53,83 | -20,15 | 9998000000 | +40,04 | -13,94 |

21162813_2

Gandini 21162814

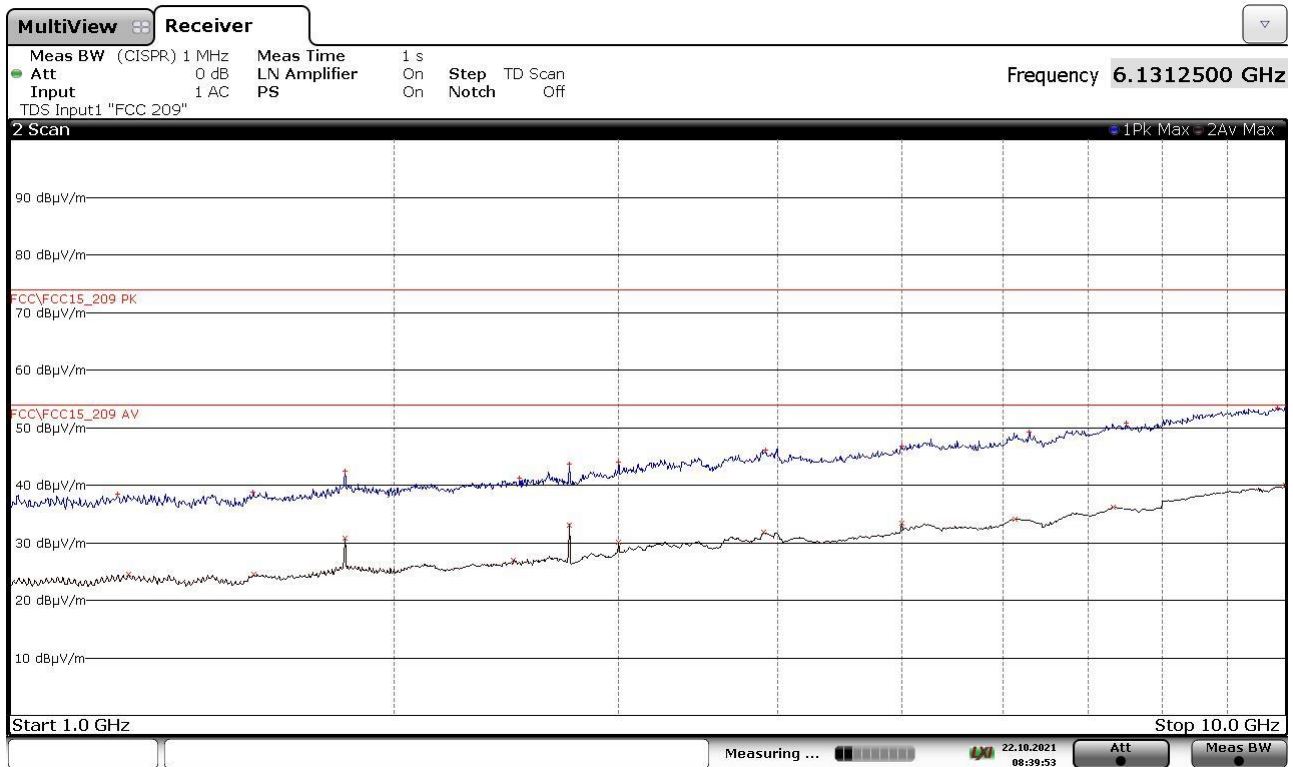


FINAL RESULT TABLE

| MAX PEAK | | | AVERAGE | | |
|------------|------------|-----------|------------|------------|-----------|
| Freq Hz | Lev dBuV/m | Margin dB | Freq Hz | Lev dBuV/m | Margin dB |
| 1213500000 | +38,39 | -35,59 | 1237000000 | +24,54 | -29,44 |
| 1550000000 | +38,73 | -35,25 | 1551250000 | +24,51 | -29,47 |
| 1830000000 | +42,50 | -31,48 | 1830250000 | +30,82 | -23,16 |
| 2506750000 | +41,19 | -32,79 | 2481250000 | +26,98 | -27,00 |
| 2745250000 | +43,69 | -30,29 | 2745250000 | +33,13 | -20,85 |
| 2998750000 | +44,05 | -29,93 | 2998250000 | +30,17 | -23,81 |
| 3911500000 | +46,06 | -27,92 | 3900000000 | +31,81 | -22,17 |
| 4998500000 | +46,75 | -27,23 | 4999750000 | +33,33 | -20,65 |
| 6297750000 | +49,27 | -24,71 | 6132250000 | +34,15 | -19,83 |
| 7496000000 | +50,71 | -23,27 | 7320750000 | +36,19 | -17,79 |
| 9849000000 | +53,45 | -20,53 | 9998250000 | +39,97 | -14,01 |

21162814_2

Gandini 21162815

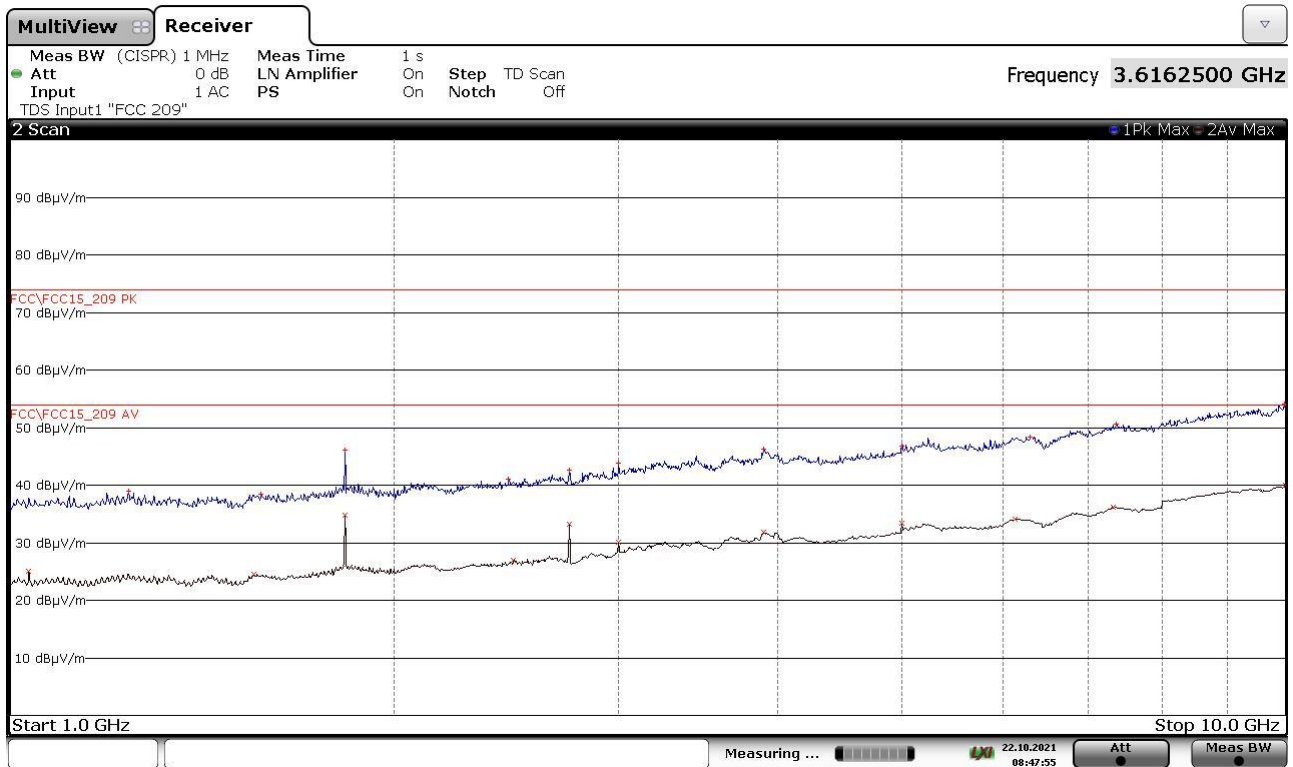

FINAL RESULT TABLE


| MAX PEAK | | | AVERAGE | | |
|------------|------------|-----------|------------|------------|-----------|
| Freq Hz | Lev dBuV/m | Margin dB | Freq Hz | Lev dBuV/m | Margin dB |
| 1237500000 | +38,89 | -35,09 | 1034000000 | +24,97 | -29,01 |
| 1573000000 | +38,43 | -35,55 | 1551250000 | +24,48 | -29,50 |
| 1830250000 | +46,04 | -27,94 | 1830250000 | +34,77 | -19,21 |
| 2458250000 | +41,05 | -32,93 | 2481250000 | +26,97 | -27,01 |
| 2745250000 | +42,58 | -31,40 | 2745250000 | +33,29 | -20,69 |
| 2998500000 | +43,86 | -30,12 | 2998250000 | +30,14 | -23,84 |
| 3900250000 | +46,33 | -27,65 | 3899750000 | +31,81 | -22,17 |
| 4998250000 | +46,80 | -27,18 | 4999750000 | +33,32 | -20,66 |
| 6303000000 | +48,34 | -25,64 | 6132250000 | +34,14 | -19,84 |
| 7372000000 | +50,65 | -23,33 | 7320750000 | +36,21 | -17,77 |
| 9983000000 | +54,06 | -19,92 | 9998500000 | +39,98 | -14,00 |

21162815_2

9.3 20 dB bandwidth

| | |
|---|---|
| Tested by | G. Gandini |
| Test date | 08.11.2021 |
| Test location (stand) | Laboratory |
| Reference standards | FCC Rules and Regulation; Titles 47 Part. 15.215 (c) ANSI C63.10 cl. 7.8.7 |
| Supplementary test set-up description | -- |
| Supplementary information..... | -- |

Test setup

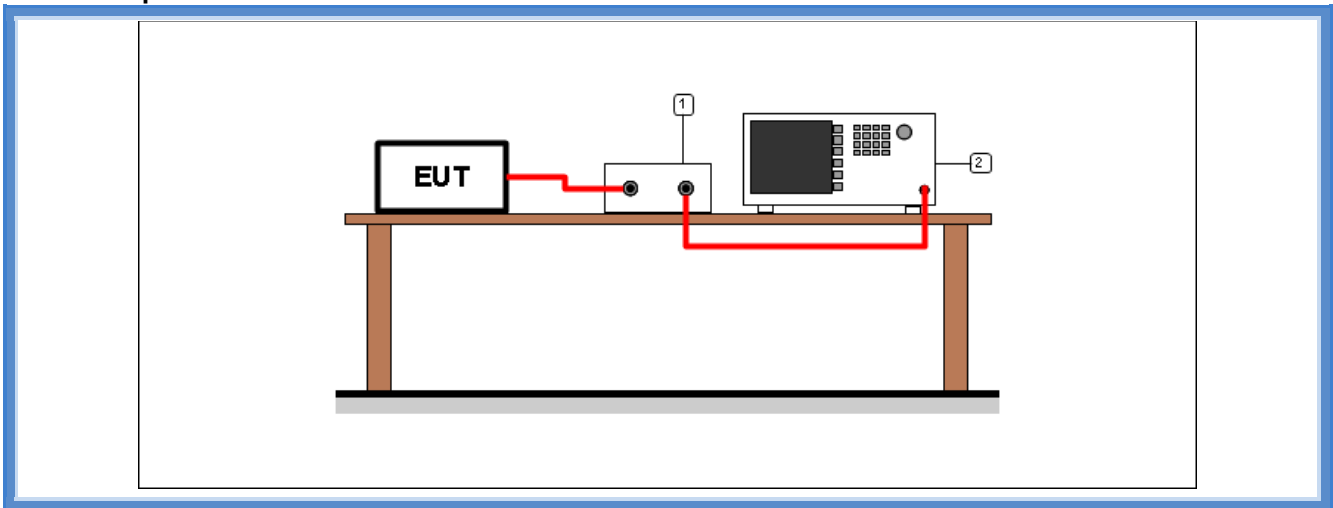

Test setup PR002_01

| Nr. | Id. Number | Manufacturer | Model | Description |
|-----|------------|-----------------|-------|---|
| 2 | CMC S295 | Rohde & Schwarz | FSW43 | Spectrum Analyzer 43GHz |
| 1 | -- | -- | -- | Cable + attenuator (calibrated before the test) |

Result

| Frequency (MHz) | Graphs | 20 dB bandwidth (kHz) |
|-----------------|-----------|-----------------------|
| 915,075 | G21162824 | 23,68 |
| 921,425 | G21162821 | 23,67 |
| 927,825 | G21162816 | 23,68 |

Graphs

Gandini 21162816



Gandini 21162821



Gandini 21162824




9.4 Channel separation

| | |
|---|--|
| Tested by | G. Gandini |
| Test date | 08.11.2021 |
| Test location (stand) | Laboratory |
| Reference standards | FCC Rules and Regulation; Titles 47 Part. 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02 cl. 9 b) ANSI C63.10 cl. 7.8.2 |
| Supplementary test set-up description | -- |
| Supplementary information..... | -- |

Acceptance limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test setup

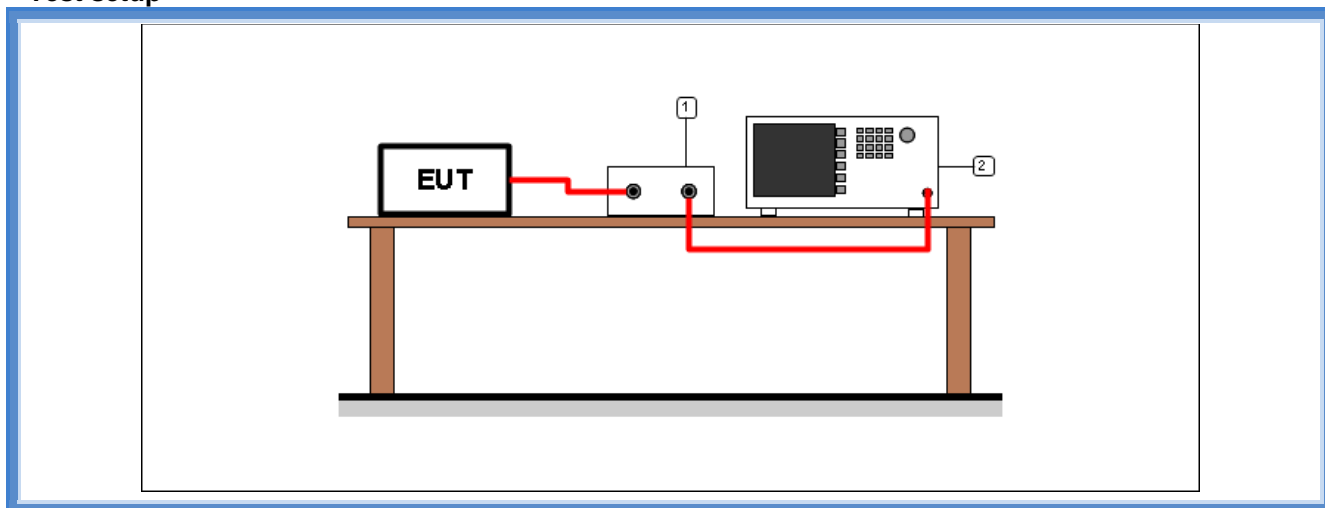

Test setup PR002_01


| Nr. | Id. Number | Manufacturer | Model | Description |
|-----|------------|-----------------|-------|---|
| 2 | CMC S295 | Rohde & Schwarz | FSW43 | Spectrum Analyzer 43GHz |
| 1 | -- | -- | -- | Cable + attenuator (calibrated before the test) |

Result

| <i>Frequency band (MHz)</i> | <i>Graphs</i> | <i>Channel separation (kHz)</i> | <i>Minimum channel separation required (kHz)</i> | <i>Results</i> |
|---------------------------------|---------------|-------------------------------------|--|----------------|
| 902 – 928 | G21162829 | 200,2 | 25 | Complies |

Graphs

Gandini 21162829

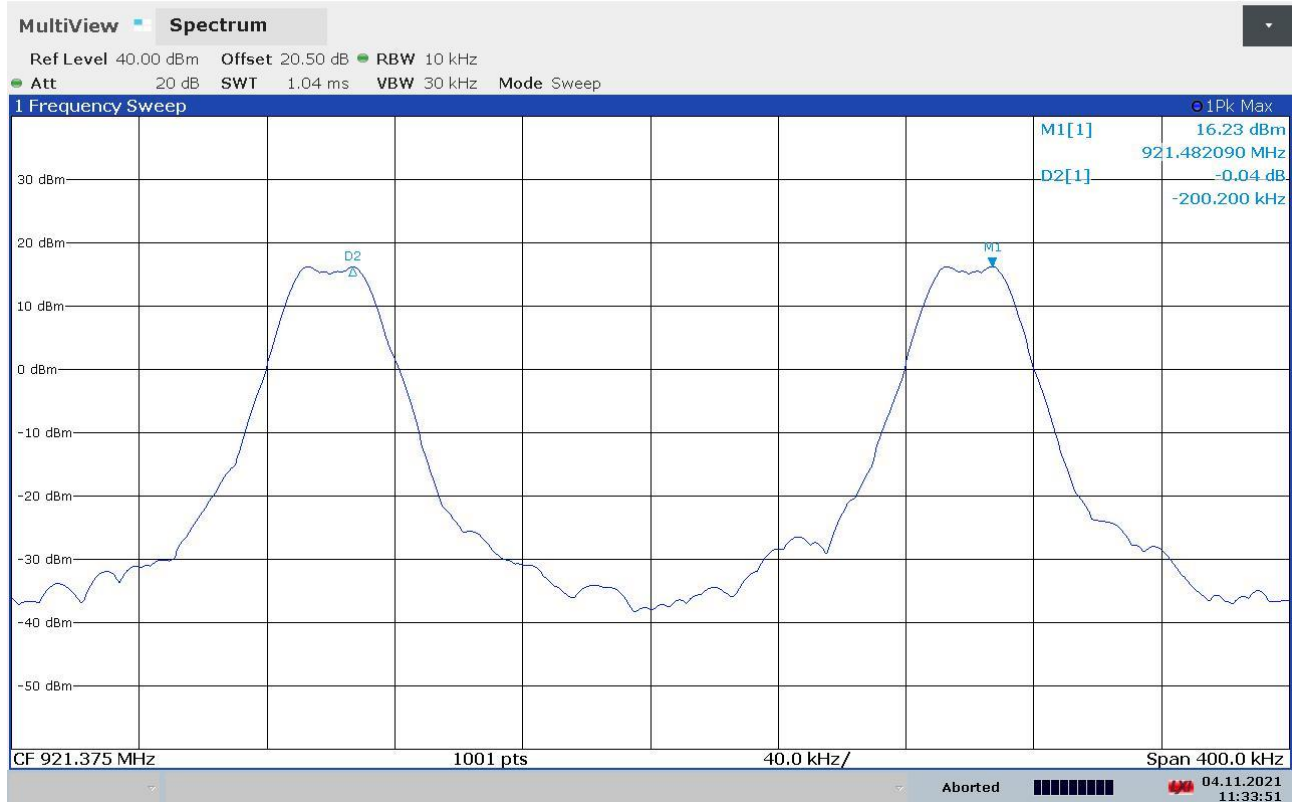


9.5 Number of hopping channels

| | |
|---|--|
| Tested by | G. Gandini |
| Test date | 08.11.2021 |
| Test location (stand) | Laboratory |
| Reference standards | FCC Rules and Regulation; Titles 47 Part. 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02 cl. 9 b) ANSI C63.10 cl. 7.8.3 |
| Supplementary test set-up description | -- |
| Supplementary information..... | -- |

Acceptance limits

For frequency hopping systems operating in the 902 – 928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0,4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0,4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Test setup

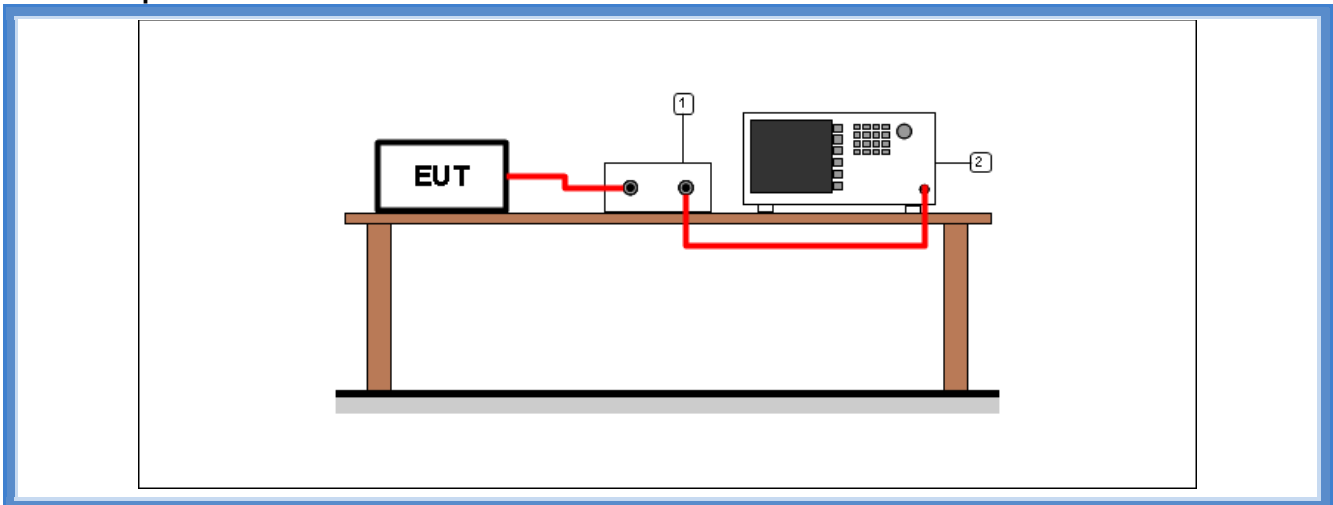

Test setup PR002_01


| Nr. | Id. Number | Manufacturer | Model | Description |
|-----|------------|-----------------|-------|---|
| 2 | CMC S295 | Rohde & Schwarz | FSW43 | Spectrum Analyzer 43GHz |
| 1 | -- | -- | -- | Cable + attenuator (calibrated before the test) |

Result


| <i>Frequency band (MHz)</i> | <i>Graphs</i> | <i>Number of hopping channels</i> | <i>Minimum number of hopping channels required</i> | <i>Results</i> |
|-----------------------------|-------------------------------------|-----------------------------------|--|----------------|
| 902 – 928 | G21162830 G21162831 G21162832 | 64 | 50 | Complies |

Graphs


Gandini 21162830

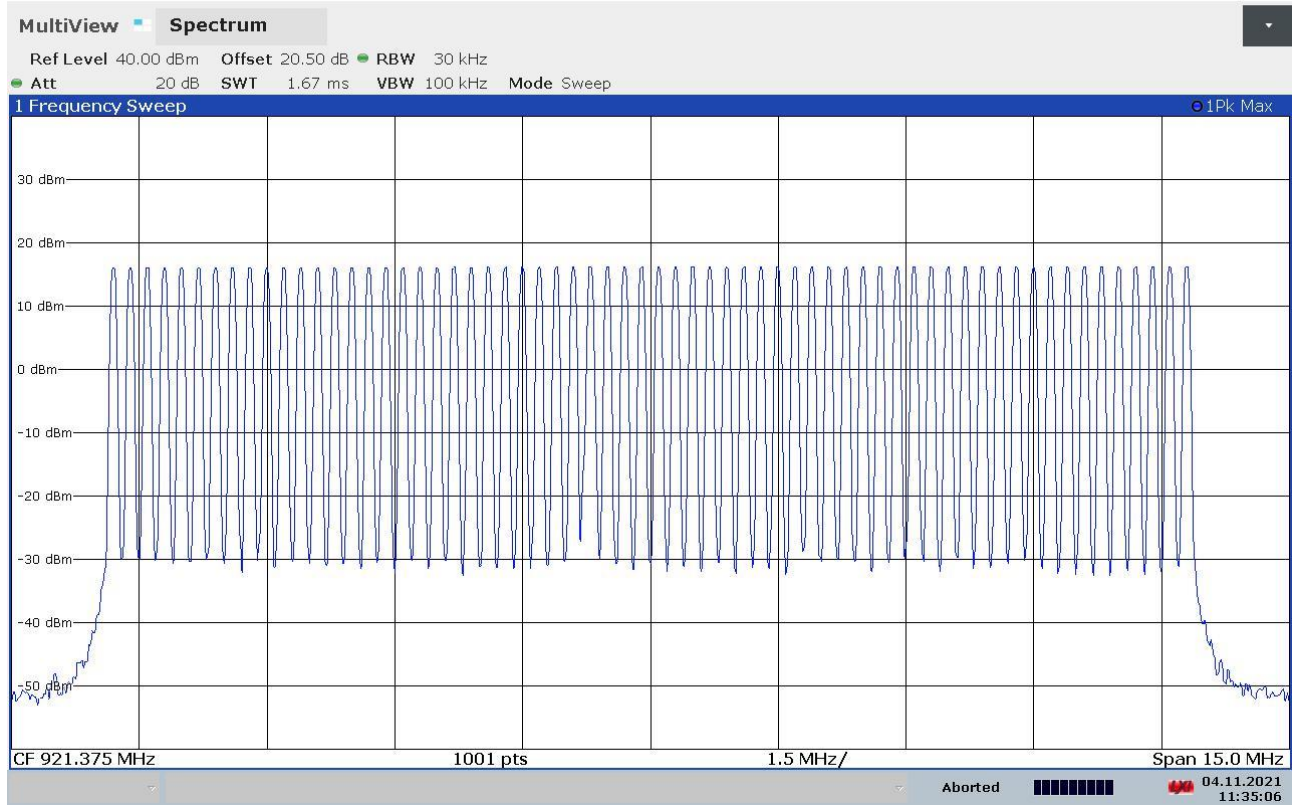

Gandini 21162831

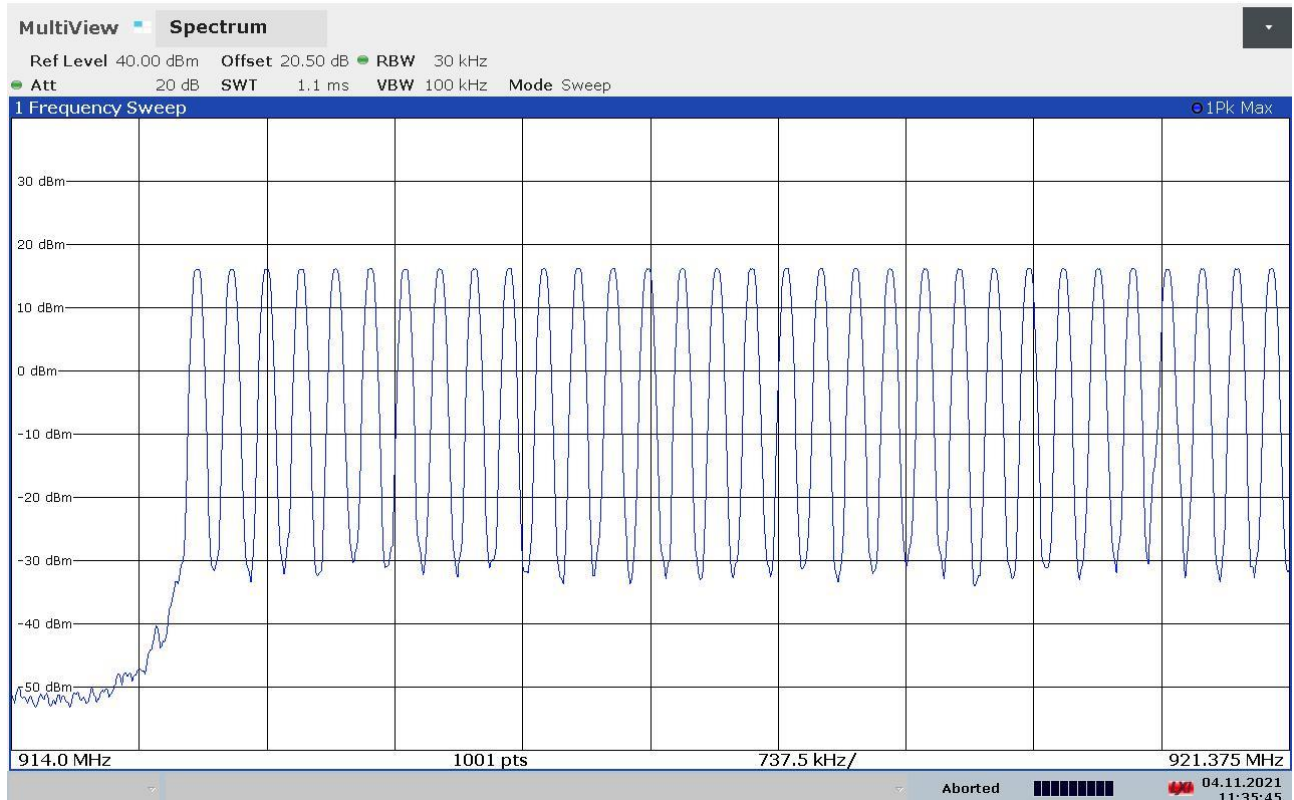

Gandini 21162832

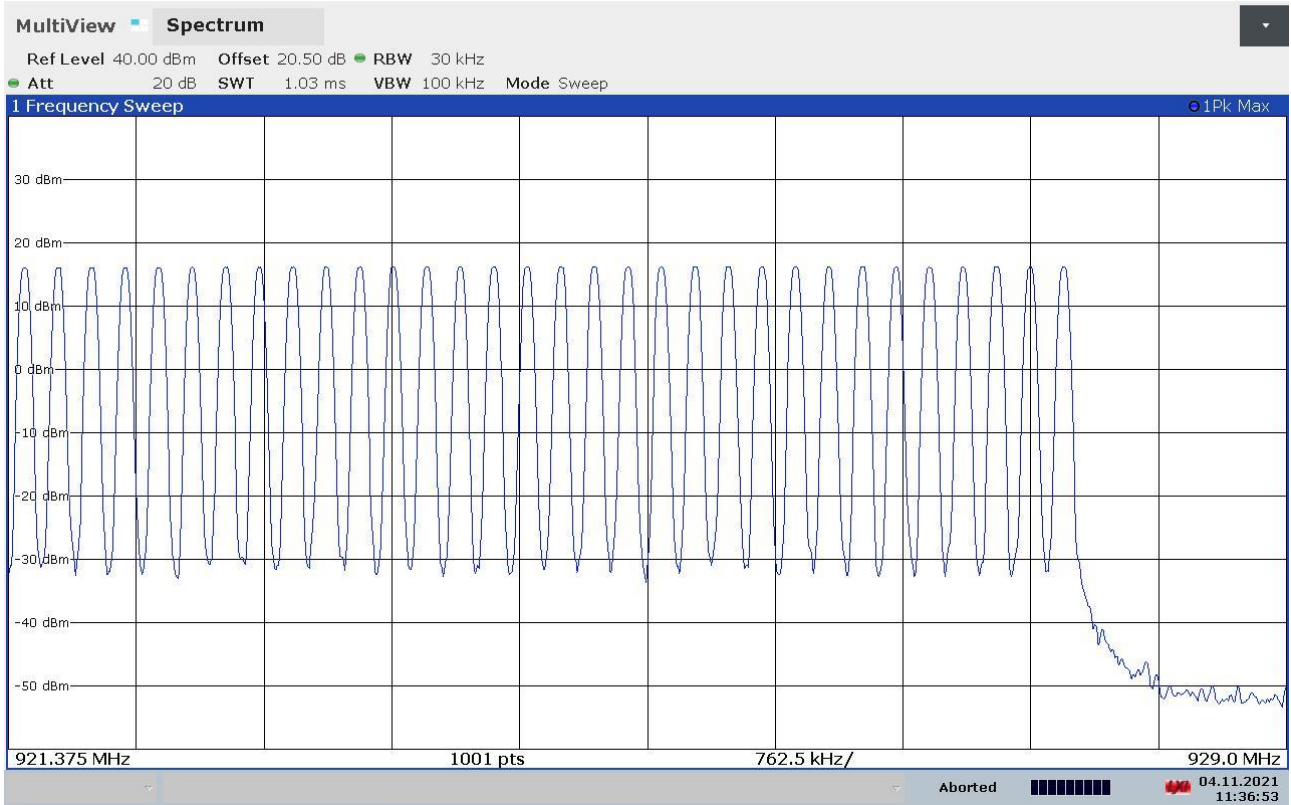


9.6 Time of occupancy

| | |
|---|--|
| Tested by | G. Gandini |
| Test date | 08.11.2021 |
| Test location (stand) | Laboratory |
| Reference standards | FCC Rules and Regulation; Titles 47 Part. 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02 cl. 9 b) ANSI C63.10 cl. 7.8.4 |
| Supplementary test set-up description | -- |
| Supplementary information..... | -- |

Acceptance limits

For frequency hopping systems operating in the 902 – 928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0,4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0,4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Test setup

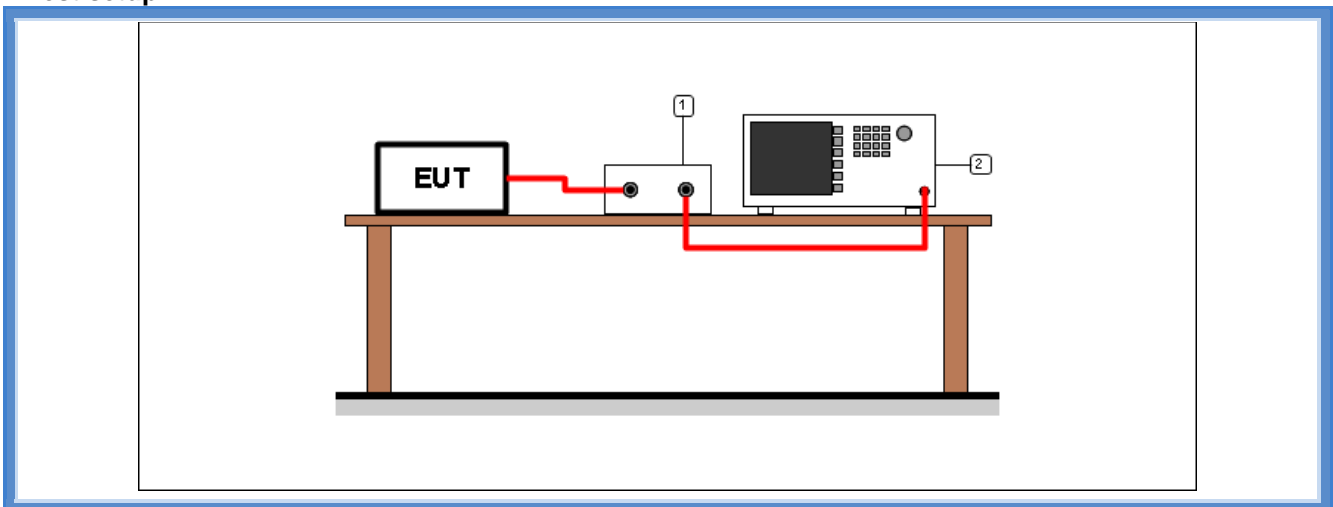

Test setup PR002_01

| Nr. | Id. Number | Manufacturer | Model | Description |
|-----|------------|-----------------|-------|---|
| 2 | CMC S295 | Rohde & Schwarz | FSW43 | Spectrum Analyzer 43GHz |
| 1 | -- | -- | -- | Cable + attenuator (calibrated before the test) |

Result

| <i>Frequency (MHz)</i> | <i>Graphs</i> | <i>Dwell time (ms)</i> |
|----------------------------|---------------|----------------------------|
| 924,875 | G21162833 | 20,85 |


| <i>Frequency (MHz)</i> | <i>Graphs</i> | <i>Number of transmissions</i> | <i>Period</i> |
|----------------------------|---------------|--------------------------------|---------------|
| 924,875 | G21162834 | 8 | 20 s |

Remarks: only the highest peaks have been considered. The lowest peaks are due to the auxiliary receiver unit


| <i>Time of occupancy (Dwell time x Nr. transmissions)</i> | <i>Maximum allowed time of occupancy</i> | <i>Results</i> |
|---|--|----------------|
| 166,80 ms | 400 ms | Complies |

Graphs

Gandini 21162833

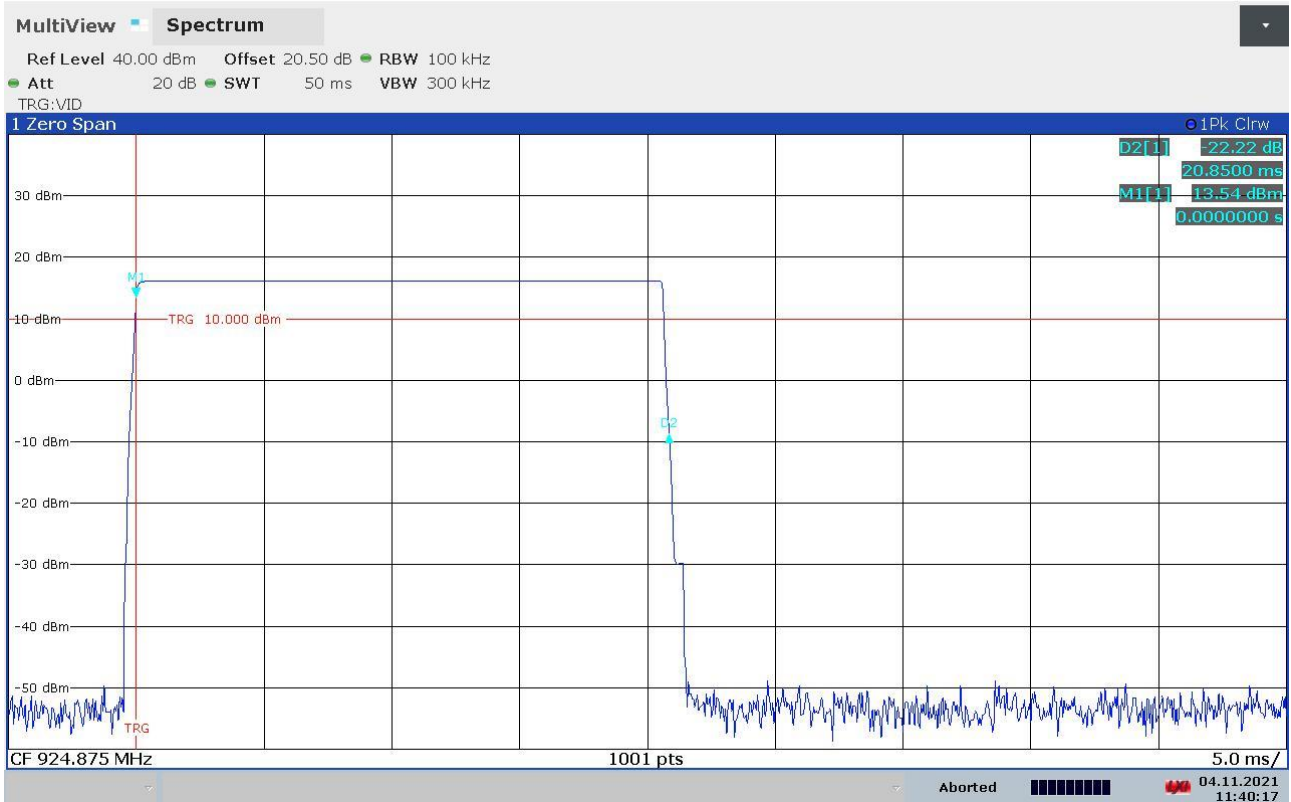

Gandini 21162834

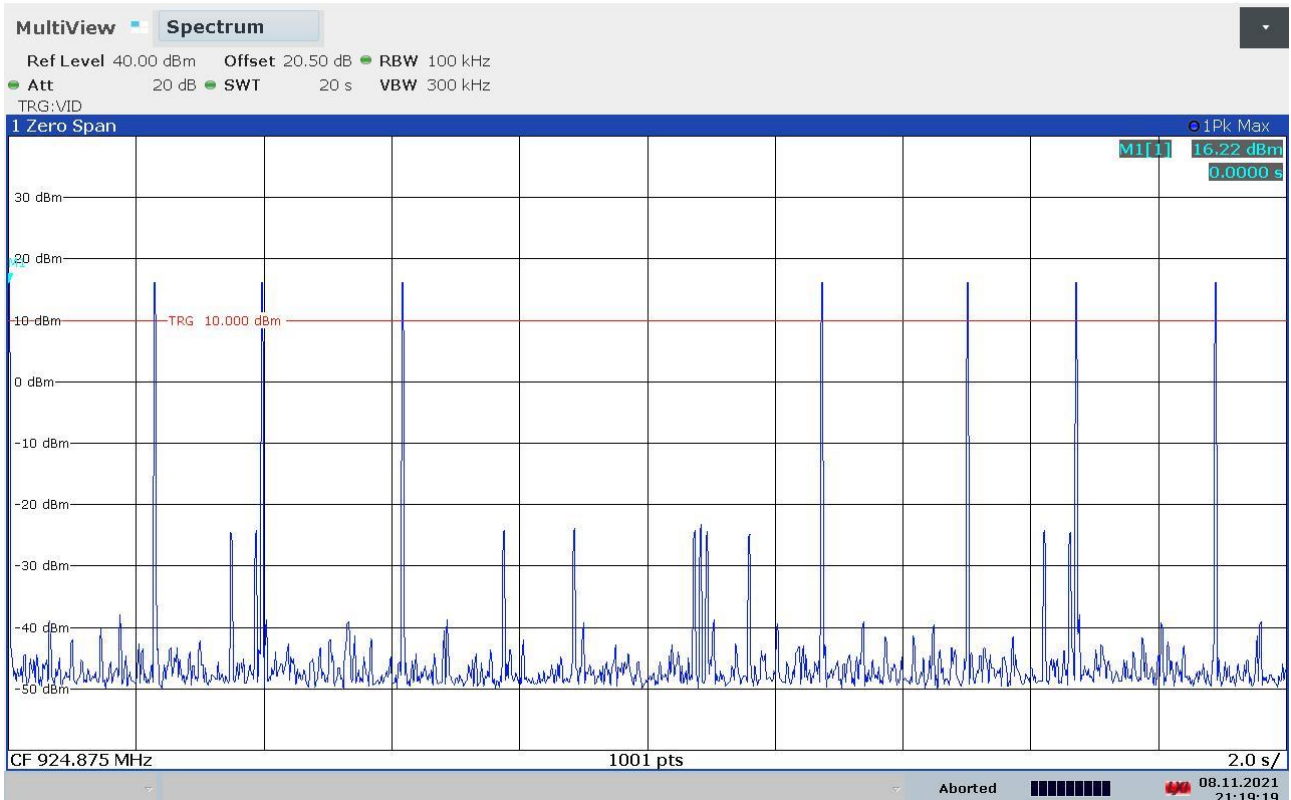

9.7 Band edge


| | |
|---|---|
| Tested by | G. Gandini |
| Test date | 08.11.2021 |
| Test location (stand) | Laboratory |
| Reference standards | FCC Rules and Regulation; Titles 47 Part. 15.247 ANSI C63.10 cl. 7.8.6 |
| Supplementary test set-up description | -- |
| Supplementary information..... | -- |

Acceptance limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Operation within the band 902 – 928 MHz.

Test setup

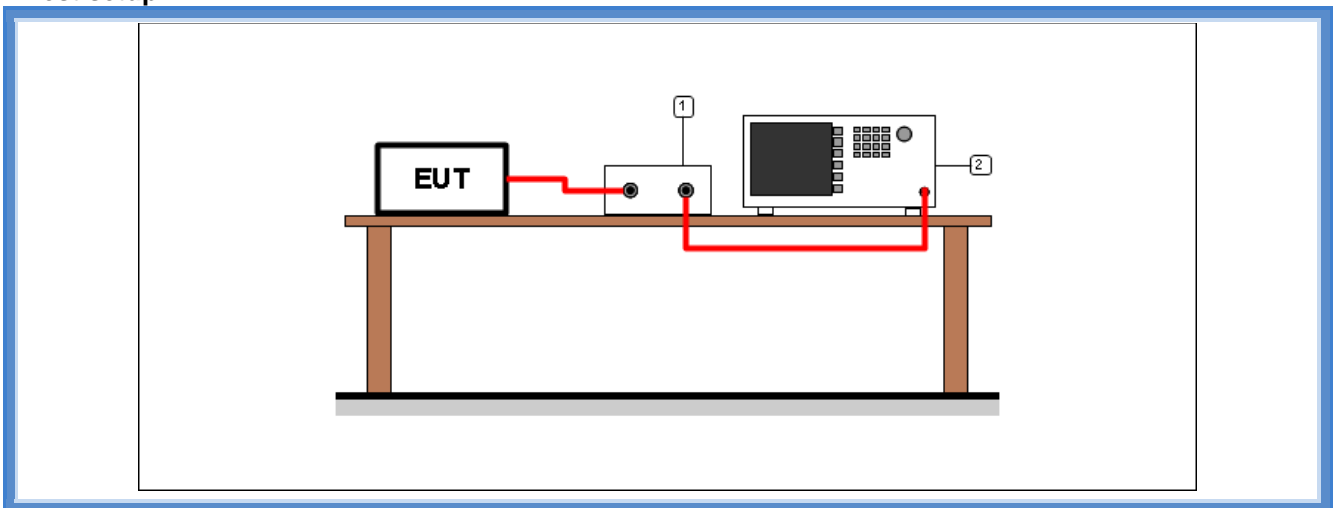

| Test setup PR002_01 | | | | |
|---------------------|------------|-----------------|-------|---|
| Nr. | Id. Number | Manufacturer | Model | Description |
| 2 | CMC S295 | Rohde & Schwarz | FSW43 | Spectrum Analyzer 43GHz |
| 1 | -- | -- | -- | Cable + attenuator (calibrated before the test) |


Result

| <i>Frequency (MHz)</i> | <i>Bandwidth</i> | <i>Graph(s) – Hopping</i> | <i>Results</i> | |
|------------------------|------------------|---------------------------|-------------------------------|----------|
| 915,075 | 100 kHz | G21162836 G21162837 | F _L : 914,9340 MHz | Complies |
| 927,825 | 100 kHz | G21162838 G21162839 | F _H : 927,9681 MHz | Complies |


| <i>Frequency (MHz)</i> | <i>Bandwidth</i> | <i>Graph(s) – No hopping</i> | <i>Results</i> | |
|------------------------|------------------|------------------------------|-------------------------------|----------|
| 915,075 | 100 kHz | G21162827 G21162828 | F _L : 914,9335 MHz | Complies |
| 927,825 | 100 kHz | G21162819 G21162820 | F _H : 927,9599 MHz | Complies |

Graphs


Gandini 21162819

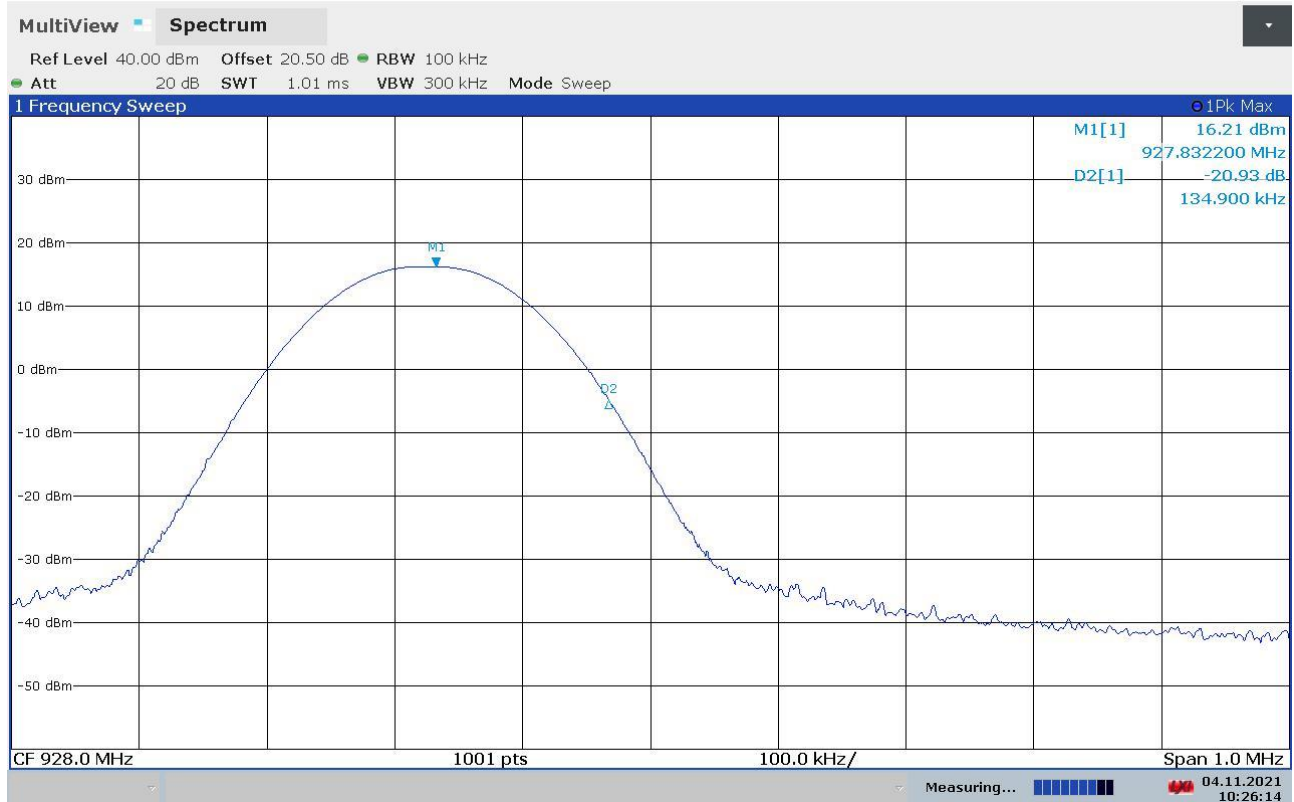


Gandini 21162820

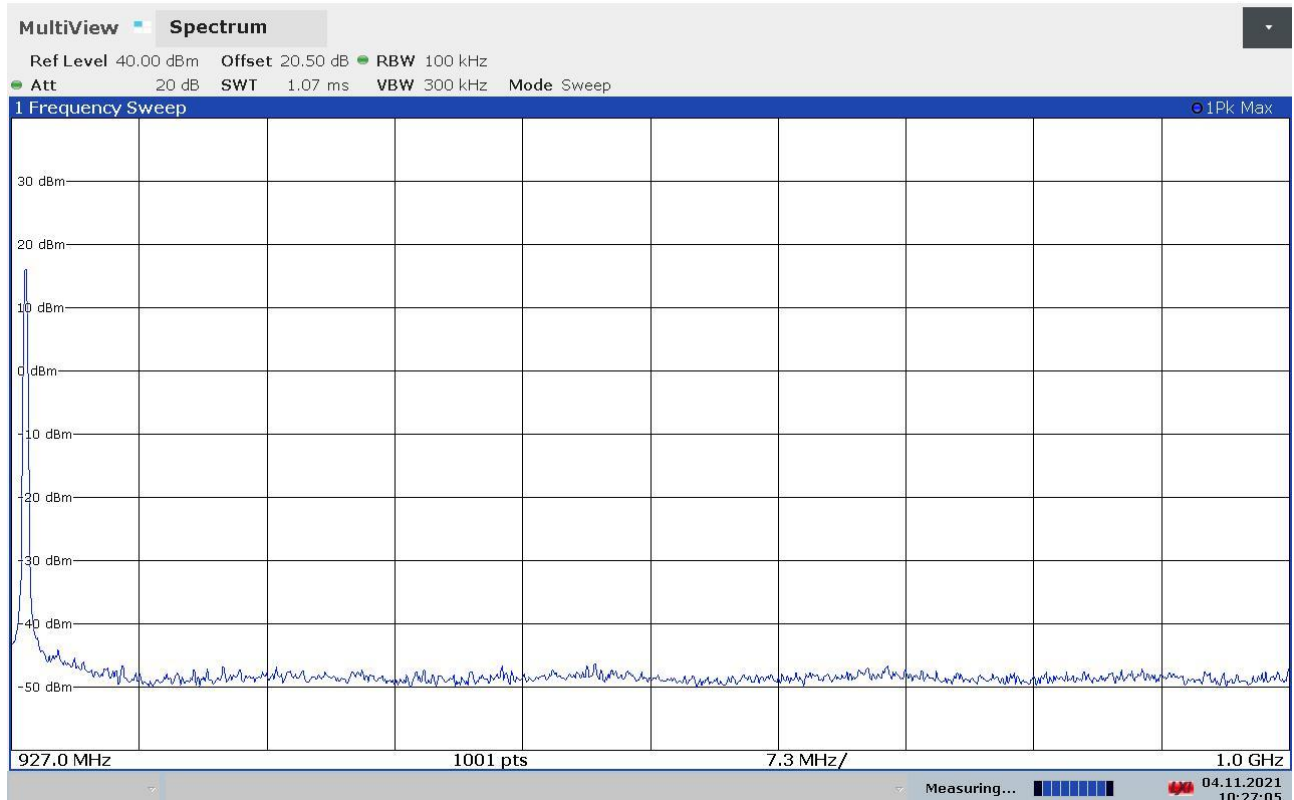


Gandini 21162827

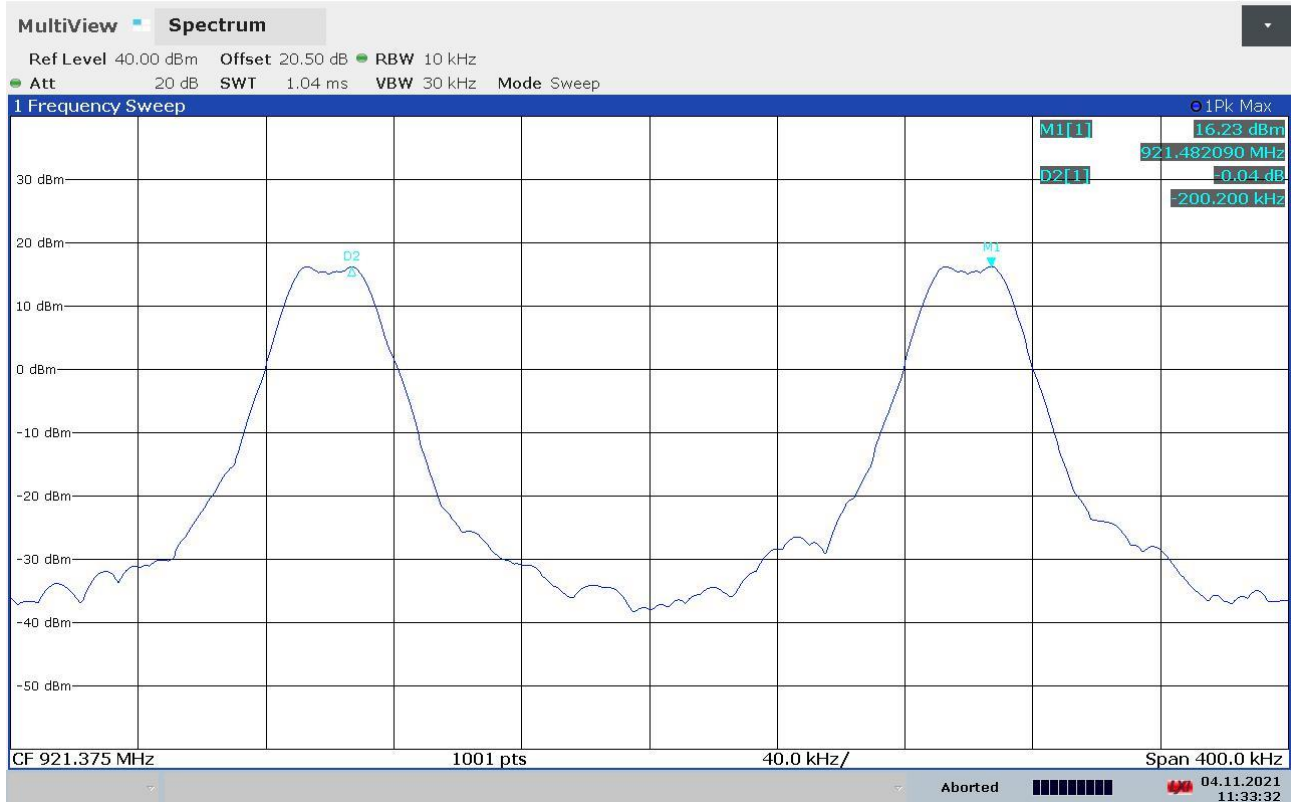


Gandini 21162828

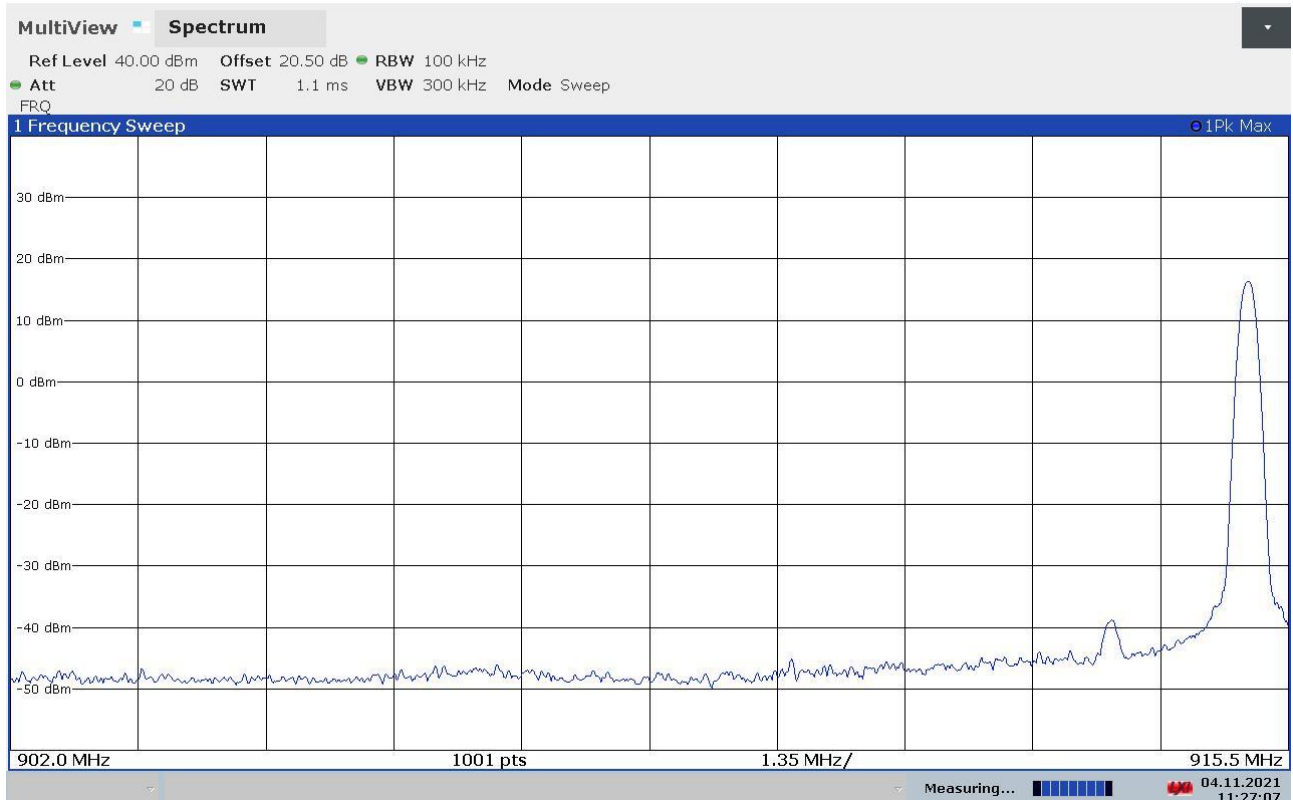


Gandini 21162836

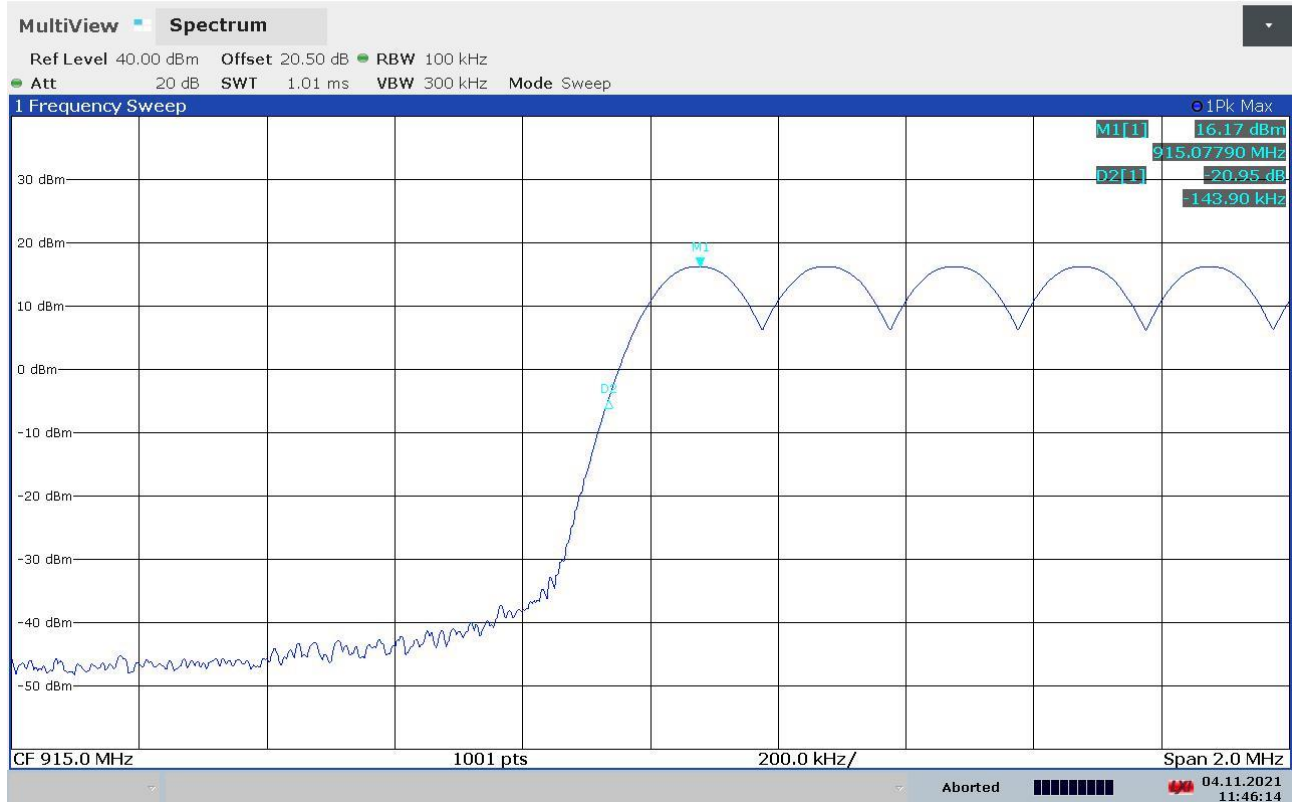


Gandini 21162837

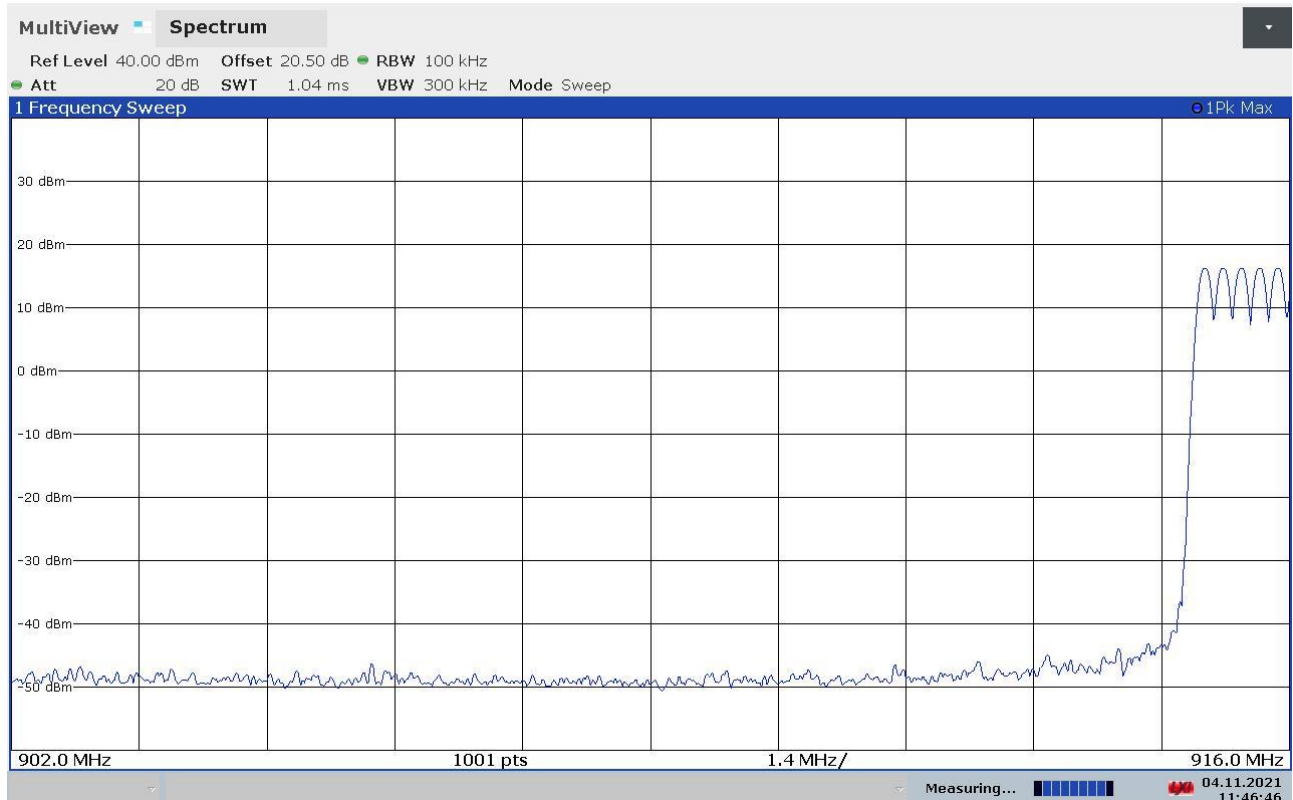

Gandini 21162838

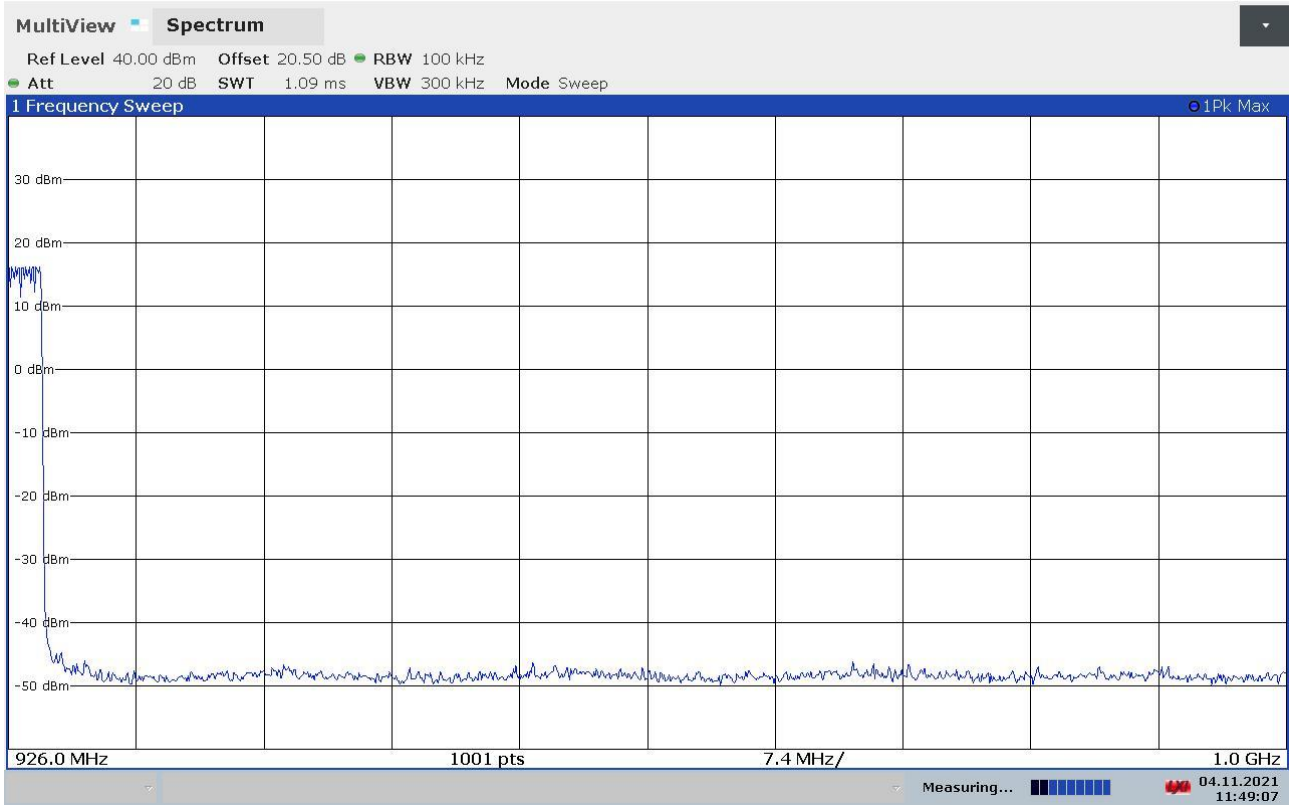

Gandini 21162839

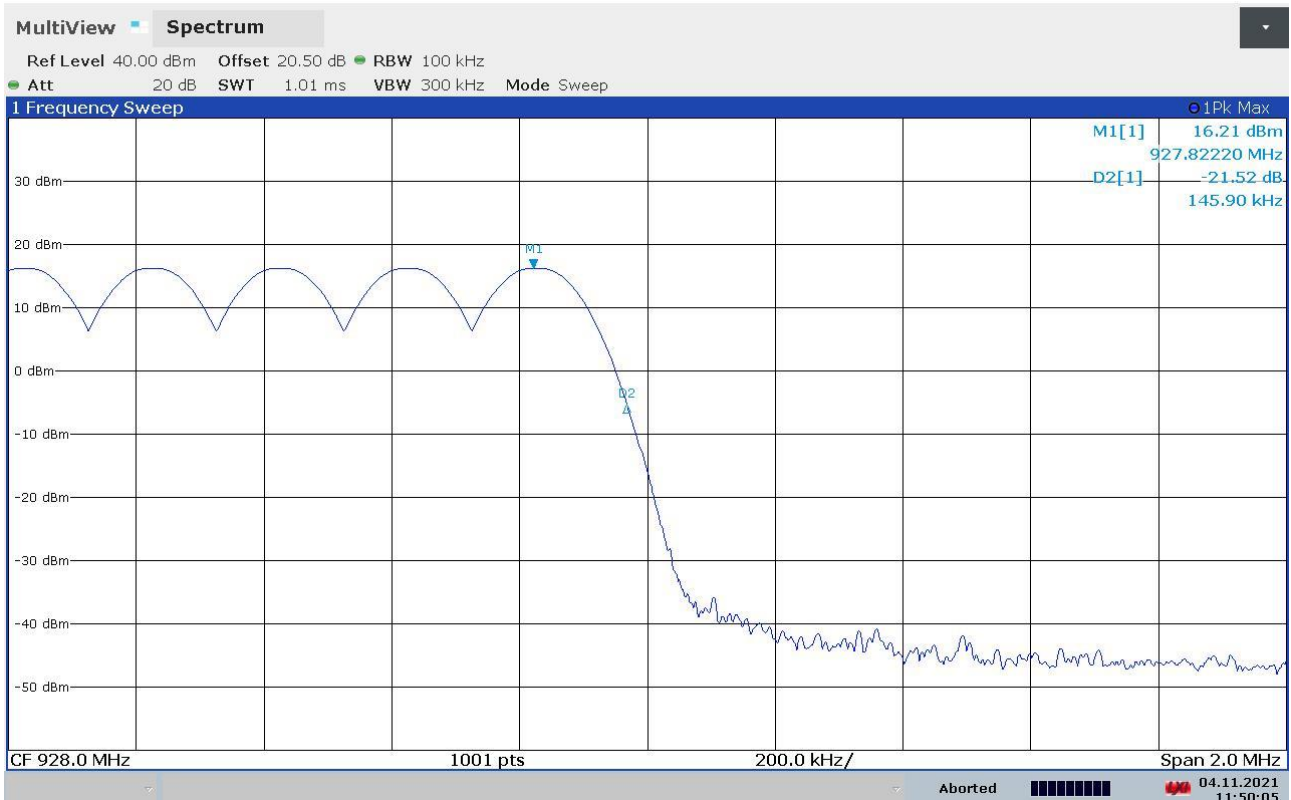


9.8 Peak Output Power

| | |
|---|---|
| Tested by | G. Gandini |
| Test date | 08.11.2021 |
| Test location (stand) | Laboratory |
| Reference standards | FCC Rules and Regulation; Titles 47 Part. 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02 cl. 2.2 ANSI C63.10 cl. 7.8.5 |
| Supplementary test set-up description | -- |
| Supplementary information..... | -- |

Acceptance limits

For frequency hopping systems operating in the 902–928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0,25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels.

Test setup

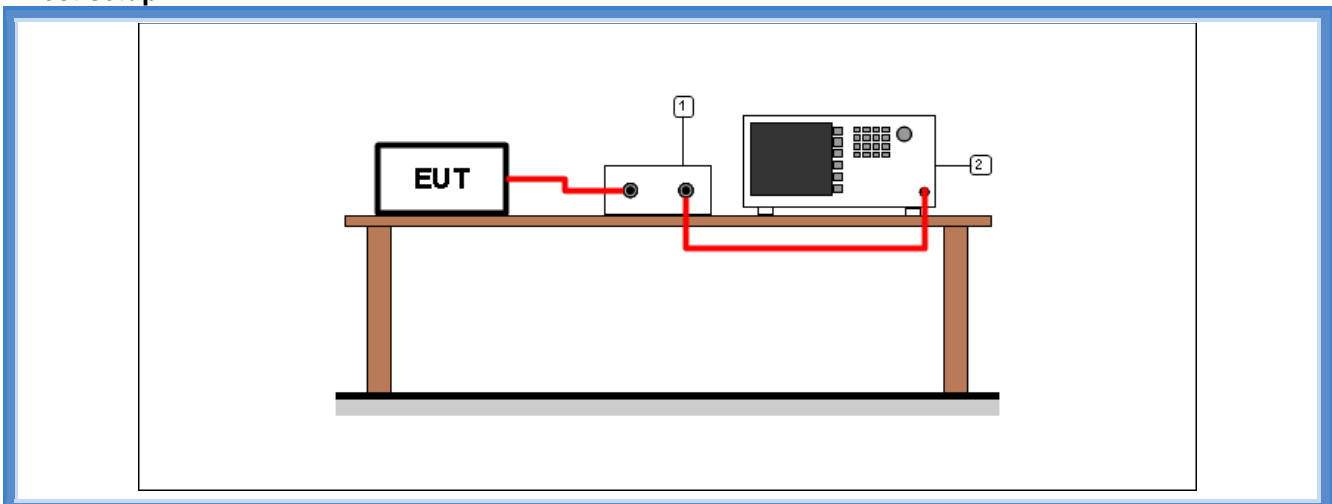


| Test setup PR002_01 | | | | |
|---------------------|------------|-----------------|-------|---|
| Nr. | Id. Number | Manufacturer | Model | Description |
| 2 | CMC S295 | Rohde & Schwarz | FSW43 | Spectrum Analyzer 43 GHz |
| 1 | -- | -- | -- | Cable + attenuator (calibrated before the test) |

Result


| Frequency (MHz) | Graphs | Peak Output Power (dBm) | Peak Output Power (mW) | Limit (mW) |
|-----------------|-----------|-------------------------|------------------------|------------|
| 915,075 | G21162826 | 16,21 | 41,78 | 1000 |
| 921,425 | G21162823 | 16,20 | 41,69 | 1000 |
| 927,825 | G21162818 | 16,21 | 41,78 | 1000 |

Graphs


Gandini 21162818

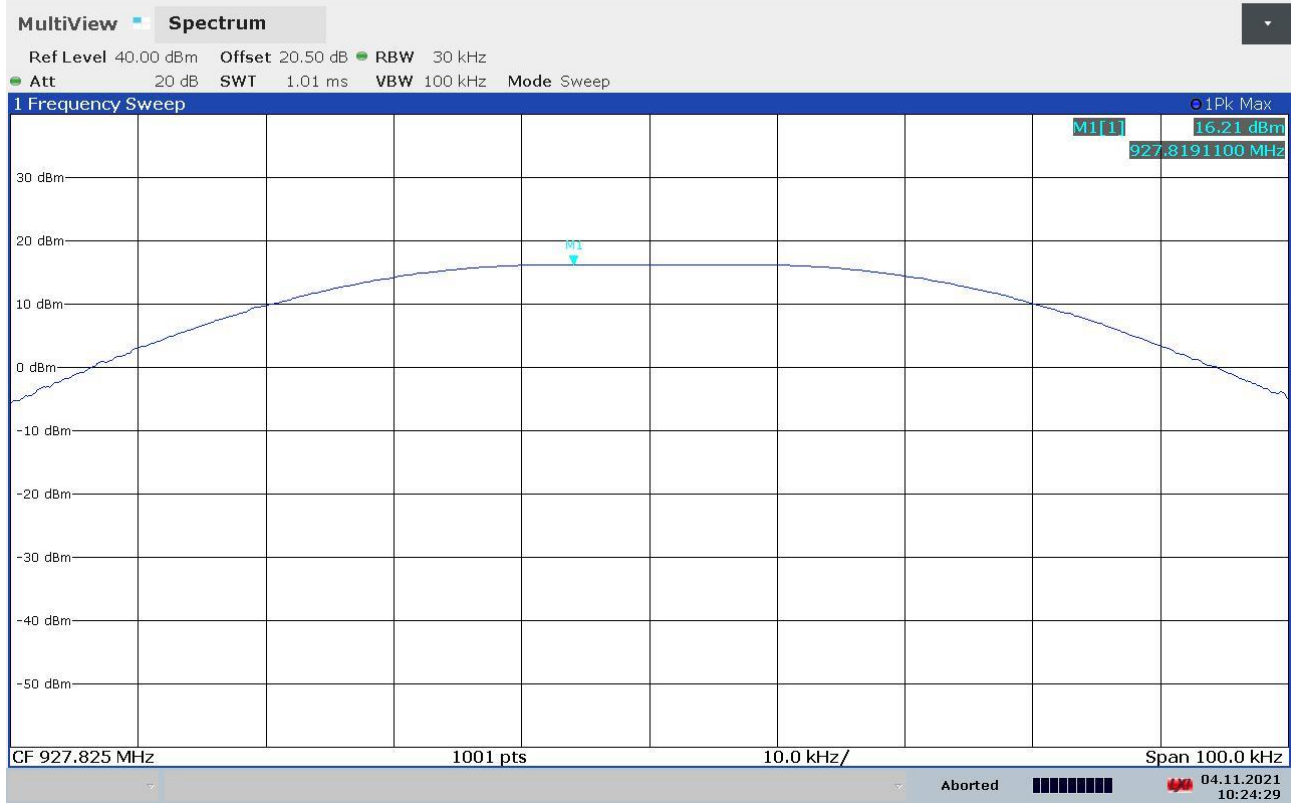

Gandini 21162823

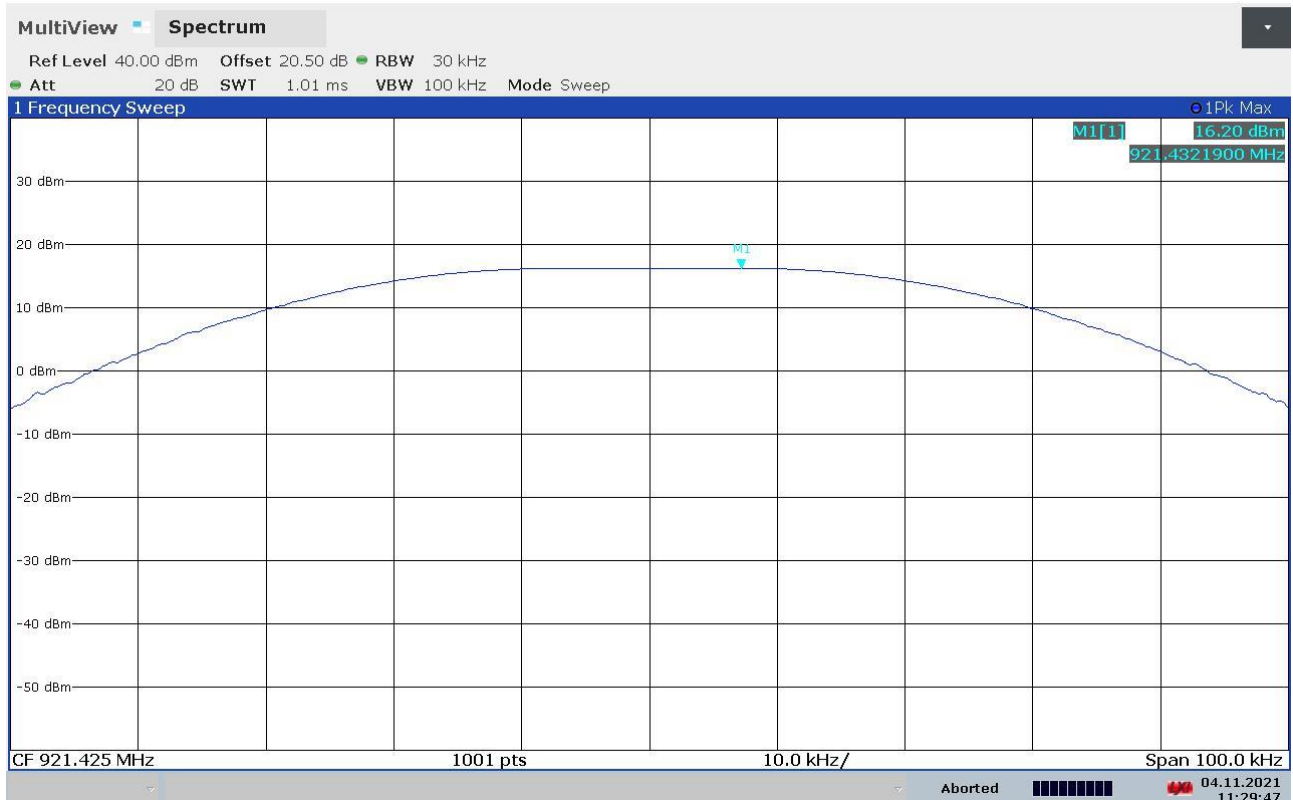

Gandini 21162826

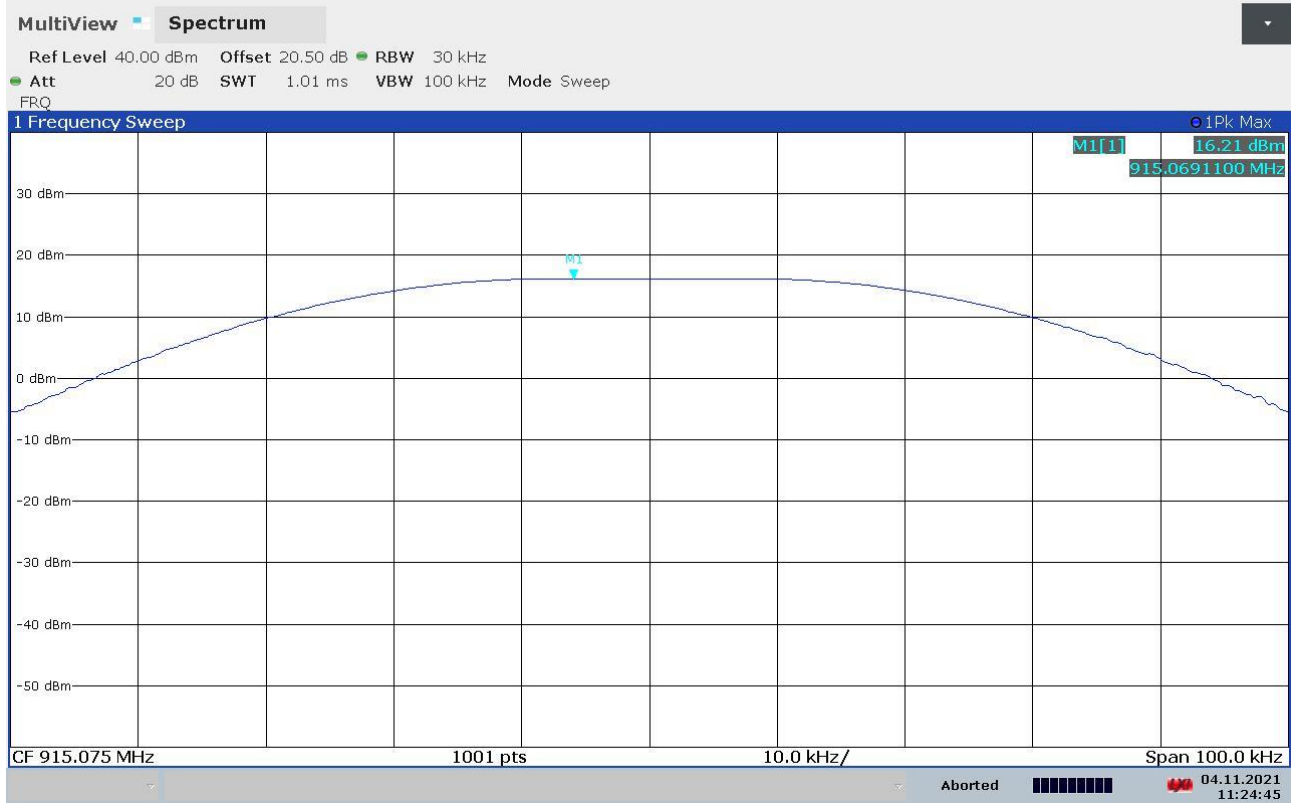

Attachment 1

Instruments list

| <i>Id. number</i> | <i>Manufacturer</i> | <i>Model</i> | <i>Description</i> | <i>Serial number</i> | <i>Last calibration</i> | <i>Due date calibration</i> |
|--------------------------|----------------------------|----------------------|-------------------------------------|-----------------------------|--------------------------------|------------------------------------|
| CMC S010 | Rohde & Schwarz | ESH3-Z2 | Impulses Limiting Device | - - - | January '21 | January '22 |
| CMC S108 | EMCO | 3115 | Horn Antenna | 9811-5622 | June '19 | June '22 |
| CMC S127 | Schaffner | HLA6120 | Loop Antenna | 1191 | November '18 | November '23 |
| CMC S200 | Schwarzbeck | NSLK 8128 | V-LISN | 8128-273 | January '21 | January '22 |
| CMC S206 | Rohde & Schwarz | ESCI 7 | EMC Receiver 9KHz-7GHz | 100781 | January '21 | January '22 |
| CMC S260 | CMC | Wfr_N | Shielded Cable | Wfr_ant10-1 | November '21 | November '22 |
| CMC S261 | CMC | Wfr_N | Shielded Cable | Wfr_ant20-1 | November '21 | November '22 |
| CMC S262 | CMC | Wfr_N_fix | Shielded Cable | Wfr_fix32-1 | November '21 | November '22 |
| CMC S263 | CMC | Wfr_N_fix | Shielded Cable | Wfr_fix31-1 | November '21 | November '22 |
| CMC S264 | CMC | Wfr_N | Shielded Cable | Wfr_ext03-1 | November '21 | November '22 |
| CMC S271 | Schwarzbeck | BBA 9106 + VHBB 9124 | Biconical Antenna (30-300MHz) | 831 | June '19 | June '22 |
| CMC S287 | Schwarzbeck | VUSLP 9111B | Log-periodic Antenna (200 MHz-3Ghz) | 9111B-203 | June '19 | June '22 |
| CMC S288 | CMC | W_sma_white | Joint Shielded Cable | W_001 | November '21 | November '22 |
| CMC S295 | Rohde & Schwarz | FSW43 | Spectrum Analyzer 43GHz | 104059 | November '19 | November '22 |
| CMC S353 | Rohde & Schwarz | ESW26 | Emi Test Receiver 1 Hz - 26.5 GHz | 101492 | September '20 | September '22 |

Attachment 1
Measurement uncertainty

| <i>Test</i> | <i>Test Setup</i> | <i>Expanded uncertainty</i> | <i>Note</i> |
|---|-------------------|-----------------------------|-------------|
| Conducted emission CISPR 16 LISN 50uH 0,009-0,0150 MHz | PE001_01 | 3,4 dB | 1 |
| Conducted emission CISPR 16 LISN 50uH 0,150-30,0 MHz | PE001_01 | 3,0 dB | 1 |
| Conducted emission CISPR 16 Voltage Probe 0,15-30 MHz | PE001_02 | 2,3 dB | 1 |
| Conducted emission CISPR 16 Current Probe 0,15-30 MHz | PE001_03 | 2,6 dB | 1 |
| Conducted emission CISPR 16 ISN 0,15-30 MHz | PE001_04 | 4,7 dB | 1 |
| Clic CISPR 16 LISN 50uH 0,150-30,0 MHz | PE001_05 | 2,9 dB | 1 |
| Radiated Emission CDNE 30-300 MHz | PE001_06 | 3,3 dB | 1 |
| Disturbance Power 30-300 MHz | PE002_01 | 3,8 dB | 1 |
| Radiated Emission LAS 0,15-30 MHz | PE003_01 | 2,0 dB | 1 |
| Radiated Emission CISPR 16 Loop Ant. 0,15-30 MHz | PE004_01 | 4,2 dB | 1 |
| Radiated Emission CISPR 16 Bicon. Ant. 30-300 MHz | PE004_02 | 4,1 dB | 1 |
| Radiated Emission CISPR 16 LogP. Ant. 300-1000 MHz | PE004_03 | 3,9 dB | 1 |
| Radiated Emission CISPR 16 Horn Ant. 1-18 GHz | PE004_04 | 4,1 dB | 1 |
| Human Exposure to electromagnetic fields | PE005_01 | 16,7 % | 1 |
| Harmonics | PE006_01 | 10 mA + 2,9 % | 1 |
| Flicker | PE007_01 | 4,36 % | 1 |
| Radiated Immunity 80 MHz - 6 GHz | PE102_XX | 2,20 dB 0,87 V/m a 3V/m | 1 |
| Conducted Immunity 0,15 - 230 MHz | PE105_XX | 1,20 dB 0,44 V a 3V | 1 |
| AC Magnetic field | PE106_01 | 1,55 % 0,15 A/m a 10A/m | 1 |
| Pulse Magnetic field | PE107_01 | 6,23 % 18,7 A/m a 300A/m | 1 |
| Dumped Magnetic field | PE108_01 | 6,23 % 1,87 A/m a 30A/m | 1 |
| Common mode conducted immunity | PE112_01 | 2,16 % 0,22 V a 10V | 1 |

Attachment 1

| Test | Test Setup | Expanded uncertainty | Note |
|--|-------------|----------------------|------|
| Power/Spurious 9kHz-30MHz | PR001_01 | 4,2 dB | 1 |
| Power/Spurious ERP 30-1000MHz d=10m | PR001_02+03 | 4,7 dB | 1 |
| Misura della potenza EIRP 1-18GHz d=3m | PR001_04+05 | 4,7 dB | 1 |
| Misura della potenza EIRP 18-40GHz d=3m | PR001_06 | 5,4 dB | 1 |
| Frequency error | PR002_01+02 | $< 1 \times 10^{-7}$ | 1 |
| Timing zero span (1001pts.) | PR002_01+02 | 0,2 % SWT | 1 |
| Modulation bandwidth | PR002_01+02 | $< 1 \times 10^{-7}$ | 1 |
| Conducted RF power and spurious emission | PR002_01+02 | 1,1 dB | 1 |
| Adjacent channel power | PR002_01+02 | 1,1 dB | 1 |
| Blocking | PR002_01+02 | 1,1 dB | 1 |

| Test | Test Setup | Expanded uncertainty | Note |
|--|------------|----------------------|------|
| Electrostatic discharge immunity test | PE101_0X | | 2 |
| Electrical fast transients / burst immunity test | PE103_0X | | 2 |
| Surge immunity test | PE104_0X | | 2 |
| Short interruption immunity test | PE109_01 | | 2 |
| Ring Wave immunity test | PE110_01 | | 2 |
| Low frequency immunity test | PE111_01 | | 2 |
| Dumped Oscillatory immunity test | PE113_01 | | 2 |
| Rev_21_01 date 23/02/2021 | | | |

Note 1:





The expanded uncertainty reported according to the document EA-4-02 is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of $p = 95\%$

Note 2:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence, covering factor $k=2$

Attachment 1

Judgement of compliance

| Case 1 | Case 2 | Case 3 | Case 4 |
|--|---|---|--|
|  <p>The sample complies with the requirements.</p> <p>The measurement results is within the specification limit when the measurement uncertainty is taken into account.</p> |  <p>The sample complies with the requirements.</p> <p>It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty although the measurement result is below the limit.</p> |  <p>The sample does not comply with the requirements.</p> <p>It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty also the measurement result is upper the limit.</p> |  <p>The sample does not comply with the requirements.</p> <p>The measurement results is outside the specification limit when the measurement uncertainty is taken into account.</p> |

In agreement with ILAC-G8:09/2019 cl.4.2.1 Guidelines on Decision Rules and Statements of Conformity

Quality manual references – Internal procedure

| | |
|--|-------------------------------------|
| Internal Procedure PM001 rev. 3.1 (Quality Manual) | Measure procedure |
| Internal Procedure INC_M rev. 9.5 (Quality Manual) | Measurement uncertainty calculation |