



## TEST REPORT Nr. R21036201

### Federal Communication Commission (FCC)

<b>Report Reference No.</b> .....	R21036201
Date of issue: .....	26.03.2021
Total number pages: .....	55
<b>Applicant's name</b> .....	Autec S.r.l.
Address .....	Via Pomaroli, 65 – 36030 Caldogno (VI) – Italy
<b>Test specification:</b>	
Standards .....	FCC Rules & Regulations, Title 47:2019 Part 15 paragraph(s): 203, 204, 205, 207, 209, 215 and 247
Non-standard test method .....	N/A
<b>Test Report Form No.</b> .....	15-247_HoppingCMC
Test Report Form(s) Originator ..	CMC Centro Misure Compatibilità S.r.l.
Master TRF .....	2021-02
<b>General disclaimer:</b>	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of CMC Centro Misure Compatibilità S.r.l.	
<b>Test item description</b> .....	Transceiver unit
Trademark .....	Autec
Manufacturer .....	Autec S.r.l.
Model / Type reference .....	Model LKN Type DF2NH
FCC ID .....	OQA-LKNDF2NH
Rating(s) .....	3,7 Vdc from battery
<b>Report</b>	
Tested by (name + signature) .....	M. Segalla
Approved by (name + signature) .....	R. Beghetto

CMC Centro Misure Compatibilità S.r.l.



<b>1</b>	<b>Summary</b>	
1	Summary.....	2
2	Reference standard .....	3
3	List of attachments.....	3
4	Deviation(s) from test specification.....	3
5	Testing location.....	3
6	General description of tested item and testing condition(s) .....	5
6.1	Photos of the test item .....	6
7	Verdict summary section .....	7
8	Test conditions.....	9
8.1	General .....	9
9	Test results .....	10
9.1	Antenna requirements .....	10
9.2	Emissions in restricted frequency bands and in unrestricted frequency bands .....	11
9.3	20 dB bandwidth.....	31
9.4	Channel separation.....	34
9.5	Number of hopping channels.....	37
9.6	Time of occupancy.....	41
9.7	Band edge .....	44
9.8	Peak Output Power.....	48

CMC Centro Misure Compatibilità S.r.l.



<b>2 Reference standard</b>	
FCC Rules and Regulation Title 47 part 15:2019	--
<b>3 List of attachments</b>	
Attachment 1: Instruments list, measurement uncertainty, judgement of compliance and quality manual references	
<b>4 Deviation(s) from test specification</b>	
None	
<b>5 Testing location</b>	
CMC Centro Misure Compatibilità S.r.l. Via della Fisica, 20 – 36016 Thiene (VI) – Italy Test site facility's FCC registration number: 182474	

<i>Revision index</i>	<i>Date</i>	<i>Change history</i>
1.0	26.03.2021	--



<b>Testing and sampling:</b>	
Date of receipt of test item .....	16.02.2021
Testing start date .....	15.03.2021
Testing end date .....	19.03.2021
Sampling procedure.....	Equipment used for testing was picked up by the manufacturer, at the end of the production process with random criterion.  The results relate to the sample as it has been received.
Internal identification.....	Adhesive label with the product number P210180
<b>General remarks:</b>	
<p>This report shall not be reproduced, except in full, without the written approval of CMC.            The test results presented in this report relate only to the object tested.            "(see appended table)": refers to a table appended to the report.            Throughout this report a comma is used as the decimal separator.</p>	
<b>Possible test case verdicts:</b>	
Test case does not apply to the test object:	N/A (Not Applicable)
Test object does meet the requirement:	P (Pass)
Test object does not meet the requirement:	F (Fail)
Test object does not performed:	N/E (Not Executed)
<b>Definition of symbols used in this test report:</b>	
<input checked="" type="checkbox"/> Indicates that the listed condition, standard or equipment is applicable for this report. <input type="checkbox"/> Indicates that the listed condition, standard or equipment is not applicable for this report.	

CMC Centro Misure Compatibilità S.r.l.







## 6 General description of tested item and testing condition(s)

Description .....	Transceiver unit							
Model Number .....	Model LKN Type DF2NH							
FCC ID .....	OQA-LKNDF2NH							
Serial Number .....	--							
Brand name .....	Autec							
Frequency band .....	902 – 928 MHz							
Nominal frequencies .....	F <sub>L</sub> : 915,05 MHz	F <sub>M</sub> : 921,40 MHz			F <sub>H</sub> : 927,80 MHz			
Test power supply .....	Voltage and Frequency			Reference poles				
				N	L1	L2	L3	PE
	<input type="checkbox"/>	AC:		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	AC:		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	DC: 3,7 V from battery						<input type="checkbox"/>	
Pseudo randomly ordered list of hopping frequencies .....	See document lkn_df2nh_operational_description-rev0							
Test configuration .....	<input type="checkbox"/>	Table top equipment						
	<input type="checkbox"/>	Floor standing equipment						
	<input checked="" type="checkbox"/>	Hand-held equipment						
Type of equipment .....	<input checked="" type="checkbox"/>	Transmitter unit						
	<input checked="" type="checkbox"/>	Receiver unit						
Type of station .....	<input checked="" type="checkbox"/>	Portable station						
	<input type="checkbox"/>	Mobile station						
Operating modes .....	No.	Operating mode of test item						
	1	EUT in continuous transmission at maximum power						





### 6.1 Photos of the test item

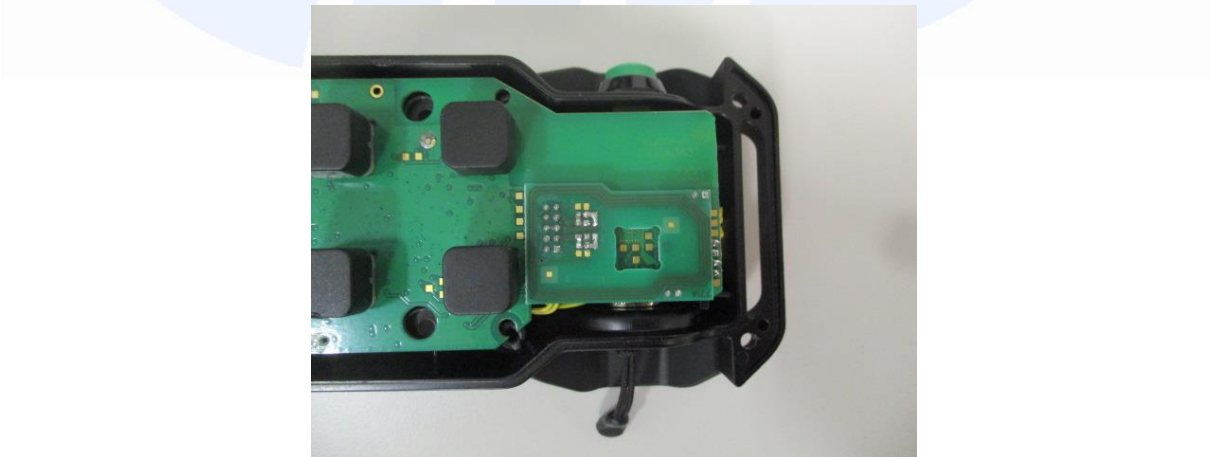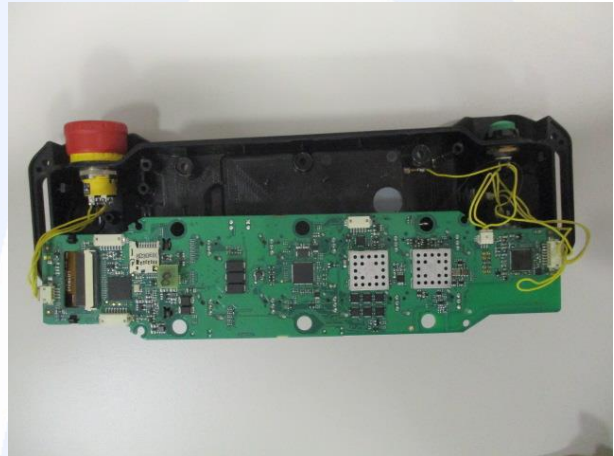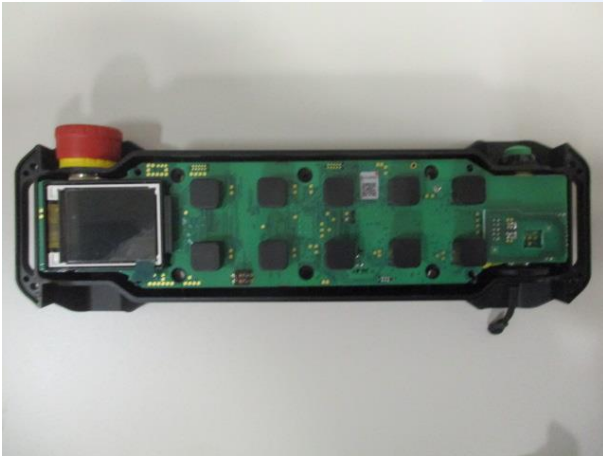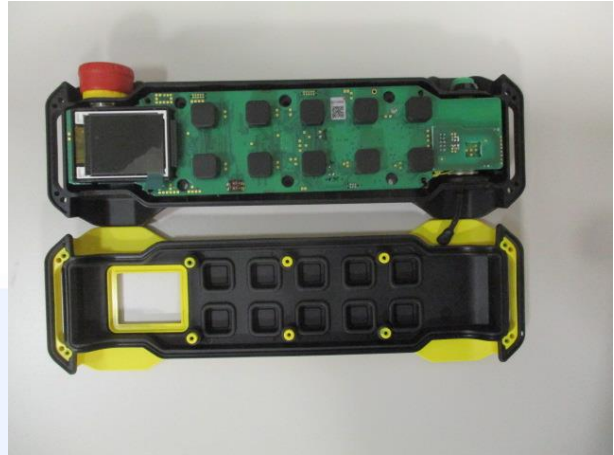

CMC Centro Misure Compatibilità S.r.l.




## 7 Verdict summary section

FCC Rules & Regulations, Title 47:2019			
Part 15 paragraph(s): 203, 204, 205, 207, 209, 215 and 247			
Clause	Requirement – Test case	Basic standard	Verdict
Part 15.247 (a) (1)	Pseudo randomly ordered list of hopping frequencies	--	<b>P</b>
Part 15.203	Antenna requirements	ANSI C63.10	<b>P</b>
Part 15.207	Conducted emissions	ANSI C63.10	<b>N/A (+)</b>
Part 15.209	Radiated emissions and spurious emission	ANSI C63.10	<b>P</b>
Part 15.247	20 dB Bandwidth	ANSI C63.10	<b>P</b>
Part 15.247	Channel Separation	ANSI C63.10	<b>P</b>
Part 15.247	Number of Hopping Channel	ANSI C63.10	<b>P</b>
Part 15.247	Time of occupancy	ANSI C63.10	<b>P</b>
Part 15.247	Band edge	ANSI C63.10	<b>P</b>
Part 15.209 and 15.247	Peak Output Power	ANSI C63.10	<b>P</b>

(+) Devices which only employ battery power. See FCC Part 15.207 (c)



<b>Normative references</b>	
<b>Reference no.</b>	<b>Description</b>
FCC Rules and Regulation Title 47 part 15:2019	--
KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices operating under section 15.247 of the FCC rules
ANSI C63.4:2014	American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz
ANSI C63.10:2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

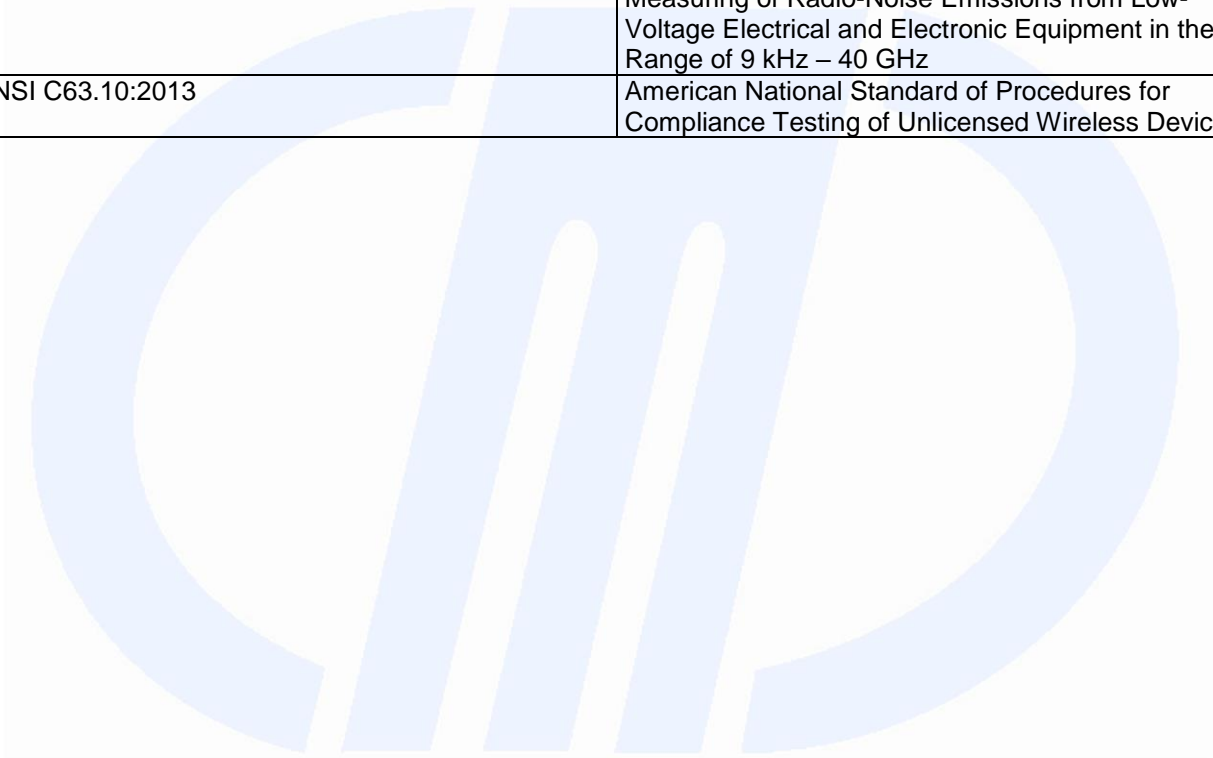





## 8 Test conditions

### 8.1 General

Environmental reference conditions.....:	The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment.		
	The climatic conditions during the tests were within the following limits:		
	<b>Temperature</b>	<b>Humidity</b>	<b>Atmospheric pressure</b>
	15 °C – 35 °C	30 % - 60 %	800 hPa – 1060 hPa
	If explicitly required in the basic standard or applied product standard the climatic values are recorded and documented separately in this test report.		
Measurement uncertainties .....	Attachment 1		



## 9 Test results

### 9.1 Antenna requirements

Tested by .....	M. Segalla	
Test date .....	15.03.2021	
Reference standards .....	FCC Rules and Regulation; Titles 47 Part. 15.203 and 15.204	
Test specification .....	<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded</p>	
Antenna type.....	<input checked="" type="checkbox"/>	Integral antenna
	<input type="checkbox"/>	External antenna
	<input type="checkbox"/>	Dedicated antenna
Antenna gain.....	≤ 2 dBi	
External R.F. power amplifier .....	Not Present	



## 9.2 Emissions in restricted frequency bands and in unrestricted frequency bands

Tested by .....	M. Segalla	
Test date .....	15.03.2021	
Test location (stand) .....	Semi-anechoic chamber (CMC A070)	
Reference standards .....	FCC Rules and Regulation; Titles 47 Part. 15.209 ANSI C63.10 cl. 6.3, 6.4, 6.5 and 6.6	
Test set-up description .....	<input checked="" type="checkbox"/>	Table top equipment set-up (80 cm above the reference ground plane)
	<input type="checkbox"/>	Floor standing equipment set-up (insulating material up to 12 mm thick)
	<input type="checkbox"/>	False floor installation equipment set-up (insulating material up to 34 cm above the reference ground plane)
Supplementary test set-up description .....	--	
Test method applied .....	SAC with measurement distance [m]: 10 m at frequencies ≤ 1 GHz 3 m at frequencies > 1 GHz	
Supplementary information .....	--	

### Acceptance limits

<b>Acceptance limits for emissions in restricted frequency bands (<math>f &lt; 1000</math> MHz)</b>		
Frequency range (MHz)	Test distance (m)	Limits [dB( $\mu$ V/m)]
0,009 to 0,490	300	48,5 to 13,8
0,490 to 1,705	30	33,8 to 22,9
1,705 to 30	30	29,5
30 to 88	3	40
88 to 216	3	43,5
216 to 960	3	46,0
960 to 1000	3	54

**Remarks:** The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz and 110–490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector. The results have been extrapolated to the specified distance using an extrapolation factor

<b>Acceptance limits for emissions in restricted frequency bands (<math>f \geq 1000</math> MHz)</b>			
Frequency (MHz)	Test distance (m)	AV limits [dB( $\mu$ V/m)]	Peak limits [dB( $\mu$ V/m)]
> 1000	3	54	74




The restricted frequency bands are listed in the following table

MHz	MHz	MHz	GHz
0,090 – 0,110	16,42 – 16,423	399,9 – 410	4,5 – 5,15
0,495 – 0,505	16,69475 – 16,69525	608 – 614	5,35 – 5,46
2,1735 – 2,1905	16,80425 – 16,80475	960 – 1240	7,25 – 7,75
4,125 – 4,128	25,5 – 25,67	1300 – 1427	8,025 – 8,5
4,17725 – 4,17775	37,5 – 38,25	1435 – 1626,5	9,0 – 9,2
4,20725 – 4,20775	73 – 74,6	1645,5 – 1646,5	9,3 – 9,5
6,215 – 6,218	74,8 – 75,2	1660 – 1710	10,6 – 12,7
6,26775 – 6,26825	108 – 121,94	1718,8 – 1722,2	13,25 – 13,4
6,31175 – 6,31225	123 – 138	2200 – 2300	14,47 – 14,5
8,291 – 8,294	149,9 – 150,05	2310 – 2390	15,35 – 16,2
8,362 – 8,366	156,52475 – 156,52525	2483,5 – 2500	17,7 – 21,4
8,37625 – 8,38675	156,7 – 156,9	2690 – 2900	22,01 – 23,12
8,41425 – 8,41475	162,0125 – 167,17	3260 – 3267	23,6 – 24,0
12,29 – 12,293	167,72 – 173,2	3332 – 3339	31,2 – 31,8
12,51975 – 12,52025	240 – 285	3345,8 – 3358	36,43 – 36,5
12,57675 – 12,57725	322 – 335,4	3600 – 4400	Above 38,6
13,36 – 13,41			

**Acceptance limits for emissions in non-restricted frequency bands**


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

## Test setup

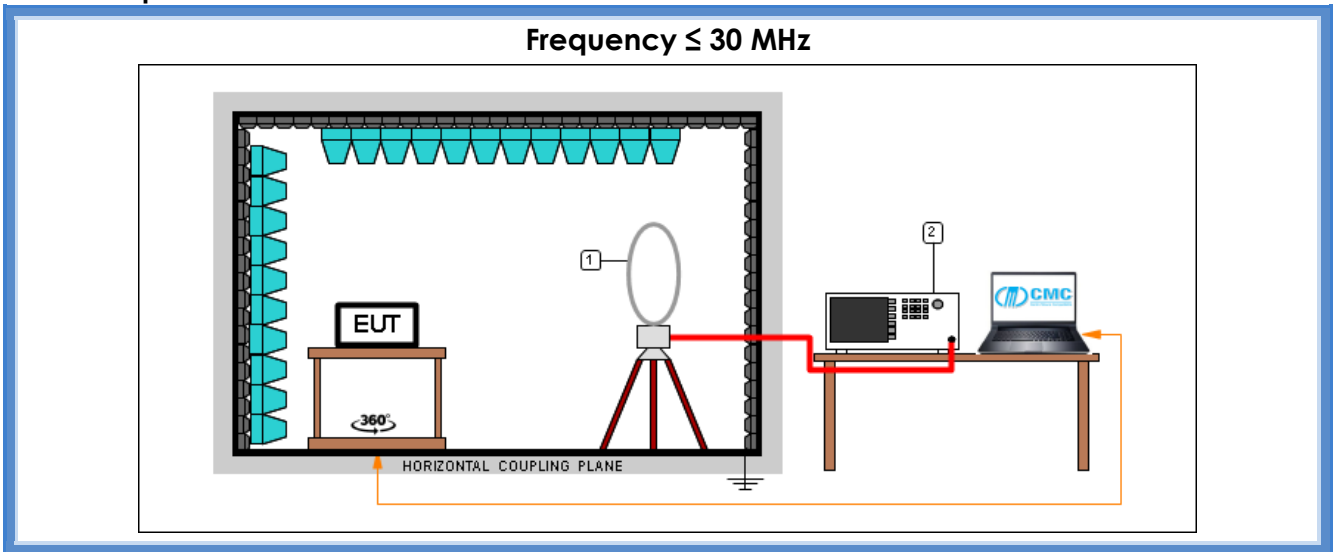

*Test setup PE004\_01*

Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S353	Rohde & Schwarz	ESW26	EMI Test Receiver 1 Hz - 26.5 GHz
1	CMC S127	Schaffner	HLA6120	Loop Antenna 9kHz - 30MHz

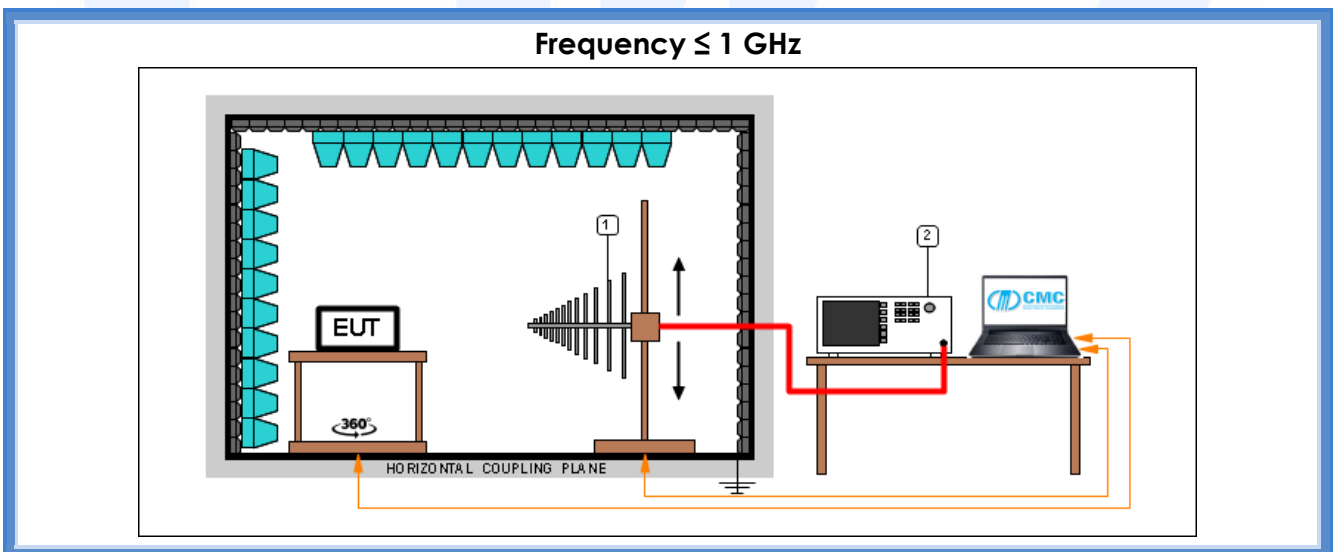


*Test setup PE004\_02*

Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S353	Rohde & Schwarz	ESW26	EMI Test Receiver 1 Hz - 26.5 GHz
1	CMC S271	Schwarzbeck	BBA 9106 + VHBB 9124	Broadband Antenna

*Test setup PE004\_03*

Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S353	Rohde & Schwarz	ESW26	EMI Test Receiver 1 Hz - 26.5 GHz
1	CMC S287	Schwarzbeck	VUSLP 9111B	Broadband Antenna

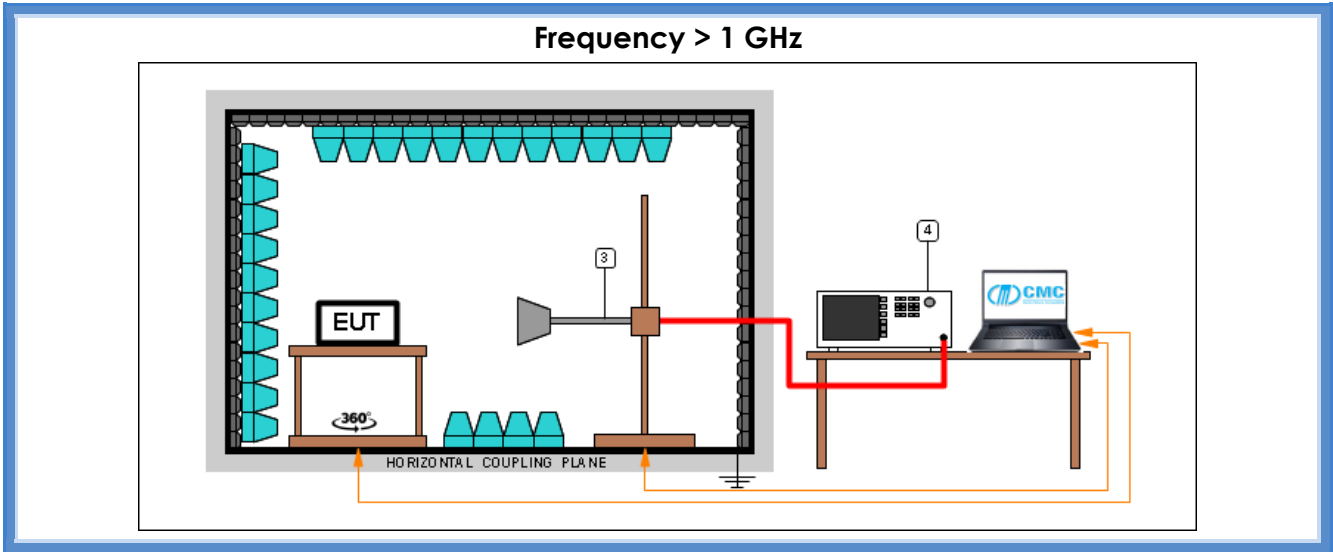

*Test setup PE004\_04*

Nr.	Id. Number	Manufacturer	Model	Description
4	CMC S353	Rohde & Schwarz	ESW26	EMI Test Receiver 1 Hz - 26.5 GHz
3	CMC S108	Emco	3115	Waveguide antenna

*Test setup PE004\_05*

Nr.	Id. Number	Manufacturer	Model	Description
4	CMC S353	Rohde & Schwarz	ESW26	EMI Test Receiver 1 Hz - 26.5 GHz
3	CMC S290	Schwarzbeck	BBHA 9170	Horn Antenna (15-40 GHz)

CMC Centro Misure Compatibilità S.r.l.





## Result

Transmission channel (MHz)	Polarization	Frequency Range (MHz)	Graphs	Result
915,05	V	1000 – 10000	G21036301	P
915,05	H	1000 – 10000	G21036302	P
921,40	H	1000 – 10000	G21036303	P
921,40	V	1000 – 10000	G21036304	P
927,80	V	1000 – 10000	G21036305	P
927,80	H	1000 – 10000	G21036306	P
927,80	H	300 – 1000	G21036313	P
927,80	V	300 – 1000	G21036314	P
921,40	V	300 – 1000	G21036315	P
921,40	H	300 – 1000	G21036316	P
915,05	H	300 – 1000	G21036317	P
915,05	V	300 – 1000	G21036318	P
Worst case	V	30 – 300	G21036319	P
Worst case	H	30 – 300	G21036320	P
Worst case	Loop	0,009 – 30	G21036321	P

**Remarks:** EUT was tested in 3 orthogonal planes, graphs are related to the highest detected levels. Measurements at frequencies lower than 30 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor  $40\log(\text{test distance}/10)$  based on the measuring distance provided by the standard. Measurements at frequencies higher than 30 MHz and lower than 1000 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor  $20\log(\text{test distance}/10)$  based on the measuring distance provided by the standard. Peaks above the limits are caused by the nominal transmitting frequencies


### Graphs Legend

PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +  
AV: Average; AV [1s] (average at 1 second) values are marked with a X



## Graphs

Sega11a 21036201

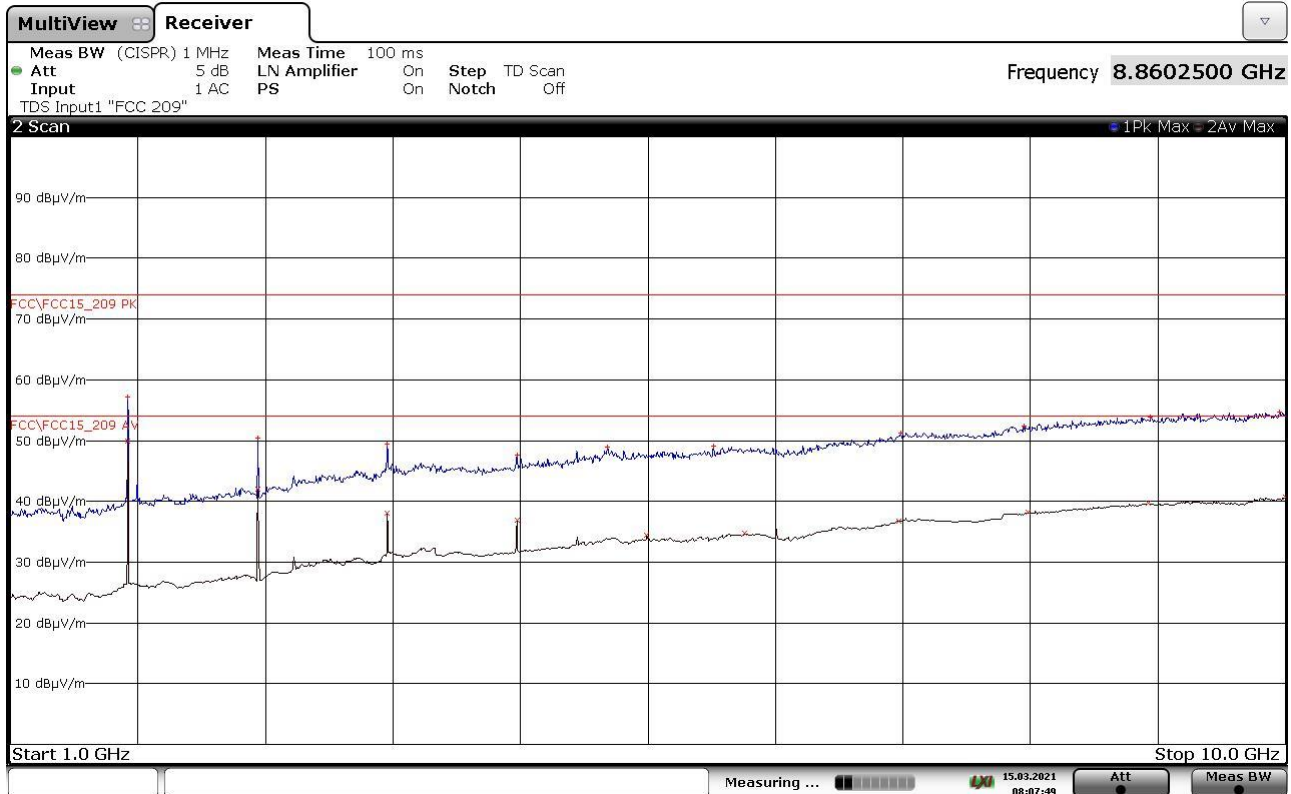


FINAL RESULT TABLE

MAX PEAK			AVERAGE		
Freq Hz	Lev dBuV/m	Margin dB	Freq Hz	Lev dBuV/m	Margin dB
1830000000	+57,14	-16,84	1830000000	+49,98	-4,00
2745250000	+50,36	-23,62	2745250000	+42,03	-11,95
3660250000	+49,46	-24,52	3660250000	+38,10	-15,88
4575250000	+47,68	-26,30	4575250000	+36,87	-17,11
5216000000	+48,87	-25,11	5490250000	+34,51	-19,47
5961750000	+49,13	-24,85	6183250000	+34,73	-19,25
7283500000	+51,23	-22,75	7271250000	+36,72	-17,26
8151250000	+52,40	-21,58	8179750000	+38,14	-15,84
9048750000	+53,87	-20,11	9029000000	+39,66	-14,32
9961000000	+54,77	-19,21	9999750000	+40,72	-13,26

21036201\_2



Segalla 21036202

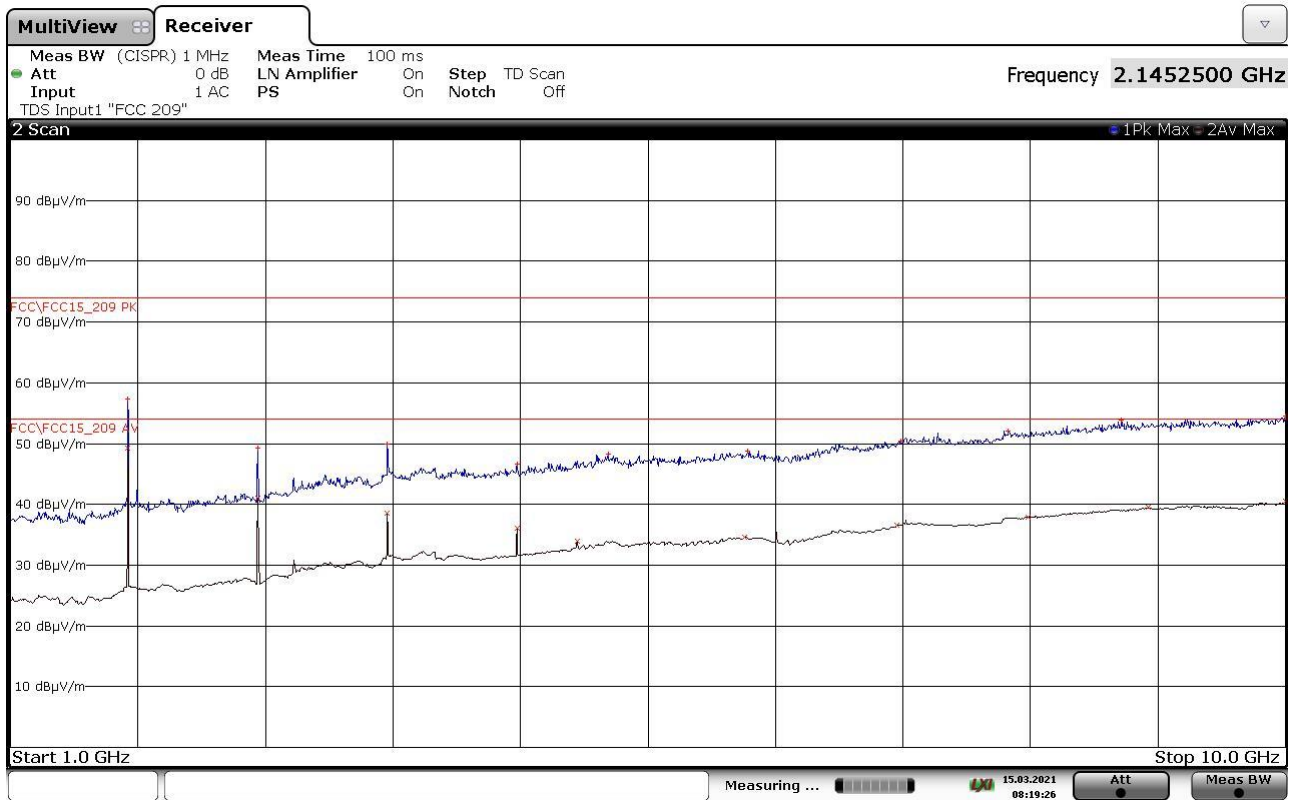

FINAL RESULT TABLE


MAX PEAK			AVERAGE		
Freq Hz	Lev dBuV/m	Margin dB	Freq Hz	Lev dBuV/m	Margin dB
1830000000	+57,29	-16,69	1830000000	+49,25	-4,73
2745250000	+49,18	-24,80	2745250000	+40,96	-13,02
3660250000	+49,94	-24,04	3660250000	+38,51	-15,47
4575250000	+46,65	-27,33	4575250000	+36,08	-17,90
5218750000	+48,25	-25,73	4998500000	+33,96	-20,02
6204750000	+48,81	-25,17	6183000000	+34,64	-19,34
7283000000	+50,42	-23,56	7258500000	+36,58	-17,40
8039500000	+52,03	-21,95	8180000000	+37,93	-16,05
8842250000	+53,79	-20,19	9028500000	+39,47	-14,51
10000000000	+54,51	-19,47	10000000000	+40,54	-13,44

21036202\_2

CMC Centro Misure Compatibilità S.r.l.



Segalla 21036203

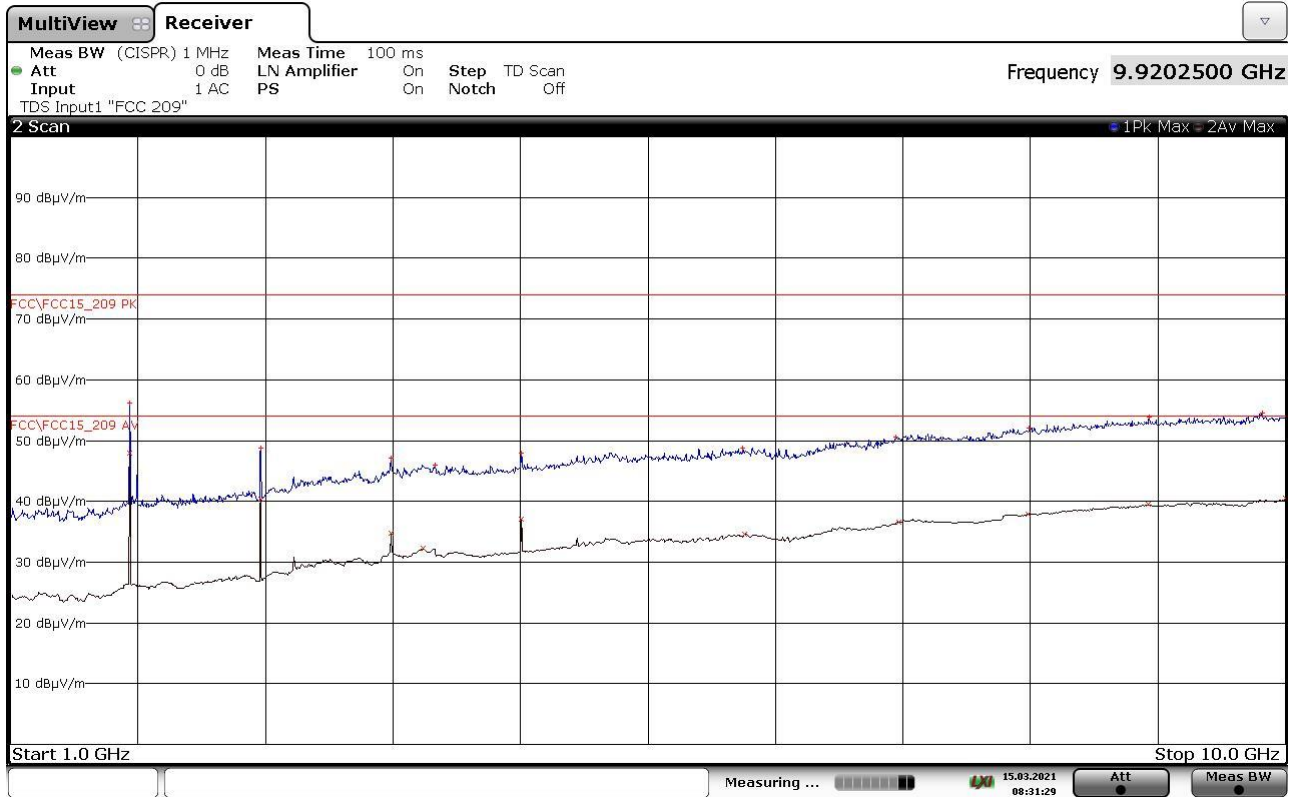

### FINAL RESULT TABLE


MAX PEAK			AVERAGE		
Freq Hz	Lev dBuV/m	Margin dB	Freq Hz	Lev dBuV/m	Margin dB
1842750000	+56,20	-17,78	1842750000	+47,87	-6,11
2764250000	+48,83	-25,15	2764250000	+40,39	-13,59
3685750000	+47,09	-26,89	3685500000	+34,78	-19,20
3999000000	+46,02	-27,96	3911000000	+32,25	-21,73
4607000000	+47,92	-26,06	4607000000	+37,08	-16,90
6169000000	+48,82	-25,16	6183000000	+34,63	-19,35
7248250000	+50,65	-23,33	7270250000	+36,55	-17,43
8192250000	+51,99	-21,99	8180000000	+37,93	-16,05
9036250000	+53,82	-20,16	9029000000	+39,46	-14,52
9834000000	+54,50	-19,48	10000000000	+40,52	-13,46

21036203\_2

CMC Centro Misure Compatibilità S.r.l.



Segalla 21036204

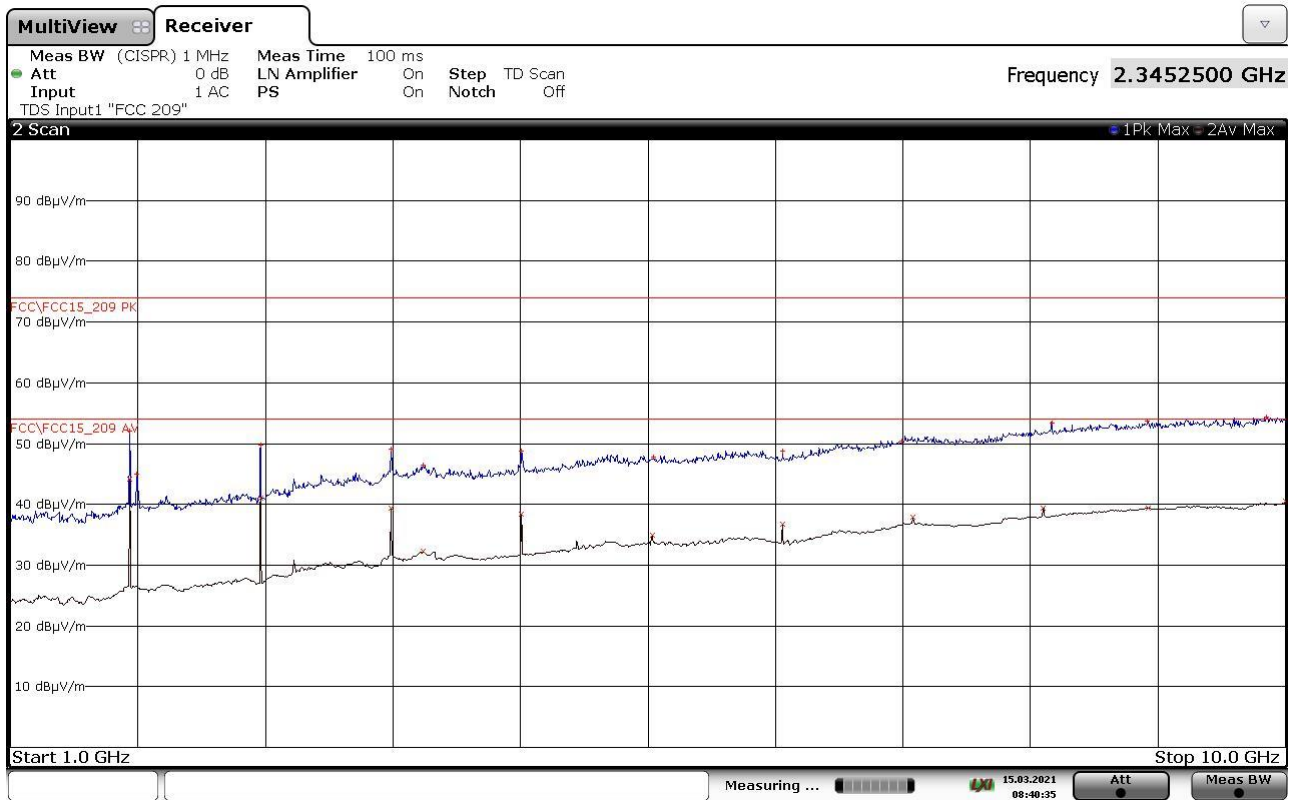

FINAL RESULT TABLE

MAX PEAK			AVERAGE		
Freq Hz	Lev dBuV/m	Margin dB	Freq Hz	Lev dBuV/m	Margin dB
1842750000	+52,04	-21,94	1842750000	+44,07	-9,91
1893500000	+44,94	-29,04	2764250000	+41,04	-12,94
2764250000	+49,81	-24,17	3685500000	+39,32	-14,66
3685500000	+49,05	-24,93	3910500000	+32,24	-21,74
3912250000	+46,53	-27,45	4607000000	+38,32	-15,66
4607000000	+48,82	-25,16	5528500000	+34,93	-19,05
5538500000	+47,70	-26,28	6449750000	+36,73	-17,25
6449750000	+48,76	-25,22	7371250000	+37,96	-16,02
7292250000	+50,39	-23,59	8292500000	+39,44	-14,54
8349500000	+53,34	-20,64	9029000000	+39,44	-14,54
9025750000	+53,73	-20,25	9999750000	+40,51	-13,47
9868500000	+54,36	-19,62			


21036204\_2

CMC Centro Misure Compatibilità S.r.l.





Segalla 21036205

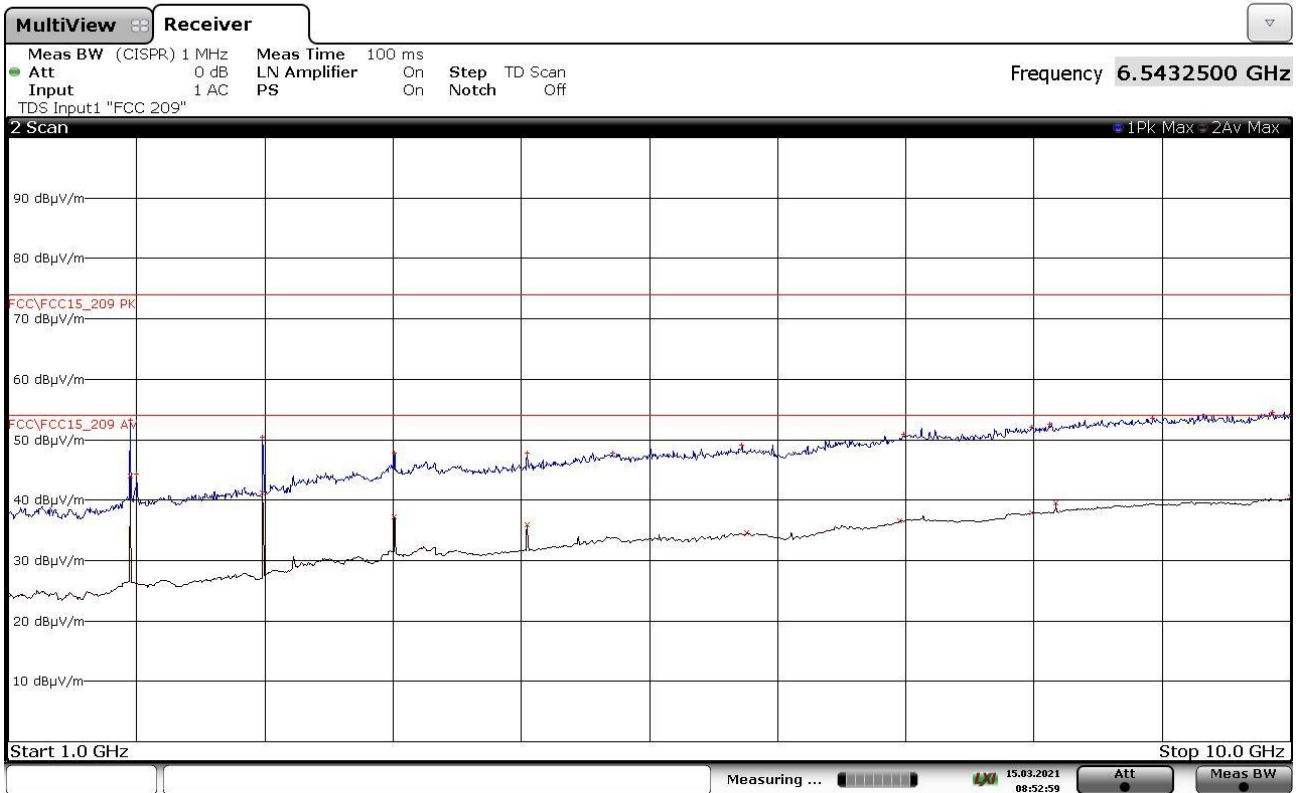

FINAL RESULT TABLE


MAX PEAK			AVERAGE		
Freq Hz	Lev dBuV/m	Margin dB	Freq Hz	Lev dBuV/m	Margin dB
1855500000	+53,26	-20,72	1855500000	+43,92	-10,06
1897500000	+44,33	-29,65	2783500000	+41,23	-12,75
2783500000	+50,41	-23,57	3711250000	+37,27	-16,71
3711250000	+47,75	-26,23	4639000000	+35,96	-18,02
4639000000	+47,70	-26,28	6183250000	+34,58	-19,40
5243000000	+47,76	-26,22	7259750000	+36,53	-17,45
6150250000	+49,08	-24,90	8180000000	+37,91	-16,07
7286000000	+50,93	-23,05	8350250000	+39,54	-14,44
8180000000	+51,99	-21,99	10000000000	+40,50	-13,48
8310250000	+52,57	-21,41			
9033750000	+53,60	-20,38			
9870000000	+54,51	-19,47			

21036205\_2





Segalla 21036206

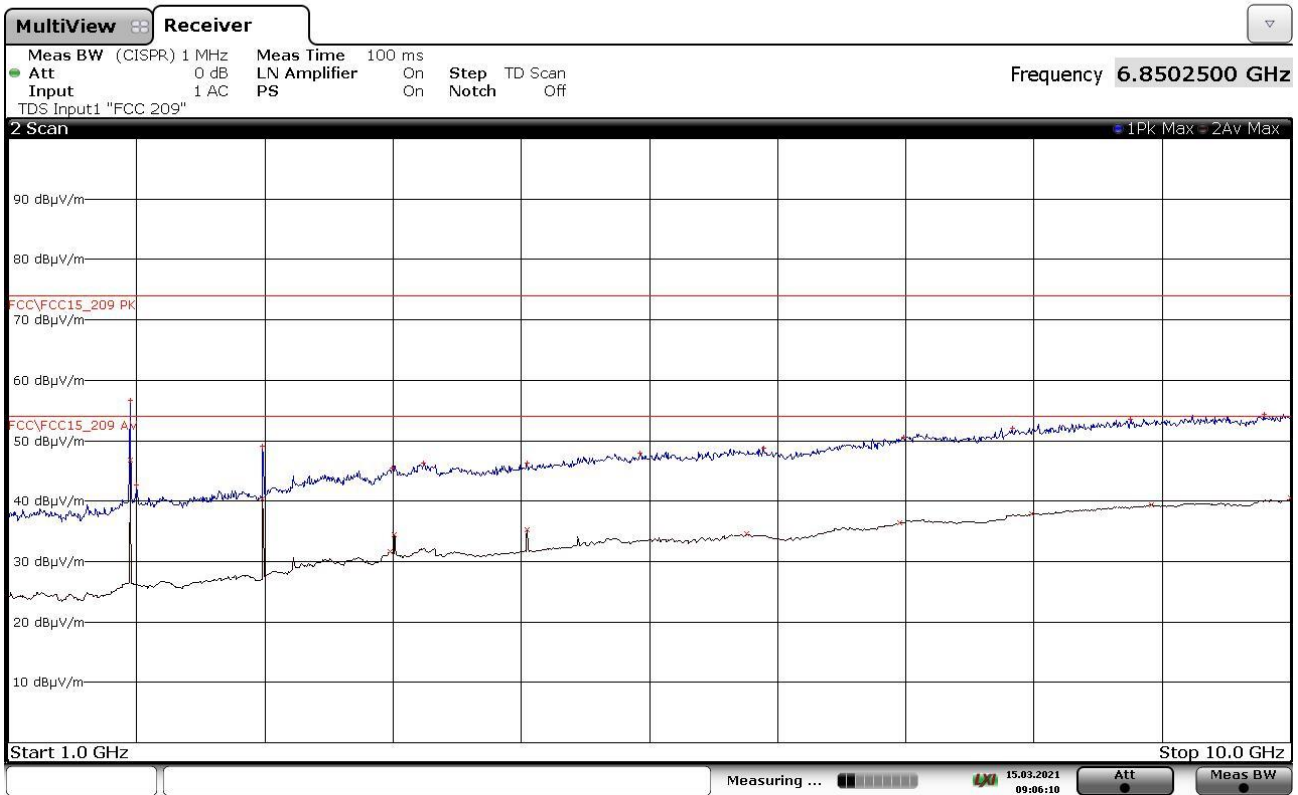

FINAL RESULT TABLE


MAX PEAK			AVERAGE		
Freq Hz	Lev dBuV/m	Margin dB	Freq Hz	Lev dBuV/m	Margin dB
1855500000	+56,60	-17,38	1855500000	+46,72	-7,26
1897500000	+42,67	-31,31	2783500000	+40,39	-13,59
2783500000	+49,17	-24,81	3680750000	+31,62	-22,36
3694250000	+45,46	-28,52	3711250000	+34,38	-19,60
3913000000	+46,36	-27,62	4639000000	+35,28	-18,70
4639000000	+46,36	-27,62	6183750000	+34,55	-19,43
5434000000	+47,94	-26,04	7259750000	+36,49	-17,49
6299250000	+48,75	-25,23	8179500000	+37,86	-16,12
7283750000	+50,65	-23,33	9027500000	+39,40	-14,58
8046000000	+52,00	-21,98	9999750000	+40,46	-13,52
8879250000	+53,53	-20,45			
9815750000	+54,32	-19,66			

21036206\_2

CMC Centro Misure Compatibilità S.r.l.



Segalla 21036213

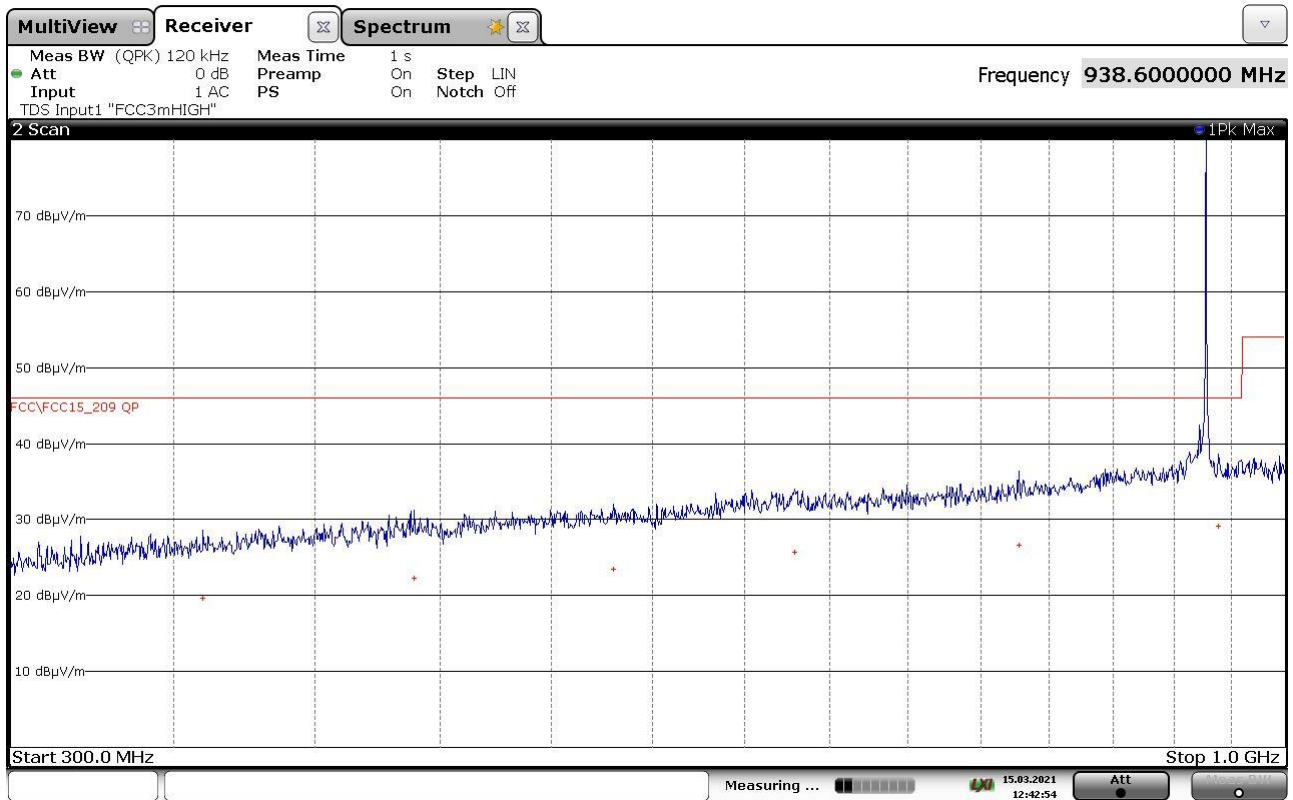

FINAL RESULT TABLE


QUASI PEAK		
Freq Hz	Lev dBuV/m	Margin dB
359640000	+19,70	-26,32
439280000	+22,21	-23,81
530360000	+23,47	-22,55
629120000	+25,68	-20,34
777480000	+26,56	-19,46
938600000	+29,19	-16,83

21036213\_2

CMC Centro Misure Compatibilità S.r.l.



Segalla 21036214

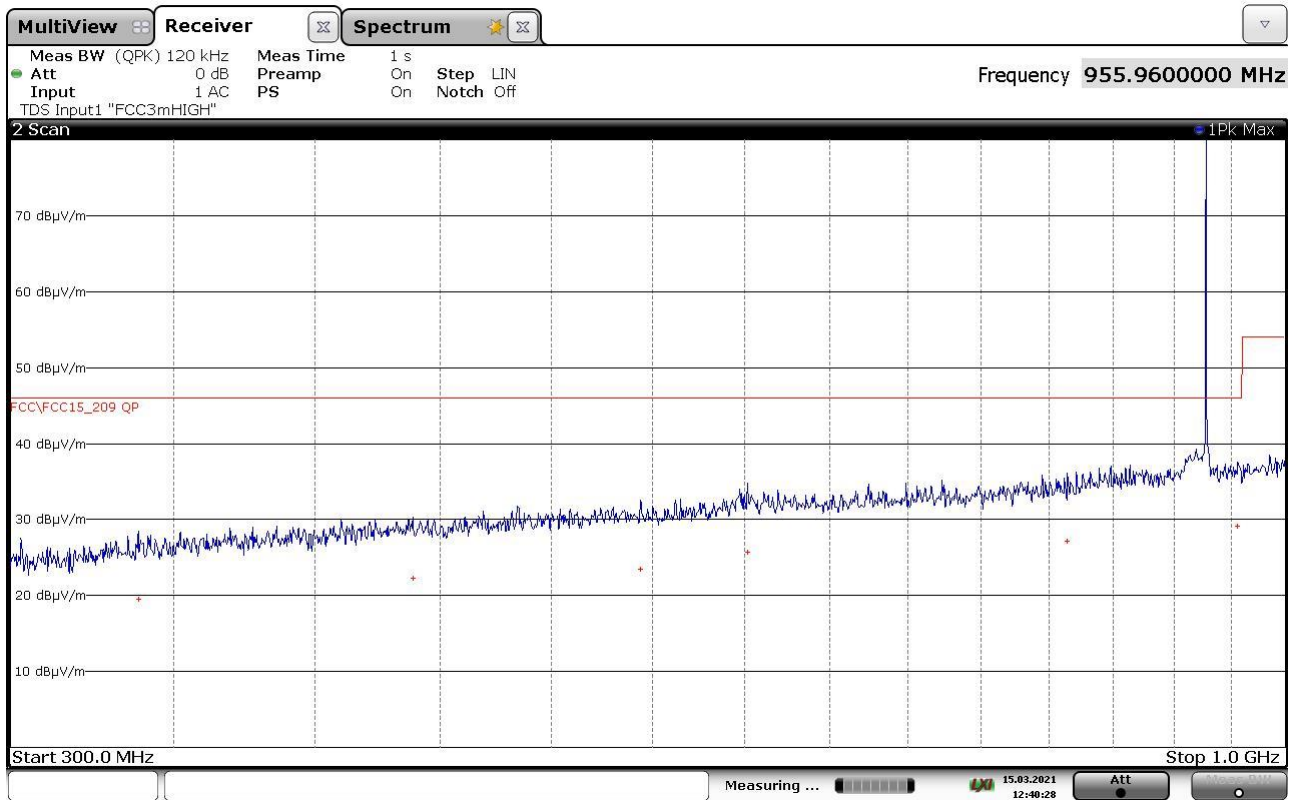

FINAL RESULT TABLE


QUASI PEAK		
Freq Hz	Lev dBuV/m	Margin dB
338480000	+19,52	-26,50
438680000	+22,23	-23,79
544040000	+23,44	-22,58
601760000	+25,71	-20,31
813840000	+27,17	-18,85
955960000	+29,11	-16,91

21036214\_2

CMC Centro Misure Compatibilità S.r.l.



Segalla 21036215

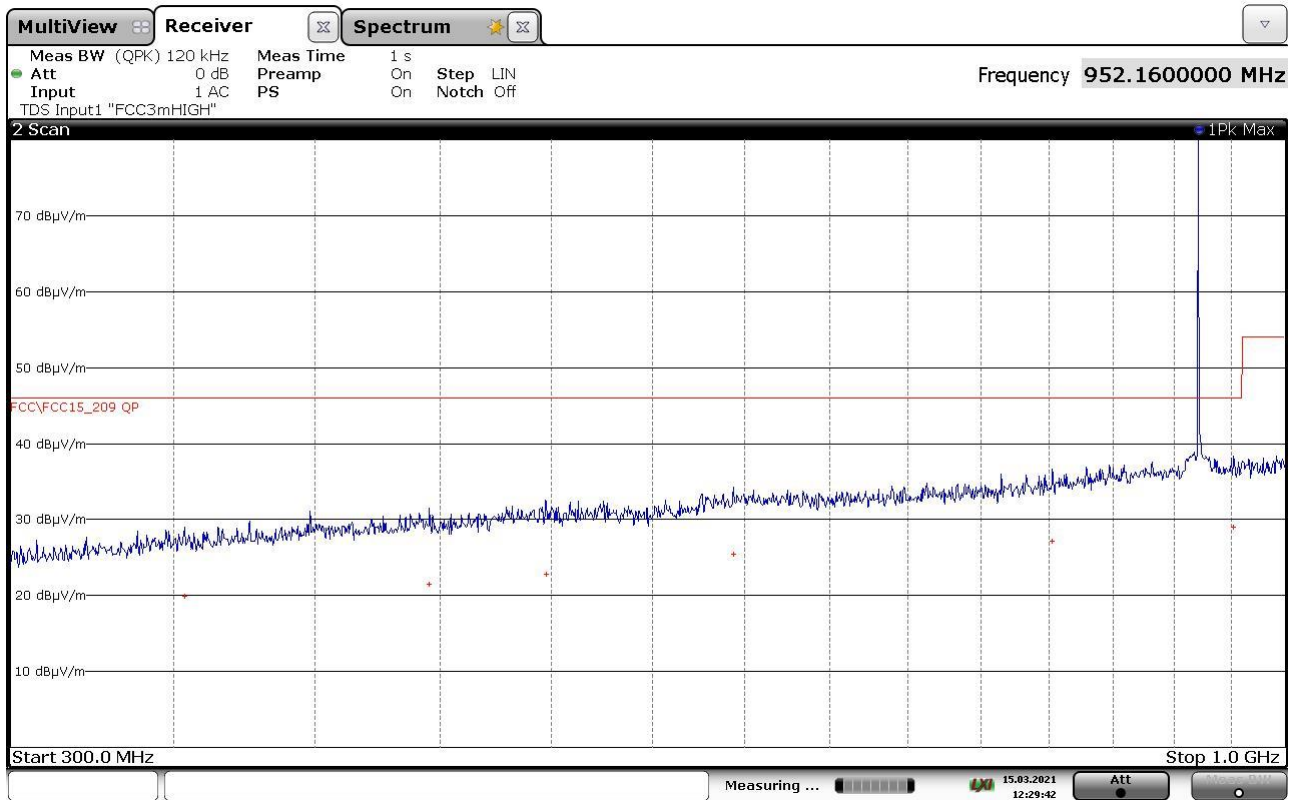

FINAL RESULT TABLE


QUASI PEAK		
Freq Hz	Lev dBuV/m	Margin dB
353680000	+19,85	-26,17
445480000	+21,51	-24,51
497360000	+22,84	-23,18
593720000	+25,47	-20,55
802520000	+27,20	-18,82
952160000	+28,98	-17,04

21036215\_2

CMC Centro Misure Compatibilità S.r.l.



Segalla 21036216

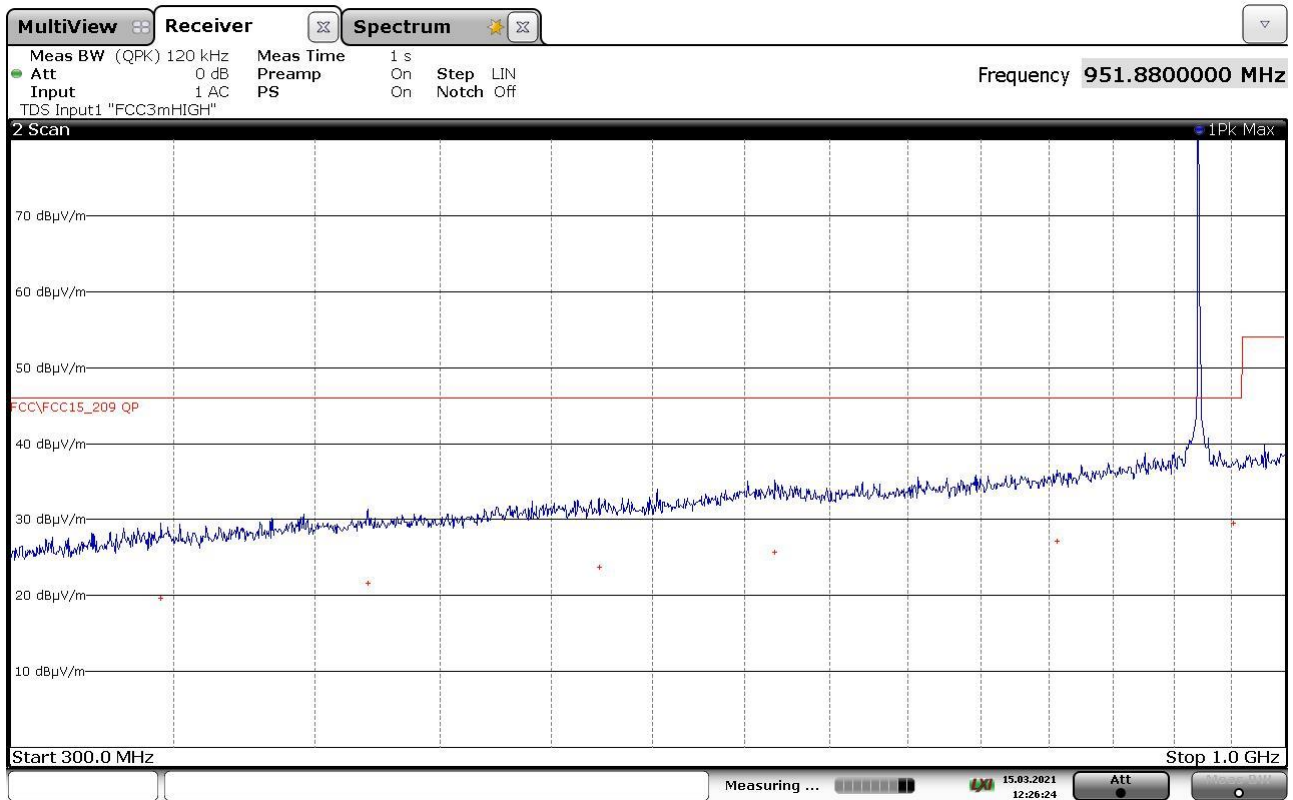

FINAL RESULT TABLE

QUASI PEAK		
Freq Hz	Lev dBuV/m	Margin dB
345720000	+19,63	-26,39
420320000	+21,68	-24,34
522920000	+23,78	-22,24
617440000	+25,64	-20,38
805960000	+27,15	-18,87
951880000	+29,46	-16,56


21036216\_2

CMC Centro Misure Compatibilità S.r.l.





Segalla 21036217

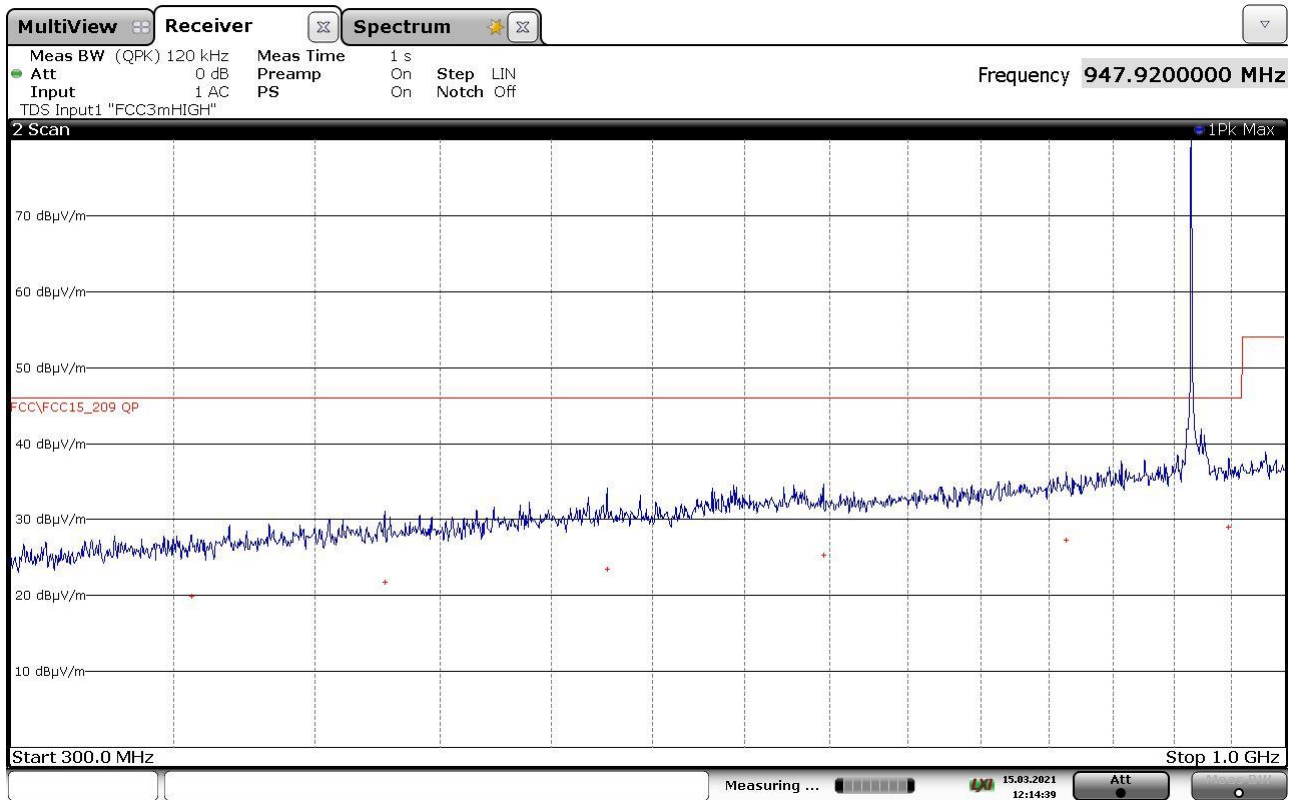

FINAL RESULT TABLE

QUASI PEAK		
Freq Hz	Lev dBuV/m	Margin dB
356040000	+19,95	-26,07
427200000	+21,81	-24,21
527000000	+23,48	-22,54
646440000	+25,37	-20,65
813040000	+27,27	-18,75
947920000	+29,04	-16,98


21036217\_2

CMC Centro Misure Compatibilità S.r.l.





Segalla 21036218

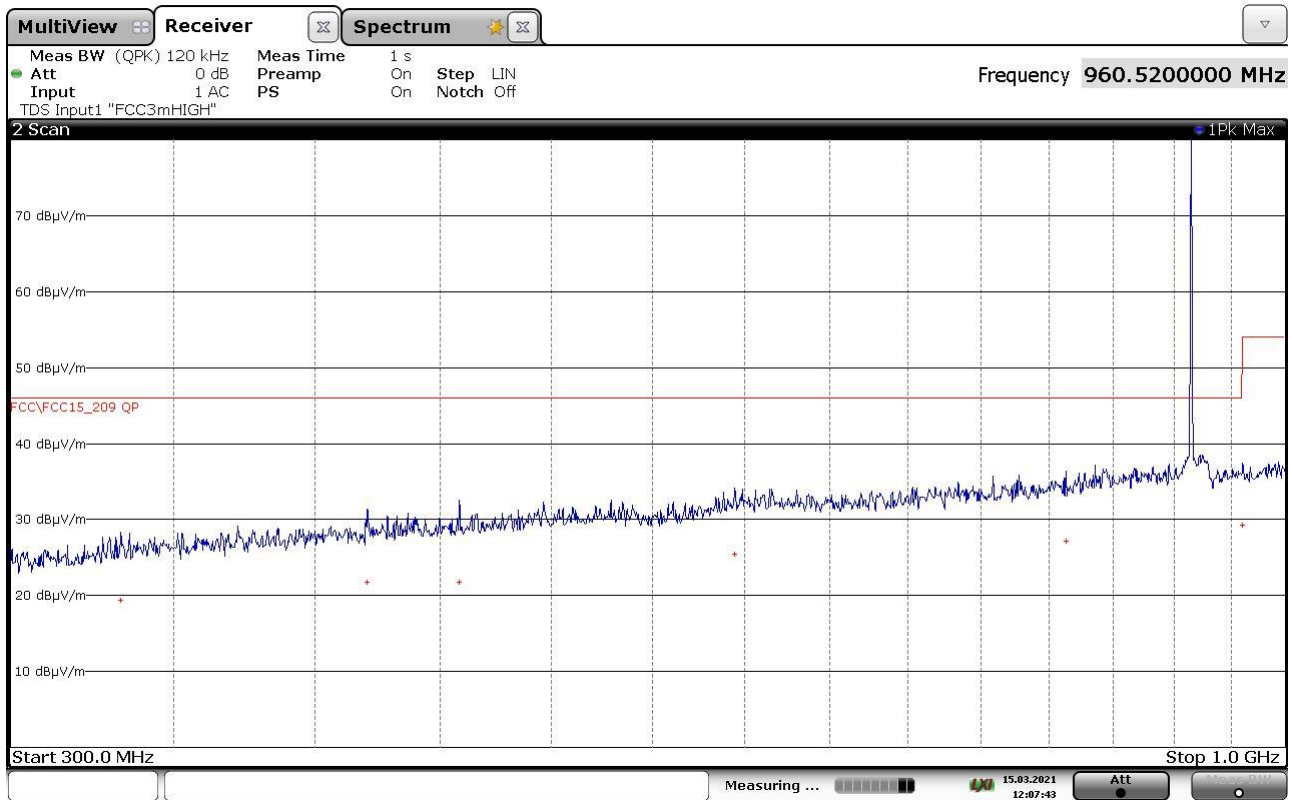

FINAL RESULT TABLE

QUASI PEAK		
Freq Hz	Lev dBuV/m	Margin dB
332960000	+19,39	-26,63
420280000	+21,75	-24,27
458440000	+21,80	-24,22
594560000	+25,49	-20,53
812800000	+27,21	-18,81
960520000	+29,27	-24,71

21036218\_2

CMC Centro Misure Compatibilità S.r.l.