





TEST REPORT nr. R18055201	
Federal Communication Commission (FCC)	
Test item	
Description	TRANSMITTER UNIT
Trademark	AUTEC
Model/Type	Model LKN Type LA1JH
FCC ID	OQA-LKNLA1JH
Test Specification	
Standard	FCC Rules & Regulations, Title 47:2017 Part 15 paragraph(s): 203, 207, 209 and 247
Client's name	AUTEC S.r.l.
Address	Via Pomaroli, 65 – 36030 Caldogno (VI) – ITALY
Manufacturer's name :	Same as client
Address	--
Report	
Tested by	G. Gandini 
Approved by	R. Beghetto – Laboratory Manager 
Date of issue	18.09.18
Contents	96 pages

This test report shall not be reproduced except in full without the written approval of CMC.
 The test results presented in this report relate only to the item tested.

CMC Centro Misure Compatibilità S.r.l.



Index

1. SUMMARY	3
2. DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	4
2.1 TEST SITE	4
3. TESTING AND SAMPLING	4
4. OPERATIVE CONDITIONS	4
5. PHOTOGRAPH(S) OF EUT	5
5.1 PHOTOGRAPH(S) OF EUT	5
6. EQUIPMENT LIST	8
7. MEASUREMENT UNCERTAINTY	9
8. REFERENCE DOCUMENTS	11
9. DEVIATION FROM TEST SPECIFICATION	12
10. TEST CASE VERDICTS	12
11. RESULTS	13
11.1 ANTENNA REQUIREMENTS	14
11.2 RADIATED EMISSIONS.....	15
11.3 20 DB BANDWIDTH.....	56
11.4 CHANNEL SEPARATION	61
11.5 NUMBER OF HOPPING CHANNELS	64
11.6 TIME OF OCCUPANCY	69
11.7 BAND EDGE.....	73
11.8 PEAK OUTPUT POWER	87
11.9 SPURIOUS EMISSION	92



1. Summary

Standard:

FCC Rules & Regulations, Title 47:2017
Part 15 paragraph(s): 203, 204, 205, 207, 209 and 247

Test specifications	Environmental Phenomena	Tests sequence	Result
Part 15.247 (a) (1)	Pseudo randomly ordered list of hopping frequencies	1	Complies
Part 15.203	Antenna requirements	2	Complies
Part 15.207	Conducted emissions	--	N.A. (+)
Part 15.209	Radiated emissions	3	Complies
Part 15.247	20 dB Bandwidth	4	Complies
Part 15.247	Channel Separation	5	Complies
Part 15.247	Number of Hopping Channel	6	Complies
Part 15.247	Time of occupancy	7	Complies
Part 15.247	Band edge	8	Complies
Part 15.209 and 15.247	Peak Output Power	9	Complies
Part 15.209	Spurious emission	10	Complies

(+) Devices which only employ battery power. See FCC Part 15.207 (c)

The Test Report was given to the Client representatives for necessary documentation of ratification of the tested equipment and it is valid for the FCC certification



2. Description of Equipment under test (EUT)

Power supply : 3,7 Vdc from battery
Type of equipment : Transmitter Unit
 Receiver Unit
Type of station : Fixed station
 Portable station
 Mobile station
Frequency band..... : 902 – 928 MHz
Nominal frequencies : F_L: 915,05 MHz F_M: 921,40 MHz F_H: 927,80 MHz
Pseudo randomly ordered list of hopping frequencies : See document lkn_la1jh_operational_description-rev0

2.1 Test Site

Company : CMC Centro Misure Compatibilità S.r.l.
Address : Via della Fisica, 20
36016 Thiene (VI) – ITALY
Test site facility's FCC registration number : 182474

3. Testing and sampling

Date of receipt of test item : 06.03.18
Testing start date : 06.03.18
Testing end date : 26.06.18
Samples tested nr..... : 1
Sampling procedure. : Equipment used for testing was picked up by the manufacturer, at the end of the production process with random criterion
Internal identification : adhesive label with the product number P180282

4. Operative conditions




EUT exercising : EUT in continuous transmission at maximum power




5. Photograph(s) of EUT

5.1 Photograph(s) of EUT



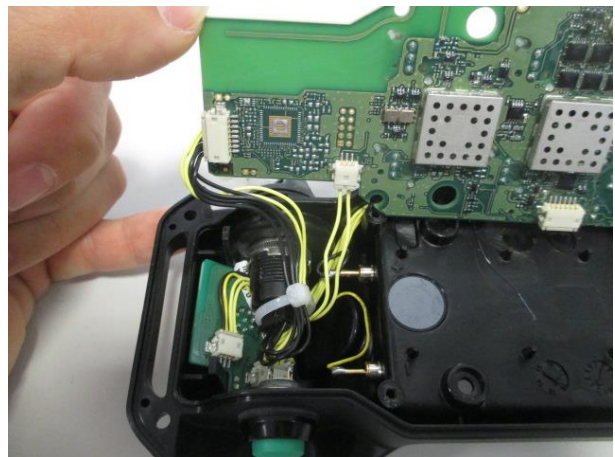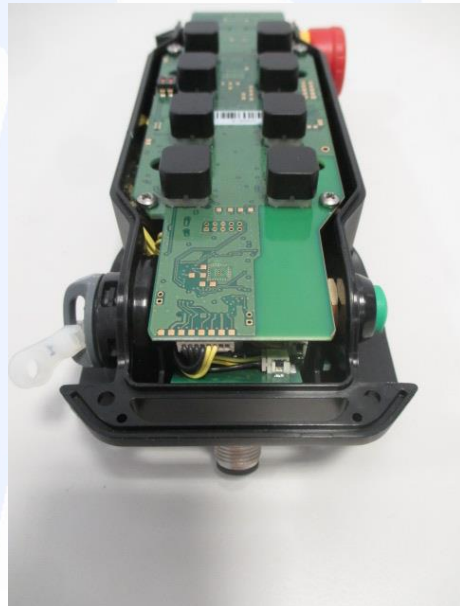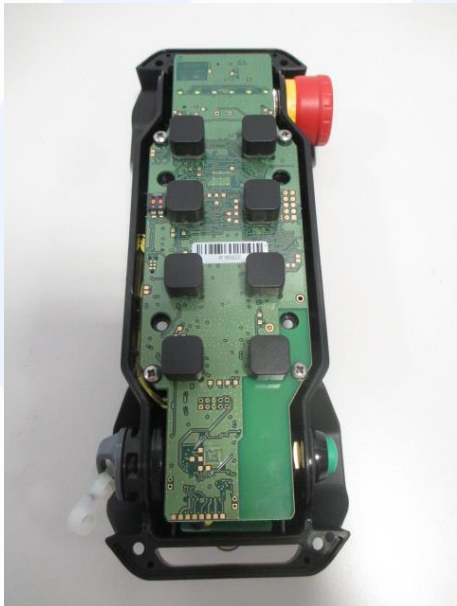

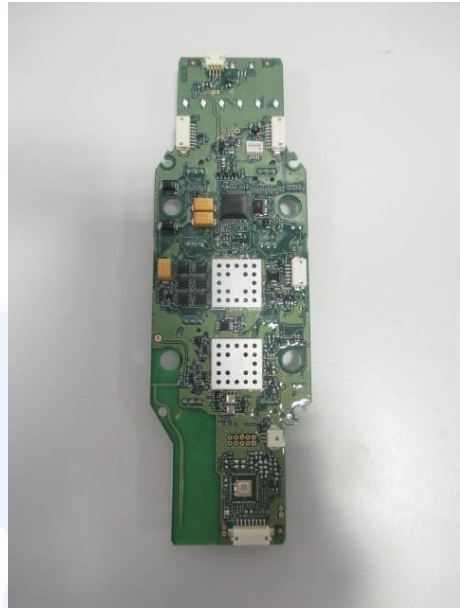



6. Equipment list

<i>Id. number</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Description</i>	<i>Serial number</i>	<i>Last calibration</i>	<i>Due date calibration</i>
CMC S010	Rohde & Schwarz	ESH3-Z2	Impulses Limiting Device	---	January '18	January '19
CMC S108	EMCO	3115	Horn Antenna	9811-5622	June '16	June '19
CMC S127	Schaffner	HLA6120	Loop Antenna	1191	November '13	November '18
CMC S164	Rohde & Schwarz	ESU26	EMC interference receiver	100052	January '18	January '19
CMC S200	Schwarzbeck	NSLK 8128	V-LISN	8128-273	January '18	January '19
CMC S227	Rohde & Schwarz	ESR7	EMI Test Receiver 7GHz	101121	January '18	January '19
CMC S260	CMC	Wfr_N	Shielded Cable	Wfr_ant10-1	November '17	November '18
CMC S261	CMC	Wfr_N	Shielded Cable	Wfr_ant20-1	November '17	November '18
CMC S262	CMC	Wfr_N_fix	Shielded Cable	Wfr_fix32-1	November '17	November '18
CMC S263	CMC	Wfr_N_fix	Shielded Cable	Wfr_fix31-1	November '17	November '18
CMC S264	CMC	Wfr_N	Shielded Cable	Wfr_ext03-1	November '17	November '18
CMC S271	Schwarzbeck	BBA 9106 + VHBB 9124	Biconical Antenna (30-300MHz)	831	June '16	June '19
CMC S287	Schwarzbeck	VUSLP 9111B	Log-periodic Antenna (200 MHz-3Ghz)	9111B-203	June '16	June '19
CMC S288	CMC	W_sma_white	Joint Shielded Cable	W_001	November '17	November '18



7. Measurement uncertainty

Test	Test Setup	Expanded uncertainty	Note
Conducted emission CISPR 16 LISN 50uH 0,009-0,0150MHz	PE001_01	3,4 dB	1
Conducted emission CISPR 16 LISN 50uH 0,150-30,0MHz	PE001_01	2,8 dB	1
Conducted emission CISPR 16 Voltage Probe 0,15-30MHz	PE001_02	2,6 dB	1
Conducted emission CISPR 16 Current Probe 0,15-30MHz	PE001_03	2,2 dB	1
Conducted emission CISPR 16 ISN 0,15-30MHz	PE001_04	4,5 dB	1
Clic CISPR 16 LISN 50uH 0,150-30,0MHz	PE001_05	3,1 dB	1
Disturbance Power 30-300 MHz	PE002_01	3,4 dB	1
Radiated Emission LAS 0,15-30MHz	PE003_01	1,5 dB	1
Radiated Emission CISPR 16 Loop Ant. 0,15-30MHz	PE004_01	3,8 dB	1
Radiated Emission CISPR 16 Bicon. Ant. 30-300MHz	PE004_02	3,3 dB	1
Radiated Emission CISPR 16 LogP. Ant. 300-1000MHz	PE004_03	3,1 dB	1
Radiated Emission CISPR 16 Horn Ant. 1-18GHz	PE004_04	3,6 dB	1
Human Exposure to electromagnetic fields	PE005_01	15,0 %	1
Harmonic current emissions test	PE006_01	10 mA + 1,6 %	1
Voltage fluctuation and flicker test	PE007_01	4,2 %	1
Radiated Immunity 80MHz-6GHz	PE102_XX	2,1 dB 0,82 V/m a 3V/m	1
Conducted Immunity 0,15-230MHz	PE105_XX	1,2 dB 0,44 V a 3V	1
AC Magnetic field	PE106_01	1,55 % 0,15 A/m a 10A/m	1
Pulse Magnetic field	PE107_01	6,24 % 18,7 A/m a 300A/m	1
Dumped Magnetic field	PE108_01	6,24 % 1,87 A/m a 30A/m	1
Common mode conducted immunity	PE112_01	2,20 % 0,22 V a 10V	1



Test	Test Setup	Expanded uncertainty	Note
Power/Spurious 9kHz-30MHz	PR001_01	3,8 dB	1
Power/Spurious ERP 30-1000MHz d=10m	PR001_02+03	4,3 dB	1
Misura della potenza EIRP 1-18GHz d=3m	PR001_04	4,3 dB	1
Misura della potenza EIRP 18-40GHz d=3m	PR001_05	5,5 dB	1
Frequency error	PR002_01+02	< 1x10 ⁻⁷	1
Timing zero span (1001pts.)	PR002_01+02	0,2 % SWT	1
Modulation bandwidth	PR002_01+02	< 1x10 ⁻⁷	1
Conducted RF power and spurious emission	PR002_01+02	1,2 dB	1
Adjacent channel power	PR002_01+02	1,2 dB	1
Blocking	PR002_01+02	1,2 dB	1

Test	Test Setup	Expanded uncertainty	Note
Electrostatic discharge immunity test	PE101_0X		2
Electrical fast transients / burst immunity test	PE103_0X		2
Surge immunity test	PE104_0X		2
Short interruption immunity test	PE109_01		2
Rev_18_01 date 30/01/2018			

Note 1:

The expanded uncertainty reported according to EN55016-4-2:2011 is based on a standard uncertainty multiplied by a coverage factor of K=2, providing a level of confidence of p = 95%

Note 2:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence, covering factor k = 2



8. Reference documents

Reference no.	Description
FCC Rules and Regulation Title 47 part 15:2017	--
ANSI C63.4:2014	American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz
ANSI C63.10:2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Internal Procedure PM001 rev. 3.0 (Quality Manual)	Measure Procedure
Internal procedure INC_M rev. 9.0 (Quality Manual)	Measurement uncertainty calculation



9. Deviation from test specification

None

10. Test case verdicts

Test case does not apply to the test object : N.A.

Test item does meet the requirement : Complies

Test item does not meet the requirement : Does not comply

Test not performed : N.E.







11. Results

In this clause tests results are reported.

Measurement uncertainty is in accordance with document CMC INC_M rev. 9.0.

Judgement of compliance:

Case 1	Case 2	Case 3	Case 4
			
<p>The sample complies with the requirement.</p> <p>The measurement results is within the specification limit when the measurement uncertainty is taken into account.</p>	<p>The sample complies with the requirement.</p> <p>It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty although the measurement result is below the limit.</p>	<p>The sample does not comply with the requirement.</p> <p>It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty also the measurement result is upper the limit.</p>	<p>The sample does not comply with the requirement.</p> <p>The measurement results is outside the specification limit when the measurement uncertainty is taken into account.</p>

In agreement with ILAC-G8: 03/2009 Guidelines on the Reporting of Compliance with Specification.



11.1 Antenna requirements

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.203 and 15.204
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
Laboratory

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

--
Measurement uncertainty: See clause 7 of this test report

Test specification

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31 (d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded

Environmental conditions

Temperature (°C)	Atmospheric pressure (kPa)	Relative humidity (%)
20	100	45

Result

Antenna Type	External R.F. power amplifier	Gain	Remarks	Results
Externa antenna	Not Present	0 dBi	--	Complies

Result: The requirements are met



11.2 Radiated emissions

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part. 15.209
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
Semi-anechoic chamber

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S108, CMC S127, CMC S164, CMC S271, CMC S287
Measurement uncertainty: See clause 7 of this test report

Test specification

Port: Enclosure
Frequency range: 0,009 MHz – 10000 MHz
Antenna polarization: Horizontal (H) – Vertical (V)
10 m for frequencies \leq 30 MHz
3 m for frequencies $>$ 30 MHz

Environmental conditions


Temperature (°C)	Atmospheric pressure (kPa)	Relative humidity (%)
22	100	45

Acceptance limits

Frequency range (MHz)	Test distance (m)	Limits [dB(μ V/m)]	
0,009 to 0,490	300	48,5 to 13,8	
0,490 to 1,705	30	33,8 to 22,9	
1,705 to 30	30	29,5	
30 to 88	3	40	
88 to 216	3	43,5	
216 to 960	3	46,0	
Above 960	3	53,9	
	Test distance (m)	Linear average detector [dB(μ V/m)]	Peak detector [dB(μ V/m)]
Above 1000	3	53,9	73,9

Remarks: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. The results have been extrapolated to the specified distance using an extrapolation factor

Setup

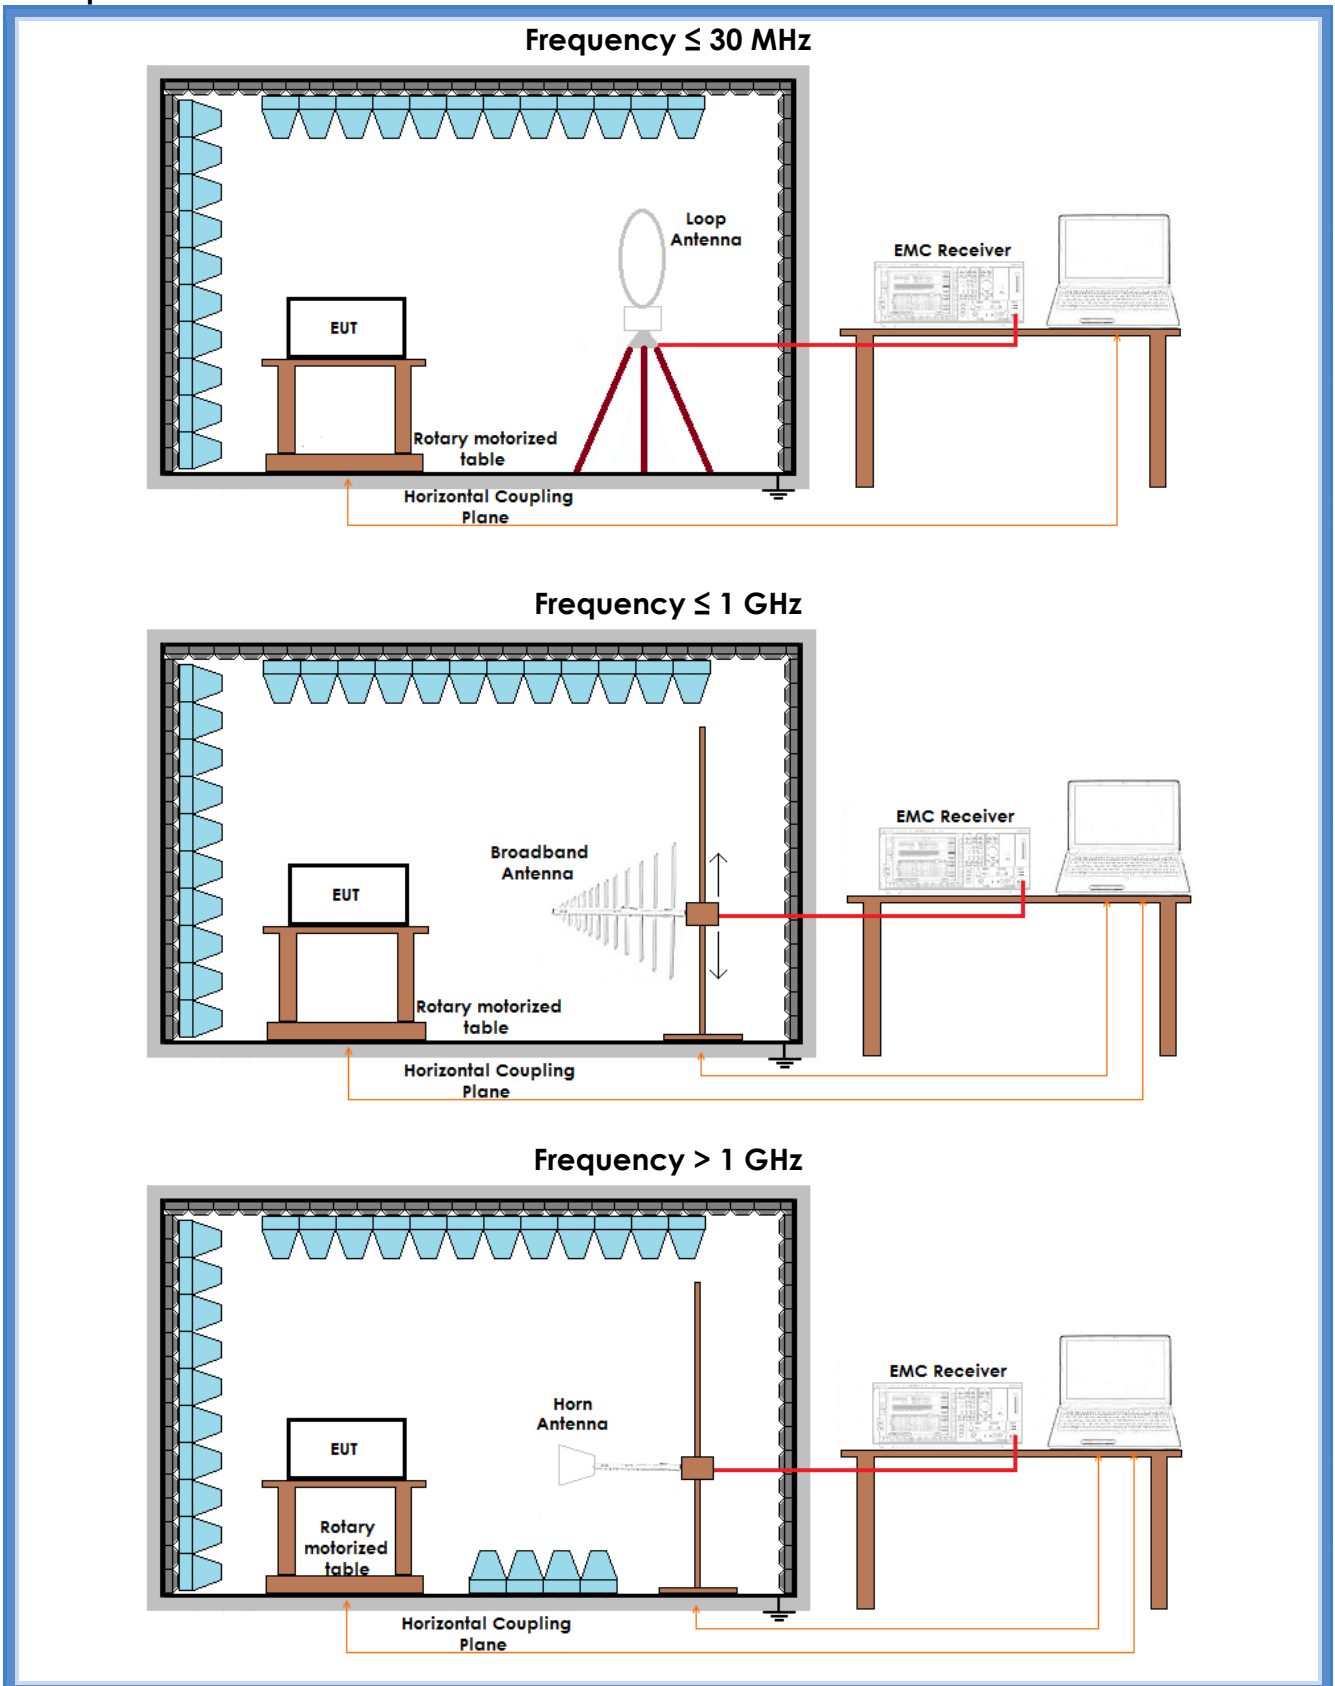



Result

Polarization	Frequency Range (MHz)	Graphs	Remarks	Result
V	30 – 300	G18055201	Lowest channel	Complies
H	30 – 300	G18055202	Lowest channel	Complies
H	30 – 300	G18055203	Medium channel	Complies
V	30 – 300	G18055204	Medium channel	Complies
V	30 – 300	G18055205	Highest channel	Complies
H	30 – 300	G18055206	Highest channel	Complies
V	300 – 1000	G18055209	Lowest channel	Complies
H	300 – 1000	G18055210	Lowest channel	Complies
H	300 – 1000	G18055211	Medium channel	Complies
V	300 – 1000	G18055212	Medium channel	Complies
V	300 – 1000	G18055213	Highest channel	Complies
H	300 – 1000	G18055214	Highest channel	Complies
V	1000 – 10000	G18055215	Lowest channel	Complies
H	1000 – 10000	G18055216	Lowest channel	Complies
H	1000 – 10000	G18055217	Medium channel	Complies
V	1000 – 10000	G18055218	Medium channel	Complies
V	1000 – 10000	G18055219	Highest channel	Complies
H	1000 – 10000	G18055220	Highest channel	Complies
Loop	0,009 – 30	G18055221	Worst case	Complies

Remarks: EUT was tested in 3 orthogonal planes. The results show the highest values. Measurements at frequencies lower than 1000 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with FCC 3A10 factor.

Peaks above the limits are due to the nominal transmitting frequencies. Final measurements have been performed only for values with margin lower than 20 dB from limit.


Final measurements above the limits of FCC Part 15.209 at 1,85 GHz are in non-restricted frequency bands, for these frequency bands the limit is 20 dB below the highest power level. The highest measured power level is 104,10 dB μ V/m, so the final measurements on non-restricted frequency bands must be lower than 84,10 dB μ V/m. For this reason, the EUT comply with the requirements of FCC Part 15.209

Graphs Legend

PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +
AV: Average; AV [1s] (average at 1 second) values are marked with a x



Graphs

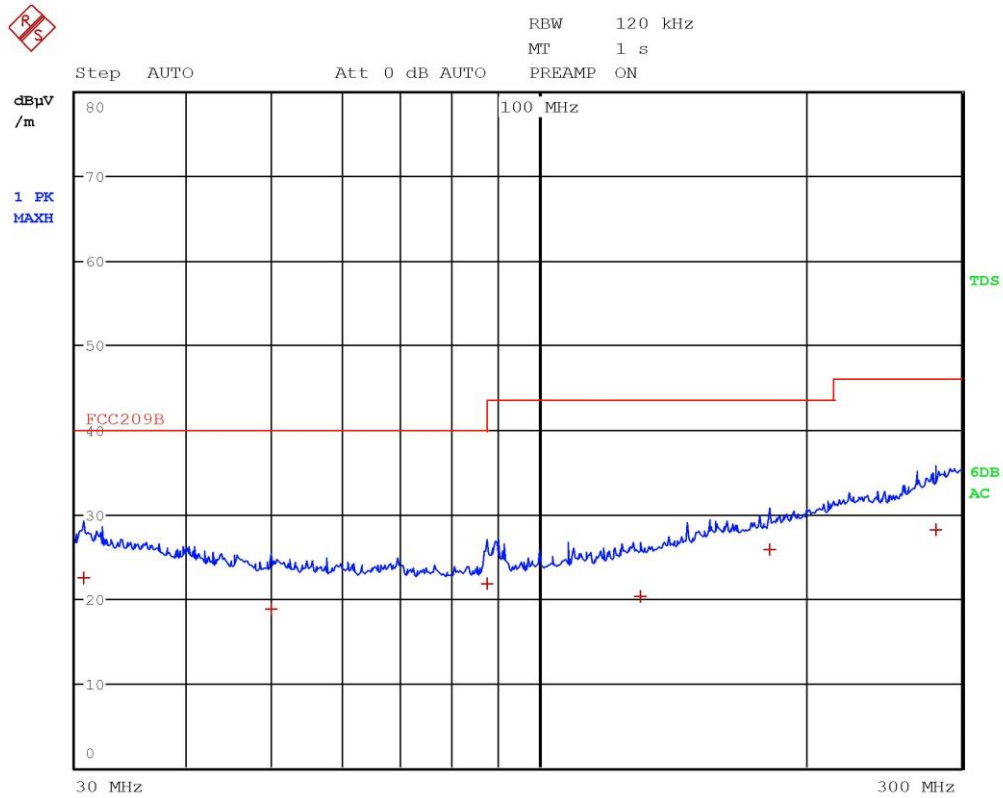


Gandini 18055201-Vert-Tx Fmin



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	30.6 MHz	22.47	-17.53
1 Quasi Peak	49.96 MHz	18.75	-21.24
1 Quasi Peak	87.4 MHz	21.77	-18.22
1 Quasi Peak	130.2 MHz	20.19	-23.32
1 Quasi Peak	182.12 MHz	25.76	-17.75
1 Quasi Peak	280.24 MHz	28.18	-17.84

Gandini 18055201-Vert-Tx Fmin

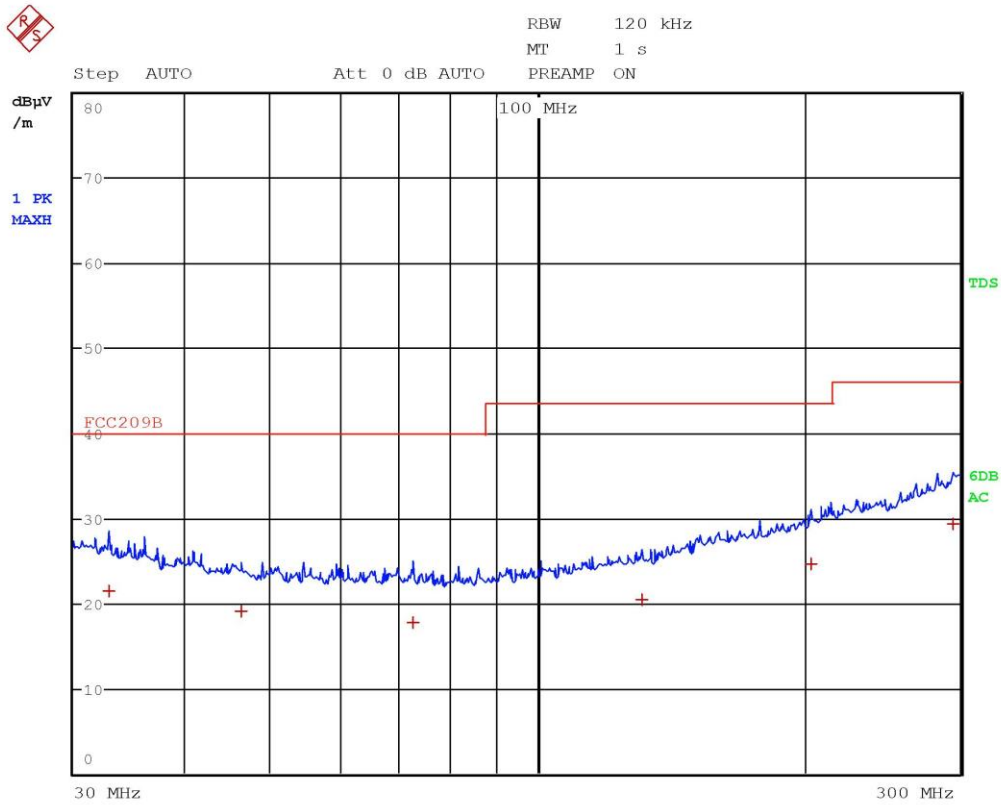


Gandini 18055202-Horiz-Tx Fmin

CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1 Quasi Peak	32.84 MHz	21.47	-18.52
1 Quasi Peak	46.32 MHz	19.10	-20.89
1 Quasi Peak	72.44 MHz	17.80	-22.19
1 Quasi Peak	131.04 MHz	20.36	-23.15
1 Quasi Peak	203.64 MHz	24.65	-18.86
1 Quasi Peak	294.08 MHz	29.26	-16.75

Gandini 18055202-Horiz-Tx Fmin

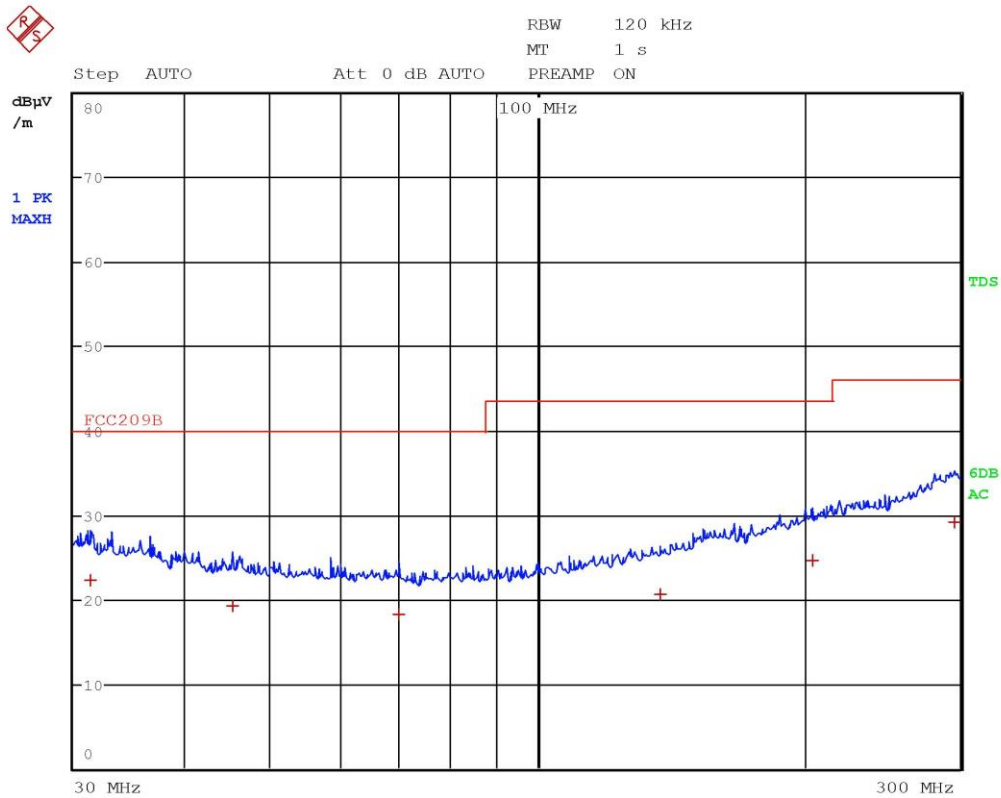


Gandini 18055203-Horiz-Tx Fmid

CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	31.36 MHz	22.29	-17.70
1 Quasi Peak	45.36 MHz	19.29	-20.70
1 Quasi Peak	69.76 MHz	18.18	-21.81
1 Quasi Peak	137.52 MHz	20.62	-22.89
1 Quasi Peak	204.2 MHz	24.67	-18.84
1 Quasi Peak	295.36 MHz	29.19	-16.82

Gandini 18055203-Horiz-Tx Fmid

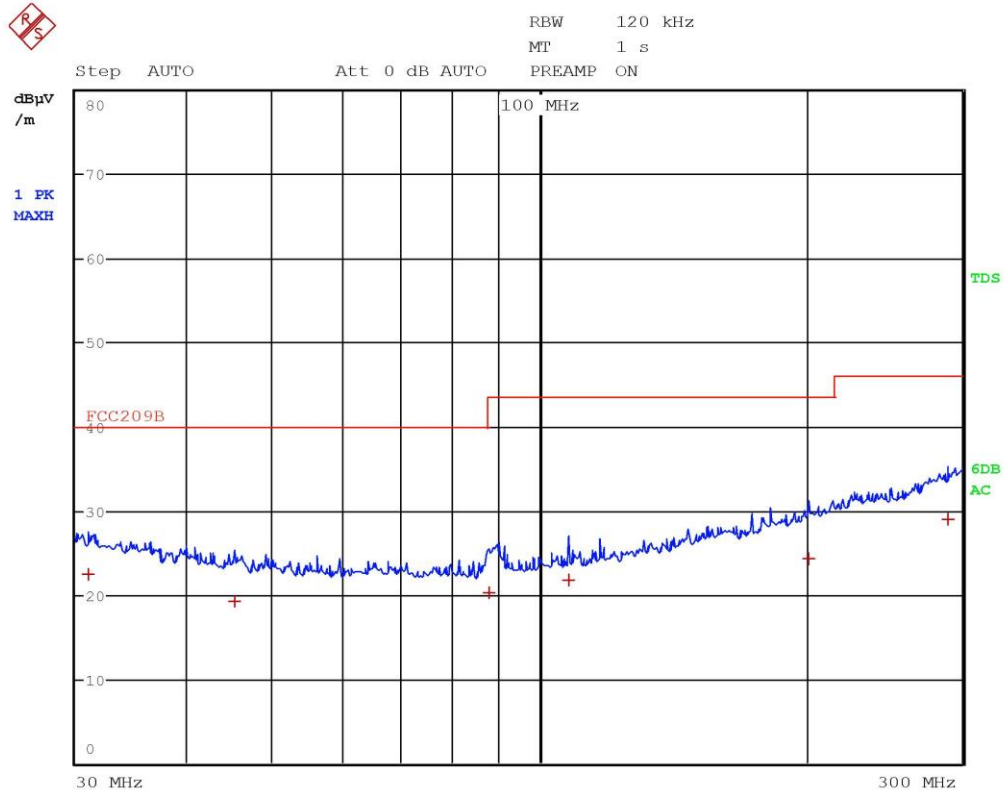


Gandini 18055204-Vert-Tx Fmid

CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1 Quasi Peak	30.92 MHz	22.46	-17.53
1 Quasi Peak	45.32 MHz	19.30	-20.69
1 Quasi Peak	87.64 MHz	20.25	-19.74
1 Quasi Peak	107.96 MHz	21.83	-21.68
1 Quasi Peak	201.48 MHz	24.32	-19.19
1 Quasi Peak	288.72 MHz	28.96	-17.05

Gandini 18055204-Vert-Tx Fmid

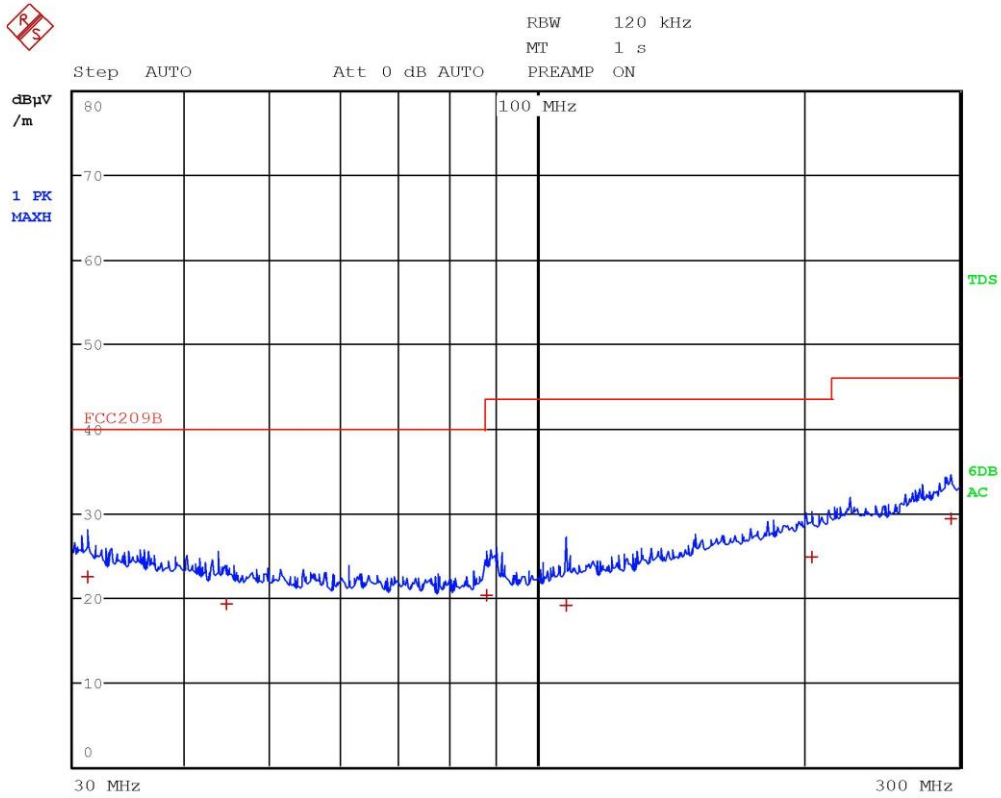


Gandini 18055205-Vert-Tx Fmax

CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	31.08 MHz	22.35	-17.64
1 Quasi Peak	44.64 MHz	19.30	-20.69
1 Quasi Peak	87.64 MHz	20.27	-19.72
1 Quasi Peak	107.84 MHz	19.07	-24.45
1 Quasi Peak	204.16 MHz	24.71	-18.80
1 Quasi Peak	293.2 MHz	29.28	-16.73

Gandini 18055205-Vert-Tx Fmax

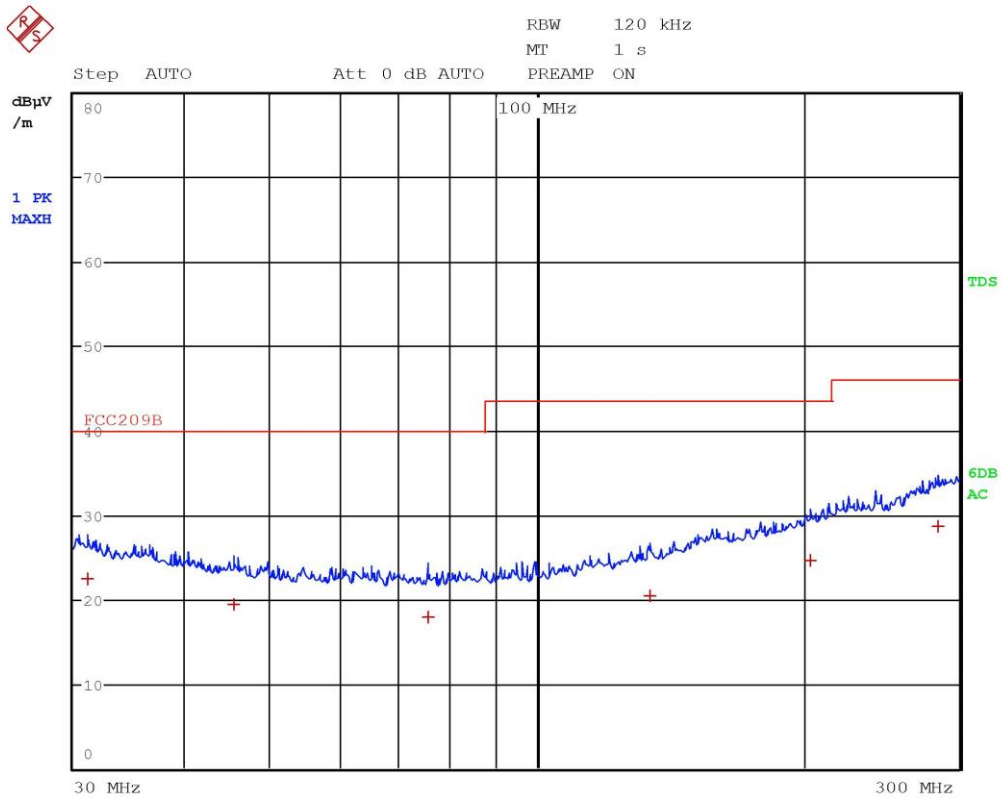

Gandini 18055206-Horiz-Tx Fmax


CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1 Quasi Peak	31.12 MHz	22.37	-17.62
1 Quasi Peak	45.4 MHz	19.35	-20.64
1 Quasi Peak	75.52 MHz	17.90	-22.09
1 Quasi Peak	134.12 MHz	20.33	-23.18
1 Quasi Peak	203.4 MHz	24.58	-18.93
1 Quasi Peak	284.2 MHz	28.67	-17.34

Gandini 18055206-Horiz-Tx Fmax

CMC Centro Misure Compatibilità S.r.l.

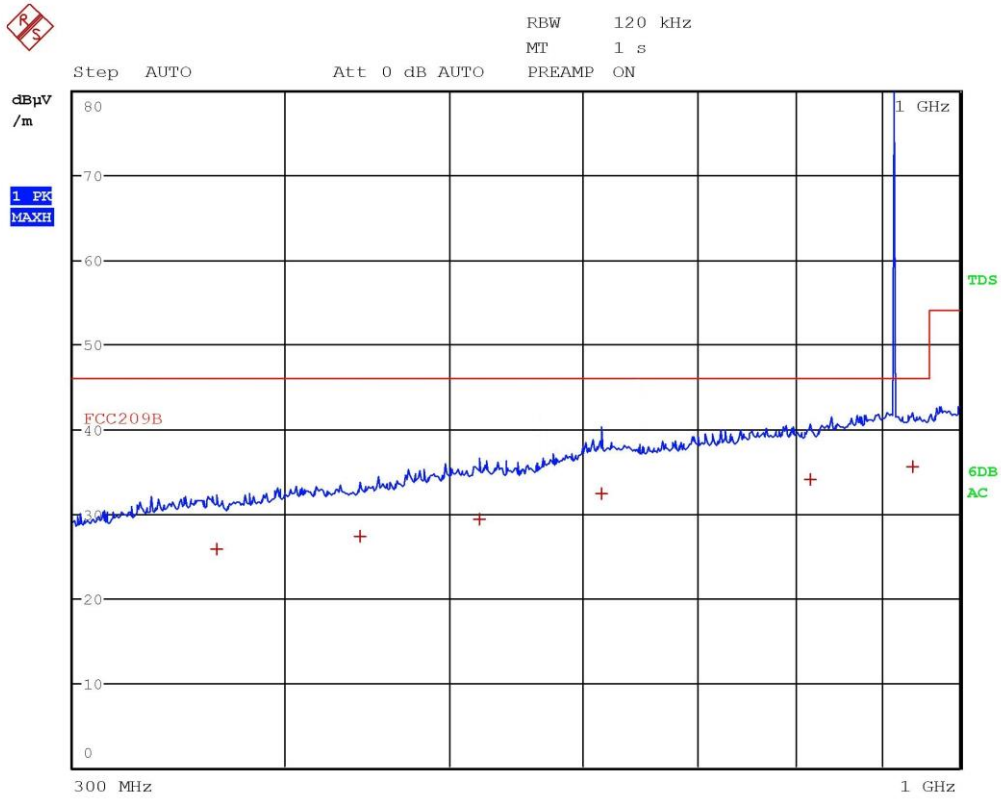

Gandini 18055209-Vert-Tx Fmin


CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dB μ V/m	DELTA LIMIT dB
1 Quasi Peak	364.16 MHz	25.73	-20.28
1 Quasi Peak	442.56 MHz	27.30	-18.71
1 Quasi Peak	521.32 MHz	29.37	-16.64
1 Quasi Peak	615.12 MHz	32.35	-13.66
1 Quasi Peak	817.12 MHz	34.06	-11.95
1 Quasi Peak	938.84 MHz	35.60	-10.41

Gandini 18055209-Vert-Tx Fmin

CMC Centro Misure Compatibilità S.r.l.

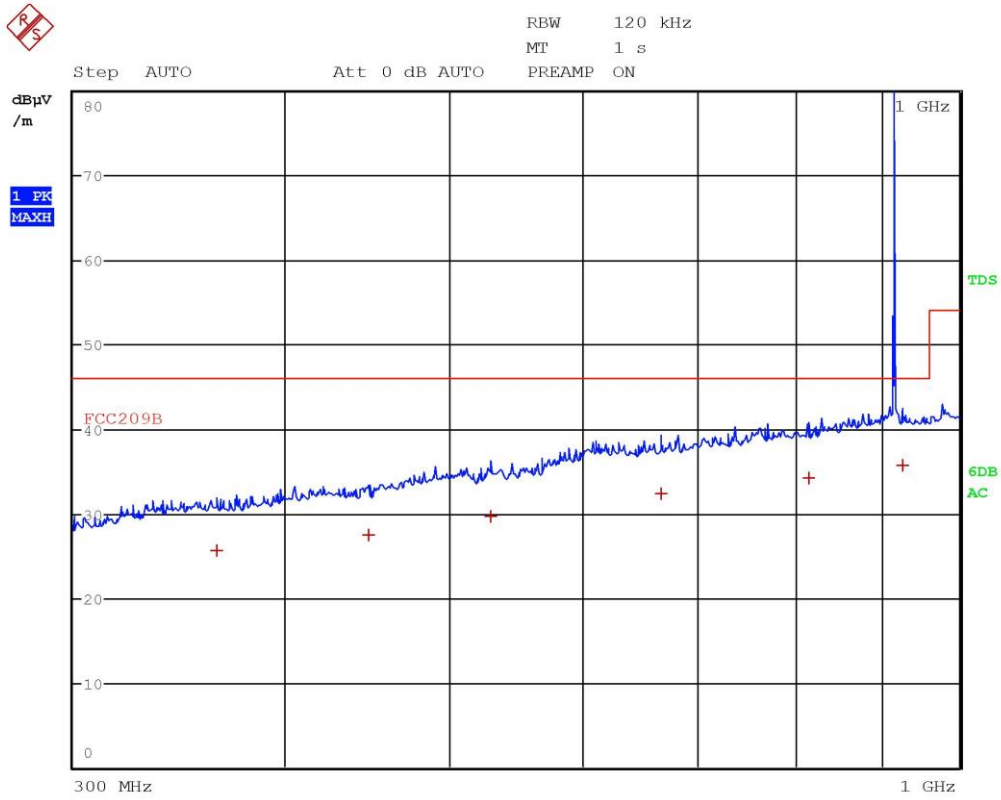

Gandini 18055210-Horiz-Tx Fmin


CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	364.84 MHz	25.71	-20.30
1 Quasi Peak	447.76 MHz	27.50	-18.51
1 Quasi Peak	528.64 MHz	29.60	-16.41
1 Quasi Peak	666.88 MHz	32.31	-13.71
1 Quasi Peak	814.8 MHz	34.16	-11.86
1 Quasi Peak	925.6 MHz	35.68	-10.34

Gandini 18055210-Horiz-Tx Fmin

CMC Centro Misure Compatibilità S.r.l.

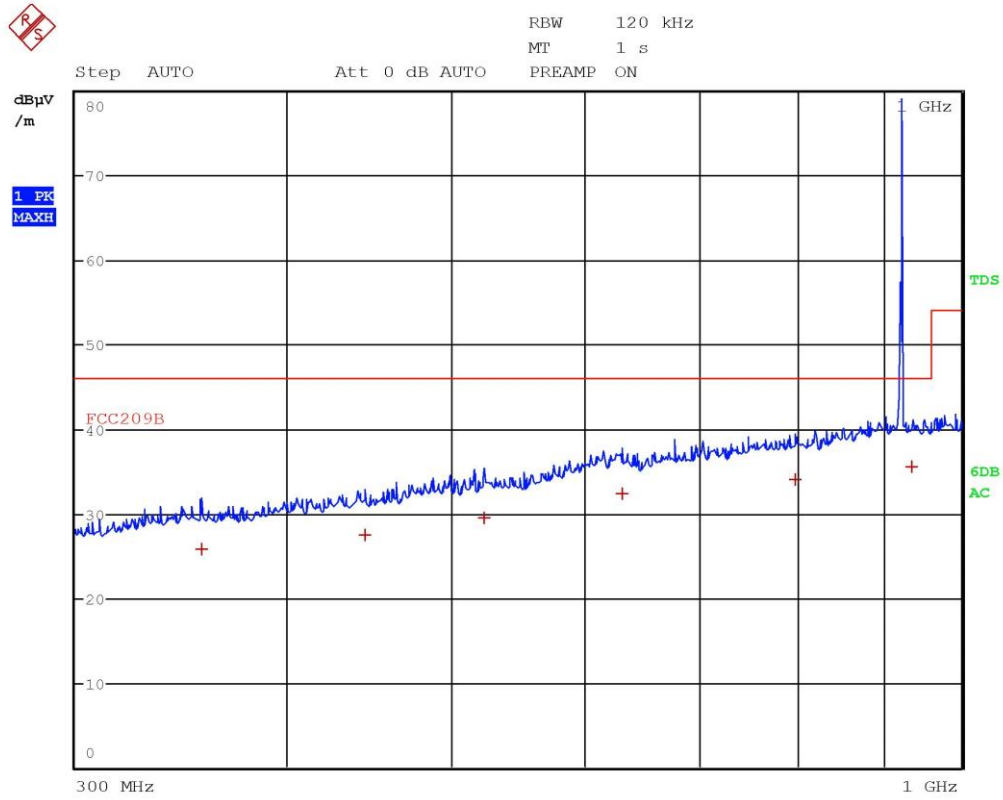


Gandini 18055211-Horiz-Tx Fmid

CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL d μ V/m	DELTA LIMIT dB
1 Quasi Peak	356.32 MHz	25.82	-20.19
1 Quasi Peak	445.04 MHz	27.43	-18.58
1 Quasi Peak	523.32 MHz	29.42	-16.59
1 Quasi Peak	630.08 MHz	32.28	-13.74
1 Quasi Peak	797.68 MHz	34.06	-11.95
1 Quasi Peak	934.88 MHz	35.55	-10.46

Gandini 18055211-Horiz-Tx Fmid

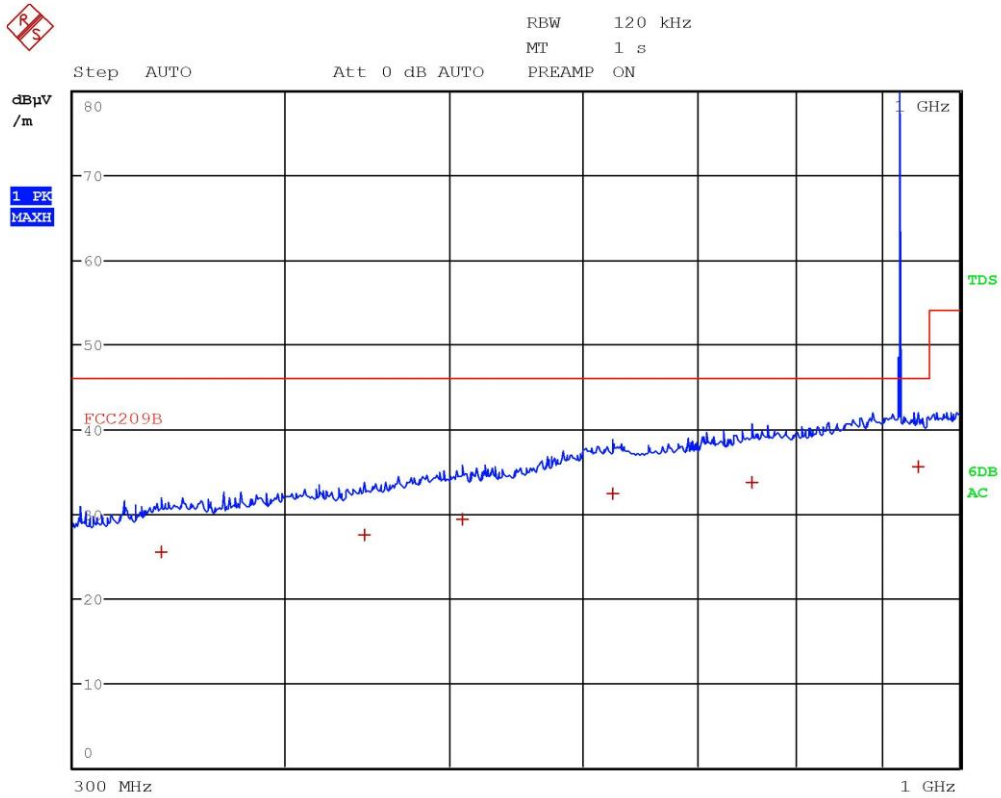


Gandini 18055212-Vert-Tx Fmid

CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	338.4 MHz	25.49	-20.52
1 Quasi Peak	445.88 MHz	27.47	-18.54
1 Quasi Peak	508.76 MHz	29.33	-16.69
1 Quasi Peak	624.52 MHz	32.39	-13.63
1 Quasi Peak	755.08 MHz	33.76	-12.26
1 Quasi Peak	946.08 MHz	35.59	-10.42

Gandini 18055212-Vert-Tx Fmid

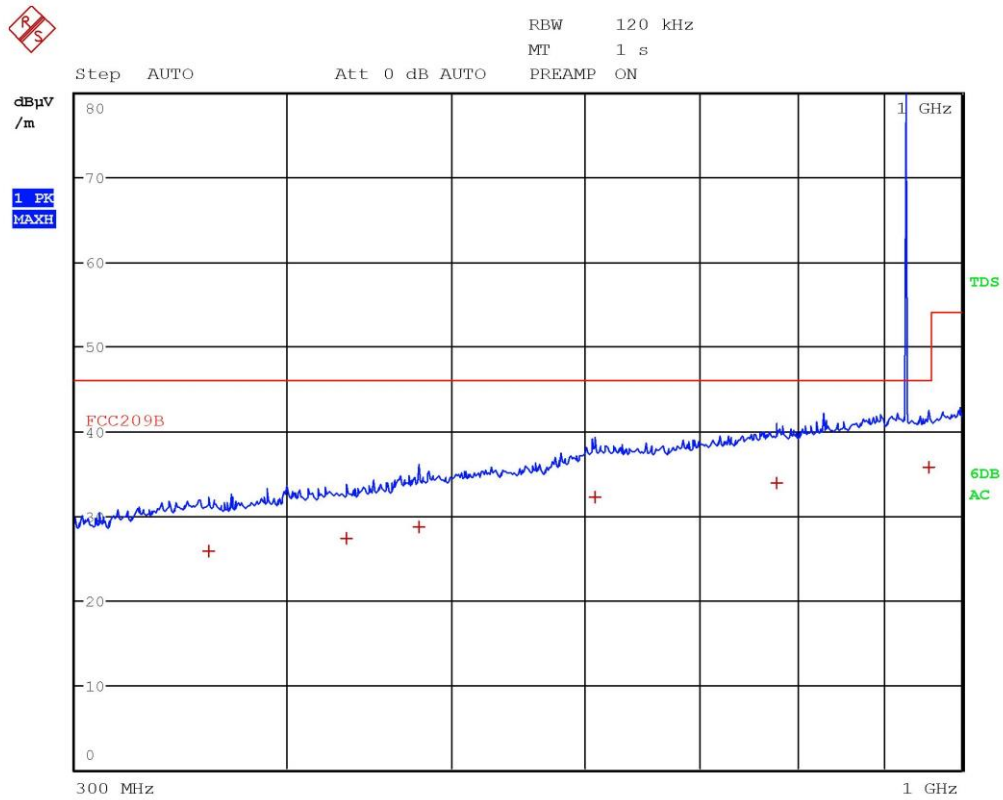


Gandini 18055213-Vert-Tx Fmax

CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	359.76 MHz	25.77	-20.24
1 Quasi Peak	433.84 MHz	27.23	-18.78
1 Quasi Peak	478.2 MHz	28.65	-17.36
1 Quasi Peak	607.88 MHz	32.23	-13.78
1 Quasi Peak	777.44 MHz	33.83	-12.19
1 Quasi Peak	957 MHz	35.70	-10.31

Gandini 18055213-Vert-Tx Fmax

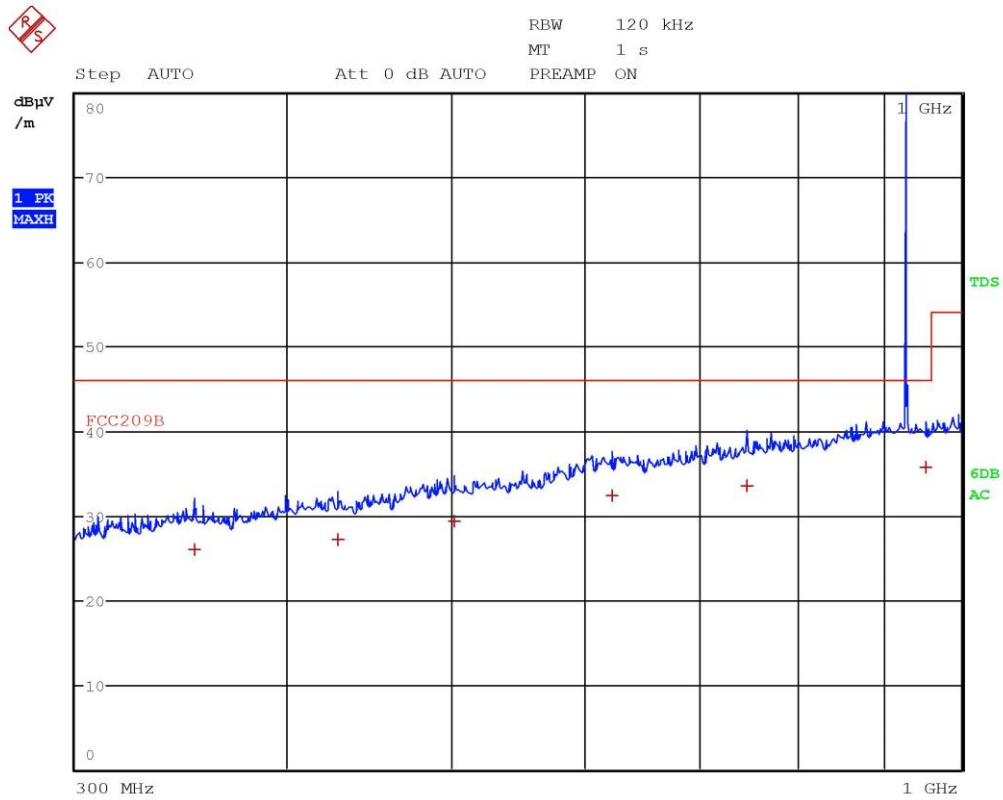

Gandini 18055214-Horiz-Tx Fmax


CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	352.56 MHz	25.90	-20.11
1 Quasi Peak	428.28 MHz	27.14	-18.87
1 Quasi Peak	502.48 MHz	29.27	-16.74
1 Quasi Peak	622.44 MHz	32.36	-13.65
1 Quasi Peak	747.44 MHz	33.60	-12.41
1 Quasi Peak	952.24 MHz	35.71	-10.30

Gandini 18055214-Horiz-Tx Fmax

CMC Centro Misure Compatibilità S.r.l.

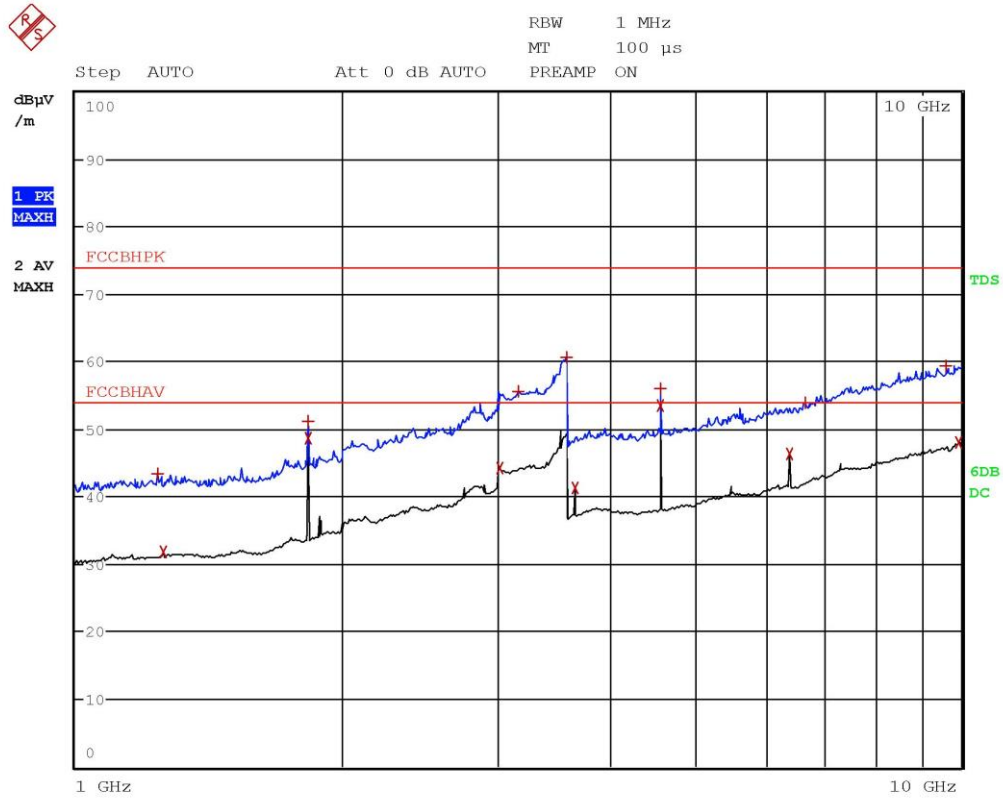

Gandini 18055215-Vert-Fmin


CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Prescan Results)			
Trace1:	FCCBHPK		
Trace2:	FCCBHAV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Max Peak	1.24 GHz	43.37	-30.60
2 Average	1.2544 GHz	31.83	-22.14
1 Max Peak	1.83 GHz	51.18	-22.79
2 Average	1.83 GHz	48.60	-5.37
2 Average	3.0104 GHz	44.13	-9.84
1 Max Peak	3.1584 GHz	55.65	-18.32
1 Max Peak	3.5984 GHz	60.60	-13.37
2 Average	3.66 GHz	41.34	-12.63
1 Max Peak	4.5752 GHz	56.08	-17.89
2 Average	4.5752 GHz	53.46	-0.51
2 Average	6.4052 GHz	46.33	-7.64
1 Max Peak	6.6696 GHz	53.92	-20.05
1 Max Peak	9.5924 GHz	59.28	-14.70
2 Average	9.9388 GHz	48.01	-5.96

Gandini 18055215-Vert-Fmin

CMC Centro Misure Compatibilità S.r.l.

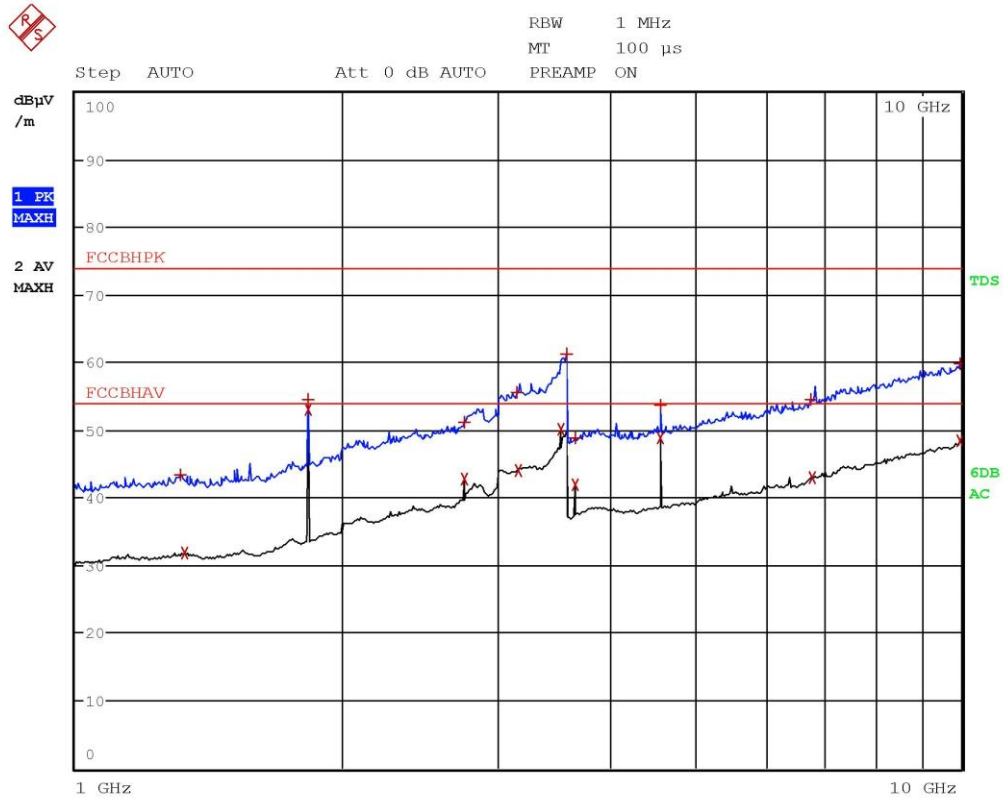


Gandini 18055216-Horiz-Fmin

CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Prescan Results)			
Trace1:	FCCBHPK		
Trace2:	FCCBHAV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL d μ V/m	DELTA LIMIT dB
1 Max Peak	1.3148 GHz	43.46	-30.51
2 Average	1.328 GHz	31.90	-22.07
1 Max Peak	1.83 GHz	54.58	-19.39
2 Average	1.83 GHz	53.14	-0.83
2 Average	2.7452 GHz	42.84	-11.14
1 Max Peak	2.752 GHz	51.12	-22.85
1 Max Peak	3.1588 GHz	55.48	-18.49
2 Average	3.1608 GHz	44.10	-9.87
2 Average	3.5256 GHz	50.18	-3.79
1 Max Peak	3.5972 GHz	61.21	-12.76
1 Max Peak	3.66 GHz	48.88	-25.09
2 Average	3.66 GHz	41.97	-12.00
2 Average	4.5752 GHz	48.79	-5.18
1 Max Peak	4.5752 GHz	53.58	-20.39
1 Max Peak	6.762 GHz	54.54	-19.43
2 Average	6.7956 GHz	43.01	-10.96
2 Average	9.9448 GHz	48.36	-5.61
1 Max Peak	9.9636 GHz	59.73	-14.24

Gandini 18055216-Horiz-Fmin

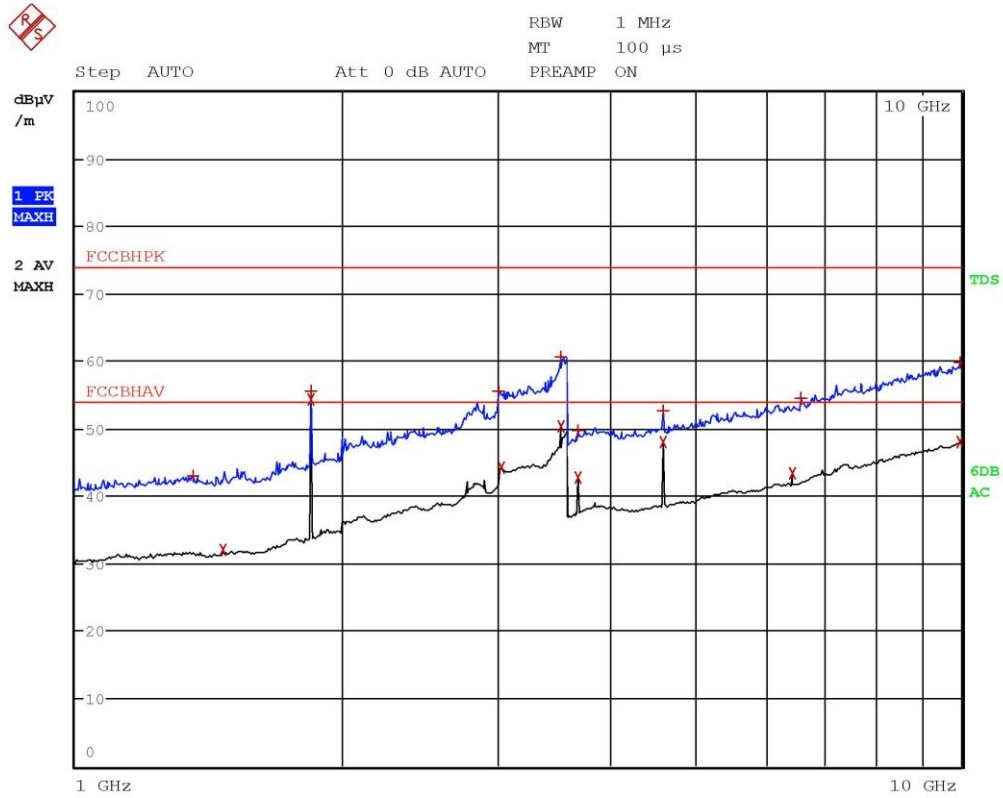

Gandini 18055217-Horiz-Fmid


CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Prescan Results)			
Trace1:	FCCBHPK		
Trace2:	FCCBHAV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dB μ V/m	DELTA LIMIT dB
1 Max Peak	1.3584 GHz	42.89	-31.09
2 Average	1.4652 GHz	31.93	-22.04
1 Max Peak	1.8428 GHz	55.64	-18.33
2 Average	1.8428 GHz	54.34	0.36
1 Max Peak	3.0004 GHz	55.67	-18.31
2 Average	3.02 GHz	44.24	-9.73
1 Max Peak	3.5256 GHz	60.52	-13.45
2 Average	3.5256 GHz	50.35	-3.62
1 Max Peak	3.6856 GHz	49.59	-24.39
2 Average	3.6856 GHz	42.67	-11.30
2 Average	4.6068 GHz	47.92	-6.05
1 Max Peak	4.6072 GHz	52.64	-21.33
2 Average	6.4496 GHz	43.45	-10.52
1 Max Peak	6.5848 GHz	54.61	-19.36
2 Average	9.9464 GHz	48.00	-5.97
1 Max Peak	9.9624 GHz	59.77	-14.20

Gandini 18055217-Horiz-Fmid

CMC Centro Misure Compatibilità S.r.l.

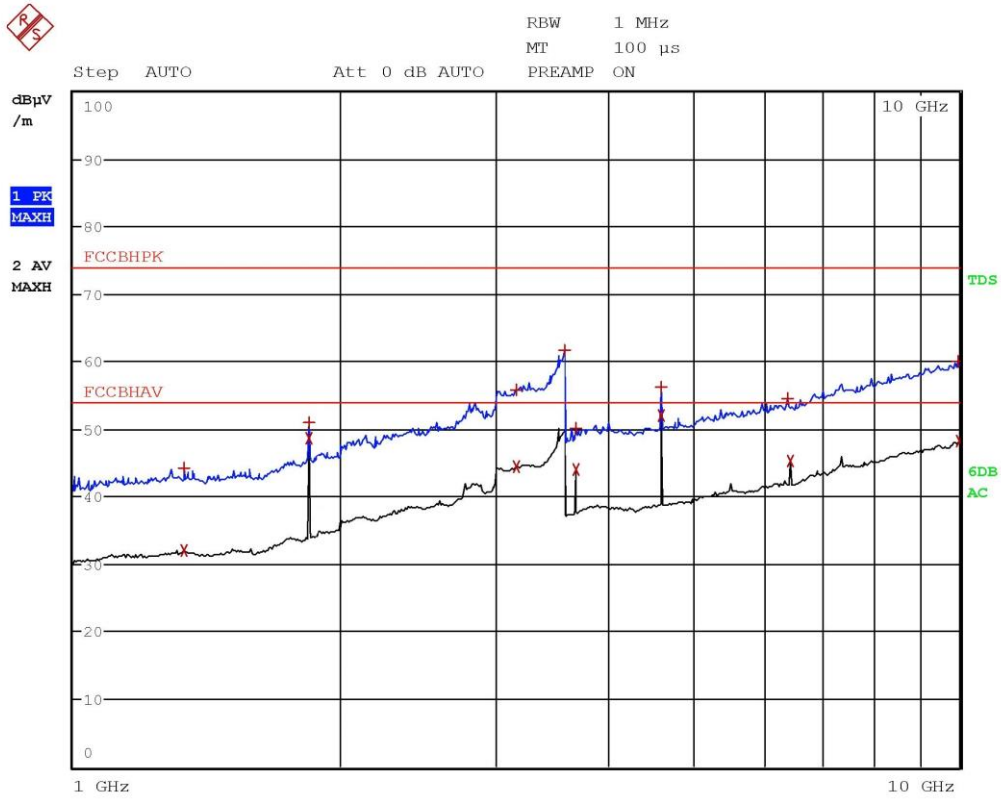

Gandini 18055218-Vert-Fmid

CMC Centro Misure Compatibilità S.r.l.