



South Industrial Estate
Bowburn
Co. Durham
DH6 5AD
United Kingdom
Tel: +44 (0) 191 377 2000
Fax: +44 (0) 191 377 2020
email: sgsiea@sgs.com

SGS United Kingdom Ltd.
International Electrical Approvals

Electromagnetic Compatibility

Test of: RF Card Entry System

Model Number: Refer to page 5

Applicant: PAC International Ltd

Test Type: Compliance

Test Specification: FCC CFR47, parts 15.107, 15.109,
15.207 and 15.209

Test Result: Complied

SGS Serial Number: DUR 24095.1/EMC/LS/02

Date of Receipt: 10th June 2002

Date of Test(s): 10th June 2002 – 20th June 2002

Date of Issue: 10th January 2003

Issue Number: 4

This report refers only to the sample submitted for test.

This report shall not be reproduced except in full without the written approval of the testing laboratory.

Test Engineer

L. Steel

Authorised Signatory

A. Reynard
Technical Manager

CONTENTS	Page Number
1. Client Information	3
2. Details Of Test Laboratory.....	3
3. Equipment Under Test (EUT)	4
3.1 Identification Of EUT.....	4
4. Test Specification, Methods and Procedures	5
4.1 Test Specification(s)	5
4.2 Purpose Of Test.....	5
4.3 Methods and Procedures.....	5
EUT System Diagram.....	6
5. Deviations or Exclusions from the Test Specifications	7
6. Operation of the EUT During Testing / Configuration and Peripherals	7
6.1 Operation of EUT during testing.	7
6.2 Configuration and Peripherals	7
7. Test Results	8
7.1 General Comments.....	8
7.2 Modifications Made to the EUT.....	8
7.3 Summary of Test Results	8
7.4 Conducted Emissions Test Results – 15.107/15.207	9
7.5 Radiated Emissions Test Results – 15.109	12
7.6 Radiated Emissions Test Results – 15.209	14

1. Client Information

Company Name: PAC International Ltd

Address: 1 Park Gate Close,
Bredbury,
Stockport,
SK6 2SZ.

Contact Person: Shaun Byrne

Telephone: 0161 406 3400

Facsimile: 0161 430 8658

2. Details Of Test Laboratory

Company Name: SGS International Electrical Approvals

UKAS Accreditation Number: 1116

Address: South Industrial Estate,
Bowburn,
Co. Durham,
DH6 5AD.

Contact Persons: Mr Alan Reynard

Telephone: 0191 377 2000

Facsimile: 0191 377 2020

3. Equipment Under Test (EUT)

3.1 Identification Of EUT

Model Number:	Refer to page 5.
Unique Identifier:	Refer to page 5
Description of EUT:	RF Card Entry System
Internal Clock Frequencies:	Refer to page 5.
Supply Voltage: (To Controller)	12 or 15v dc via ac/dc adapter (see page 5) NOTE: All other parts of the system obtain their power via the controller.
Classification:	Refer to page 5.
Accessories Supplied:	Refer to page 5.

4. Test Specification, Methods and Procedures

4.1 Test Specification(s)

Specification(s)	Title
FCC CFR 47 : October 1999 Parts 15.107/15.207, 15.109 and 15.209	Code Of Federal Regulations

4.2 Purpose Of Test


- 1) To test the whole system to clauses 15.107/15.207 and 15.109
- 2) To test the 20373 front panel card reader only, to the requirements of 15.209 (Upto 30 MHz only).

4.3 Methods and Procedures

The standard listed above refers to the following tests: -

CFR 47 Clause	Test
15.107/15.207	Conducted Emissions (Intentional and Unintentional Radiators)
15.109 (30-1000 MHz)	Radiated Emissions (Intentional and Unintentional Radiators)
15.209 (9 kHz to 30 MHz)	Radiated Emissions (Intentional Radiator)

EUT System Diagram

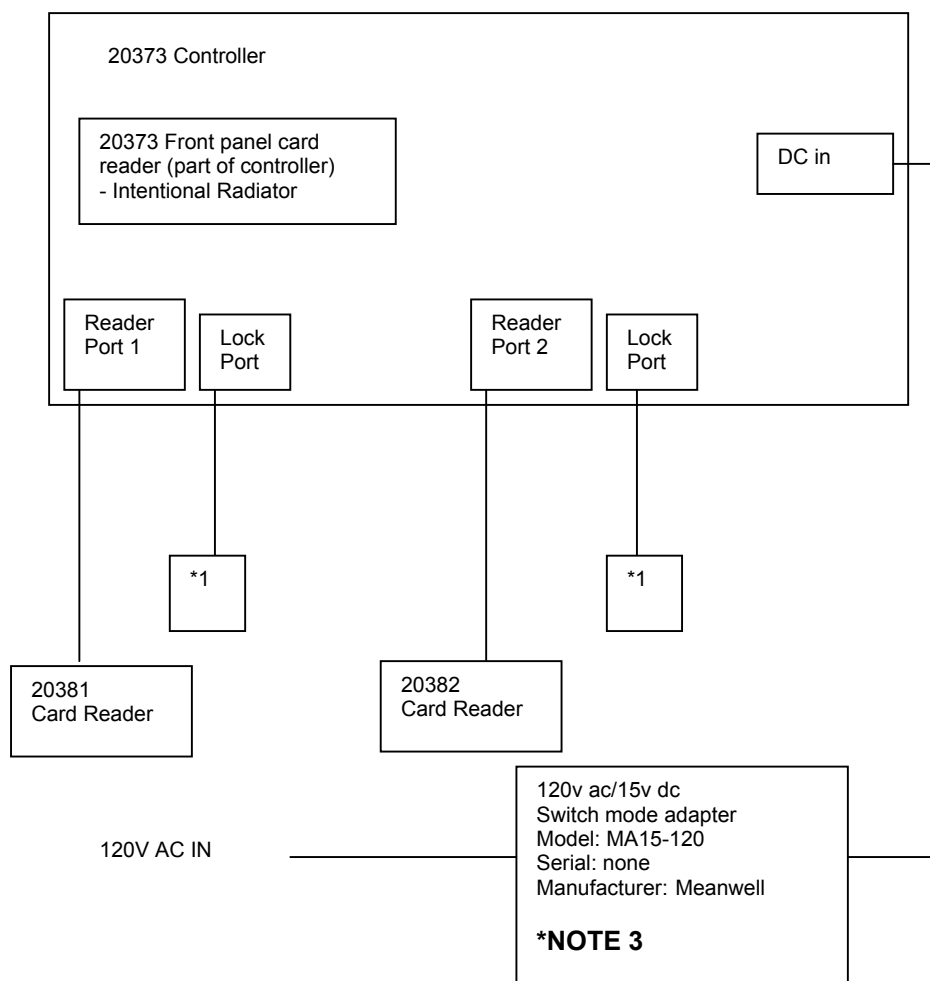

*1=150Ω/100nF networks as terminations.

NOTE 1: All interconnecting cables 1m long. Interconnecting cables are signal/low voltage dc.

NOTE 2: Power adapter is not supplied by PAC. It is a typical power supply, supplied in order to perform the conducted emissions test.

NOTE 3: For testing to 15.107/15.207 a different ac/dc adapter was used to that shown above. The details of the adapter used for the Conducted Emissions are as follows:

Manufacturer: Ecopac Power UK Ltd, Model: SA60-12v, Voltage: 12 v dc

Component Model No.	Serial No.	Description	Intentional/ Unintentional Radiator?	Highest Frequency Generated/Used
20373	None	Controller	Unintentional	11 MHz
20373	None	Front Panel	Intentional and Unintentional	11 MHz
20381	1973717	Card Reader	Intentional and Unintentional	614 kHz
20382	1973947	Card Reader	Intentional and Unintentional	614 kHz

5. Deviations or Exclusions from the Test Specifications

There were no deviations from the test specifications.

6. Operation of the EUT During Testing / Configuration and Peripherals

6.1 Operation of EUT during testing.

Refer to individual test results sections for details of EUT operation during testing.

6.2 Configuration and Peripherals

Refer to page 5.

7. Test Results

7.1 General Comments

The test methods used are referred to in the individual test results sections of this test report.

7.2 Modifications Made to the EUT

No modifications were made to the EUT during the testing process.

7.3 Summary of Test Results

CFR 47 Clause	Test	Result
15.107/15.207	Conducted Emissions (Whole EUT system tested)	Complied
15.109	Radiated Emissions (Whole EUT system tested)	Complied
15.209	Radiated Emissions (PAC 20373 front panel card reader only)	Complied

Result

- i) In the configuration tested, the whole system complies with the requirements of Clauses 15.107/15.207 and 15.109 of CFR 47 : October 1999.
- ii) In the configuration tested, the PAC 20373 front panel card reader complies with the requirements of Clause 15.209 of CFR 47 : October 1999, across the frequency range 9 kHz to 30 MHz.

Full details of all tests can be found in the test results section of this report.

7.4 Conducted Emissions Test Results – 15.107/15.207

CFR 47 Clause:	15.107/15.207
Limits:	CISPR 22, Class B (As specified in FCC document FCC 02-157 (ET Docket No. 98-80), adopted May 23 rd 2002).
Frequency Range	0.15 – 30 MHz.

Operating Mode

The compliance test was performed with authorised cards presented to the controller front panel reader, the 20381 reader and the 20382 reader.

NOTE: Measurements were performed at the AC mains of the controller:

Test Method

As per ANSI 63.4 : 1992

Measurement detector details: Quasi-Peak, 9 kHz bandwidth

Test Results

NOTE: The test results shown have automatically been corrected to account for LISN attenuation and cable loss, via measurement software.


Live Terminal Worst Case Emissions

Frequency (MHz)	Quasi Peak Measurement (dB μ V)	Quasi Peak Limit (dB μ V)	Average Measurement (dB μ V)	Average Limit (dB μ V)
0.182	44.47	64.4	42.47	54.4
0.246	43.87	61.9	43.1	51.9
0.484	37.7	56.3	37.4	46.3
0.966	36.97	50.5	36.97	40.5
1	36.37	56	36.37	46
16.01	34.55	60	31.05	50

Neutral Terminal Worst Case Emissions

Frequency (MHz)	Quasi Peak Measurement (dB μ V)	Quasi Peak Limit (dB μ V)	Average Measurement (dB μ V)	Average Limit (dB μ V)
0.184	46.07	64.3	44.27	54.3
0.241	45.37	62.1	44.57	52.1
0.484	40.5	56.3	40.5	46.3
0.970	37.17	56	37.17	46
1.29	28.97	56	28.97	46
16.15	31.85	60	27.85	50

Conducted Emissions Test Configuration

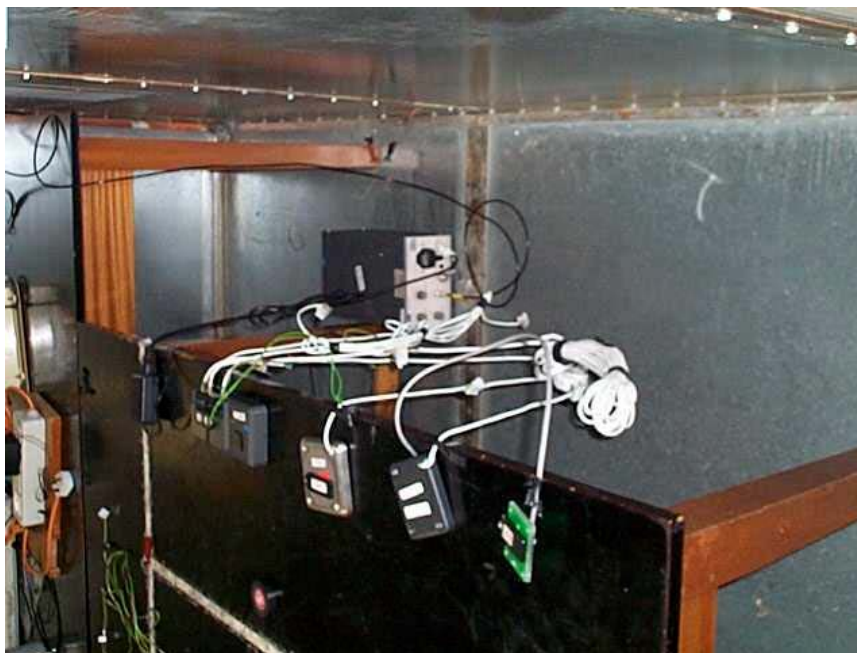

Conducted Emissions Environmental Conditions

Power Supply (to controller)	120V, 60Hz
Temperature	19.5°C
Relative Humidity	43%
Barometric Pressure	994mb

Conducted Emissions Measurement Uncertainties

Frequency	± 200kHz
Amplitude	± 3.0dB

The uncertainties stated are calculated in accordance with the requirements of UKAS with a confidence level of 95%.

Test Equipment Used

Equipment Type	Model Number	Last Calibration Date
LISN (50Ω)	Thurlby Thandar TTi 1600	Jan 02
Chase Receiver	LHR7000	Sep 01
SGS Screened Room	-	-
Spectrum Analyser	HP8563E	Nov 00
Check Equip.	PLC 1C	-

7.5 Radiated Emissions Test Results – 15.109

CFR Clause	15.109
Limits	Class B
Frequency Range	30-1000 MHz

Operating Mode

The compliance test was performed with authorised cards presented to the controller front panel reader, the 20381 reader and the 20382 reader.

Test Results***Worst Case Emissions***

Frequency MHz	Peak Measurement @3m (dB μ V/m)	Quasi-Peak Limit @3m (dB μ V/m)	Antenna Polarity
33.21	25.0	40.0	Vertical
44.26	22.5	40.0	Vertical
100.46	30.2	43.5	Vertical
120.00	16.5	43.5	Vertical
266.03	15.4	46.0	Vertical
278.42	14.7	46.0	Vertical
288.35	16.5	46.0	Vertical
299.68	17.2	46.0	Vertical

NOTE 1: The test results shown have automatically been corrected to account for Antenna factors, pre-amplifier gain and cable losses, via measurement software.

NOTE 2: Vertical antenna polarity was worst case for all emissions, hence results for horizontal antenna polarity were not recorded.


Test Method

As per ANSI 63.4 : 1992

Measurements performed at a test distance of 3m.

Measurement detector details: Quasi-Peak, 120 kHz bandwidth

Radiated Emissions Test Configuration

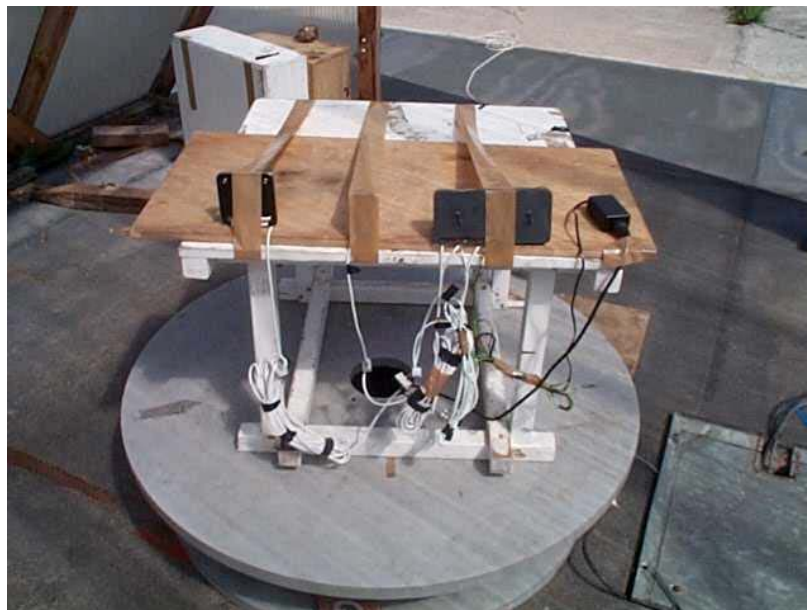

Radiated Emissions Environmental Conditions

Power Supply (to controller)	120V AC, 60 Hz
Temperature	14.5°C
Relative Humidity	46%
Barometric Pressure	992mb

Radiated Emissions Measurement Uncertainties

Frequency	± 200kHz
Amplitude	± 4.6dB

The uncertainties stated are calculated in accordance with the requirements of UKAS with a confidence level of 95%.

Test Equipment Used

Equipment Type	Model Number	Last Calibration Date
Receiver System	HP 8573B	Nov 01
Biconical Antenna	EMCO 3110	Nov 00
Log Periodic Antenna	EMCO 3146	Aug 01
Pre-amplifier	ZHL 1042J	Jan 02
Check Equip.	York CNE III	-
Software	Open Site HP85879	-

7.6 Radiated Emissions Test Results – 15.209

CFR Clause	15.209
Frequency Range	9 kHz to 30 MHz

Operating Mode

The compliance test was performed with an authorised card presented to the controller front panel reader.

Test Results

Peak Measurements

Frequency MHz	Corrected Peak Measurement** (dB μ V/m)	Limit (dB μ V/m)	Measurement Distance (metres)
*0.154	-12.35	23.87	300
0.041	-40.05	35.34	300
0.125	-46.6	25.66	300
0.165	-48.97	23.25	300
0.308	-27.89	17.83	300
¹ 0.700	-14.08	30.70	30
¹ 0.850	-14.08	29.01	30
¹ 0.900	-14.08	28.51	30

*Indicates EUT carrier frequency. The supply voltage to the controller was varied between 85% and 115% to maximise the carrier level.

¹Indicates typical noise floor figures of test equipment.

Test Method

As per ANSI 63.4 : 1992

** Measurements performed at a test distance of 1m and extrapolated to correct distance of 300m and 30m respectively using a factor of 40 dB/decade. Hence a correction factor of – 99.08 for 300m and –59.08 for 30m was used. The corrected levels are shown above.

Measurement detector details: Peak Detector, 300 Hz bandwidth where $F \leq 150$ kHz, 10 kHz bandwidth where $F > 150$ kHz

Radiated Emissions Test Configuration**Radiated Emissions Environmental Conditions**

Power Supply (to controller)	120V AC, 60 Hz
Temperature	13°C
Relative Humidity	59%
Barometric Pressure	976mb

Radiated Emissions Measurement Uncertainties

Frequency	± 200kHz
Amplitude	± 4.6dB

The uncertainties stated are calculated in accordance with the requirements of UKAS with a confidence level of 95%.

Test Equipment Used

Equipment Type	Model Number	Last Calibration Date
Loop Antenna	EMCO 6502	Dec 00
Spectrum Analyser	HP8563E	Nov 00