



South Industrial Estate
Bowburn
Co. Durham
DH6 5AD
United Kingdom
Telephone: +44 (0) 191 377 2000
Fax: +44 (0) 191 377 2020
ce.sales.uk@sgsgroup.com

SGS United Kingdom Ltd.

EMC Services

Electromagnetic Compatibility Test Report

Test of: Low Profile Dual-Tech Reader

Model Number: 20467

Applicant: PAC International LTD

Test Type: Compliance

Test Specification: FCC CFR47, parts 15.109 for unintentional radiators, parts 15.207 and 15.209 for Intentional Radiators.

SGS Serial Number: DUR22523B/EMC/LS/00

Date of Receipt: 12th September 2000

Date of Test(s): 20th to 29th September 2000

Date of Issue: 3rd October 2000

Issue Number: 1

Test Engineer

L. Steel

Authorised Signatory

A. H. Reynard

CONTENTS	Page Number
1. Client Information.....	4
2. Details Of Test Laboratory.....	4
3. Equipment Under Test (EUT).....	5
3.1 Identification Of EUT.....	5
4. Test Specification, Methods and Procedures.....	5
4.1 Test Specification(s).....	5
4.2 Purpose Of Test	5
4.3 Methods and Procedures.....	6
5. Deviations or Exclusions from the Test Specifications	7
6. Support Equipment	8
7. Operation of the EUT During Testing / Configuration and Peripherals.....	11
7.1 Operation of EUT during testing.	11
7.2 Configuration and Peripherals	11
8. Test Results	12
8.1 General Comments	12
8.2 Modifications Made to the EUT.....	12
8.3 Summary of Test Results	13
8.4 Radiated Emissions Test Results- Unintentional Radiator	14
8.5 AC Power Line Conducted Emissions Test Results	16
8.6 Radiated Emissions Test Results- Intentional Radiator.....	19

1. Client Information

Company Name: PAC International LTD.

UKAS Accreditation Number 1116

Address: 1 Park Gate Close,
Bredbury,
Stockport,
SK6 2SZ,
United Kingdom.

Contact Person: Mr Shaun Byrne

Telephone: +44 161 406 3400

Facsimile: +44 161 430 8658

2. Details Of Test Laboratory

Company Name: SGS EMC Services LTD.

Address: Unit 10,
Bowburn South Industrial Estate,
Bowburn,
County Durham,
DH6 5AD,
United Kingdom.

Contact Persons: Mr Alan Reynard / Mr Fred Huggins

Telephone: +44 191 377 2000

Facsimile: +44 191 377 2020

3. Equipment Under Test (EUT)

3.1 Identification Of EUT

Model Number:	20467
Unique Identifier:	Unique Identifier Not Supplied
Description of EUT:	The EUT is an R.F. card entry reader, designed to prevent access to restricted areas by unauthorised persons.
Fundamental (Carrier) Frequency	133 kHz Single Channel
Internal Clock Frequencies:	16 MHz
Supply Voltage:	18V DC (Via central controller)
Classification:	Intentional radiator, incorporating digital device.
Environment Class:	Commercial / Class A
Ports present:	One port comprising six wires. Refer to configuration/peripherals section of this report for details.
Accessories Supplied:	Central Controller (refer to section 6 for full details)

4. Test Specification, Methods and Procedures

4.1 Test Specification(s)

Specification(s)	Title
FCC CFR 47 : October 1999 Parts 15.109, 15.207 and 15.209	Code Of Federal Regulations
ANSI C63.4 : 1992	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz.

4.2 Purpose Of Test

To perform the relevant tests and assess the product for compliance with the above specification (s), so that the manufacturer (PAC International Limited) can verify compliance with the specified limits.

4.3 Methods and Procedures

The standards listed on the previous page refer to the following tests:

CFR 47 Clause	Test
15.109	Radiated Emissions (Unintentional Radiator)
15.207	AC Power line Conducted Emissions
15.209	Radiated Emissions (Intentional Radiator)

5. Deviations or Exclusions from the Test Specifications

There were no deviations from the test specifications.

The scope of the inspection is limited to what is specified in the clients instructions and does not include any other checks or tests such as the electrical (electronic) control systems ability to cope with the implications of the dates falling on, before or after "January 2000".

6. Support Equipment

The EUT was tested whilst interfaced with a central controller.

Controller Manufacturer: PAC International Ltd
Model No.: 2200
Serial No.: Unique identifier not supplied.

The controller consists of the following input/output ports:

AC Mains Port
Front Panel RF ID Reader Port
DC Battery Backup Port (Internal 12V Lead Acid Battery)
Channel 1 Port (For connecting RF ID reader)
Channel 2 Port (For connecting RF ID reader)
Channel 3 Port (For connecting RF ID reader)
Channel 4 Port (For connecting RF ID reader)
2xRelay ports
RS232 Port
Six Wire Bus Port
Tamper Port
Spare Port (similar to RS 232 Port)

The controller ports were terminated as follows:

Front Panel RF Reader

The front panel was mechanically / physically left in the controller, but was not electrically connected for radiated emissions of the intentional radiator (sec 15.209). (The EUT is also a reader, hence it would be difficult to distinguish between front panel emissions and actual EUT emissions).

The front panel was connected physically and electrically for radiated emissions of the unintentional radiator(sec 15.109) and conducted emissions (sec 15.207).

Front Panel Manufacturer: PAC International Ltd
Model No.: 21397
Serial No.: Unique identifier not supplied.

Channel 1 port :

A 1m lead was connected to this port (ten core, unscreened). 150 Ω resistors were connected to each conductor, with respect to the GND terminal, except for:

LED terminal, terminated with 10k Ω , with respect to ground
Signal terminal, terminated with 100 Ω , with respect to ground
Lock output, terminated with 22 Ω , between L+ and L- terminals.

Channel 2 port :

A 1m lead was connected to this port (ten core, unscreened). 150 Ω resistors were connected to each conductor, with respect to the GND terminal, except for:

LED terminal, terminated with 10k Ω , with respect to ground

Signal terminal, terminated with 100 Ω , with respect to ground

Lock output, terminated with 22 Ω , between L+ and L- terminals.

Channel 3 port :

A 1m lead was connected to this port (ten core, unscreened). 150 Ω resistors were connected to each conductor, with respect to the GND terminal, except for:

LED terminal, terminated with 10k Ω , with respect to ground

Signal terminal, terminated with 100 Ω , with respect to ground

Lock output, terminated with 22 Ω , between L+ and L- terminals.

Channel 4 port :

The EUT was connected to this port via a 1m lead. (The +V supply terminal, ground terminal, signal terminal and VCA terminal were used. All other terminals were terminated via 1m leads (6 core, unscreened) with 150 Ω resistors, with respect to ground, except for the lock output which was terminated with a 22 Ω resistor between L+ and L- terminals).

Six Wire Bus Port

A 1m lead was connected to this port (six core, unscreened). 150 Ω resistors were connected to each conductor, with respect to the -V terminal, with the exception of the +V conductor, which was terminated with a 330 Ω resistor, as declared by the client.

Tamper Port

A 1m lead was connected to this port (six core, unscreened). 150 Ω resistors were connected to each conductor, with respect to the GND terminal, as declared by the client.

Printer / RS 232 Port

A 1m lead was connected to this port (six core, unscreened). 150 Ω resistors were connected to each conductor, with respect to the GND terminal, as declared by the client.

Relay Port #1

A 1m lead was connected to this port (six core, unscreened). 150 Ω resistors were connected to each conductor, with respect to the GND terminal, as declared by the client.

Relay Port#2

A 1m lead was connected to this port (six core, unscreened). 150 Ω resistors were connected to each conductor, with respect to the GND terminal, as declared by the client.

7. Operation of the EUT During Testing / Configuration and Peripherals

7.1 Operation of EUT during testing.

Refer to individual test results sections for details of EUT operation during testing.

7.2 Configuration and Peripherals

The EUT was tested whilst interfaced with a central controller. (refer to section 6 of this report for controller details).

The EUT consists of one port, comprising the following terminals, terminated as indicated:

Terminal Details	Description of termination
+V terminal	Controller
Ground terminal	Controller
Signal terminal	Controller
VCA terminal,	Controller

Three further terminals are provided on the reader. These terminals were terminated with 150 Ω resistors.

Note: The client states that this is the usual configuration when a PAC card reader is interfaced with a PAC controller. The terminals terminated with 150 Ω resistors can be used when a non-PAC controller is used.

Terminations applied at the end of 1m lead (six core, unscreened).

8. Test Results

8.1 General Comments

The test methods used are referred to in the individual test results sections of this test report.

8.2 Modifications Made to the EUT

No modifications were made to the EUT during the testing process.

8.3 Summary of Test Results

CFR 47 Clause	Test	Result
15.109	Radiated Emissions (Unintentional)	Complied
15.207	AC Power line Conducted Emissions	Complied
15.209	Radiated Emissions (Intentional)	Complied

Result

In the configuration tested, the EUT complies with the requirements of Clauses 15.109, 15.207 and 15.209 of CFR 47 : October 1998.

Full details of all tests can be found in the test results section of this report.

8.4 Radiated Emissions Test Results- Unintentional Radiator

CFR Clause	15.109
Limits	Class A
Frequency Range	30 – 1000 MHz

Operating Mode

The compliance test was performed with an authorised RF ID tag/token on the reader (door open condition).

Test Results

Worst Case Emissions

Frequency (MHz)	Quasi Peak Measurement (dB μ V)	Quasi Peak Limit (dB μ V)	Antenna Polarity (H/V)
46.048	34.6	39.0	V
82.919	34.6	39.0	V
82.923	36.1	39.0	V
119.788	35.2	43.5	V
175.093	36.4	43.5	V
193.531	33.3	43.5	V

Test Method

As per ANSI C63.4 : 1992

Measurements performed at a test distance of 10m.

Frequency Range tested = 30 to 1000MHz (as per sec 15.33 (a)(1)).

Measurement Detector Details: Quasi-Peak, 120 kHz bandwidth.

Note: Initial pre-testing was performed to obtain worst case operating mode for the compliance test (Authorised RF ID card on and off the reader).

Radiated Emissions Test Configuration**EUT Configuration****Radiated Emissions Environmental Conditions**

Power Supply (to controller)	120V, 60Hz
Temperature	17 °C
Relative Humidity	63 %
Barometric Pressure	992 mb

Radiated Emissions Measurement Uncertainties

Frequency	± 200kHz
Amplitude	± 4.6dB

The uncertainties stated are calculated in accordance with the requirements of UKAS with a confidence level of 95%.

Test Equipment Used

Equipment Type	Model Number	Last Calibration Date	Calibration Interval
Biconical Antenna	EMCO 3109	2/6/98	3 Years
Log Periodic Antenna	EMCO 3146	2/6/98	3 Years
Hewlett Packard Receiver System	HP8573B	23/7/00	1 Year

8.5 AC Power Line Conducted Emissions Test Results

CFR 47 Clause:	15.207
Frequency Range	0.45 – 30 MHz.

Operating Mode

The compliance test was performed with an authorised RF ID tag/token on the reader (door open condition).

Test Results

Live Terminal Worst Case Emissions

Frequency (MHz)	Quasi Peak Measurement (dB μ V)	Quasi Peak Limit (dB μ V)
13.0680	41.9	47.96
13.3335	41.6	47.96
14.6700	43.0	47.96
14.9355	43.2	47.96
15.7365	42.2	47.96
16.0020	42.6	47.96

Neutral Terminal Worst Case Emissions

Frequency (MHz)	Quasi Peak Measurement (dB μ V)	Quasi Peak Limit (dB μ V)
13.0680	42.1	47.96
13.6035	42.8	47.96
13.8690	43.8	47.96
14.4000	42.0	47.96
14.9355	43.3	47.96
15.2010	42.7	47.96

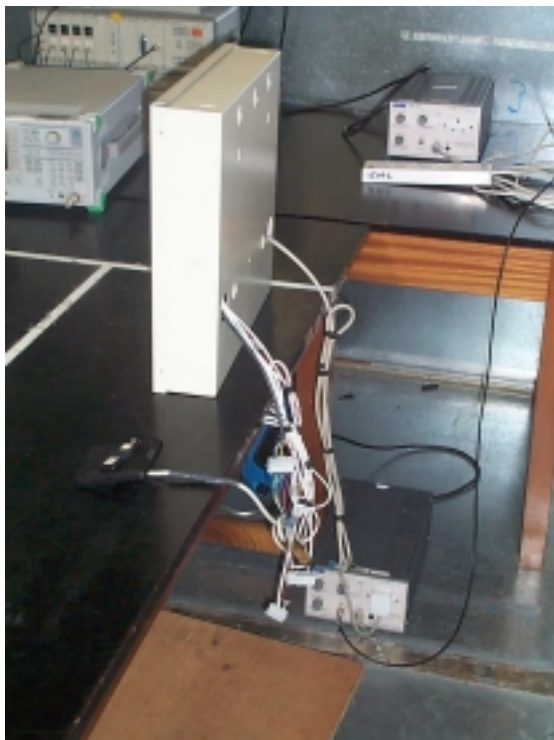
Note: The figures shown have been corrected automatically by measurement software, to account for cable loss and LISN attenuation.

Test Method

As per ANSI C63.4 : 1992.

Measurement Detector Details: Quasi-Peak, 9 kHz bandwidth.

Note: Initial pre-testing was performed to obtain worst case operating mode for the compliance test (Authorised RF ID card on and off the reader) .

Conducted Emissions Test Configuration**EUT Configuration****Conducted Emissions Environmental Conditions**

Power Supply (to controller)	120V, 60Hz
Temperature	20.5°C
Relative Humidity	48 %
Barometric Pressure	1010 mb

Conducted Emissions Measurement Uncertainties

Frequency	± 200kHz
Amplitude	± 3.0dB

The uncertainties stated are calculated in accordance with the requirements of UKAS with a confidence level of 95%.

Test Equipment Used

Equipment Type	Model Number	Last Calibration Date	Calibration Interval
LISN (50Ω)	Thurlby Thandar TTi 1600	13/9/99	2 Years
Chase Receiver	LHR7000	22/2/00	1 Year
Software	Version 6.00b	N/A	N/A
SGS Screened Room	-	N/A	N/A

8.6 Radiated Emissions Test Results- Intentional Radiator

CFR Clause	15.209
Frequency Range	0.133MHz – tenth harmonic frequency

Operating Mode

Fundamental (carrier) emission measurements performed without token on reader (door closed condition). All other measurements performed with card on reader (door open condition).

Test Results

Worst Case Emissions

Frequency (kHz)	Corrected Peak Measurement (dB μ V/m)	Limit (dB μ V/m)
*133.702	19.27	25.08
400.480	-25.54	25.08
667.904	-28.64	25.08
934.760	-27.00	25.08
¹ 1069	-28.00	25.08
¹ 1203	-30.00	25.08
¹ 1470	-26.00	25.08

*Indicates fundamental (carrier) emission at 115% of controller mains supply voltage (138V), card not on reader.

¹Noise floor figures of test equipment shown at approximate fundamental harmonic frequencies.

Test Method

As per ANSI C63.4 : 1992

Measurements were performed at 3m and extrapolated to correct distance (300m below 490kHz) using a factor of 40dB/dec. Hence the correction factor of –80 dB was used. The corrected values are given above.

Frequency Range tested = 0.15MHz to tenth harmonic frequency (as per sec 15.33 (a)(1)).

Measurement Detector Details: Peak, 300Hz bandwidth at frequencies below 150 kHz, 10 kHz at frequencies above 150 kHz.

Note: Initial pre-testing was performed to obtain worst case operating mode for the compliance test (Authorised RF ID card on and off the peripheral readers).

Radiated Emissions Test Configuration**EUT Configuration****Radiated Emissions Environmental Conditions**

Power Supply (to controller)	120V, 60Hz
Temperature	15.5 °C
Relative Humidity	49 %
Barometric Pressure	1024 mb

Radiated Emissions Measurement Uncertainties

Frequency	± 200kHz
Amplitude	± 4.6dB

The uncertainties stated are calculated in accordance with the requirements of UKAS with a confidence level of 95%.

Test Equipment Used

Equipment Type	Model Number	Last Calibration Date	Calibration Interval
Active loop antenna	EMCO 6502	7/8/98	3 Years
Spectrum Analyser	HP 8563E	10/5/00	1 Year

BLANK PAGE

Last page of test report