



**TRL Compliance**  
part of TRAC global

**REPORT ON THE CERTIFICATION TESTING OF A  
STANLEY SECURITY SOLUTIONS EUROPE Ltd  
VANDAL RESISTANT READER  
WITH RESPECT TO  
THE FCC RULES CFR 47, PART 15.209 May 2007  
INTENTIONAL RADIATOR SPECIFICATION**



**TRL Compliance**  
part of TRAC global

TEST REPORT NO: RU1357/7980

COPY NO: 2.....

ISSUE NO: 1

FCC ID: OQL-R-VN

**REPORT ON THE CERTIFICATION TESTING OF A  
STANLEY SECURITY SOLUTIONS EUROPE Ltd  
VANDAL RESISTANT READER  
WITH RESPECT TO  
THE FCC RULES CFR 47, PART 15.209 May 2007  
INTENTIONAL RADIATOR SPECIFICATION**

TEST DATE: 21<sup>st</sup> – 25<sup>th</sup> June 2007

TESTED BY: ..... D. WINSTANLEY

APPROVED BY: ..... J CHARTERS  
RADIO SECTION  
LEADER

DATE: 26<sup>th</sup> November 2007.....

Distribution:

- Copy Nos:
1. Stanley Security Solutions Europe Limited
  2. FCC EVALUATION LABORATORIES
  3. TRL Compliance Ltd

THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE

## CONTENTS

	<b>PAGE</b>
CERTIFICATE OF CONFORMITY & COMPLIANCE	3
APPLICANT'S SUMMARY	4
EQUIPMENT TEST CONDITIONS	5
TESTS REQUIRED	6
TEST RESULTS	7-11

	<b>ANNEX</b>
PHOTOGRAPHS	A
PHOTOGRAPH No. 1: Test setup	
PHOTOGRAPH No. 2: Transmitter front view	
PHOTOGRAPH No. 3: Transmitter rear view potted	
APPLICANT'S SUBMISSION OF DOCUMENTATION LIST	B
MEASUREMENT UNCERTAINTY	C
TEST EQUIPMENT CALIBRATION	D
BAND OCCUPANCY PLOT	E
EMISSION GRAPH(s)	F
AC POWERLINE CONDUCTION GRAPH(s)	G

**Notes:**

- |    |  |     |                                     |
|----|--|-----|-------------------------------------|
| 1. | Component failure during test  | YES | <input checked="" type="checkbox"/> |
|    |  | NO  | <input type="checkbox"/>            |
| 2. | If Yes, details of failure:  |     |                                     |
| 3. | The facilities used for the testing of the product contain in this report are FCC Listed.  |     |                                     |
| 4. | The contents of the attached applicants declarations and other supplied information are not covered by the scope of this laboratory's UKAS or FCC accreditations' and is provided in good faith. |     |                                     |



# TRL Compliance

part of TRAC global

## CERTIFICATE OF CONFORMITY & COMPLIANCE

FCC IDENTITY: OQL-R-VN

PURPOSE OF TEST: Certification

TEST SPECIFICATION: FCC RULES CFR 47, Part 15.209 May 2007

TEST RESULT: Compliant to Specification

EQUIPMENT UNDER TEST: Vandal Resistant Reader

EQUIPMENT SERIAL No: 2466969

ITU: EMISSION CODE: 32kA1D

EQUIPMENT TYPE: Inductive Reader

PRODUCT USE: Access Control

CARRIER EMISSION: 0.207  $\mu\text{V/m}$  @ 300m

ANTENNA TYPE: Integral

ALTERNATIVE ANTENNA: Not applicable

FREQUENCY OF OPERATION: 133 kHz

CHANNEL SPACING: Wideband

NUMBER OF CHANNELS: 1

FREQUENCY GENERATION: SAW Resonator ☐ Crystal ☒ Synthesiser ☐

MODULATION METHOD: Amplitude ☒ Digital ☐ Angle ☐

POWER SOURCE(s): +110 Vac

TEST DATE(s): 21<sup>st</sup> – 25<sup>th</sup> June 2007

ORDER No(s): 4500000500

APPLICANT: Stanley Security Solutions Europe Limited

ADDRESS: 1 Park Gate Close  
Bredbury  
Stockport  
SK6 2SZ

TESTED BY: \_\_\_\_\_ D. WINSTANLEY

APPROVED BY: \_\_\_\_\_ J. CHARTERS  
RADIO SECTION  
LEADER

## APPLICANT'S SUMMARY

EQUIPMENT UNDER TEST (EUT):	Vandal Resistant Reader		
EQUIPMENT TYPE:	Inductive Reader		
SERIAL NUMBER OF EUT:	2466969		
PURPOSE OF TEST:	Certification		
TEST SPECIFICATION(s):	FCC RULES CFR 47, Part 15.209 May 2007		
TEST RESULT:	COMPLIANT	Yes No	[X] [ ]
APPLICANT'S CATEGORY:	MANUFACTURER IMPORTER DISTRIBUTOR TEST HOUSE AGENT		[X] [ ] [ ] [ ] [ ]
APPLICANT'S ORDER No(s):	4500000500		
APPLICANT'S CONTACT PERSON(s):	Mr M Cook		
E-mail address:	mcook@stanleyworks.com		
APPLICANT:	Stanley Security Solutions Europe Limited		
ADDRESS:	1 Park Gate Close Bredbury Stockport SK6 2SZ		
TEL:	+44 (0) 161 406 3418		
FAX:	+44 (0) 161 406 9957		
EUT(s) COUNTRY OF ORIGIN:	United kingdom		
TEST LABORATORY:	TRL Compliance Ltd		
UKAS ACCREDITATION No:	0728		
TEST DATE(s):	21 <sup>st</sup> – 25 <sup>th</sup> June 2007		
TEST REPORT No:	RU1357/7980		

## EQUIPMENT TEST / EXAMINATIONS REQUIRED

1.	TEST/EXAMINATION	RULE PART	DETECTOR	APPLICABILITY
	Intentional Emission Frequency:	15.209(a)	Average	Yes
	Intentional Emission Field Strength:	15.209(a)	Average	Yes
	Intentional Emission Band Occupancy:	15.215(c)	Peak	Yes
	Intentional Emission ERP (mW):	-	-	No
	Spurious Emissions – Conducted:	15.207	Quasi Peak Average	Yes
	Spurious Emissions – Radiated <1000MHz:	15.209	Quasi Peak Average	Yes
	Spurious Emissions – Radiated >1000MHz:	-	-	No
	Maximum Frequency of Search:	15.33	-	Yes
	Antenna Arrangements Integral:	15.203	-	Yes
	Antenna Arrangements External Connector:	15.204	-	Yes
	Restricted Bands:	15.205	-	Yes
	Extrapolation Factor:	15.31(f)	-	Yes

2.	Product Use:	Access Control	
3.	Emission Designator:	32kA1D	
4.	Duty Cycle:		<100%
5.	Transmitter bit or pulse rate and level:		bps
6.	Temperatures:	Ambient (Tnom)	13°C
7.	Supply Voltages:	Vnom	+110 Vac
	Note: Vnom voltages are as stated above unless otherwise shown on the test report page		
8.	Equipment Category:	Single channel Two channel Multi-channel	[X] [ ] [ ]
9.	Channel spacing:	Narrowband Wideband	[ ] [X]

## TRANSMITTER TESTS

### TRANSMITTER SPURIOUS EMISSIONS – RADIATED – PART 15.209

Ambient temperature	=	18°C(<1GHz)	1m measurements <30MHz	[X]
Relative humidity	=	69 (<1GHz),	3m measurements <30MHz	[X]
Conditions	=	Open Area Test Site (OATS)	30m extrapolated from 1m	[X]
Supply voltage	=	+110 Vac	30m extrapolated from 3m	[X]
Channel number	=	1	300m extrapolated from 1m	[X]
			300m extrapolated from 3m	[X]
			3m measurements >1GHz	[X]

	FREQ. (MHz)	MEAS. Rx. (dBμ)	CABLE LOSS (dB)	ANT FACT. (dB/m)	FIELD STRENGTH (dBμV/m)	EXTRAP. FACTOR (dB)	FIELD STRENGTH (μV/m)	LIMIT (μV/m)
0.009MHz - 0.49MHz								Note 11
0.49MHz - 1.705MHz								Note 11
1.705MHz - 30MHz								Note 11
30MHz - 88MHz	30.40	13.67	0.93	18.40	33.0	-	44.67	100
	31.50	15.16	0.94	17.50	33.6	-	47.86	100
	32.25	16.96	0.94	17.10	35.0	-	56.23	100
	33.25	16.55	0.95	16.50	34.0	-	50.12	100
	33.40	17.48	0.95	16.55	35.0	-	56.23	100
	35.20	13.98	0.97	16.65	31.6	-	38.02	100
	37.35	23.47	0.98	14.55	39.0	-	89.12	100
	38.95	19.81	0.99	13.50	34.3	-	51.88	100
	39.75	19.51	0.99	13.00	33.5	-	47.32	100
	62.95	25.77	1.18	5.05	32.0	-	39.81	100
	65.70	20.57	1.23	5.00	26.8	-	21.87	100
	73.80	18.26	1.24	5.80	25.3	-	18.40	100
	77.70	16.94	1.26	6.60	24.8	-	17.37	100
	81.65	13.88	1.32	7.30	22.5	-	13.33	100
	83.75	15.95	1.35	7.70	25.0	-	17.78	100
	86.15	13.23	1.37	8.00	22.6	-	13.48	100
88MHz - 216MHz								Note 11
216MHz - 960MHz								Note 11
960MHz - 1GHz								Note 11
Limits	0.009 MHz to 0.49 MHz		2400/f(kHz) μV/m @ 300m					
	0.49 MHz to 1.705 MHz		24000/f(kHz) μV/m @ 30m					
	1.705MHz to 30MHz		30μV/m @ 30m					
	30MHz to 88MHz		100μV/m @ 3m					
	88MHz to 216MHz		150μV/m @ 3m					
	216MHz to 960MHz		200μV/m @ 3m					
	960MHz to 1GHz		500μV/m @ 3m					

The test equipment used for the Transmitter Spurious Emissions – Radiated – Part 15.209 tests is shown overleaf:

**Notes:**

- 1 Results quoted are extrapolated as indicated.
- 2 Emissions were searched to: (x) 1000MHz inclusive, as per Part 15.33a.
- 3 Extrapolation factor 24.3 dB from 1m to 3m, as measured.
- 4 Extrapolation factor 80dB from 3m to 300m, as per Part 15.31f.
- 5 Extrapolation factor 40dB from 3m to 30m, as per Part 15.31f.
- 6 Measurements >1GHz @ 1m as per Part 15.31f(1).
- 7 Receiver detector 9kHz – 30MHz = CISPR, Quasi-Peak, 10kHz bandwidth.  
Apart From the bands 9kHz-90kHz and 110kHz-490kHz where an average detector is used.
- 8 Receiver detector 30MHz - 1GHz = CISPR, Quasi-Peak, 120kHz bandwidth.
- 9 Receiver detector >1GHz = Peak Hold, 1MHz resolution bandwidth.
- 10 New batteries used for battery powered products.
- 11 Emissions 20dBs below the limit are not recorded.
- 12 For emissions below 30MHz cable losses are assumed to be negligible.
- 13 f(kHz) is the frequency of operation or spurious emission.
- 14 See Annex G for emissions plot(s) 30MHz 1GHz.

**Test Method:**

- 1 As per Radio – Noise Emissions, ANSI C63.4: 2003.
- 2 Measuring distances as Notes 1 to 4 above.
- 3 EUT 0.8 metre above ground plane.
- 4 Emissions maximised by rotation of EUT, on an automatic turntable.  
Raising and lowering the receiver antenna between 1m & 4m >30MHz.  
Horizontal and vertical polarisations, of the receive antenna.  
EUT orientation in three orthogonal planes. Maximum results recorded.

TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
AE, LOOP, Z2, 9kHz - 30MHz	ROHDE & SCHWARZ	HFH2	881058 - 53	07	<b>X</b>
RECEIVER	ROHDE & SCHWARZ	ESVS 10	825892/006	UH04	<b>X</b>
RANGE 1	TRL	3 METRE	N/A	UH06	<b>X</b>
RANGE 1	TRL	10 METRE	N/A	UH07	<b>X</b>
RECEIVER	ROHDE & SCHWARZ	ESHS 10	841429/012	UH187	<b>X</b>
ANTENNA	YORK	CBL611/A	1618	UH191	<b>X</b>

## TRANSMITTER TESTS

### TRANSMITTER INTENTIONAL EMISSION – RADIATED – Part 15.209

Ambient temperature	=	13°C(<1GHz),	1m measurements <30MHz	[X]
Relative humidity	=	63%(<1GHz),	3m measurements <30MHz	[X]
Conditions	=	Open Area Test Site (OATS)	30m measurements @ fc	[ ]
Supply voltage	=	+110 Vac	300m extrapolated from 1m	[X]
Channel number	=	1	300m extrapolated from 3m	[X]

FREQ. (kHz)	MEASUREMENT DISTANCE (Meters)	MEASUREMENT Rx. READING (dBµV/m)	EXTRAPOLATION FACTOR (dB)	FIELD STRENGTH (µV/m)
133.3	1	90.6	104	0.207
133.3	3	66.3	80	0.207
Limit value @ fc		18.05 µV/m @ 300m		
Band occupancy @ -20 dBc		f lower		f higher
		117.4679 kHz		149.5192 kHz

See spectrum analyser plot – Annex E

#### Notes:

- Results quoted are extrapolated as indicated.
- Receiver detector @ fc = Average, 200 Hz bandwidth.
- When battery powered the EUT was powered with new batteries.
- For emissions below 30MHz the receiver automatically compensates for the loss due to the antenna factor of the loop antenna. This loss is 20 dBs across the measurement range 9kHz – 30MHz.
- For emissions below 30MHz the cable loss are assumed to be negligible.
- Peak Emissions were found to be less than or equal to the average limit and were therefore deemed to comply with 15.35(b).
- The test results quoted are the maximum seen after the supply voltage was varied between 85% and 115% of Vnom.

#### Test Method:

- As per Radio – Noise Emissions, ANSI C63.4: 2003.
- Measuring distances 1m and 3m.
- EUT 0.8 metre above ground plane.
- Emissions maximised by rotation of EUT, on an automatic turntable.  
Raising and lowering the receiver antenna between 1m & 4m.  
Horizontal and vertical polarisations, of the receive antenna > 30 MHz.  
EUT orientation in three orthogonal planes. Maximum results recorded.

The test equipment used for the Transmitter Intentional Emission – Radiated – Part 15.209 test is shown below:

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
AE, LOOP, Z2, 9kHz – 30MHz	ROHDE & SCHWARZ	HFH2	881058 – 53	07	<b>X</b>
RANGE 1	TRL	3 METRE	N/A	UH06	<b>X</b>
RANGE 1	TRL	10 METRE	N/A	UH07	<b>X</b>
RECEIVER	ROHDE & SCHWARZ	ESHS 10	841429/012	UH187	<b>X</b>
SPECTRUM ANALYSER	ROHDE & SCHWARZ	FSU 46	20034	UH281	<b>X</b>

## TRANSMITTER TESTS

### TRANSMITTER CONDUCTED EMISSIONS – AC POWER LINE Part 15.207

Ambient temperature = 23°C(<1GHz),  
Relative humidity = 63%(<1GHz),  
Conditions = Power Line Laboratory  
Supply voltage = 110V AC  
Supply Frequency = 60Hz

### SIGNIFICANT EMISSIONS

FREQUENCY (MHz)	MEASUREMENT RECEIVER READING (dBµV)	DETECTOR	CONDUCTOR (L or N)	LIMIT (dBµV)
19.470	32.84	Average	Live	50.00
24.270	39.54	Average	Neutral	50.00
28.540	46.37	Quasi Peak	Neutral	60.00
28.805	46.93	Average	Live	50.00

**Notes:**

- 1 See attached plot in Annex F.
- 2 EUT tested with and with out tag present.
- 3 Worst case value for each frequency recorded.
- 4 Only emissions within 20 dB of the limit are recorded.

**Test Method:**


- 1 As per Radio – Noise Emissions, ANSI C63.4: 2003.

The test equipment used for the Transmitter Conducted Emissions – AC Power Line Part 15.207 test was:

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
RECEIVER	ROHDE & SCHWARZ	ESHS 10	830051/001	UH03	<b>X</b>
LISN/AMN	ROHDE & SCHWARZ	ESH3-Z5	8407 31/015	UH195	<b>X</b>

## POWER LINE CONDUCTION EMISSIONS

Limits Part 15.207  
(Levels below the limit are only displayed if within 20dB of the limit)

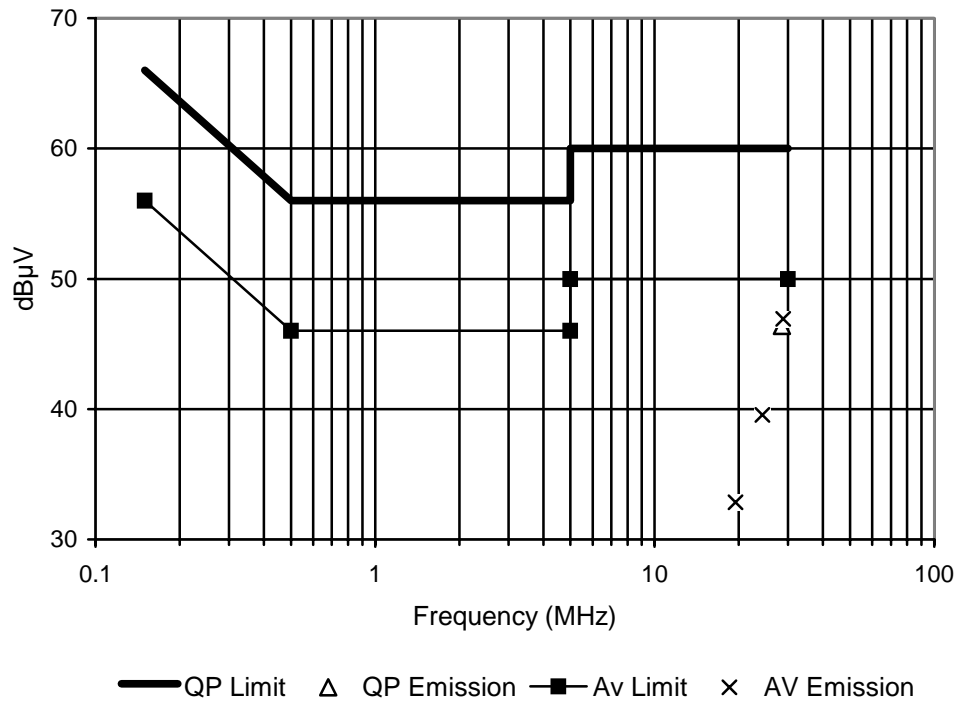

**ANNEX A**  
**PHOTOGRAPHS**

PHOTOGRAPH No. 1

TEST SETUP



PHOTOGRAPH No. 2

TRANSMITTER FRONT VIEW



### TRANSMITTER REAR VIEW POTTED



**ANNEX B**  
**APPLICANT'S SUBMISSION OF DOCUMENTATION LIST**

## APPLICANT'S SUBMISSION OF DOCUMENTATION LIST

a.	TCB	-	APPLICATION	[X]
		-	FEE	[X]
b.	AGENT'S LETTER OF AUTHORISATION	-		[X]
c.	MODEL(s) vs IDENTITY	-		[X]
d.	ALTERNATIVE TRADE NAME DECLARATION(s)	-		[X]
e.	LABELLING	-	PHOTOGRAPHS	[X]
		-	DECLARATION	[ ]
		-	DRAWINGS	[X]
f.	TECHNICAL DESCRIPTION	-		[X]
g.	BLOCK DIAGRAMS	-	Tx	[X]
		-	Rx	[ ]
		-	PSU	[ ]
		-	AUX	[ ]
h.	CIRCUIT DIAGRAMS	-	Tx	[X]
		-	Rx	[ ]
		-	PSU	[ ]
		-	AUX	[ ]
i.	COMPONENT LOCATION	-	Tx	[X]
		-	Rx	[ ]
		-	PSU	[ ]
		-	AUX	[ ]
j.	PCB TRACK LAYOUT	-	Tx	[X]
		-	Rx	[ ]
		-	PSU	[ ]
		-	AUX	[ ]
k.	BILL OF MATERIALS	-	Tx	[X]
		-	Rx	[ ]
		-	PSU	[ ]
		-	AUX	[ ]
l.	USER INSTALLATION / OPERATING INSTRUCTIONS	-		[X]

**ANNEX C**  
**MEASUREMENT UNCERTAINTY**

## **Radio Testing – General Uncertainty Schedule**

*All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95% confidence where no required test level exists.*

### **[1] Adjacent Channel Power**

Uncertainty in test result = **1.86dB**

### **[2] Carrier Power**

Uncertainty in test result (Equipment - TRLUH120) = **2.18dB**

Uncertainty in test result (Equipment – TRL05) = **1.08dB**

Uncertainty in test result (Equipment – TRL479) = **2.48dB**

### **[3] Effective Radiated Power**

Uncertainty in test result = **4.71dB**

### **[4] Spurious Emissions**

Uncertainty in test result = **4.75dB**

### **[5] Maximum frequency error**

Uncertainty in test result (Equipment - TRLUH120) = **119ppm**

Uncertainty in test result (Equipment – TRL05) = **0.113ppm**

Uncertainty in test result (Equipment – TRL479) = **0.265ppm**

### **[6] Radiated Emissions, field strength OATS 14kHz-18GHz Electric Field**

Uncertainty in test result (14kHz – 30MHz) = **4.8dB**, Uncertainty in test result (30MHz – 1GHz) = **4.6dB**,  
Uncertainty in test result (1GHz-18GHz) = **4.7dB**

### **[7] Frequency deviation**

Uncertainty in test result = **3.2%**

### **[8] Magnetic Field Emissions**

Uncertainty in test result = **2.3dB**

### **[9] Conducted Spurious**

Uncertainty in test result (Equipment TRL479) Up to 8.1GHz = **3.31dB**

Uncertainty in test result (Equipment TRL479) 8.1GHz – 15.3GHz = **4.43dB**

Uncertainty in test result (Equipment TRL479) 15.3GHz – 21GHz = **5.34dB**

Uncertainty in test result (Equipment TRLUH120) Up to 26GHz = **3.14dB**

### **[10] Channel Bandwidth**

Uncertainty in test result = **15.5%**

### **[11] Amplitude and Time Measurement – Oscilloscope**

Uncertainty in overall test level = **2.1dB**, Uncertainty in time measurement = **0.59%**, Uncertainty in Amplitude measurement = **0.82%**

### **[11] Power Line Conduction**

Uncertainty in test result = **3.4dB**

**[12] Spectrum Mask Measurements**

Uncertainty in test result = **2.59% (frequency)**  
Uncertainty in test result = **1.32dB (amplitude)**

**[13] Adjacent Sub Band Selectivity**

Uncertainty in test result = **1.24dB**

**[14] Receiver Blocking – Listen Mode, Radiated**

Uncertainty in test result = **3.42dB**

**[15] Receiver Blocking – Talk Mode, Radiated**

Uncertainty in test result = **3.36dB**

**[16] Receiver Blocking – Talk Mode, Conducted**

Uncertainty in test result = **1.24dB**

**[17] Receiver Threshold**

Uncertainty in test result = **3.23dB**

**[18] Transmission Time Measurement**


Uncertainty in test result = **7.98%**

**ANNEX D**  
**TEST EQUIPMENT CALIBRATION**

TRL Number	Equipment Type	Manufacturer	Last Cal Calibration	Calibration Period	Due For Calibration
UH003	Receiver	R&S	24/07/2006	12	24/07/2007
UH004	Receiver	R&S	11/10/2006	12	11/10/2007
UH006	3m Range ERP CAL	TRL	08/12/2006	12	08/12/2007
UH028	Log Periodic Ant	Schwarbeck	30/05/2007	24	30/05/2009
UH029	Bicone Antenna	Schwarbeck	22/05/2007	24	22/05/2009
UH041	Multimeter	AVOmeter	04/01/2007	12	04/01/2008
UH122	Oscilloscope	Tektronix	07/06/2005	24	07/06/2007
UH132	Power meter	Marconi	10/01/2007	12	10/01/2008
UH162	ERP Cable Cal	TRL	02/01/2007	12	02/01/2008
UH187	Receiver	R&S	11/10/2006	12	11/10/2007
UH191	Antenna	York	11/08/2006	24	11/08/2008
UH195	LISN	R&S	09/01/2007	12	09/01/2008
UH228	Power Sensor	Marconi	15/01/2007	12	15/01/2008
UH253	1m Cable N type	TRL	07/12/2006	12	07/12/2007
UH254	1m Cable N type	TRL	07/12/2006	12	07/12/2007
UH265	Notch filer	Telonic	11/01/2006	24	11/01/2008
UH269	1m Cable N type	TRL	07/12/2006	12	07/12/2007
UH270	1m Cable N type	TRL	07/12/2006	12	07/12/2007
UH271	1.5m Cable N type	TRL	07/12/2006	12	07/12/2007
UH272	1.5m Cable N type	TRL	07/12/2006	12	07/12/2007
UH273	2m Cable N type	TRL	07/12/2006	12	07/12/2007
UH274	2m Cable N type	TRL	07/12/2006	12	07/12/2007
UH281	Spectrum Analyser	R&S	24/07/2006	12	24/07/2007
L005	CMTA	R&S	10/01/2007	12	10/01/2008
L007	Loop Antenna	R&S	22/05/2007	24	22/05/2009
L138	1-18GHz Horn	EMCO	23/05/2007	24	23/05/2009
L139	1-18GHz Horn	EMCO	23/05/2007	24	23/05/2009
L176	Signal Generator	Marconi	01/03/2007	12	01/03/2008
L193	Bicone Antenna	Chase	12/10/2003	24	12/10/2005
L203	Log Periodic Ant	Chase	21/10/2003	24	21/10/2005
L343	CCIR Noise Filter	TRL	20/09/2006	12	20/09/2007
L426	Temperature Indicator	Fluke	09/01/2007	12	09/01/2008
L479	Analyser	Anritsu	09/01/2007	12	09/01/2008
L552	Signal Generator	Agilent	24/07/2006	12	24/07/2007

**ANNEX E**  
**BANDWIDTH PLOT**

## BANDWIDTH PLOT

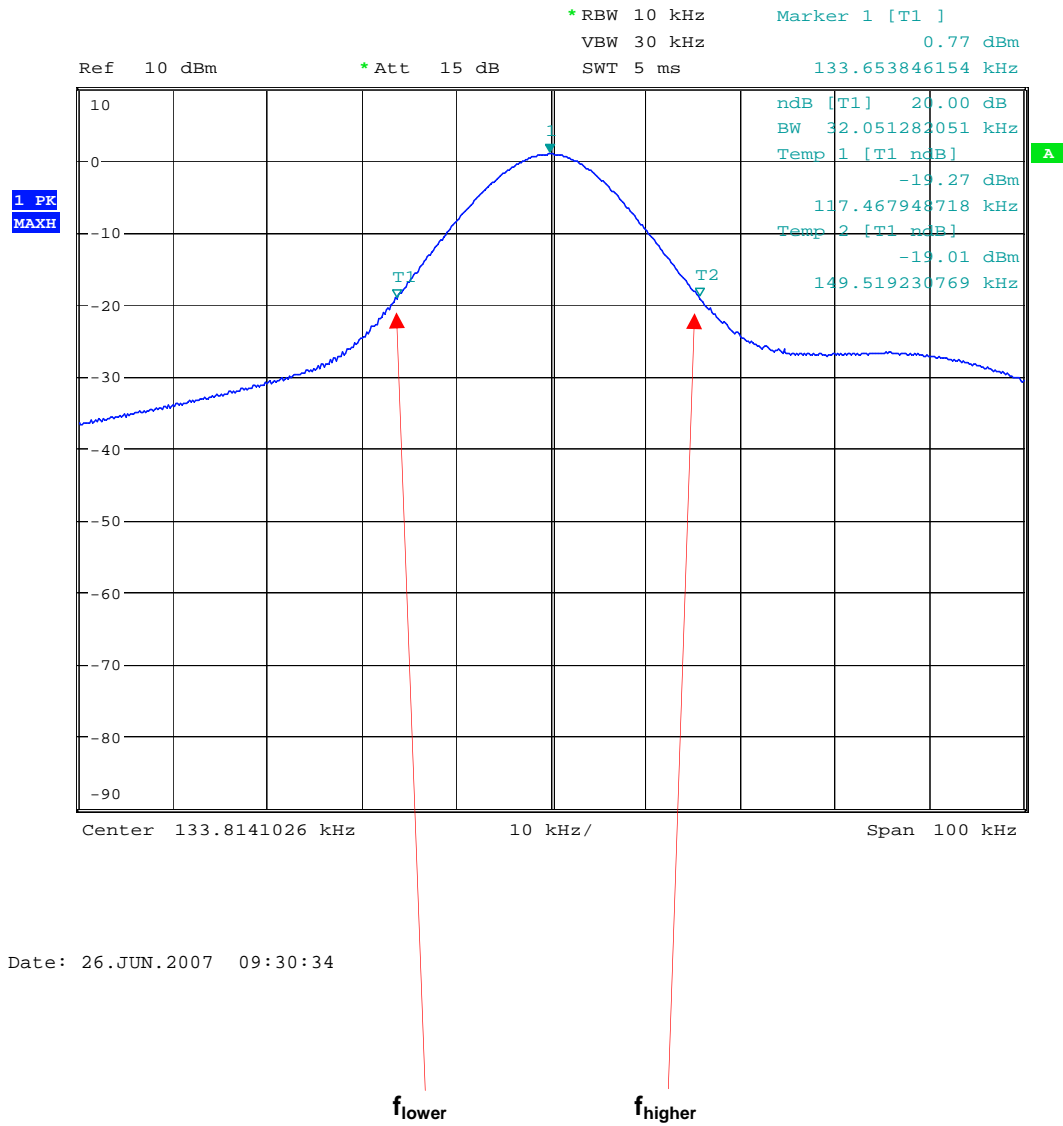

$f_{\text{lower}}$       =      117.4679 kHz  
 $f_{\text{higher}}$       =      149.5192 kHz  
 Occupied Bandwidth      =      32.0513 kHz

**ANNEX F**  
**EMISSIONS GRAPH(s)**

TRL Compliance Services Ltd  
E-Field Radiation (30MHz-1GHz)

21 Jun 2007 14:19


EUT: Vandal resistant reader  
Manuf: PAC International.  
Op Cond: Prescan 30MHz - 1000MHz  
Operator: S Hodgkinson  
Test Spec: Part15  
Comment: Unit in Tx mode key present, unit facing Rx antenna.  
Rx antenna Vertical  
Result File: vprvkeyp.dat : New Measurement

Scan Settings (1 Range)

Frequencies			Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten
30MHz	1000MHz	50kHz	120kHz	PK	1msec	Auto

Transducer	No.	Start	Stop	Name
1	21	30MHz	1000MHz	UH72
	22	30MHz	1000MHz	UH191

Final Measurement: Detector: X QP  
Meas Time: 2sec  
Subranges: 50  
Acc Margin: 10 dB

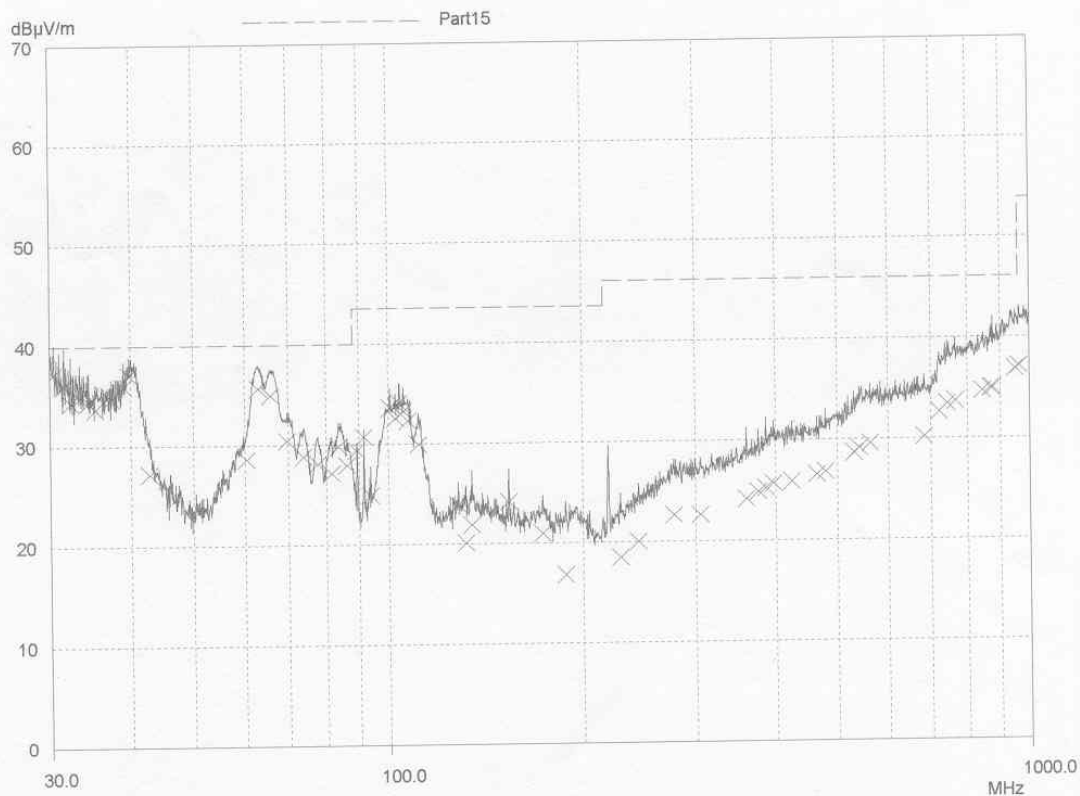

PAGE 1

**ANNEX F**  
**AC POWERLINE CONDUCTION GRAPH(s)**


# Powerline Conduction

22 Jun 2007 14:18

## 150kHz - 30MHz

EUT: Vandal Resitant Reader  
 Manuf: PAC International  
 Op Cond: LISN UH05, cable UH21 & Receiver UH187  
 Operator: D Winstanley  
 Test Spec: EN55022 Class B (or Variant)  
 Comment: Live Line, 110V, 60Hz, Unit in TX Mode, Key Present, PSU & Controller Connected

Scan Settings		(1 Range)			Receiver Settings			
Frequencies		Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
Start	Stop	5kHz	10kHz	PK+AV	50msec	Auto	OFF	60dB
150kHz	30MHz							
Transducer	No.	Start	Stop	Name				
	1	10kHz	30MHz	UH21				
Final Measurement:		Detectors:	X QP / + AV					
		Meas Time:	2sec					
		Subranges:	25					
		Acc Margin:	20 dB					

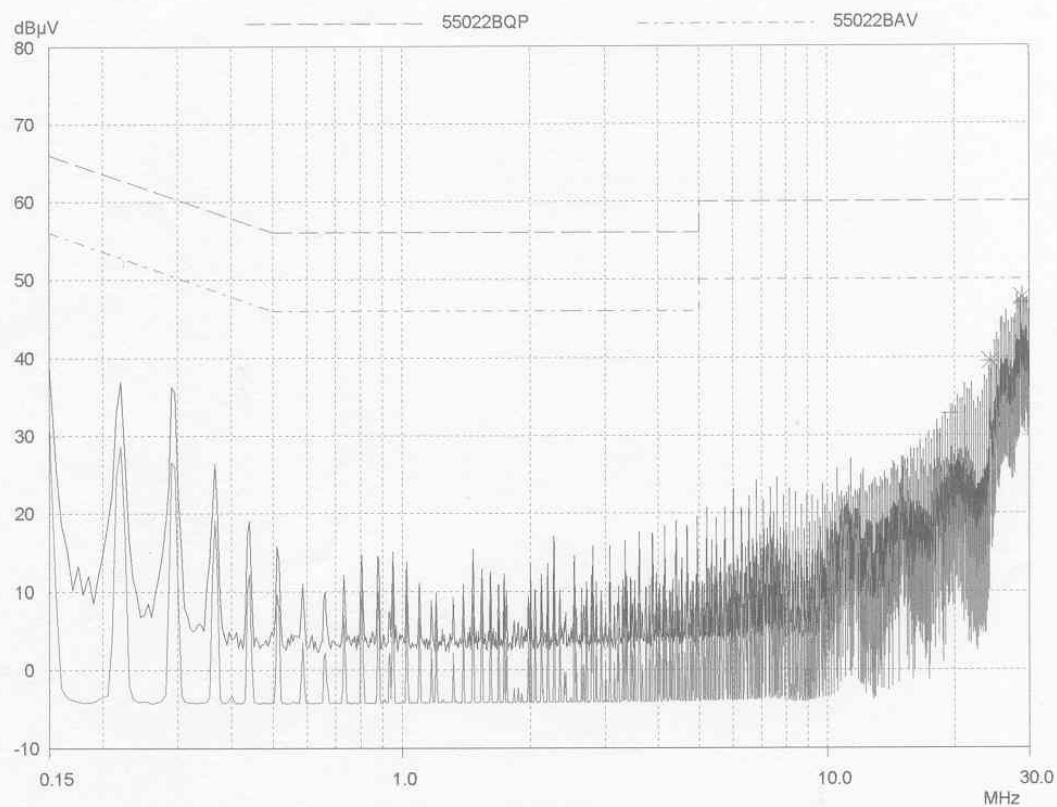

PAGE 1