


**FCC Part 101 Certification
for
Triton Network Systems, Inc.
FCC ID: OQT28SNP-03-02
28 GHz SONET OC-3
Wireless Consecutive Point to Point
Millimeter-Wave Transceiver Models:
TNS-28-SNP-03-100, -200, -300, -400, -500, -600**

Report written	Peter Boers	Report reviewed	Candy Campbell
Function	Contractor	Function	ITS Team leader
Report date	August 25, 2000	Review date	
Signature		Signature	

All services undertaken are subject to the following general policy: Reports are submitted for exclusive use of the client to whom they are addressed. Their significance is subject to the adequacy and representative character of the samples and to the comprehensiveness of the tests, examinations or surveys made. This report shall not be reproduced except in full, without written consent of Intertek testing Services, NA Inc. This report must not be used to claim product endorsement by NVLAP, NIST nor any other agency of the U.S. Government.

Table of Contents

1. Introduction.....	3
2. Product Description	3
2.1. Multiple list/ Family information.....	3
2.2. Frequency Availability.....	4
2.3. Block Diagram of the product.....	4
3. Summary of Tests and results.....	4
4. Test plan.....	5
4.1. General.....	5
4.2. Frequency stability.....	5
4.3. Output power	5
4.4. Bandwidth.....	5
4.5. Emission Limitation (Mask)	5
4.6. Spurious emissions.....	6
4.7. Incidental radiation	6
4.8. Receiver verification.....	6
4.9. RF Safety evaluation.....	6
5. Test results	7
5.1. General.....	7
5.2. Frequency Tolerance and Frequency Stability	7
5.3. Output power	8
5.4. Bandwidth.....	9
5.5. Emission Designator	9
5.6. Emission Limitation (Mask)	10
5.7. Spurious emissions.....	14
5.8. Incidental radiation	16
5.9. RF Safety evaluation.....	16
5.10. Equipment list.....	17
6. Photos of the EUT.....	18
7. Additional Materials	19
7.1. Final RF amplifier diagram.....	19
7.2. Bill of Materials	19

1. Introduction

On August 21 to 24, 2000, we tested the 28 GHz SONET OC-3 Wireless Consecutive Point to Point Millimeter Wave Transmitter System, Models:

**TNS-28-SNP-03-100,
TNS-28-SNP-03-200,
TNS-28-SNP-03-300,
TNS-28-SNP-03-400,
TNS-28-SNP-03-500,
TNS-28-SNP-03-600**

to determine if they were compliant with the FCC Part 101 emission standard. The difference between the four models rests only on the selection of wave guide filters for the appropriate bands. We found that the units met the applicable requirements when tested as received.

2. Product Description

The 28 GHz SONET OC-3 radio is a data-link radio device. A pair of radios, working together, forms a full duplex 155 Mbps data link, in accordance with the SONET OC-3 specification as specified in the Bellcore GR-253-CORE standard. Within the radio network model, the radio link acts as a physical layer link, or bit pipe, similar to a bi-directional optical regenerator. The radio replicates data without regard to content.

The 28 GHz SONET OC-3 radio uses a 100 MHz channel pair (50 MHz transmit, 50 MHz receive) to carry an aggregate data rate of approximately 190 Mbps in each direction across the link. The SONET OC-3 payload accounts for 155 Mbps. The radios are designed to be installed by operators on building rooftop, towers, or other suitable structures to provide high-bandwidth communication links. Operators can use linked radios to provide broadband fixed wireless technology services to an entire metropolitan service without using fiber optical cable.

2.1. Multiple list/ Family information

Part number coding					Transmit Frequency Band
TNS	FF	PPA	BB	XXX	
TNS	28	SNP	03	100	27,500 MHz to 27,700 MHz
TNS	28	SNP	03	200	27,700 MHz to 27,900 MHz
TNS	28	SNP	03	300	27,950 MHz to 28,150 MHz
TNS	28	SNP	03	400	28,150 MHz to 28,350 MHz
TNS	28	SNP	03	500	27,500 MHz to 27,850 MHz
TNS	28	SNP	03	600	28,000 MHz to 28,350 MHz

2.2. Frequency Availability

The frequencies available for this particular device operating under FCC rules, Part 101.101 as:

Radio Services	Frequency Band (GHz)	Applicable Subparts	Note
Common Carrier (Pt 101)	27.500 – 28.350	L	LMDS

2.3. Block Diagram of the product

Triton Confidential

3. Summary of Tests and results

Test Performed	Reference	Pass/Fail Criteria
Frequency Availability	101.101	Pass
Frequency Tolerance and Frequency Stability	101.107	Pass
Bandwidth	101.109	Pass
Occupied Bandwidth	2.1049	Pass
Emission Limitations (Mask)	101.111	Pass
Transmitter Power Limitations	101.113	Pass
RF Safety assessment	1.1307	Performed

4. Test plan

4.1. General

All testing will be performed by or under supervision of ITS test personnel, using ITS test procedures applicable for the product and standards required. Testing will be performed at normal laboratory conditions unless specifically indicated otherwise in the test report.

4.2. Frequency stability

FCC rules, Part 101, Section 107 defines the Frequency stability requirement for transmitters in the 27.5 – 28.35 GHz range as 0.001% of the transmitter frequency over the temperature range of –30 to +50 degrees Celsius and 85% to 115% of the nominal supply voltage range.

Four vendors for the basic reference oscillator in the product are contemplated, however not all are available at this moment. Only the stability of the available reference oscillators will be tested by measuring the transmit frequency over the specified voltage and temperature range. When further vendors for the reference oscillator become available, subsequent stability tests must be performed and documented.

4.3. Output power

FCC rules Part 101, Section 113 requires that the output power of the transmitter does not exceed 55dBW EIRP with the additional stipulation that no higher power than necessary to carry out the desired communication shall be allowed.

The output power of this transmitter will be measured over the allocated frequency band from 27,500 MHz to 28,350 MHz in the low end, the middle and the high end of the band for all operating modes of the transceiver.

4.4. Bandwidth

The spectral output of the transceiver will be measured in the low end of the band, approximately in the middle of the band and at the high end of the band, for each of the different models and/or modulation schemes and at the nominal power rating(s) of the transceiver. The 99% power bandwidth will be calculated from the spectral display.

4.5. Emission Limitation (Mask)

The spectral output of the transceiver will be measured in the low end of the band, approximately in the middle of the band and at the high end of the band to show that the emissions fall under the mask as defined in FCC rules, part 101.111. The shape of the mask will be calculated based on the nominal rated output power of 1 Watt (30 dBm).

4.6. Spurious emissions

Radiated spurious emissions will be measured at a distance of 1 or 3 meters from the product in the frequency range for 30 MHz to 200 GHz. For the frequency range above 40 GHz, external mixers connected to standard gain horns will be used to down convert the frequency and only radiated measurements will be made.

4.7. Incidental radiation

Incidental radiation will be measured according to the requirements of FCC Part 15. B and ANSI C63.4:1992.

4.8. Receiver verification

The receiver section of the transceiver is covered under the requirements of FCC part 15 (verification). Specific attention will be paid to the potential emissions of the local oscillator frequencies appearing at the antenna terminals.

4.9. RF Safety evaluation

The transceiver is neither a portable nor a mobile device. A determination will be made if the transceiver is categorically excluded from MPE evaluation or not. If an MPE evaluation is required, the theoretical calculations of the safety zone will be made and an experimental test will be made to substantiate these calculations.

5. Test results

5.1. General

The Triton 28 GHz SONET OC-3 transceiver was tested at the facilities of ITS Boxborough from August 21 to August 24, 2000. All testing was performed at nominal operating conditions at room ambient temperature unless otherwise specified.

5.2. Frequency Tolerance and Frequency Stability

The carrier frequency of each transmitter authorized in these services must be maintained within the following percentage of the reference frequency according to FCC part 101.107

Frequency Range (MHz)	Frequency Tolerance
27350 - 28500	0.001 percent

Table 1. Frequency Stability versus Voltage

Maximum Allowed Frequency Deviation (Hz): 273500				
Voltage (VDC)	Reference Frequency (Hz)	Measured Frequency (Hz)	Deviation (Hz)	Pass/Fail
40.8	28,274,987,222	28,274,987,275	53	Pass
48.0	28,274,987,222	-----	-----	-----
55.2	28,274,987,222	28,274,987,268	46	Pass

Table 2. Frequency Stability versus Temperature

Maximum Allowed Frequency Deviation (Hz): 273500				
Temperature (°C)	Reference Frequency (Hz)	Measured Frequency (Hz)	Deviation (Hz)	Pass/Fail
-30	28,274,987,222	28,274,988,011	789	Pass
-20	28,274,987,222	28,274,987,890	668	Pass
-10	28,274,987,222	28,274,987,884	662	Pass
0	28,274,987,222	28,274,987,671	449	Pass
10	28,274,987,222	28,274,987,430	208	Pass
20	28,274,987,222	-----	-----	-----
30	28,274,987,222	28,274,987,049	-173	Pass
40	28,274,987,222	28,274,986,888	-334	Pass
50	28,274,987,222	28,274,986,588	-634	Pass

5.3. Output power

FCC rules Part 101, Section 113 requires that the output power of the transmitter does not exceed 55dBW IERP, with the additional stipulation that no higher power than necessary to carry out the desired communication shall be allowed.

The output power of the transmitter is measured both with a Wattmeter and with the built-in function in the R&S spectrum analyzer to determine channel power. Both measurements are corrected for the 11.83 dB loss in the cable between the transmitter antenna output and the measurement instrumentation.

The transmitter was modulated with a 32 QAM signal with a quasi-random bit pattern. Consequently the measured average power is lower than the peak output power of the transmitter depending on the relative occurrence of the various amplitudes used in the 32 QAM constellation diagram.

The numerical gain of the antenna (according to the manufacturer) is 3981.1 or 36 dB over an isotropic radiator. The transmitters will automatically reduce the output power to the minimum level required to maintain a reliable data transmission. The following table represents the maximum possible output power of 1 Watt (30 dBm) that is programmed into each individual transmitter as a factory setting. The output power can be varied over a range of at least 50 dB.

Table 3. Transmitter maximum output power

Modulation	Frequency (MHz)	Measured Power (dBm)	Calculated EIRP based on 36 dB antenna gain (dBW)	IERP Limit (dBW)	Pass/Fail
32QAM	27,525	28.33	34.33	55	Pass
32QAM	27,575	29.33	35.33	55	Pass
32QAM	28,175	29.89	35.89	55	Pass
32QAM	28,325	29.57	35.57	55	Pass

5.4. Bandwidth

The occupied bandwidth is determined by the 99% power bandwidth as calculated by the internal function of the R&S spectrum analyzer. The data is taken from the following figures showing the screen data of this spectrum analyzer.

Table 4. Occupied Bandwidth

Mode	Frequency (MHz)	Authorized BW (MHz)	Measured Occupied Bandwidth (MHz)	Detail information	Pass/Fail
32QAM	27525	850	41.58	Figure 2	Pass
32QAM	27575	850	42.08	Figure 3	Pass
32QAM	28175	850	42.08	Figure 4	Pass
32QAM	28325	850	42.08	Figure 5	Pass

5.5. Emission Designator

Part of the application (License or Certification) require the inclusion of an emissions designator as determined by 47 CFR 2.201 and 2.202

The characteristics of the emissions designator are as follows:

	Value
Necessary Bandwidth – This may be calculated using the formulas of 2.202 or if that is not possible with the occupied bandwidth	42M1
First Symbol – Type of modulation of the main carrier	D
Second Symbol – Nature of signal(s) modulating the main carrier	1
Third Symbol – Type of information be transmitted	D

5.6. Emission Limitation (Mask)

The mean power of emissions must be attenuated below the mean output power of the transmitter in accordance with the following schedule (from FCC 101.111):

Table 5. Emission Limitations Mask Schedule

Percentage Shift From Center Frequency	Attenuation Equation From Part 101.111.2(ii)	Attenuation Below Center Frequency Peak (dBc)	Spectrum Analyzer RBW
0 to 50	None	0	1 MHz
50 to 250	$11 + 0.4(P-50) + 10 \log B$	28 to 56	1 MHz
Greater than 250	$43 + 10 \log(P_o)$	43	4 kHz

P = Percent removed from the carrier frequency.

B = Authorized bandwidth in MHz.

P_o = Mean output power in Watts.

Attenuation greater than 56 dB is not required.

For a 1 Watt system: $43 + 10 \log(1 \text{ Watts}) = 43 + 0 = 43 \text{ dB}$.

Note: Emission mask plots shown in Figures 2 through 7 on the following pages show compliance of the EUT with the emission mask requirements defined in Part 101.111.2 (ii). The connecting cable between the transmitter antenna connector and the spectrum analyzer has a measured loss of 11.83 dB at 27.5 and 28.5 GHz. This value has been added as an offset in the spectrum analyzer display so that the display reads directly in the correct power (dBm) values.

The emission mask points are calculated as follows:

For the 850 MHz authorized bandwidth as outlined in FCC part 101.109 and a nominal output power of 1 Watt (30dBm)

Percentage Shift From Center Frequency	Attenuation Equation From Part 101.111.2(ii)	Attenuation Below Center Frequency Peak (dBc)	Frequency deviation from center in MHz
0 to 50	None	0	0 - 425
50	$11 + 0.4(P-50) + 10 \log B$	40.3	425
89.25	$11 + 0.4(P-50) + 10 \log B$ or 56	56	758.625
250	$11 + 0.4(P-50) + 10 \log B$ or 56	56	2125
Greater than 250	$43 + 10 \log(P_o)$	43	>2125

Figure 8 shows a wide band spectral display proving that the transmitter complies with the requirement of 56 dB attenuation below the carrier level.

Figure 1. FCC mask for the 28 GHz band

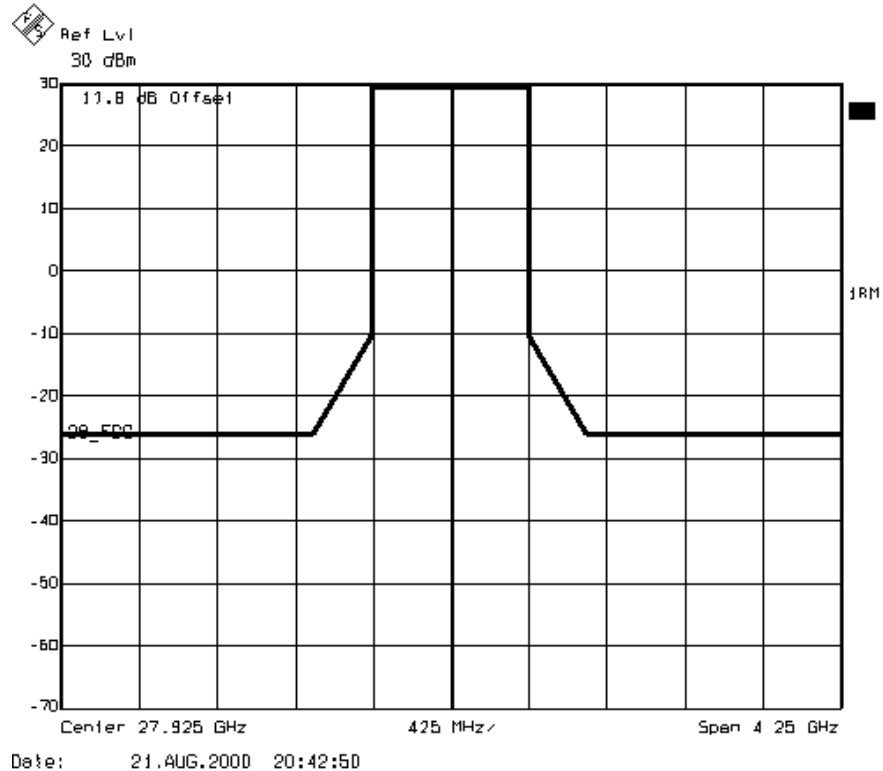


Figure 2. – 32 QAM , 1Watt output at the lower band edge. Actual output power 28.33 dBm

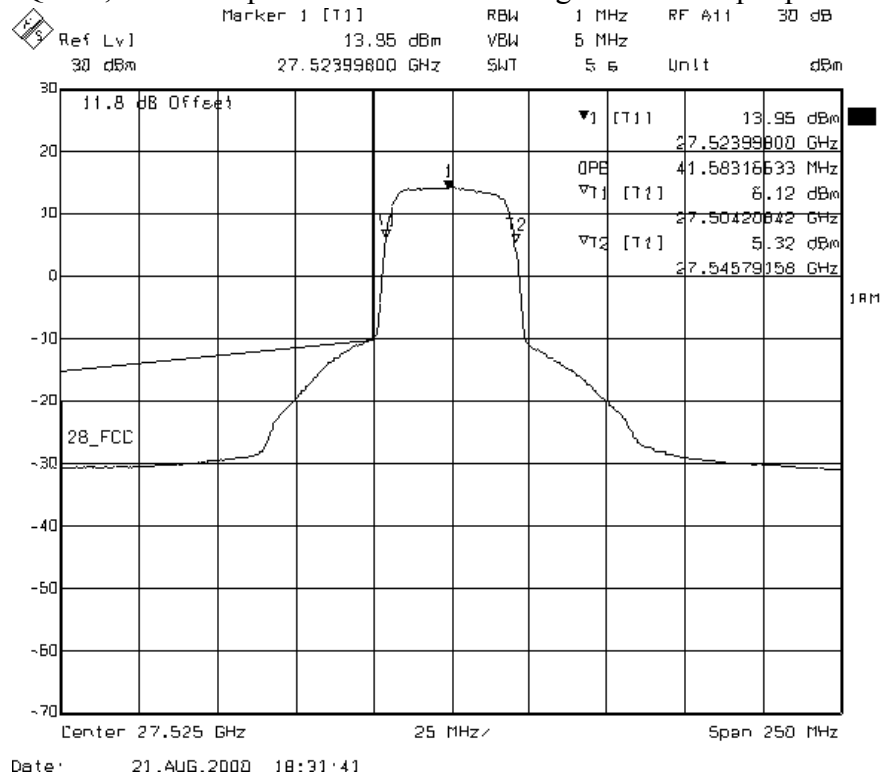


Figure 3. – 32 QAM, 1Watt at the lower band edge – next channel - actual power 29.33dBm

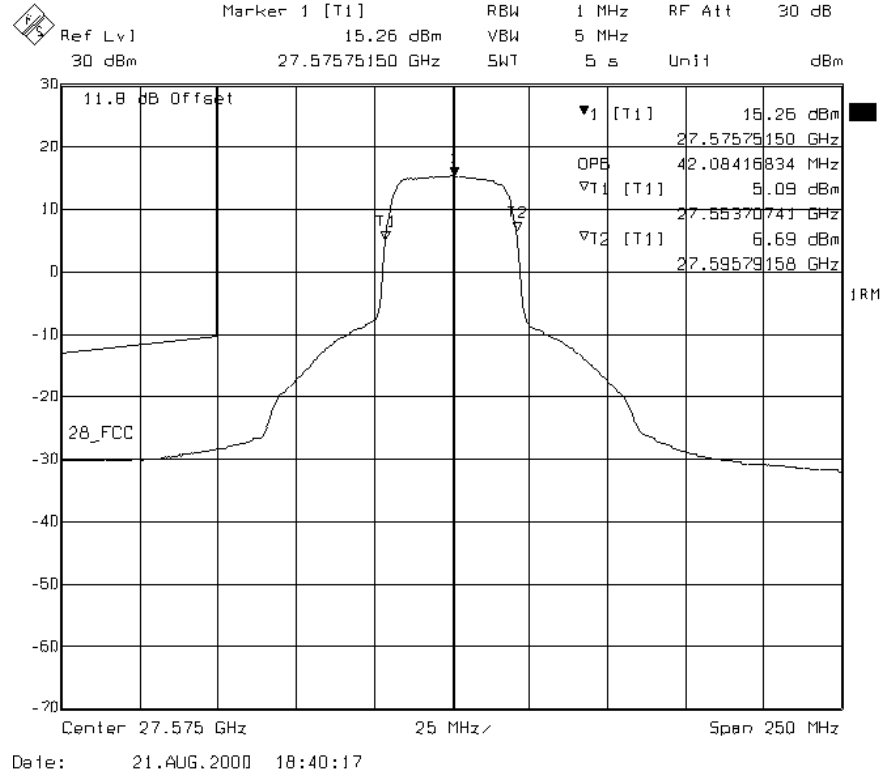


Figure 4. – 32 QAM, 1Watt output in the middle of the band, power 29.89dBm


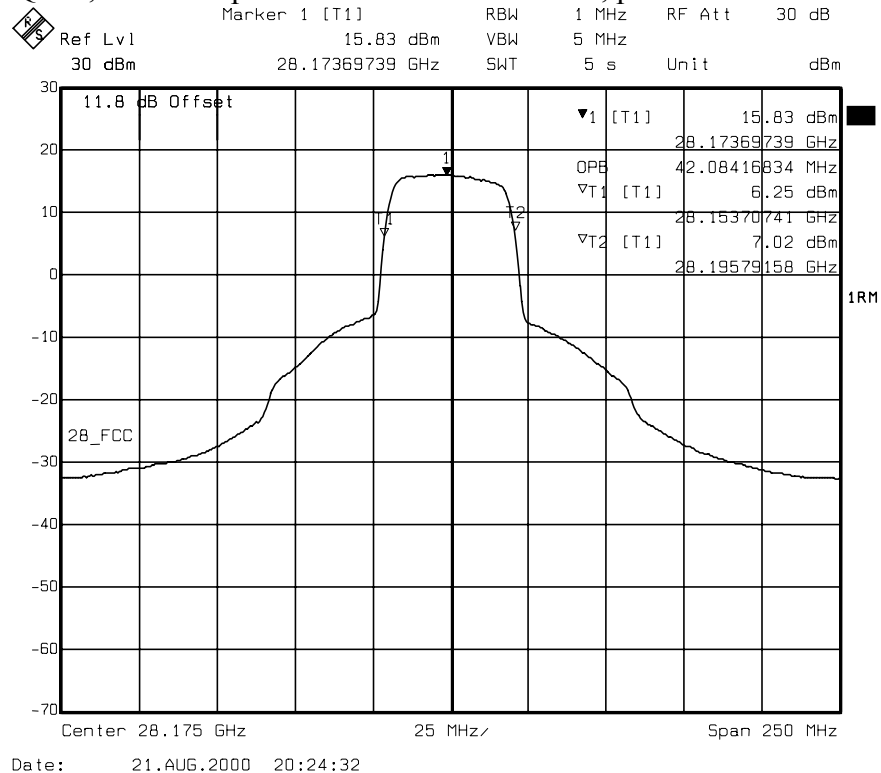


Figure 5. – 32 QAM, 1Watt output at the high end of the band – Actual power 29.57dBm

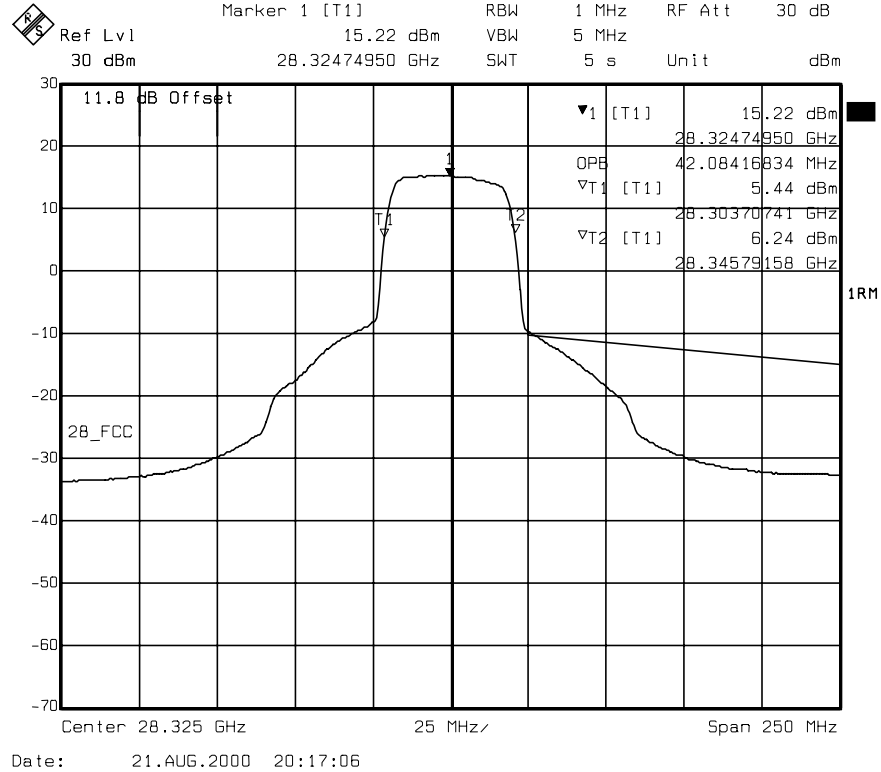


5.7. Spurious emissions

Measurements were made both conducted in the range of 30 MHz to 40 GHz on the antenna terminal and radiated from 1 – 200 GHz with a EUT to antenna distance of 0.3 meter. No spurious could be detected with the available instrumentation. Minimum sensitivity was minus 50dBm.

Figure 6 shows that spurious emissions are attenuated at least 56 dB outside the skirt ranges of the emission mask and up to 250% of the authorized bandwidth removed from the center of the band.

Figure 6. – span 4250 MHz (2 x 250 percent authorized BW)

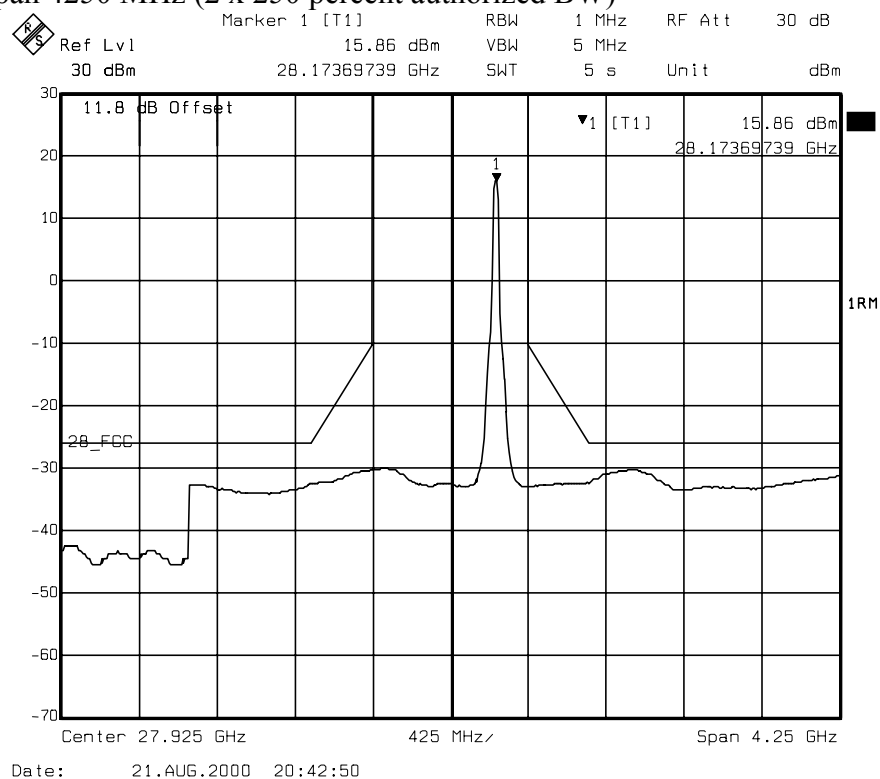

On any frequency removed from the assigned frequency by more that 250% of the authorized bandwidth, the attenuation of unwanted signals in any 4 kHz band shall be at least $43 + 10\log(P)$ dB, or 43 dB for this transmitter. Conducted transmit antenna power scans were made over the frequency range of 1 – 40 GHz with a bandwidth of 50 kHz in order to speed up measurement time and no emissions were found above the spectrum analyzer noise floor. Figure 7 illustrates such a scan.

The transmit power was lowered to -4.2dBm and spurious emissions were measured similar to the previous measurements. Figure 8 shows that under low power conditions spurious emissions continue to meet the requirements.

Figure 7. Spurious emissions scan


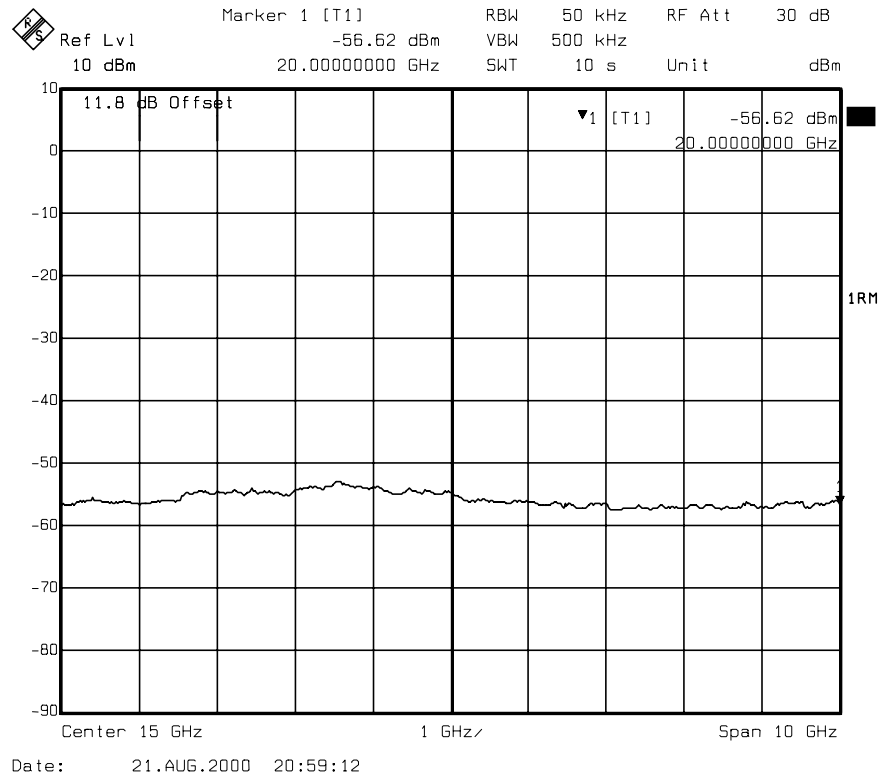


Figure 8. Spurious emissions at low output power: -4dBm

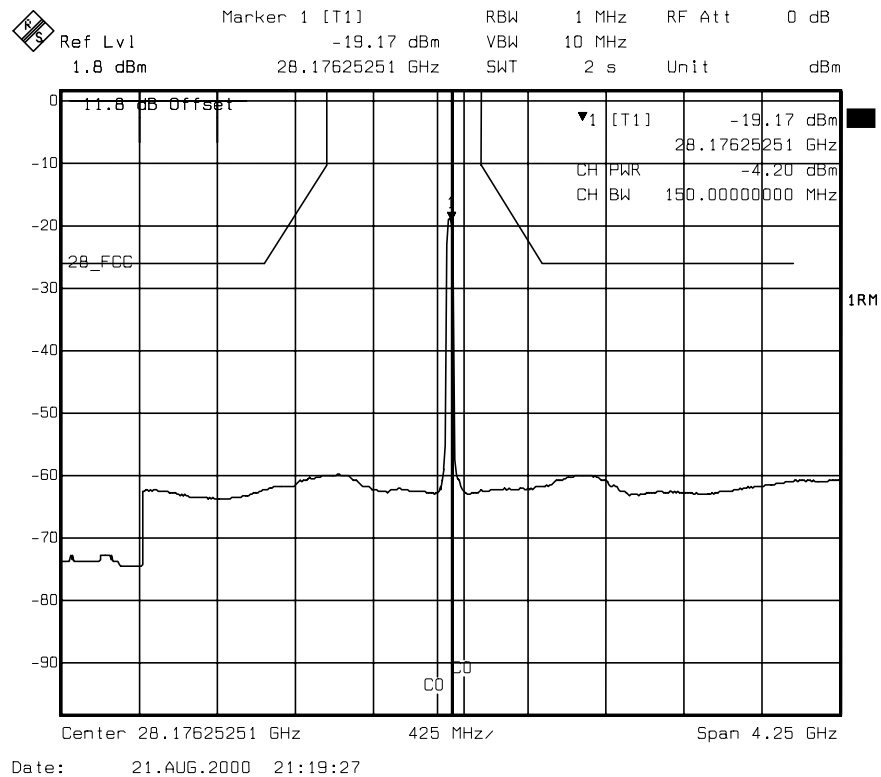

5.8. Incidental radiation

The Triton Network Systems 38 GHz SONET OC-3 meets the requirements of FCC Part, Class B for incidental radiators. A full report substantiating that is available under ITS report J20021364A

5.9. RF Safety evaluation

The Wireless Consecutive Point to Point Millimeter-Wave Transceiver models TNS-28-SNP-03-100, -200, -300, -400, -500 and -600 are stationary, fixed-mounted units with a maximum EIRP of 36 dBW or 3981 Watt effective radiated power in the main lobe of the antenna.

This is more than the 1640 W EIRP threshold established by the FCC for RF safety evaluation, therefore the transmitter is not categorically excluded from MPE evaluation.

Based on the following physical characteristics:

Conducted antenna power	1 Watt
Antenna Gain	3981.1
Maximum antenna dimension	34.5 cm

and the theoretical formulas FCCC OET 65, the following RF safety parameters can be calculated for operation on 28 GHz:

1. Transition between near and far field; $0.5D^2/\lambda$ is 5.55 meters
2. Maximum near field power; $4P/A$ is 42.79 W/m^2
3. Power density at the far field transition point; $S=PG/(4.\pi.R^2)$ is 10.28 W/m^2
4. Distance for power density to equal 10 W/m^2 ; $PG/(4.\pi.R^2)$ is 5.63 meters.

Experimentally we determined the field strength as measured with a broadband E-field probe.

The measurement results closely followed the theoretical predictions.

The results are tabulated below:

Distance (m)	E-field (V/m)	Calculated IERP (W/m2)	Theoretical far field (W/m2)
5.0	71	13.37	na
5.3	63	10.52	na
6.8	50	6.63	6.85

From the above, the following conclusions can be reached:

- The Triton TNS 28 transceiver complies with the 50 W/m^2 RF safety limits for occupational RF workers.
- A safety zone in front of the unit of at least 6 meters for the protection of the general public needs to be established.
- A RF safety-warning label needs to be present on the transceiver. The user/installation manual needs to provide information on the proper mounting such that the safety zone is maintained.
- When multiple antennas are installed in the same location, a RF exposure assessment will have to be made at the time of installation.

5.10. Equipment list

The following equipment was used for radiated and conducted emissions testing in accordance with FCC Part 101.

Table 7. Equipment List

Equipment	Manufacturer	Model	Serial	Cal Due
Spectrum Analyzer	Tektronix	2784	B010153	02/03/00
Spectrum Analyzer	R&S	FSEK	1088.1491.25	05-jun-2001
Horn Antenna	EMCO	3116	2090	15 mar 01
Harmonic Mixer	MILLITECH	MHB-10-R00W0 75-110GHz	015	N/A
Harmonic Mixer	MILLITECH	MHB-15-R00W0 50-75GHz	019	N/A
Harmonic Mixer	MILLITECH	MSH-05-8FDCSN 140-220GHz	017	N/A
Harmonic Mixer	MILLITECH	MHB-06-R00WN 110-170 GHz	022	N/A
Harmonic Mixer	MILLITECH	MHB-22-R00W0 33-50GHz	013	N/A
Wattmeter	HP	437 B	3125U23390	7/7/01
Wattmeter probe	HP	8487A	1093452G	6/6/01
Attenuator	Weinschel	54-20	09632	--
K-connector cable, 10'	--	--	10.4	--
K-connector cable, 10'	--	--	10.6	--
K-connector cable, 18"	--	--	CBL001	11/03/00
Temperature chamber	Watlow	Series 1500	--	--
Power supply	HP	6554A	3844A00845	28/04/01
E field probe	AR	FP2080	21150	9-aug-2000

6. Photos of the EUT

See Separate Photo file

7. Additional Materials

7.1. Final RF amplifier diagram

Triton Confidential

7.2. Bill of Materials

The following list gives the part numbers for the major assemblies present in the equipment as tested.

Description	Triton part number	
Reference Oscillator	3100000-1001	
Transmitter Module	3328730-1000, 0001	Need some explanation
Receiver Module	3228780-1000, 0001	Need some explanation
Exciter assembly	2528002-0001 2328004-0001	Need some explanation
Antenna assembly	2300004-0001	
IF filter	2600000-0001	
Wave guide filters	2600001-0001,2 2628001-0001,2,3,4,5,6	Need some explanation
Power supply	3000001-0002	
Network Interface card (SONET)	2900040-1001	
Modem	2700000-0002	