


condition TX ~ RX 1.5m
E-plane horizontal

model game pad GP525
test date 2002/1/8
test freq. 27.12
test site open site

0	-75.8 dBm
10	-79.2 dBm
20	-74.2 dBm
30	-82.8 dBm
40	-77.4 dBm
50	-71.2 dBm
60	-66.8 dBm
70	-63.7 dBm
80	-62.2 dBm
90	-61.4 dBm
100	-60.2 dBm
110	-58.9 dBm
120	-59.2 dBm
130	-59.4 dBm
140	-59.9 dBm
150	-58.4 dBm
160	-60.5 dBm
170	-63.2 dBm
180	-65.2 dBm
190	-70.2 dBm
200	-73.7 dBm
210	-74.9 dBm
220	-70.7 dBm
230	-67.5 dBm
240	-64.2 dBm
250	-63.4 dBm
260	-61.2 dBm
270	-59.4 dBm
280	-58.4 dBm
290	-59.9 dBm
300	-60.4 dBm
310	-59.2 dBm
320	-60.9 dBm
330	-61.9 dBm
340	-62.8 dBm
350	65.8 dBm
average	-61.7 dBm
nax	65.8 dBm
nin	-82.8 dBm
eference	-55.0 dBm

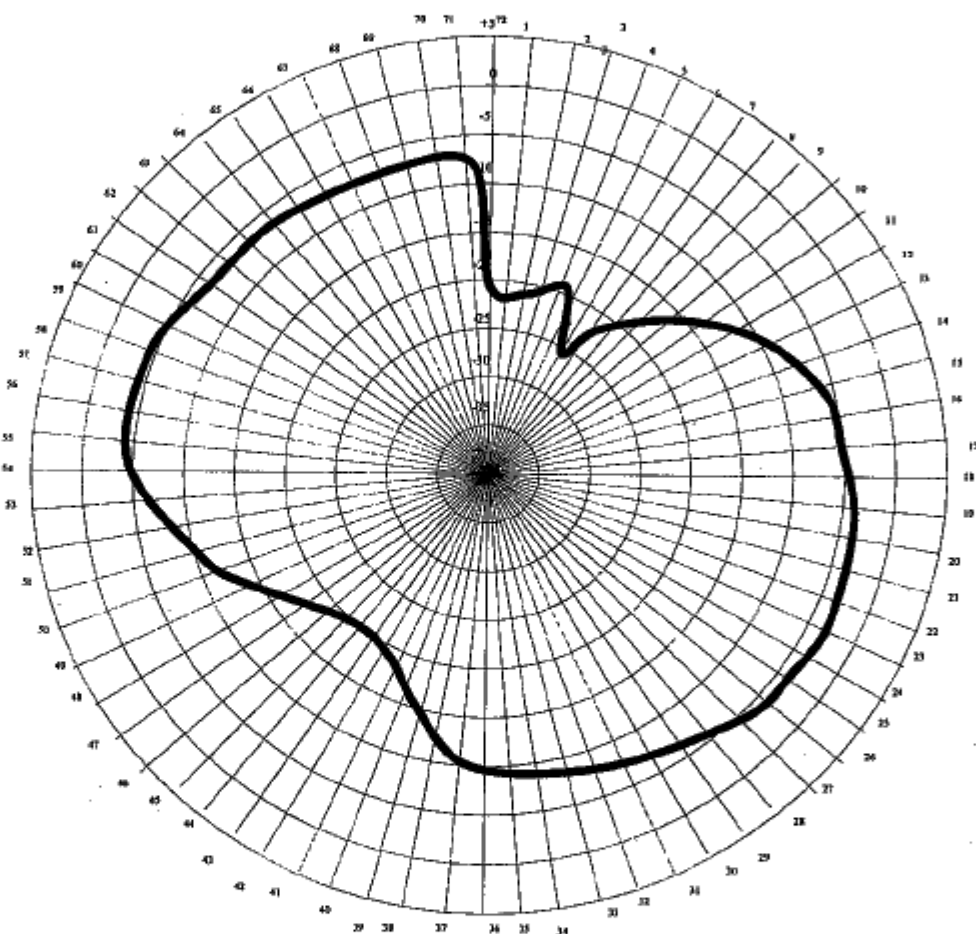

H-plane vertical

model game pad GP525

test date 2002/1/8

test freq. 27.12

test site open site

0	-71.7 dBm
10	-73.9 dBm
20	-83.9 dBm
30	-81.4 dBm
40	-71.7 dBm
50	-68.6 dBm
60	-64.8 dBm
70	-62.2 dBm
80	-60.3 dBm
90	-60.4 dBm
100	-58.4 dBm
110	-59.3 dBm
120	-58.2 dBm
130	-57.7 dBm
140	-58.3 dBm
150	-59.2 dBm
160	-63.9 dBm
170	-63.2 dBm
180	-65.7 dBm
190	-71.0 dBm
200	-74.8 dBm
210	-72.8 dBm
220	-69.3 dBm
230	-65.2 dBm
240	-53.3 dBm
250	60.2 dBm
260	-63.8 dBm
270	-58.5 dBm
280	-58.0 dBm
290	-59.4 dBm
300	-57.8 dBm
310	-59.5 dBm
320	-61.0 dBm
330	-60.8 dBm
340	-62.5 dBm
350	-64.6 dBm
average	-61.0 dBm
max	60.2 dBm
min	-83.9 dBm
reference	-55.0 dBm

