

FCC PART 15C TEST REPORT FOR CERTIFICATION  
On Behalf of

Microlab Electronics Co.,Ltd.

Bluetooth Speaker

Model Number: DS4

FCC ID: OR8-DS4

Prepared for : Microlab Electronics Co.,Ltd.  
South Baozi Rd., Shenzhen Microlab Industrial Park , Shenzhen 518122 ,China

Prepared By : EST Technology Co., Ltd.  
Santun(guantai Road), Houjie Town, DongGuan City,  
GuangDong, China.

Tel: 86-769-83081888-808




Report Number: ESTE-R1605051  
Date of Test : April 22 - May 16, 2016  
Date of Report : May 17, 2016


# TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT) .....	5
2. SUMMARY OF TEST .....	6
2.1. Summary of test result.....	6
2.2. Test Facilities .....	7
2.3. Measurement uncertainty .....	8
2.4. Assistant equipment used for test.....	8
2.5. Block Diagram .....	8
2.6. Test mode .....	8
2.7. Channel List for Bluetooth .....	9
2.8. Test Equipment.....	10
3 POWER LINE CONDUCTED EMISSION TEST.....	11
3.1. Limit.....	11
3.2. Block Diagram of Test Setup .....	11
3.3. Test Procedure .....	11
3.4. Test Result.....	11
3.5. Test data .....	12
4 RADIATED EMISSION TEST .....	16
4.1 Limit.....	16
4.2. Test Procedure .....	17
4.3. Block Diagram of Test setup.....	18
4.4. Test Result.....	19
4.5. Test Data.....	20
5 CONDUCTED SPURIOUS EMISSION.....	39
5.1. Limit .....	39
5.2. Test Procedure .....	39
5.3. Test Result.....	39
5.4. Test Data.....	40
6 BAND EDGE COMPLIANCE TEST .....	46
6.1. Limit .....	46
6.2. Block Diagram of Test setup.....	46
6.3. Test Procedure .....	46
6.4. Test Result.....	46
6.5. Test Data.....	47
7 6dB Bandwidth Test.....	51
7.1. Limit .....	51
7.2. Test Procedure .....	51
7.3. Test Result.....	51
7.4. Test Data.....	52
8 OUTPUT POWER TEST .....	54
8.1. Limit .....	54

8.2	Test Procedure .....	54
8.3	Test Procedure .....	54
8.4	Test Result .....	55
8.5	Test Data .....	56
9	POWER SPECTRAL DENSITY TEST .....	58
9.1	Limit .....	58
9.2	Test Procedure .....	58
9.3	Test Result .....	59
9.4	Test Data .....	60
10	ANTENNA REQUIREMENTS .....	62
10.1	Limit .....	62
10.2	Result .....	62
11	TEST SETUP PHOTO .....	63
12	PHOTO EUT .....	66

### Test Report Verification

<b>Applicant:</b>	Microlab Electronics Co.,Ltd.	
<b>Address:</b>	South Baozi Rd., Shenzhen Microlab Industrial Park , Shenzhen 518122 ,China	
<b>Manufacturer</b>	Klipsch Group, Inc.	
<b>Address:</b>	3502 Woodview Trace, Indianapolis, IN 46268	
<b>E.U.T:</b>	Bluetooth Speaker	
<b>Model Number:</b>	DS4	
<b>Power Supply:</b>	DC18V From Adapter Input AC 100~240V- 50/60 Hz	
<b>Test Voltage:</b>	DC18V From Adapter Input AC 120V/60 Hz DC18V From Adapter Input AC 240V/50 Hz	
<b>Trade Name:</b>	Jamo	Serial No.: -----
<b>Date of Receipt:</b>	April 22, 2016	Date of Test: April 22 - May 16, 2016
<b>Test Specification:</b>	FCC Rules and Regulations Part 15 Subpart C:2015 ANSI C63.10:2013	
<b>Test Result:</b>	<p>The device described above is tested by EST Technology Co., Ltd.. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements.</p> <p>This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.</p> <p style="text-align: right;"><b>Date:</b> May 17, 2016</p>	
<b>Prepared by:</b>	<b>Tested by:</b>	<b>Approved by:</b>
		
Ada / Assistant	Tony.Tang/ Engineer	IcemanHu / Manager
<b>Other Aspects:</b>	None.	
Abbreviations: OK/P=passed    fail/F=failed    n.a/N=not applicable    E.U.T=equipment under tested		
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.		



# 1. GENERAL INFORMATION

## 1.1. Description of Device (EUT)

Product Name	:	Bluetooth Speaker	
FCC ID	:	OR8-DS4	
Model Number	:	DS4	
Operation frequency	:	2402MHz~2480MHz	
Number of channel	:	79	40
Antenna	:	Internal antenna, 0dBi gain	
Modulation	:	Dual-mode Bluetooth 4.0 BT BDR: GFSK BT EDR: $\pi/4$ -DQPSK BT EDR: 8-DPSK	Dual-mode Bluetooth 4.0 BLE: GFSK
Sample Type	:	Prototype production	

## 2. SUMMARY OF TEST

### 2.1. Summary of test result

Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207	PASS
Radiated Emissions	FCC Part 15: 15.209 FCC Part 15: 15.247(d)	PASS
Band Edge Compliance	FCC Part 15: 15.209 FCC Part 15: 15.247(d)	PASS
Conducted spurious emissions	FCC Part 15: 15.247(d)	PASS
6dB Bandwidth	FCC Part 15: 15.247 (a)(2)	PASS
Peak Output Power	FCC Part 15: 15.247 (b)	PASS
Power Spectral Density	FCC Part 15: 15.247 (e)	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

## 2.2. Test Facilities

EMC Lab	:	Certificated by CNAL, CHINA Registration No.: L5288 Date of registration: December 07, 2015  Certificated by FCC, USA Registration No.: 989591 Date of registration: November 20, 2013  Certificated by Industry Canada Registration No.: 9405A-1 Date of registration: December 30, 2015  Certificated by VCCI, Japan Registration No.: R-3663 & C-4103 Date of registration: July 25, 2011  Certificated by TUV Rheinland, Germany Registration No.: UA 50195514 0001 Date of registration: January 07, 2011  Certificated by TUV/PS, Shenzhen Registration No.: SCN1017 Date of registration: January 27, 2011  Certificated by Intertek ETL SEMKO Registration No.: 2011-RTL-L1-18 Date of registration: April 28, 2011  Certificated by Siemic, Inc. Registration No.: SLCN021 Date of registration: November 8, 2011  Certificated by Nemko, Hong Kong Registration No.: 175193 Date of registration: May 4, 2011
Name of Firm	:	EST Technology Co., Ltd.
Site Location	:	San Tun Management Zone, Houjie Town, Dongguan, Guangdong, China

### 2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.54dB
Uncertainty for Radiation Emission test (30MHz-1GHz)	3.62
Uncertainty for Radiation Emission test (1GHz to 18GHz)	4.86
Uncertainty for radio frequency	7×10-8
Uncertainty for conducted RF Power	0.20dB
Uncertainty for Power density test	0.26dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


### 2.4. Assistant equipment used for test

#### 2.4.1. Adapter

M / N : FJ-SW1802000N  
 Input : AC 100-240V~50/60Hz 1.5A MAX  
 Output : DC 18V 2.000A

### 2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 or 1.5 meter high above ground. EUT was be set into BT test mode by Bluesuite software before test.



(EUT: Bluetooth Speaker)

### 2.6. Test mode

A special test software was used to control EUT work in Continuous TX mode(100% duty cycle), and select test channel, wireless mode and data rate.

Mode	Channel	Frequency
BT 4.0-BLE GFSK	Low	2402MHz
	Middle	2440MHz
	High	2480MHz



2.7. Channel List for Bluetooth

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	2	2404
3	2406	4	2408
5	2410	6	2412
7	2414	8	2416
9	2418	10	2420
11	2422	12	2424
13	2426	14	2428
15	2430	16	2432
17	2434	18	2436
19	2438	20	2440
21	2442	22	2444
23	2446	24	2448
25	2450	26	2452
27	2454	28	2456
29	2458	30	2460
31	2462	32	2464
33	2466	34	2468
35	2470	36	2472
37	2474	38	2476
39	2478	40	2480

## 2.8. Test Equipment

### 2.8.1. For conducted emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	832354	June,28,15	1 Year
Artificial Mains Networ	Rohde & Schwarz	ENV216	101260	June,28,15	1 Year
Pulse Limiter	Rohde & Schwarz	ESSP-920BT-Z2	101100	June,28,15	1 Year

### 2.8.2. For radiated emission test (9 kHz-30MHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESCI	100435	June,29,15	1 Year
Loop Antenna	ETS-LINDGREN	6502	00071730	June,29,15	1 Year

### 2.8.3. For radiated emission test(30-1000MHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESVS10	100004	June,28,15	1 Year
Spectrum Analyzer	Agilent	E4411B	MY50140697	June,28,15	1 Year
Bilog Antenna	Teseq	CBL 6111D	27090	June,28,15	1 Year
Signal Amplifier	Agilent	310N	187037	June,28,15	1 Year
RF Cable	Hubersuhner	W10.02	534123	June,28,15	1 Year

### 2.8.4. For Radio & radiated emission test(above 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Horn Antenna	SCHWARZECK	BBHA 9120 D	BBHA9120D1002	June,28,15	1 Year
Board-Band Horn Antenna	SCHWARZECK	BBHA 9170	9170-497	June,28,15	1 Year
Signal Amplifier	SCHWARZECK	BBV9718	9718-212	June,28,15	1 Year
Spectrum Analyzer	Agilent	E4408B	MY44211139	June,28,15	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSV	103173	June,28,15	1 Year
RF Cable	Hubersuhner	RG 214/U	513423	June,28,15	1 Year


### 3 POWER LINE CONDUCTED EMISSION TEST

#### 3.1. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. \* Decreasing linearly with logarithm of frequency.  
 2. The lower limit shall apply at the transition frequencies.

#### 3.2. Block Diagram of Test Setup

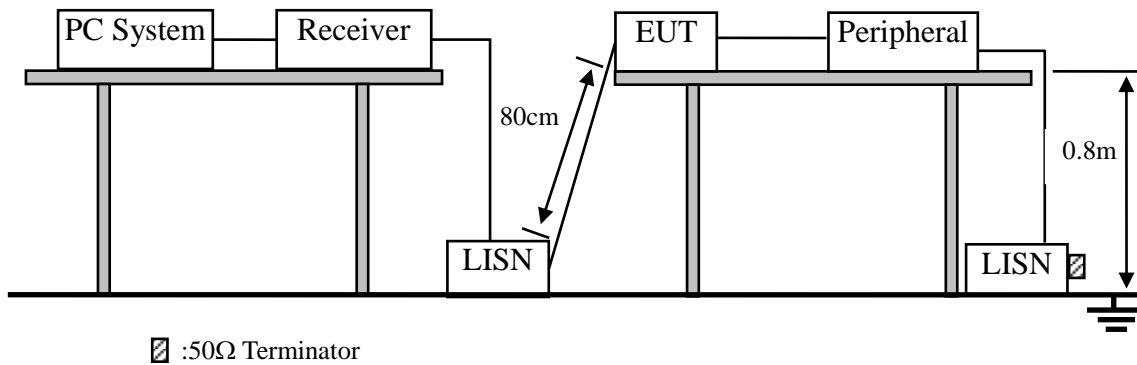

#### 3.3 Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.


The bandwidth of test receiver (R & S ESHS30) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.

#### 3.4. Test Result

**PASS.** (All emissions not reported below are too low against the prescribed limits.)


### 3.5. Test data

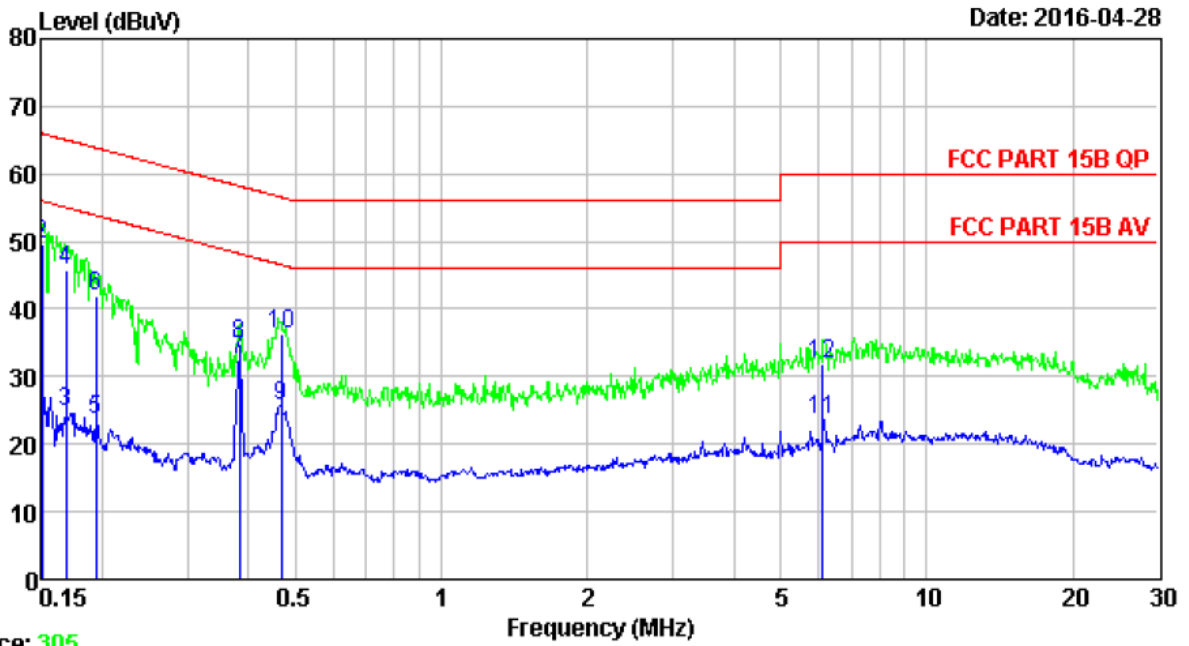

Trace: 305

Site no : 844 Shield Room Data no. : 306  
 Env. / Ins. : Temp:25.3'C Humi:58% Press:101.50kPa LINE Phase : LINE  
 Limit : FCC PART 15B QP  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : DS4  
 Test Mode : TX


	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	9.61	9.81	8.39	27.81	66.00	38.19	Peak
2	0.15	9.61	9.81	30.30	49.72	66.00	16.28	QP
3	0.17	9.61	9.81	5.27	24.69	65.03	40.34	Peak
4	0.17	9.61	9.81	26.48	45.90	65.03	19.13	QP
5	0.19	9.61	9.80	4.15	23.56	63.84	40.28	Peak
6	0.19	9.61	9.80	22.61	42.02	63.84	21.82	QP
7	0.38	9.61	9.82	13.01	32.44	58.21	25.77	Peak
8	0.38	9.61	9.82	15.42	34.85	58.21	23.36	QP
9	0.47	9.61	9.81	6.26	25.68	56.54	30.86	Peak
10	0.47	9.61	9.81	16.93	36.35	56.54	20.19	QP
11	6.12	9.66	9.86	3.97	23.49	60.00	36.51	Peak
12	6.12	9.66	9.86	12.48	32.00	60.00	28.00	QP

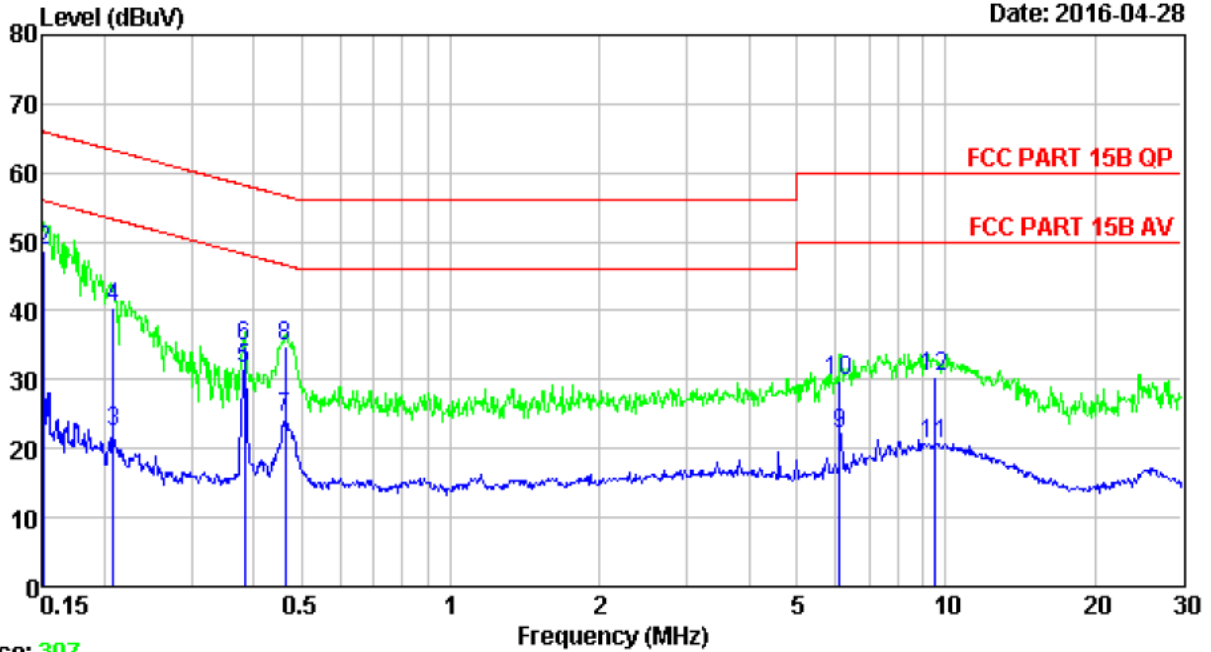

Trace: 307

Site no : 844 Shield Room Data no. : 308  
 Env. / Ins. : Temp:25.3°C Humi:58% Press:101.50kPa LINE Phase : NEUTRAL  
 Limit : FCC PART 15B QP  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : DS4  
 Test Mode : TX


	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV)	Limits (dBUV)	Margin (dB)	Remark
1	0.15	9.46	9.81	9.44	28.71	55.96	27.25	Average
2	0.15	9.46	9.81	29.33	48.60	65.96	17.36	QP
3	0.21	9.60	9.80	3.06	22.46	53.27	30.81	Average
4	0.21	9.60	9.80	21.00	40.40	63.27	22.87	QP
5	0.38	9.59	9.82	12.06	31.47	48.21	16.74	Average
6	0.38	9.59	9.82	15.51	34.92	58.21	23.29	QP
7	0.46	9.59	9.81	4.97	24.37	46.63	22.26	Average
8	0.46	9.59	9.81	15.35	34.75	56.63	21.88	QP
9	6.12	9.66	9.86	2.72	22.24	50.00	27.76	Average
10	6.12	9.66	9.86	10.40	29.92	60.00	30.08	QP
11	9.50	9.69	9.87	1.25	20.81	50.00	29.19	Average
12	9.50	9.69	9.87	10.76	30.32	60.00	29.68	QP

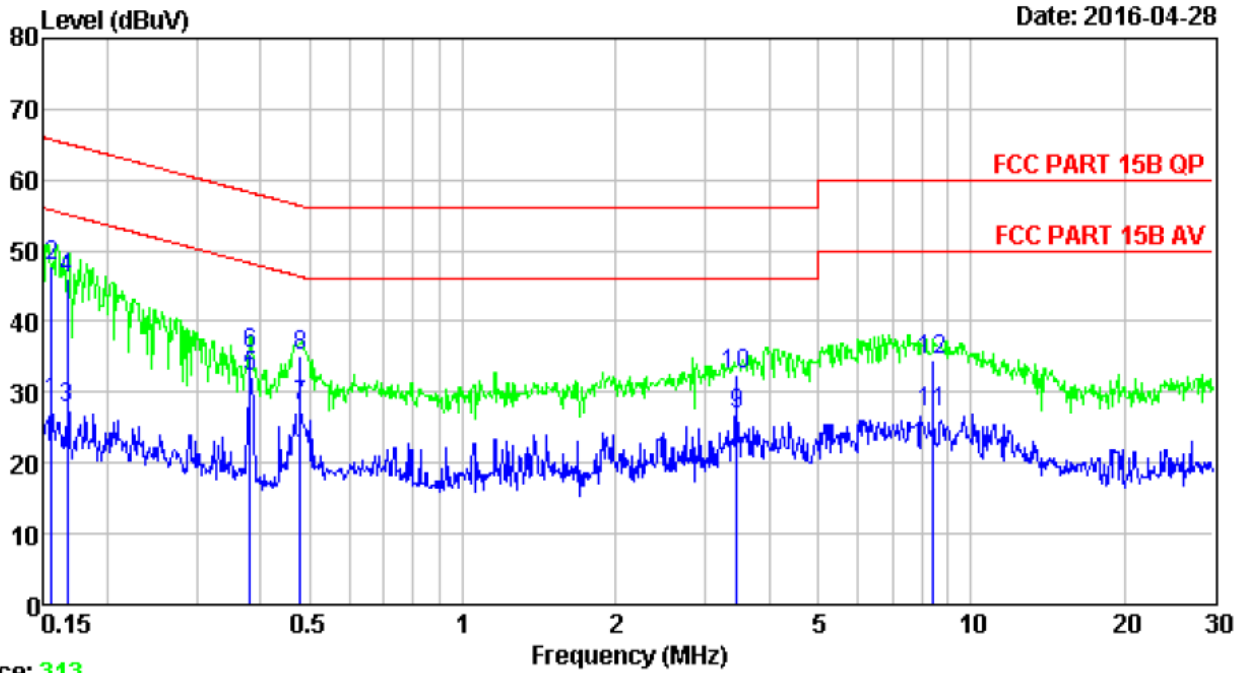

Trace: 313

Site no : 844 Shield Room Data no. : 314  
 Env. / Ins. : Temp:25.3'C Humi:58% Press:101.50kPa LINE Phase : LINE  
 Limit : FCC PART 15B QP  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input AC 240V/50Hz  
 M/N : DS4  
 Test Mode : TX

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.16	9.61	9.81	9.21	28.63	55.69	27.06	Average
2	0.16	9.61	9.81	28.33	47.75	65.69	17.94	QP
3	0.17	9.61	9.81	8.22	27.64	55.12	27.48	Average
4	0.17	9.61	9.81	26.77	46.19	65.12	18.93	QP
5	0.38	9.61	9.82	12.62	32.05	48.25	16.20	Average
6	0.38	9.61	9.82	15.95	35.38	58.25	22.87	QP
7	0.48	9.61	9.81	8.61	28.03	46.36	18.33	Average
8	0.48	9.61	9.81	15.77	35.19	56.36	21.17	QP
9	3.45	9.63	9.85	7.27	26.75	46.00	19.25	Average
10	3.45	9.63	9.85	12.92	32.40	56.00	23.60	QP
11	8.41	9.66	9.86	7.61	27.13	50.00	22.87	Average
12	8.41	9.66	9.86	15.11	34.63	60.00	25.37	QP

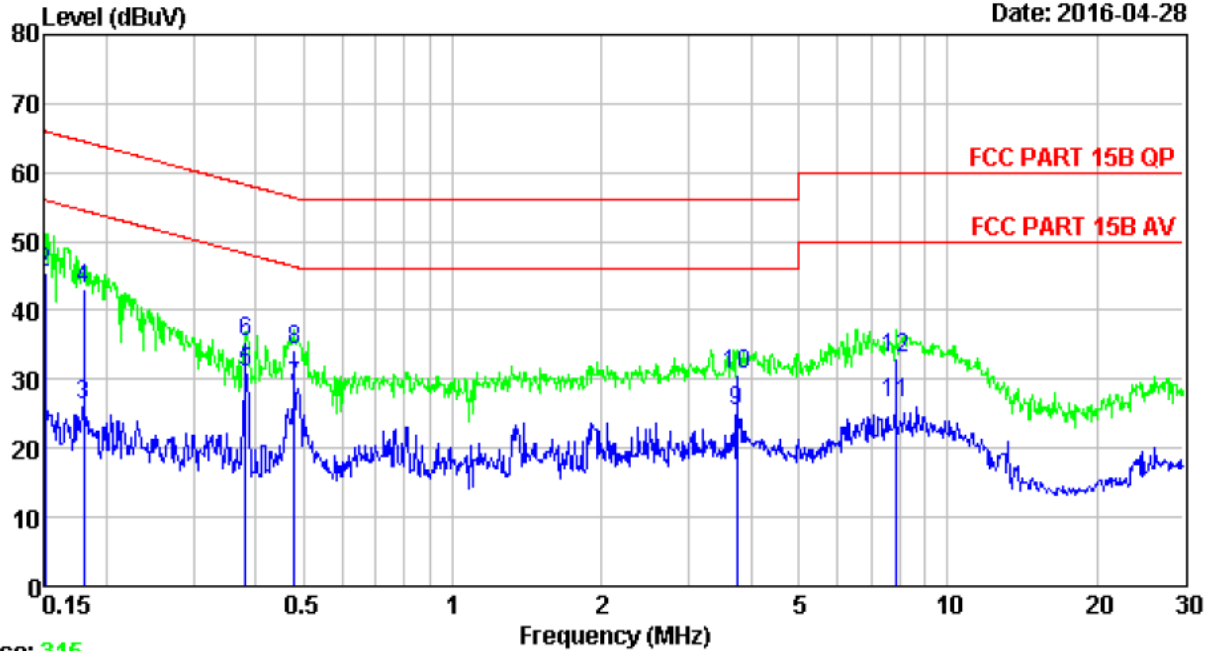

Trace: 315

Site no : 844 Shield Room Data no. : 316  
 Env. / Ins. : Temp:25.3'C Humi:58% Press:101.50kPa LINE Phase : NEUTRAL  
 Limit : FCC PART 15B QP  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input AC 240V/50Hz  
 M/N : DS4  
 Test Mode : TX

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV)	Limits (dBUV)	Margin (dB)	Remark
1	0.15	9.46	9.81	6.94	26.21	56.00	29.79	Average
2	0.15	9.46	9.81	26.29	45.56	66.00	20.44	QP
3	0.18	9.55	9.80	6.83	26.18	54.50	28.32	Average
4	0.18	9.55	9.80	23.83	43.18	64.50	21.32	QP
5	0.38	9.59	9.82	11.68	31.09	48.25	17.16	Average
6	0.38	9.59	9.82	16.08	35.49	58.25	22.76	QP
7	0.48	9.59	9.81	9.67	29.07	46.36	17.29	Average
8	0.48	9.59	9.81	14.73	34.13	56.36	22.23	QP
9	3.76	9.64	9.84	5.81	25.29	46.00	20.71	Average
10	3.76	9.64	9.84	11.29	30.77	56.00	25.23	QP
11	7.85	9.67	9.88	7.14	26.69	50.00	23.31	Average
12	7.85	9.67	9.88	13.38	32.93	60.00	27.07	QP

## 4 RADIATED EMISSION TEST

### 4.1 Limit

#### 4.1.1 15.209 limits

Frequency (MHz)	Field strength (μV/m)	Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark : (1) Emission level  $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

#### 4.1.2 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.



## 4.2. Test Procedure

EUT was placed on a turn table, which is 0.8 meter high above ground for 9kHz~1000MHz test, and which is 1.5 meter high above ground for above 1GHz test. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

The test frequency analyzer system was set to Peak Detect (300Hz RBW in 9kHz to 150kHz and 10kHz RBW in 150kHz to 30MHz) Function and Specified Bandwidth with Maximum Hold Mode.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 1MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz


PEAK detector, 1MHz/1MHz for PAEK measurement,

PEAK detector, 1MHz/10Hz for Average measurement


The frequency range from 30MHz to 10th harmonic (25GHz) are checked.

### 4.3 Block Diagram of Test setup


9kHz~30MHz

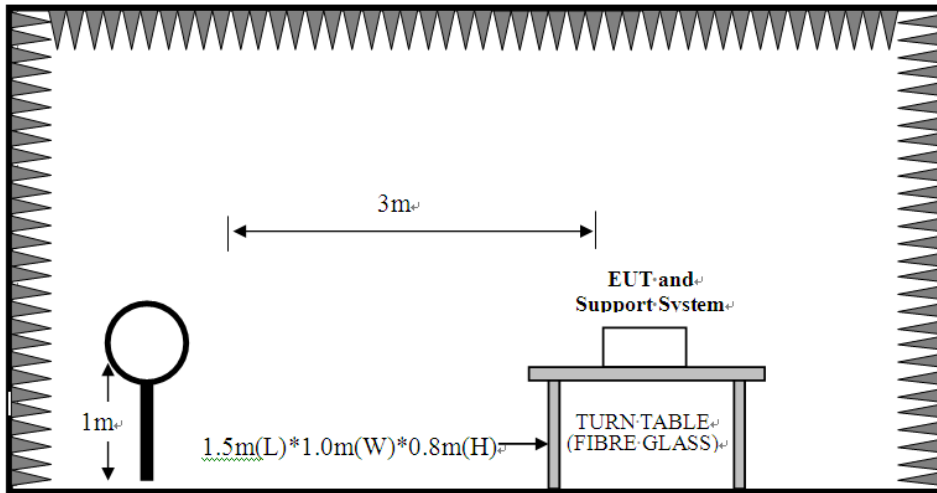

30~1000MHz

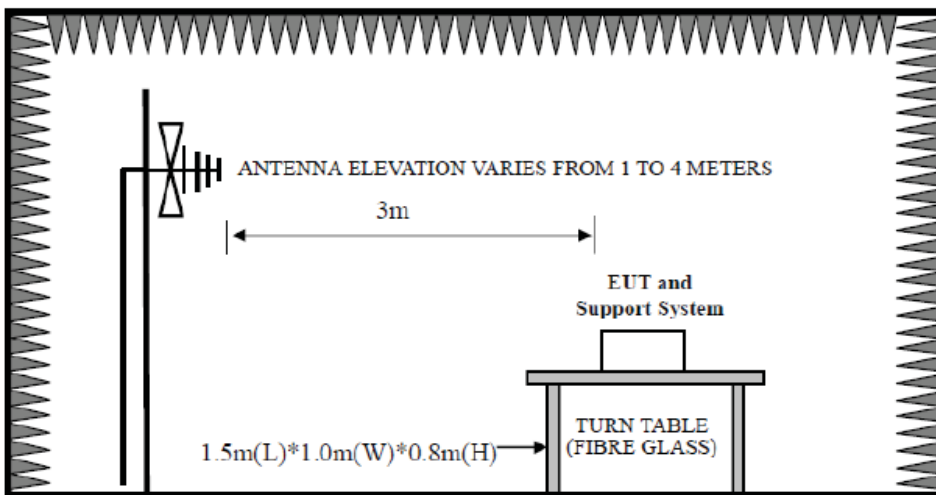

Above 1GHz

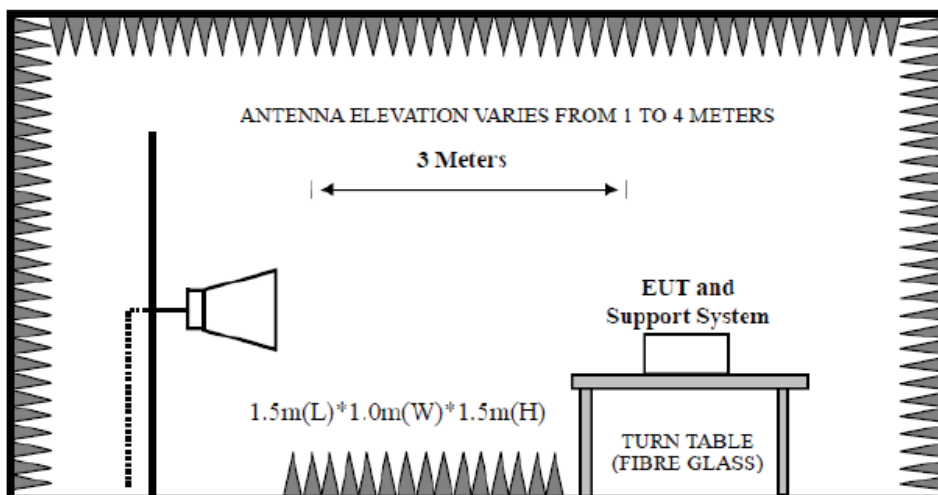

## 4.4 Test Result

### **PASS.**

All the emissions from 30MHz to 25 GHz were comply with 15.209 limits.

- Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
- 2、 The frequency 2402MHz 、 2440MHz and 2480 MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.


## 4.5 Test Data

9 kHz – 30 MHz

Pass


Note: The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

30-1000 MHz

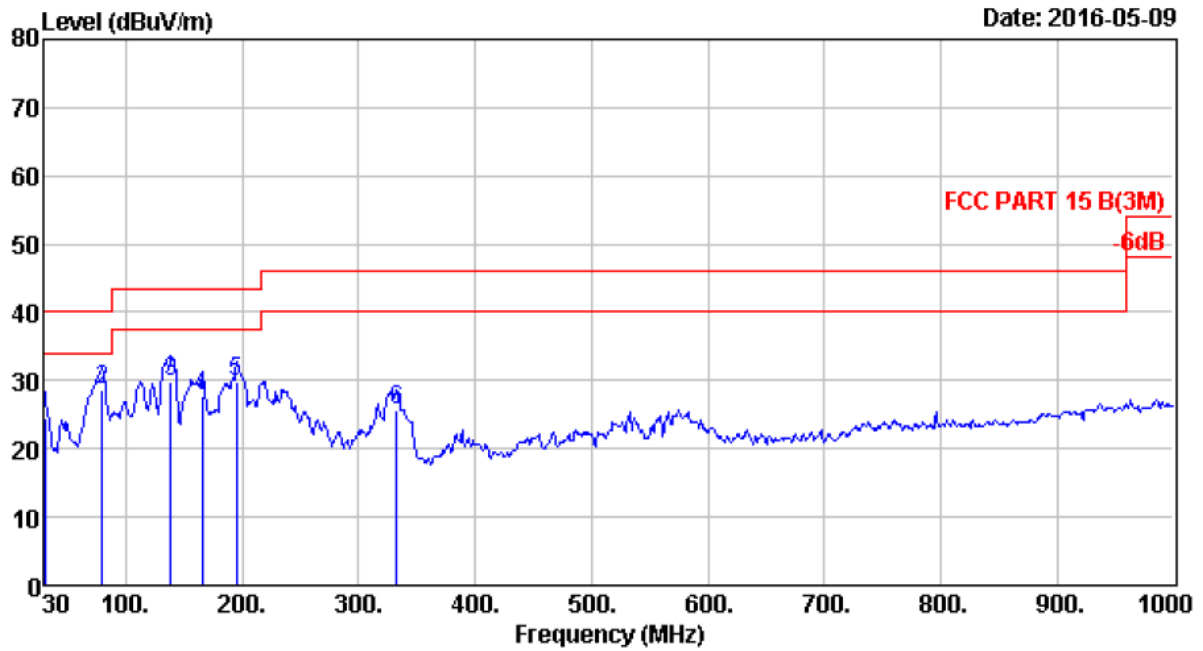


Site no. : 966 1# chamber                      Data no. : 1001  
 Dis. / Ant. : 3m 27137                      Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input 120V/60Hz  
 M/N : DS4  
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.00	18.51	0.65	5.26	24.42	40.00	15.58	QP
2	79.47	6.98	1.24	20.56	28.78	40.00	11.22	QP
3	138.64	11.42	1.54	16.75	29.71	43.50	13.79	QP
4	165.80	9.66	1.68	16.35	27.69	43.50	15.81	QP
5	194.90	7.72	1.78	20.35	29.85	43.50	13.65	QP
6	332.64	13.93	2.48	9.23	25.64	46.00	20.36	QP

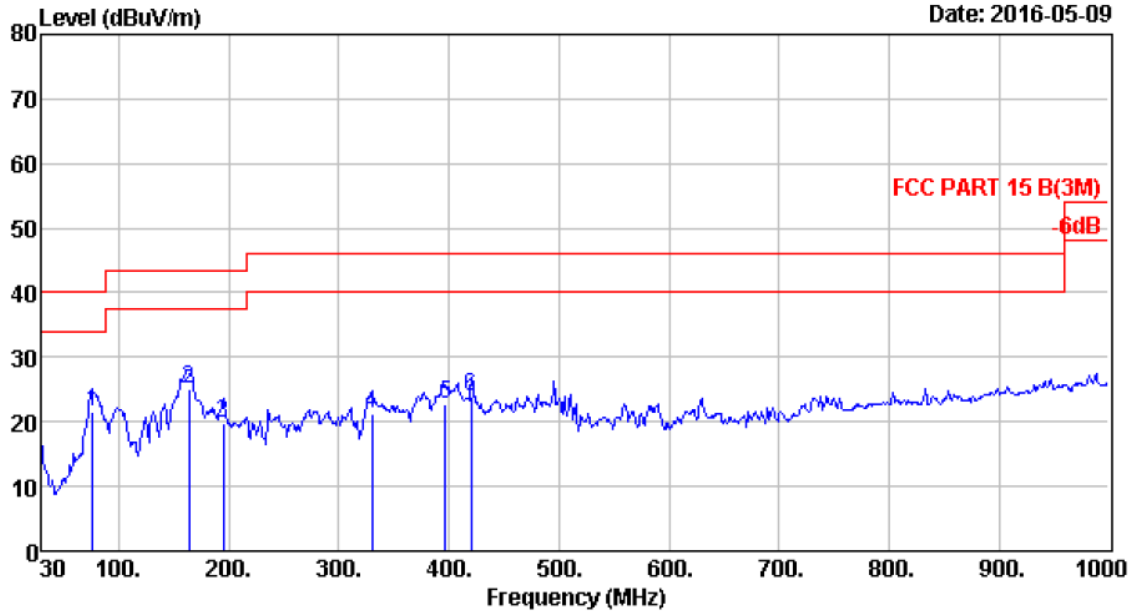


Site no. : 966 1# chamber Data no. : 1002  
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input 120V/60Hz  
 M/N : DS4  
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	76.56	6.66	1.19	13.75	21.60	40.00	18.40	QP
2	163.86	9.89	1.67	13.60	25.16	43.50	18.34	QP
3	194.90	7.72	1.78	10.16	19.66	43.50	23.84	QP
4	329.73	13.85	2.43	4.96	21.24	46.00	24.76	QP
5	396.66	15.91	2.63	4.25	22.79	46.00	23.21	QP
6	419.94	16.30	2.71	4.89	23.90	46.00	22.10	QP

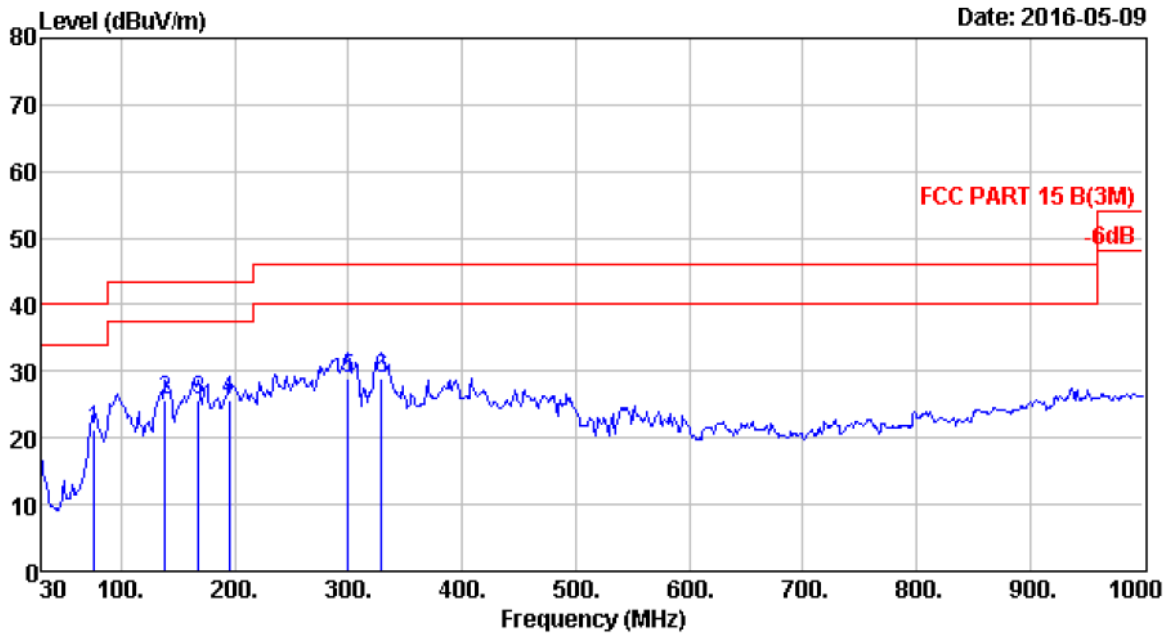

Site no. : 966 1# chamber                      Data no. : 1003  
 Dis. / Ant. : 3m 27137                          Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input 120V/60Hz  
 M/N : DS4  
 Test Mode : GFSK TX 2440MHz


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	76.56	6.66	1.19	13.33	21.18	40.00	18.82	QP
2	138.64	11.42	1.54	12.75	25.71	43.50	17.79	QP
3	167.74	9.43	1.71	14.47	25.61	43.50	17.89	QP
4	194.90	7.72	1.78	16.06	25.56	43.50	17.94	QP
5	299.66	13.01	2.38	13.46	28.85	46.00	17.15	QP
6	328.76	13.82	2.44	12.62	28.88	46.00	17.12	QP

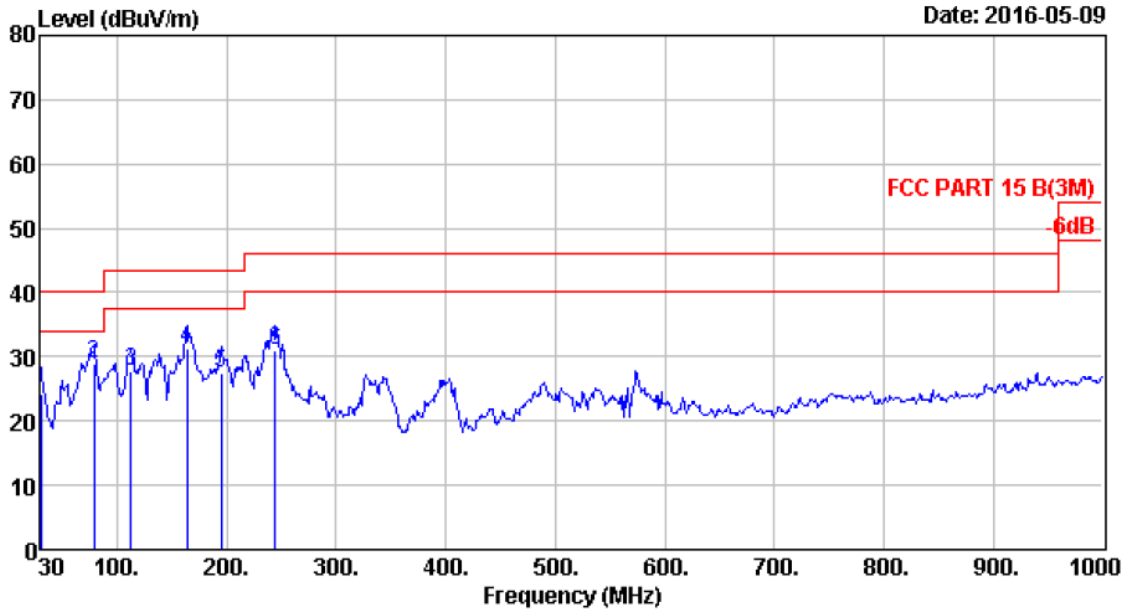

Site no. : 966 1# chamber Data no. : 1004  
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input 120V/60Hz  
 M/N : DS4  
 Test Mode : GFSK TX 2440MHz


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.00	18.51	0.65	5.10	24.26	40.00	15.74	QP
2	78.50	6.89	1.22	20.88	28.99	40.00	11.01	QP
3	112.45	10.68	1.43	15.75	27.86	43.50	15.64	QP
4	163.86	9.89	1.67	19.60	31.16	43.50	12.34	QP
5	194.90	7.72	1.78	18.02	27.52	43.50	15.98	QP
6	244.37	10.92	2.12	17.93	30.97	46.00	15.03	QP



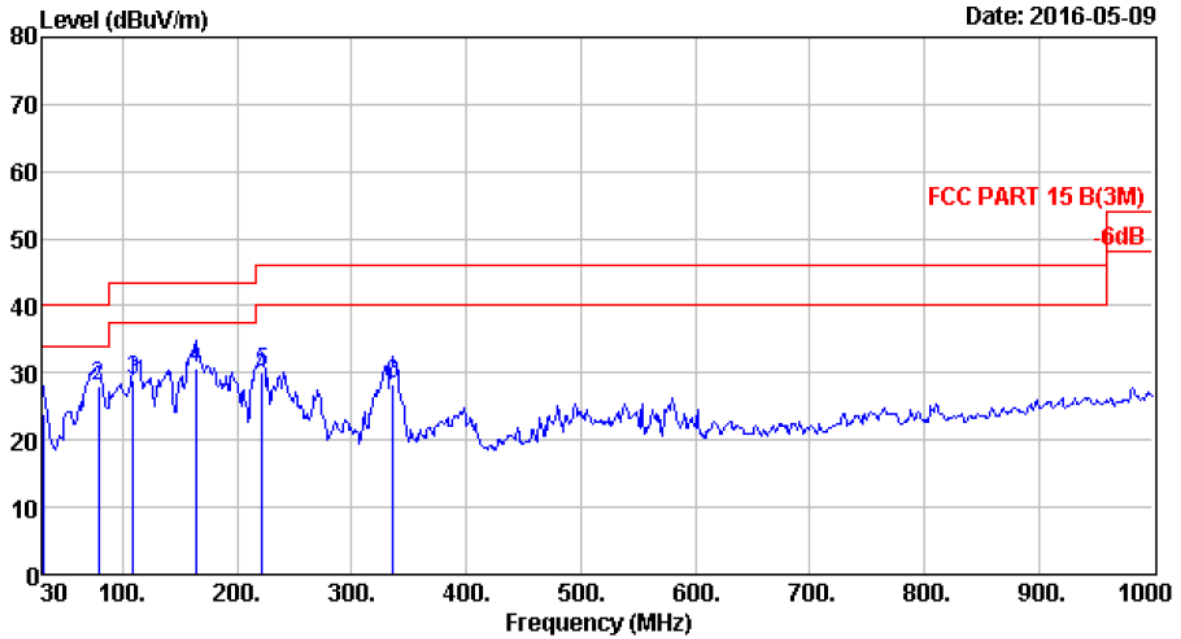

Site no. : 966 1# chamber Data no. : 1005  
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input 120V/60Hz  
 M/N : DS4  
 Test Mode : GFSK TX 2480MHz


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.00	18.51	0.65	4.87	24.03	40.00	15.97	QP
2	78.50	6.89	1.22	19.97	28.08	40.00	11.92	QP
3	109.54	10.44	1.40	17.20	29.04	43.50	14.46	QP
4	163.86	9.89	1.67	19.27	30.83	43.50	12.67	QP
5	222.06	9.31	2.01	18.75	30.07	46.00	15.93	QP
6	336.52	14.05	2.50	11.85	28.40	46.00	17.60	QP

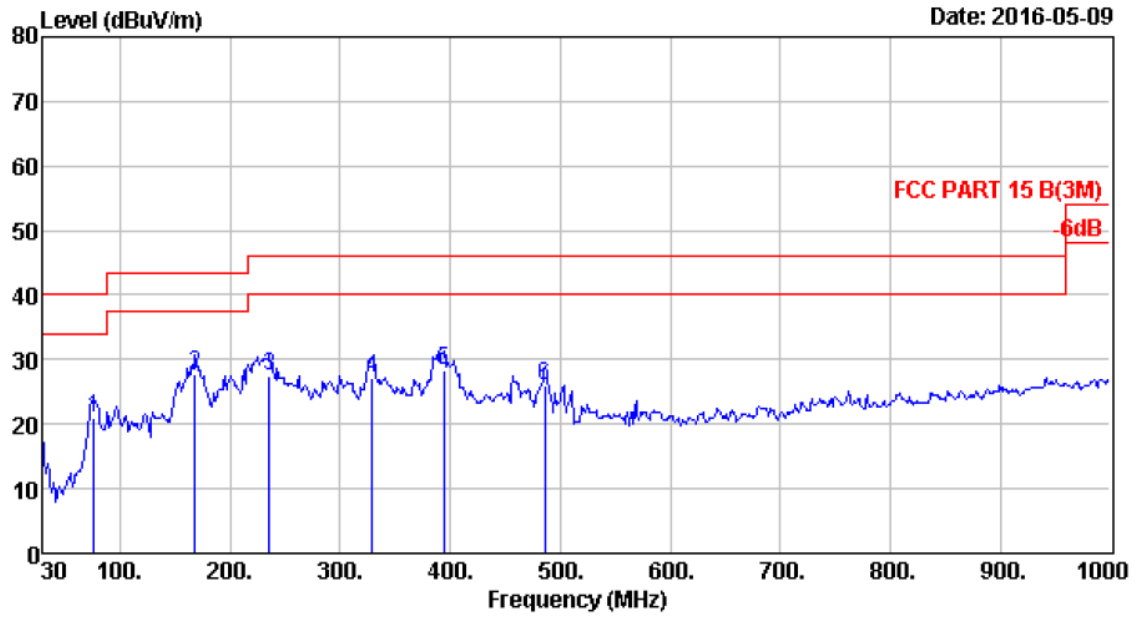

Site no. : 966 1# chamber Data no. : 1006  
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input 120V/60Hz  
 M/N : DS4  
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	76.56	6.66	1.19	13.09	20.94	40.00	19.06	QP
2	167.74	9.43	1.71	16.69	27.83	43.50	15.67	QP
3	235.64	9.80	2.09	15.70	27.59	46.00	18.41	QP
4	328.76	13.82	2.44	10.77	27.03	46.00	18.97	QP
5	393.75	15.78	2.58	10.05	28.41	46.00	17.59	QP
6	485.90	17.67	3.10	5.17	25.94	46.00	20.06	QP

1000-18000 MHz

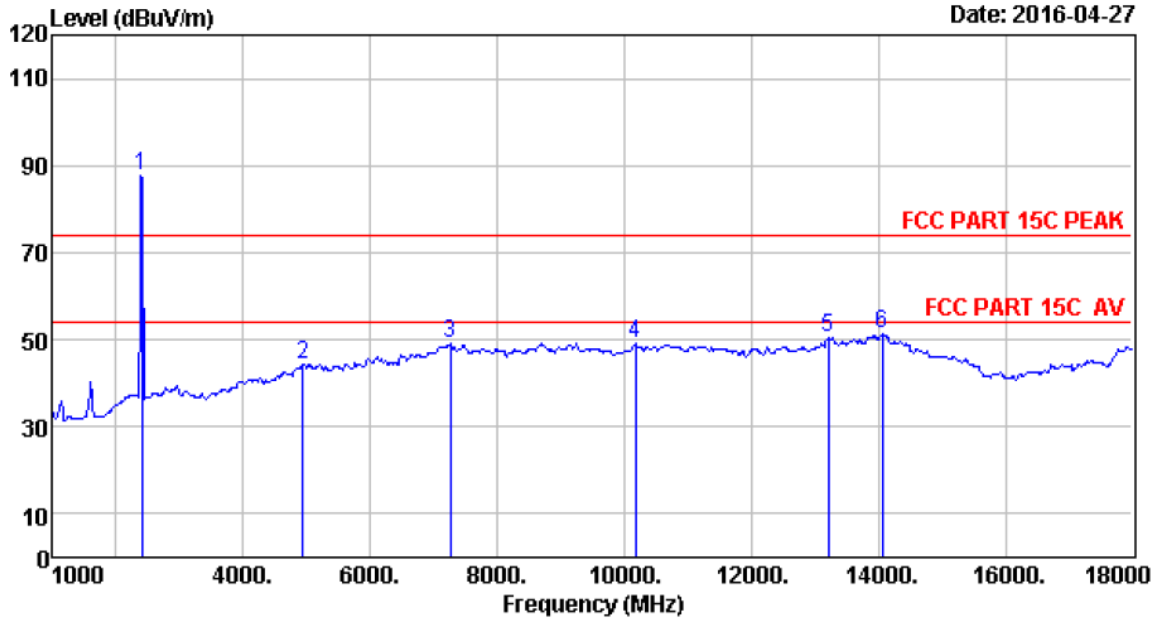


Date: 2016-04-27

Site no. : 966 1# chamber Data no. : 1105  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : DS4  
 Test Mode : GFSK TX 2402MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	27.61	6.62	34.64	88.19	87.78	74.00	-13.78	Peak
2	31.47	12.37	35.96	36.52	44.40	74.00	29.60	Peak
3	36.53	11.55	34.02	34.89	48.95	74.00	25.05	Peak
4	38.42	11.49	34.53	33.59	48.97	74.00	25.03	Peak
5	39.38	11.46	32.79	32.49	50.54	74.00	23.46	Peak
6	41.51	10.90	33.06	31.80	51.15	74.00	22.85	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

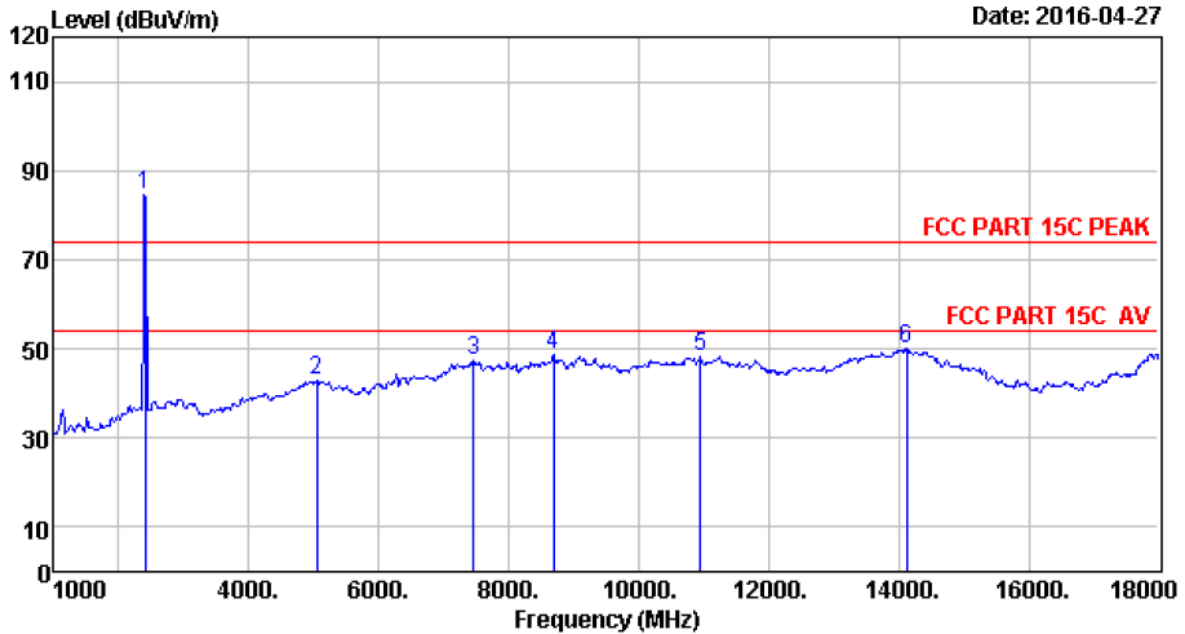


Date: 2016-04-27

Site no. : 966 1# chamber Data no. : 1106  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : DS4  
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	84.92	84.51	74.00	-10.51	Peak
2	5046.00	31.57	12.53	36.15	34.82	42.77	74.00	31.23	Peak
3	7460.00	36.52	11.61	34.21	33.49	47.41	74.00	26.59	Peak
4	8684.00	37.32	11.45	33.66	33.69	48.80	74.00	25.20	Peak
5	10945.00	39.46	11.29	34.13	31.71	48.33	74.00	25.67	Peak
6	14124.00	41.57	10.91	33.22	30.97	50.23	74.00	23.77	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

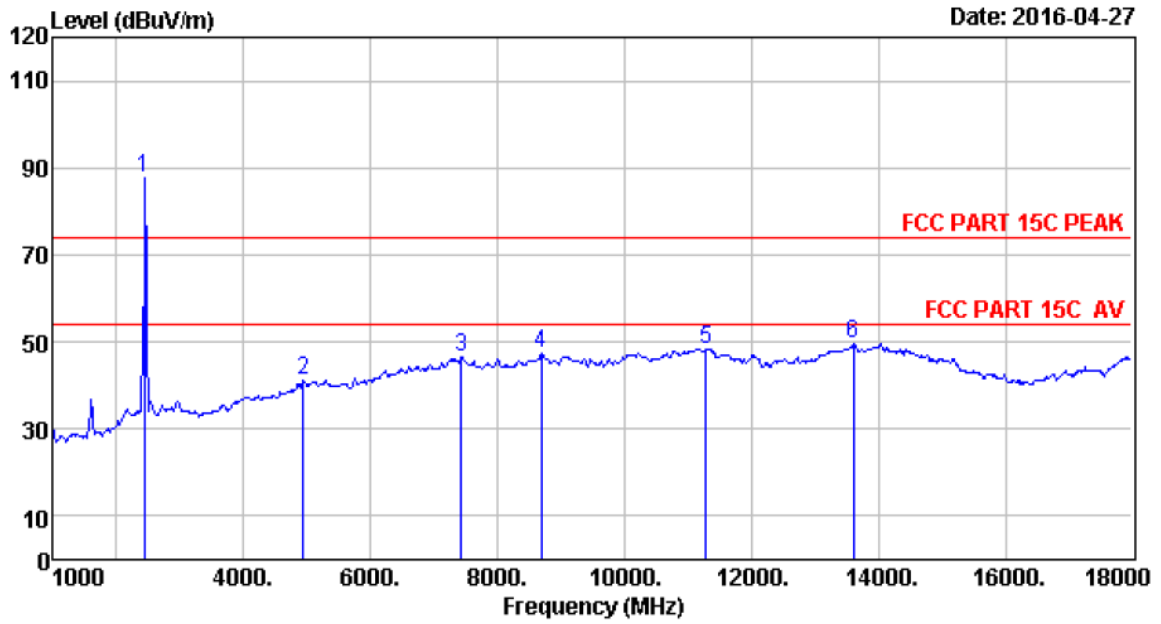

Site no. : 966 1# chamber                      Data no. : 1107  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : DS4  
 Test Mode : GFSK TX 2440MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2440.00	27.60	6.67	34.85	88.33	87.75	74.00	-13.75	Peak
2	4944.00	31.47	12.37	35.96	33.24	41.12	74.00	32.88	Peak
3	7426.00	36.56	11.60	34.22	32.67	46.61	74.00	27.39	Peak
4	8684.00	37.32	11.45	33.66	32.42	47.53	74.00	26.47	Peak
5	11285.00	39.33	11.08	33.32	31.14	48.23	74.00	25.77	Peak
6	13614.00	40.40	11.36	32.68	30.41	49.49	74.00	24.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

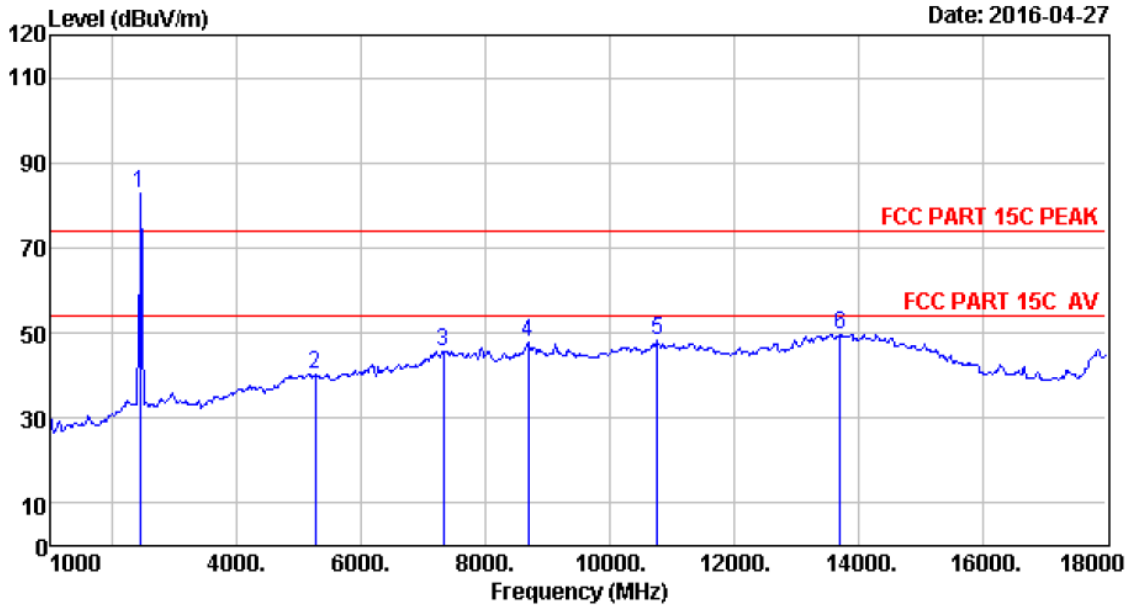

Site no. : 966 1# chamber                      Data no. : 1108  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : DS4  
 Test Mode : GFSK TX 2440MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.00	27.60	6.67	34.85	83.60	83.02	74.00	-9.02	Peak
2	5250.00	31.69	12.29	35.97	32.45	40.46	74.00	33.54	Peak
3	7324.00	36.55	11.57	34.14	31.73	45.71	74.00	28.29	Peak
4	8684.00	37.32	11.45	33.66	32.71	47.82	74.00	26.18	Peak
5	10775.00	39.28	11.30	34.02	31.59	48.15	74.00	25.85	Peak
6	13716.00	40.69	11.24	32.94	30.73	49.72	74.00	24.28	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

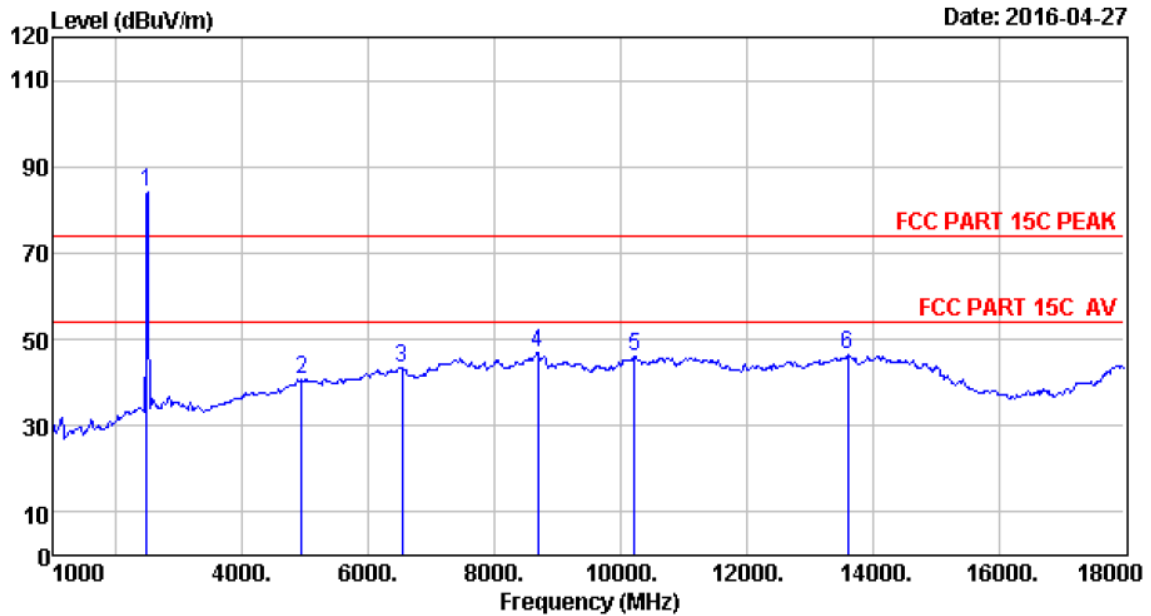

Site no. : 966 1# chamber Data no. : 1109  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : DS4  
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	85.11	84.29	74.00	-10.29	Peak
2	4944.00	31.47	12.37	35.96	32.91	40.79	74.00	33.21	Peak
3	6525.00	34.29	12.20	34.97	32.09	43.61	74.00	30.39	Peak
4	8684.00	37.32	11.45	33.66	31.63	46.74	74.00	27.26	Peak
5	10214.00	38.48	11.47	34.50	30.79	46.24	74.00	27.76	Peak
6	13614.00	40.40	11.36	32.68	27.21	46.29	74.00	27.71	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

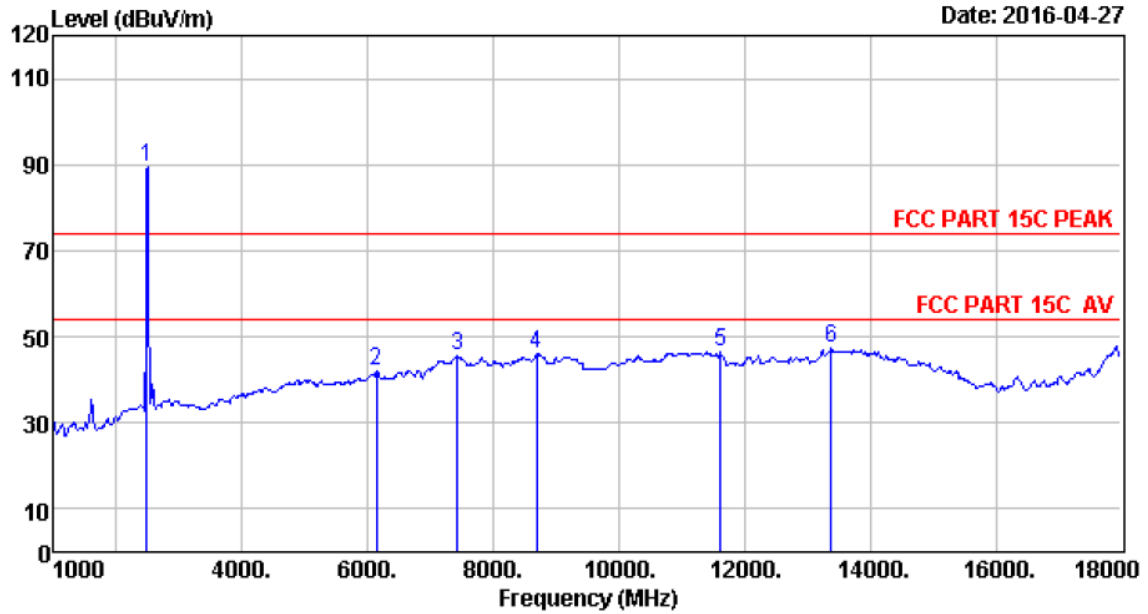

Site no. : 966 1# chamber Data no. : 1110  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : DS4  
 Test Mode : GFSK TX 2480MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	90.28	89.46	74.00	-15.46	Peak
2	6134.00	33.08	12.15	35.12	32.08	42.19	74.00	31.81	Peak
3	7426.00	36.56	11.60	34.22	31.55	45.49	74.00	28.51	Peak
4	8684.00	37.32	11.45	33.66	30.89	46.00	74.00	28.00	Peak
5	11625.00	39.06	11.04	33.19	29.79	46.70	74.00	27.30	Peak
6	13376.00	39.78	11.48	32.91	29.01	47.36	74.00	26.64	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.



18000-25000 MHz


Date: 2016-04-27

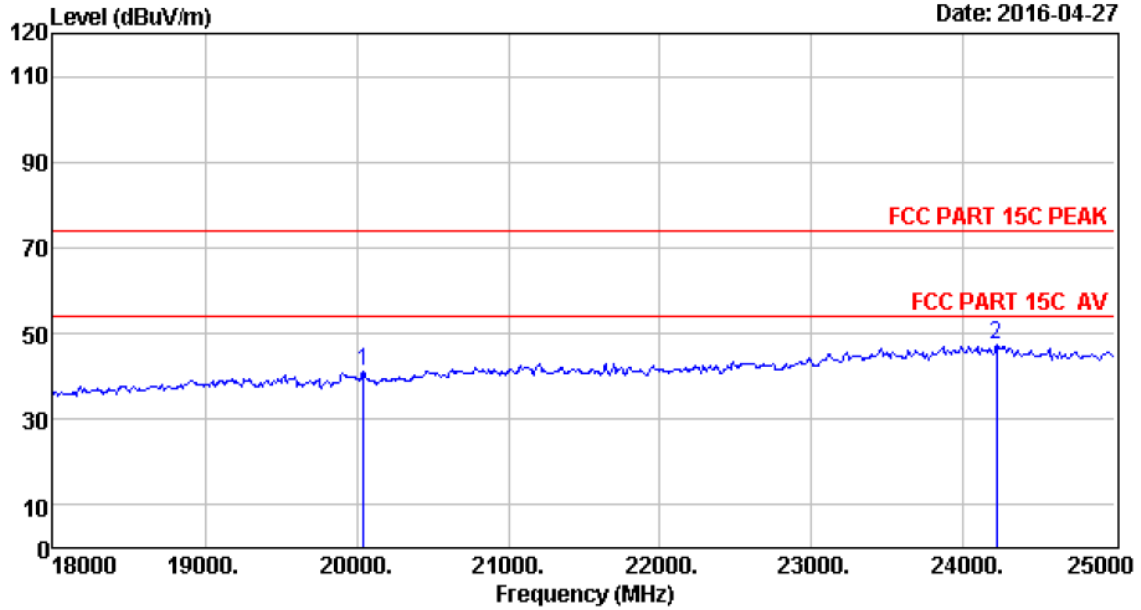

Site no. : 966 1# chamber Data no. : 1099  
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : DS4  
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20044.00	46.09	19.70	36.66	11.98	41.11	74.00	32.89	Peak
2	24216.00	45.65	22.17	33.15	12.49	47.16	74.00	26.84	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

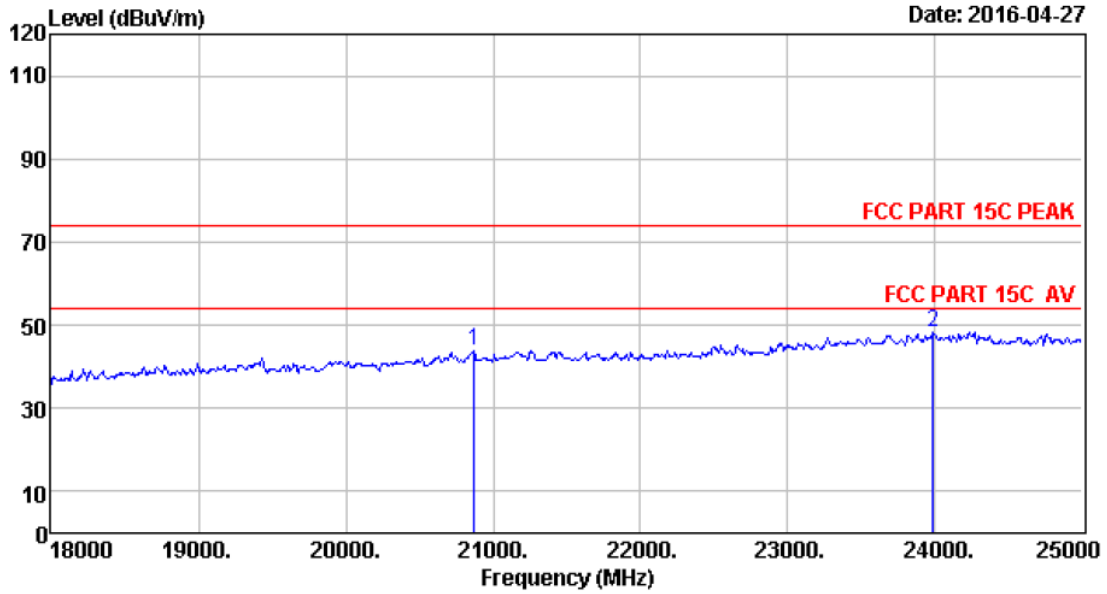

Site no. : 966 l# chamber                      Data no. : 1100  
 Dis. / Ant. : 3m ANT ABOVE 18G              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : DS4  
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20870.00	46.22	20.07	35.91	13.62	44.00	74.00	30.00	Peak
2	23985.00	45.60	22.03	32.83	13.41	48.21	74.00	25.79	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

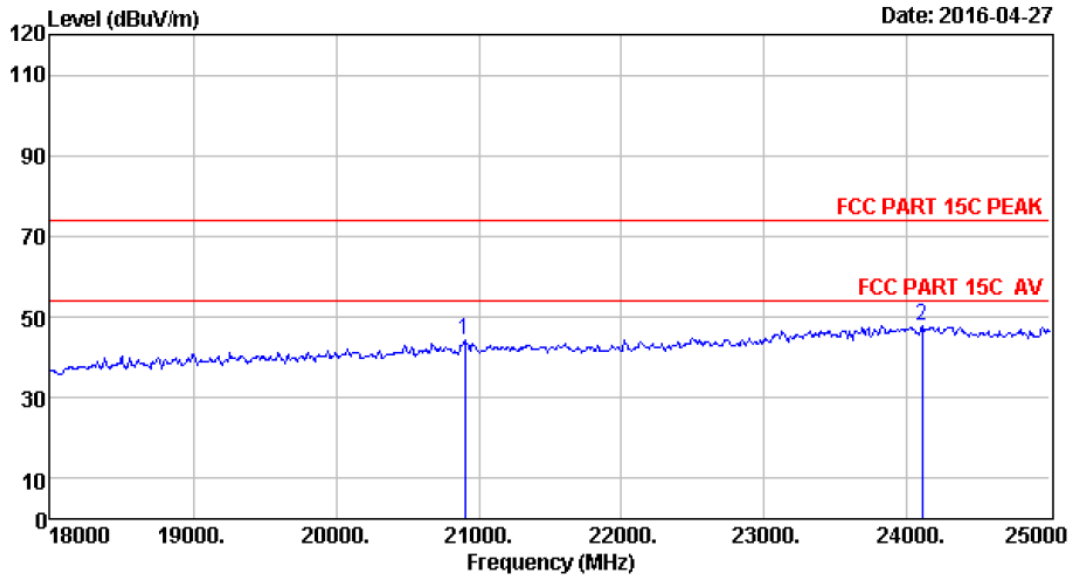

Site no. : 966 1# chamber                      Data no. : 1101  
 Dis. / Ant. : 3m ANT AEVOE 18G              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : DS4  
 Test Mode : GFSK TX 2440MHz

	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	46.25	20.09	35.89	13.75	44.20	74.00	29.80	Peak
2	45.62	22.10	32.95	13.25	48.02	74.00	25.98	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

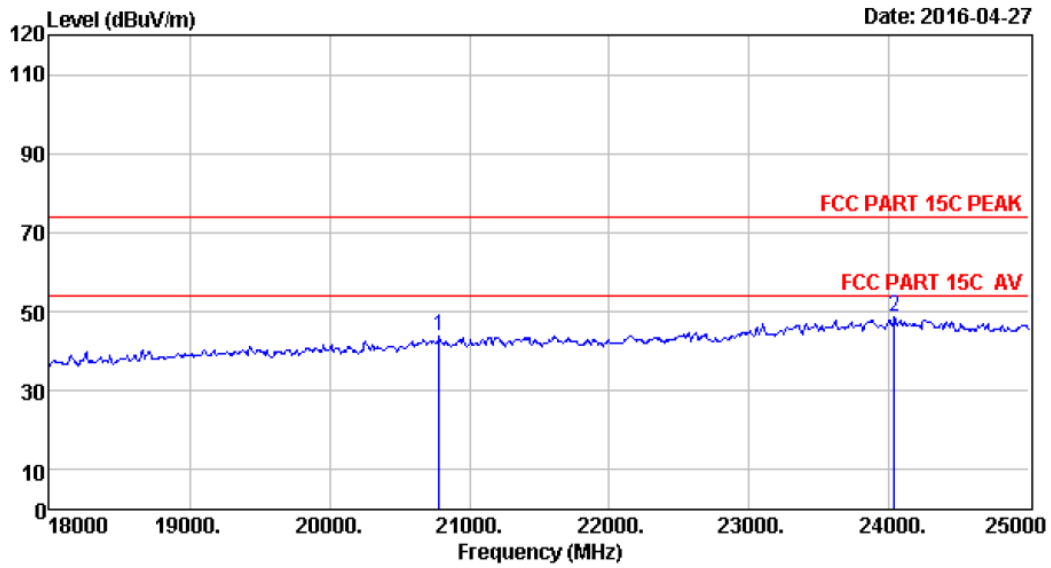

Site no. : 966 1# chamber                      Data no. : 1102  
 Dis. / Ant. : 3m ANT ABOVE 18G                      Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : DS4  
 Test Mode : GFSK TX 2440MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	20786.00	46.18	20.04	36.00	13.57	43.79	74.00	30.21	Peak
2	24034.00	45.60	22.06	32.84	14.00	48.82	74.00	25.18	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

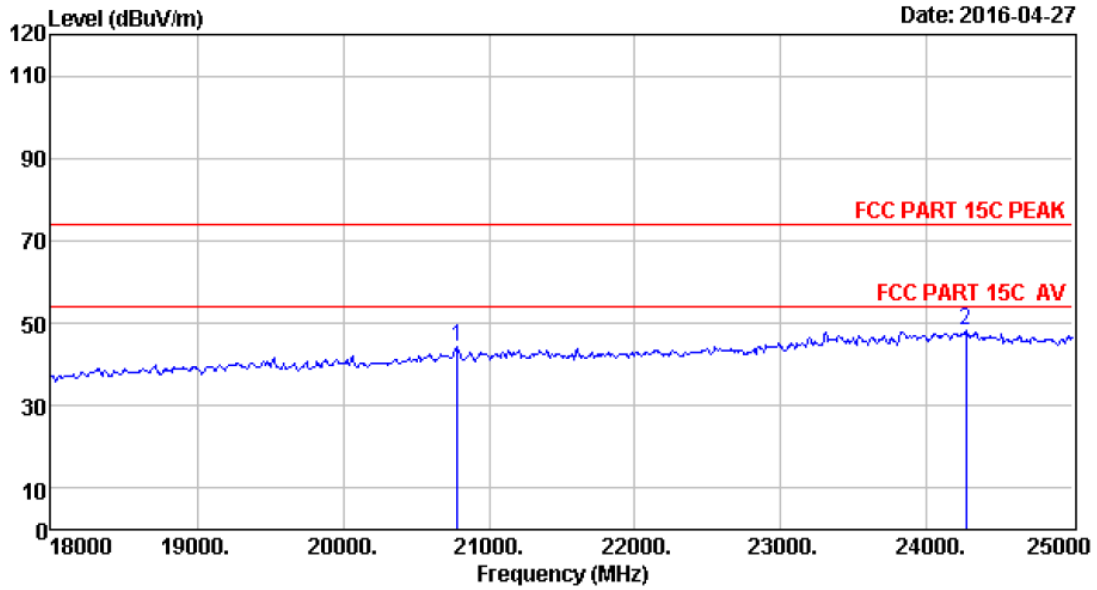

Site no. : 966 1# chamber                      Data no. : 1103  
 Dis. / Ant. : 3m ANT ABOVE 18G                  Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : DS4  
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20786.00	46.18	20.04	36.00	14.26	44.48	74.00	29.52	Peak
2	24265.00	45.65	22.19	33.23	13.45	48.06	74.00	25.94	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

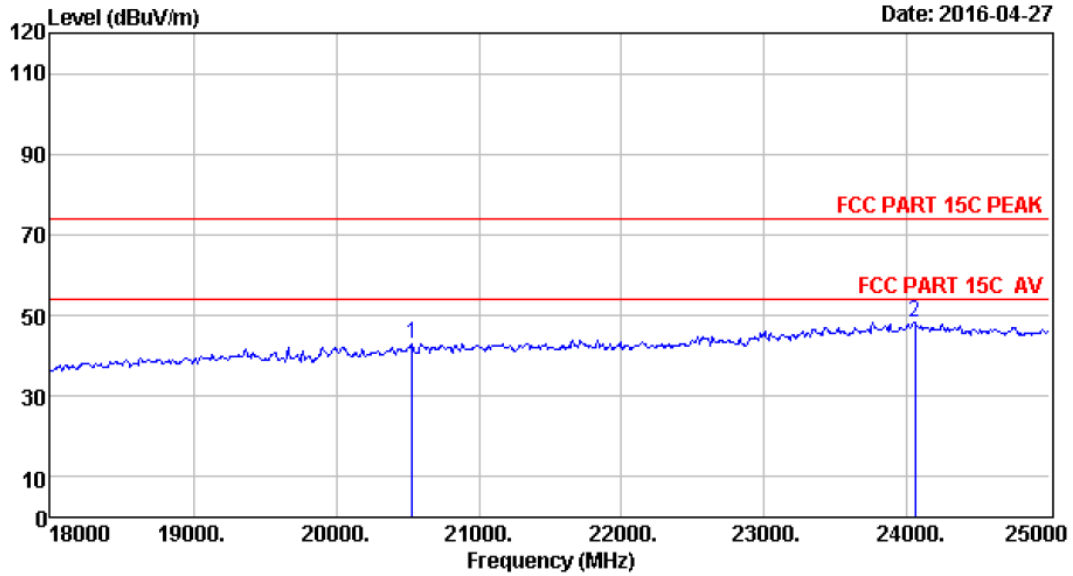

Site no. : 966 1# chamber                      Data no. : 1104  
 Dis. / Ant. : 3m ANT ABOVE 18G              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : DS4  
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20534.00	46.01	19.92	36.23	13.23	42.93	74.00	31.07	Peak
2	24055.00	45.61	22.08	32.88	13.40	48.21	74.00	25.79	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

## 5 CONDUCTED SPURIOUS EMISSION

### 5.1 Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

### 5.2 Test Procedure



The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz for frequency range from 30MHz to 1000 MHz; The resolution bandwidth is set to 1 MHz, The video bandwidth is set to 3 MHz for frequency range from 1000MHz to 25000 MHz.

### 5.3 Test Result



**PASS** (The testing data was attached in the next pages.)

### 5.4 Test Data



Test Mode: BT 4.0-BLE GFSK 2402MHz

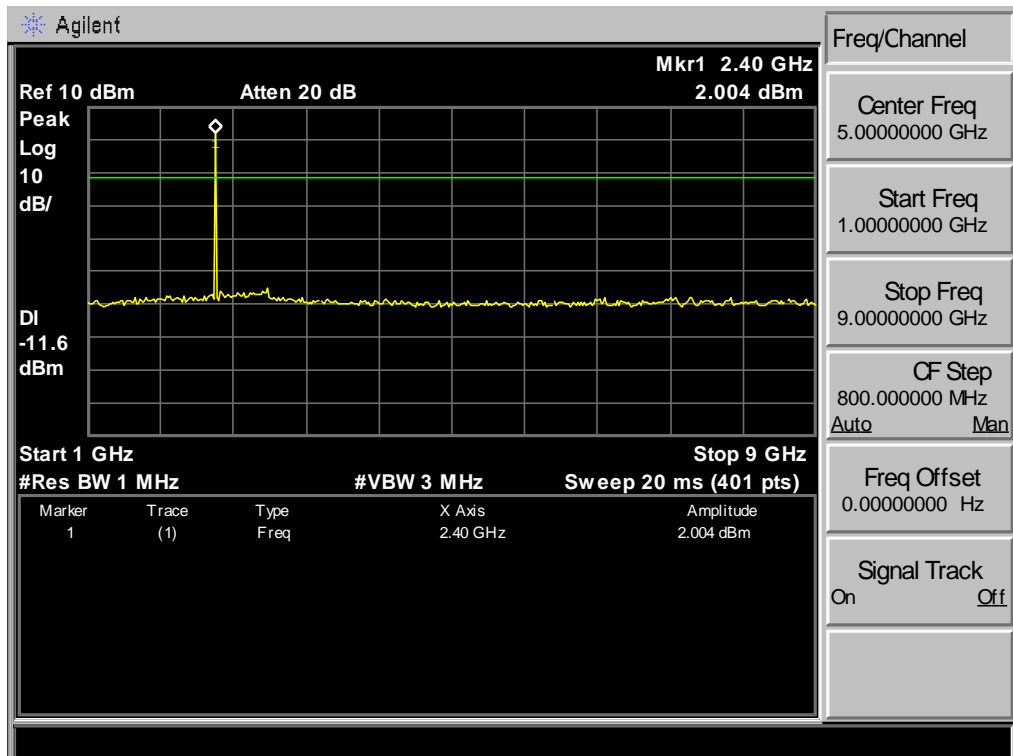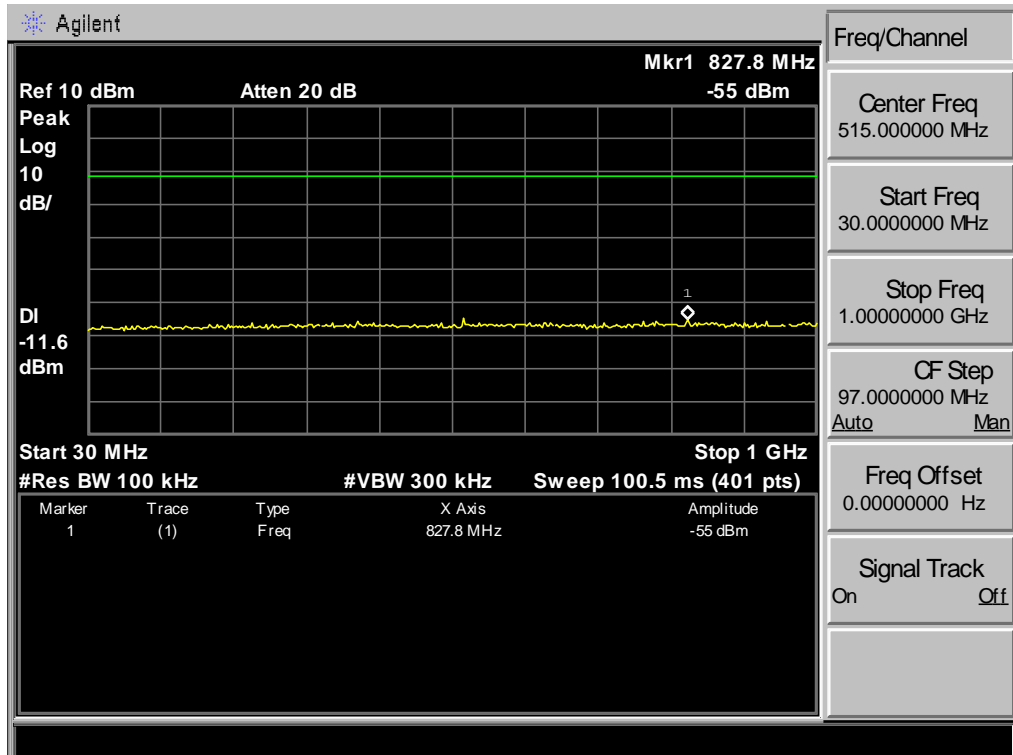




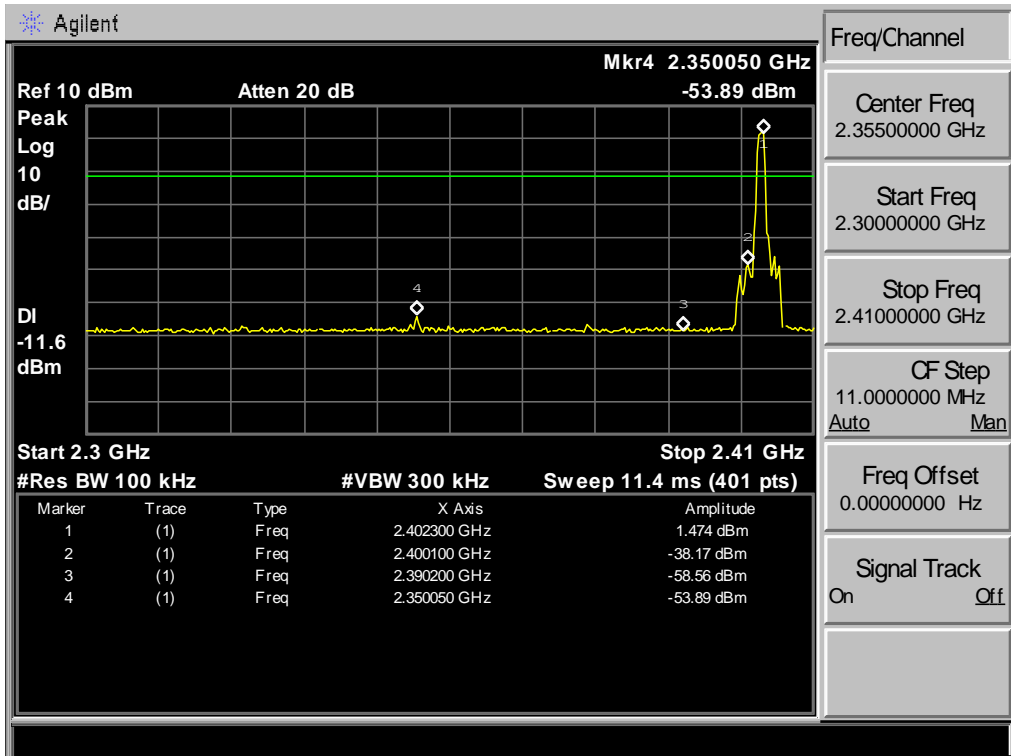
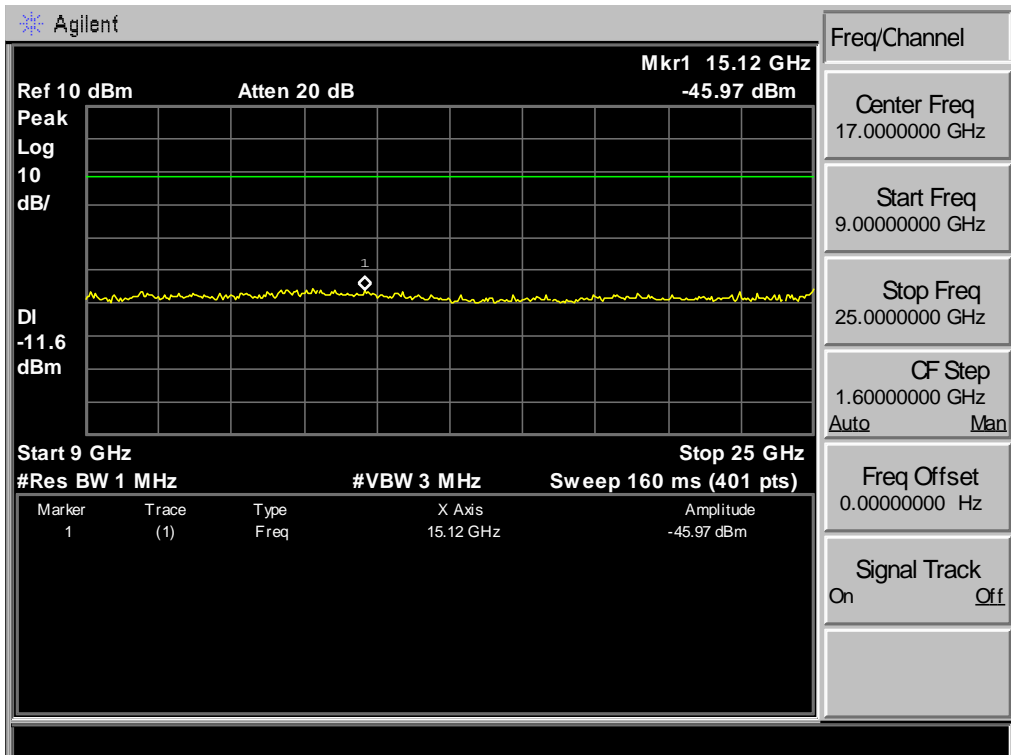




Test Mode: BT 4.0-BLE GFSK 2440MHz

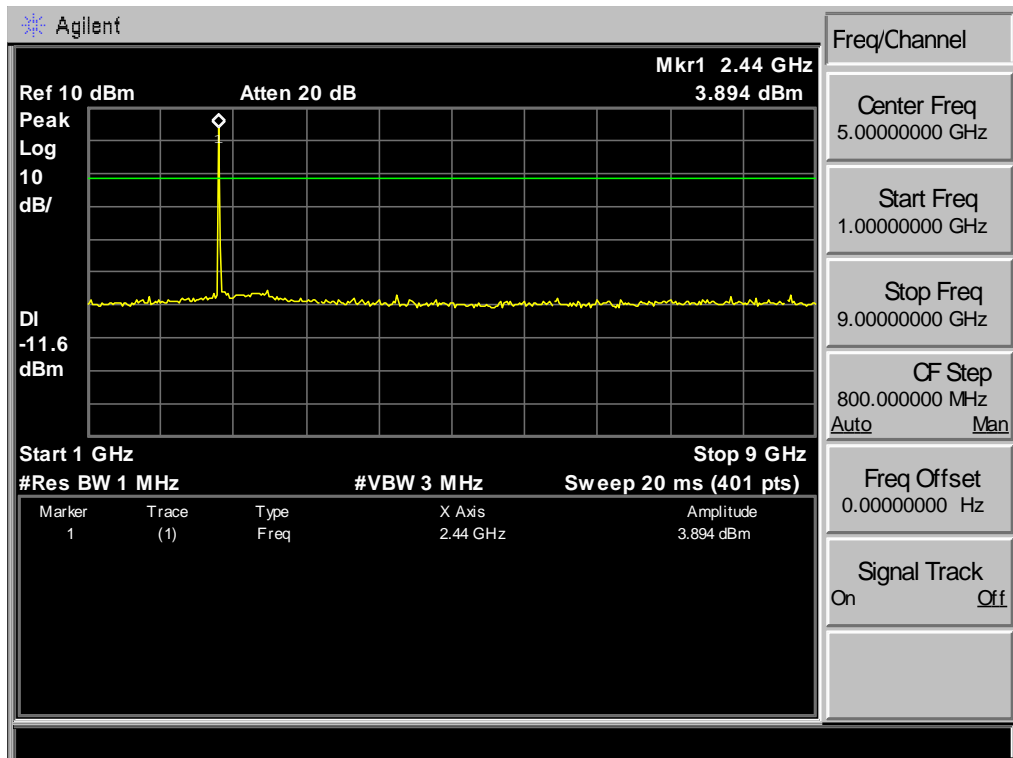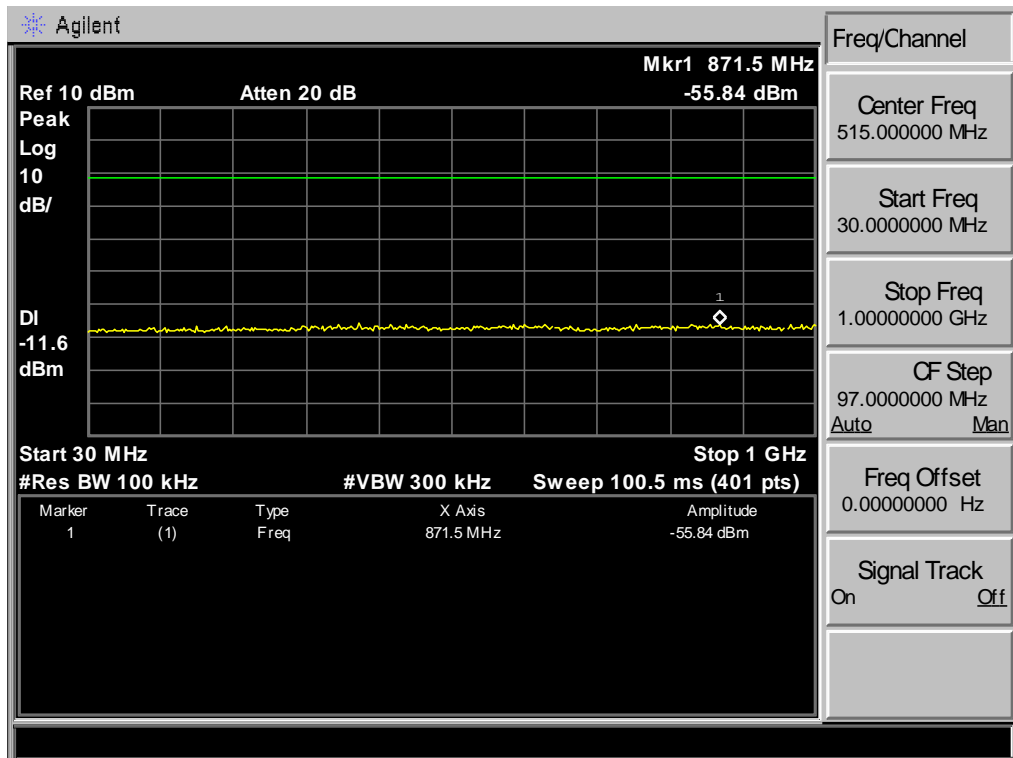

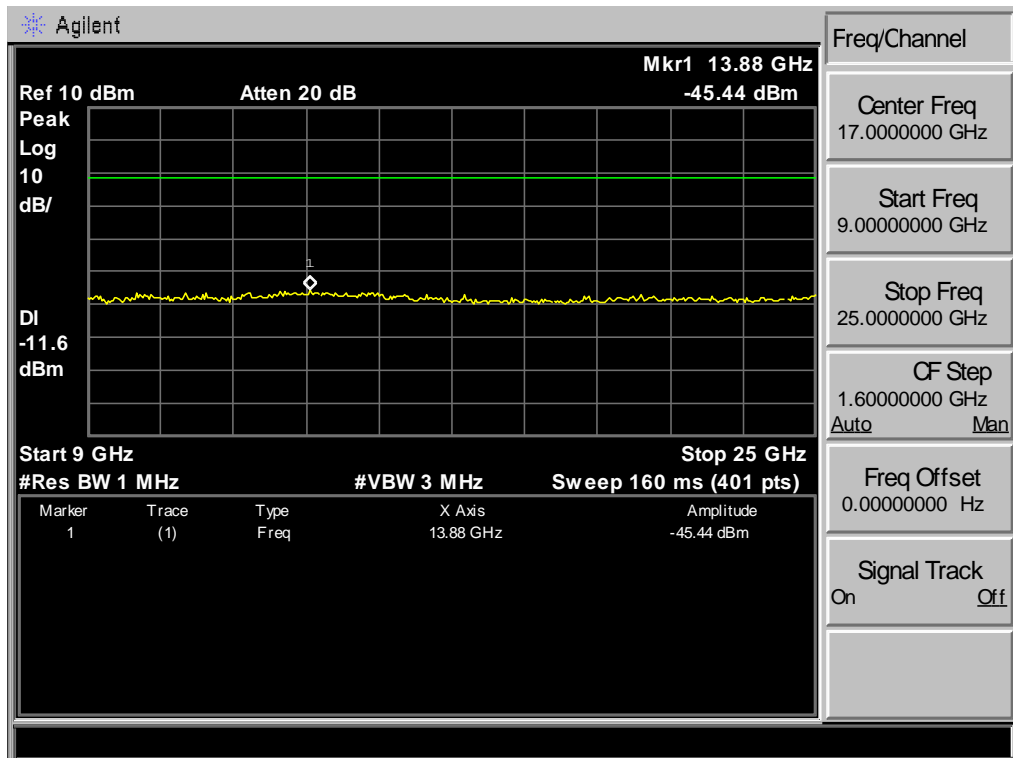

Test Mode: BT 4.0-BLE GFSK 2480MHz

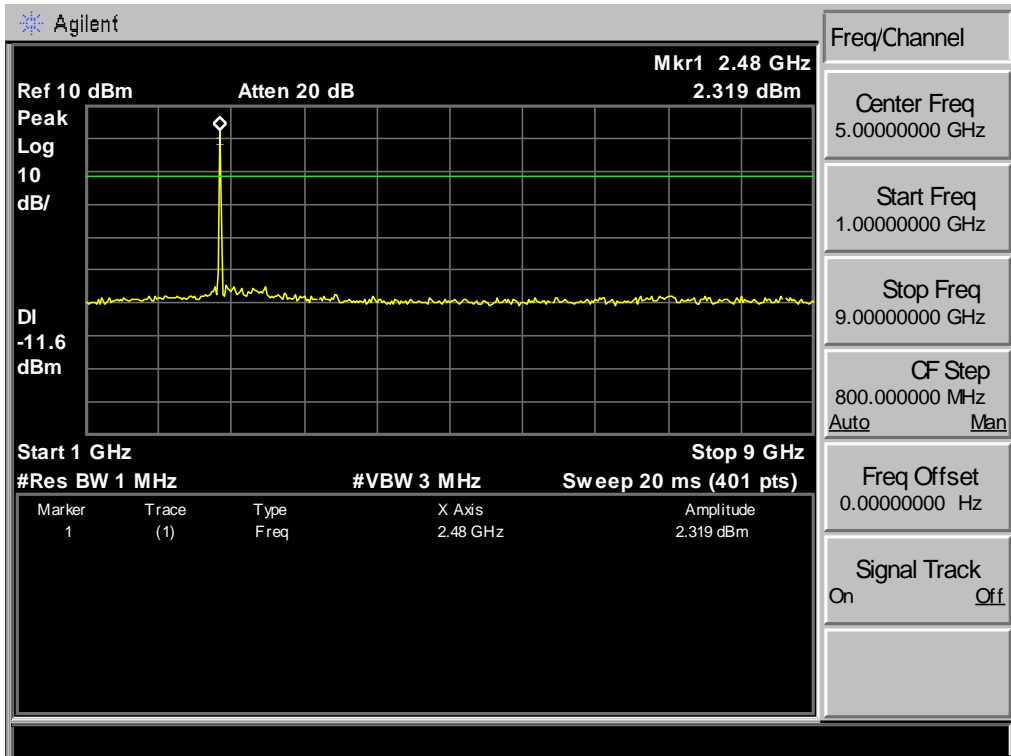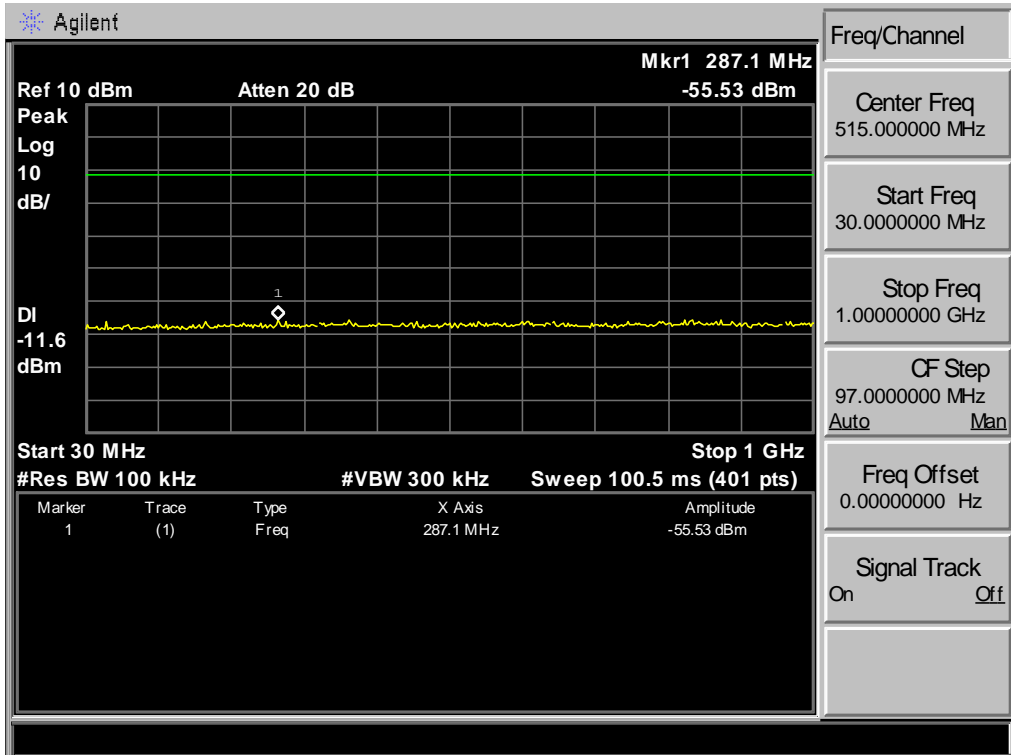

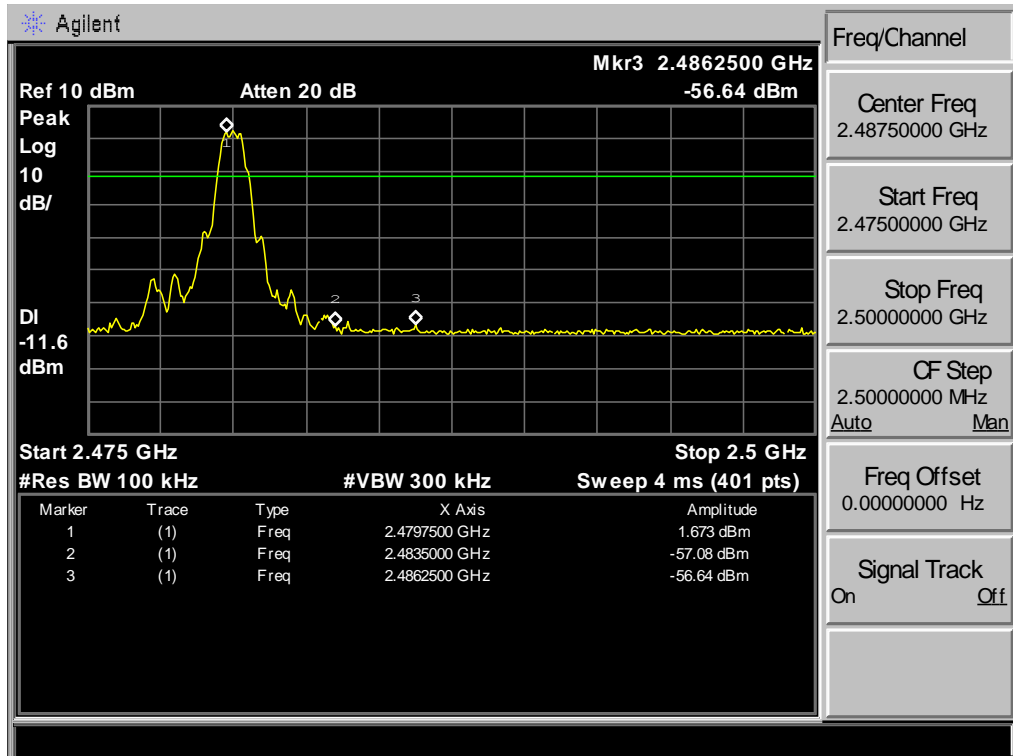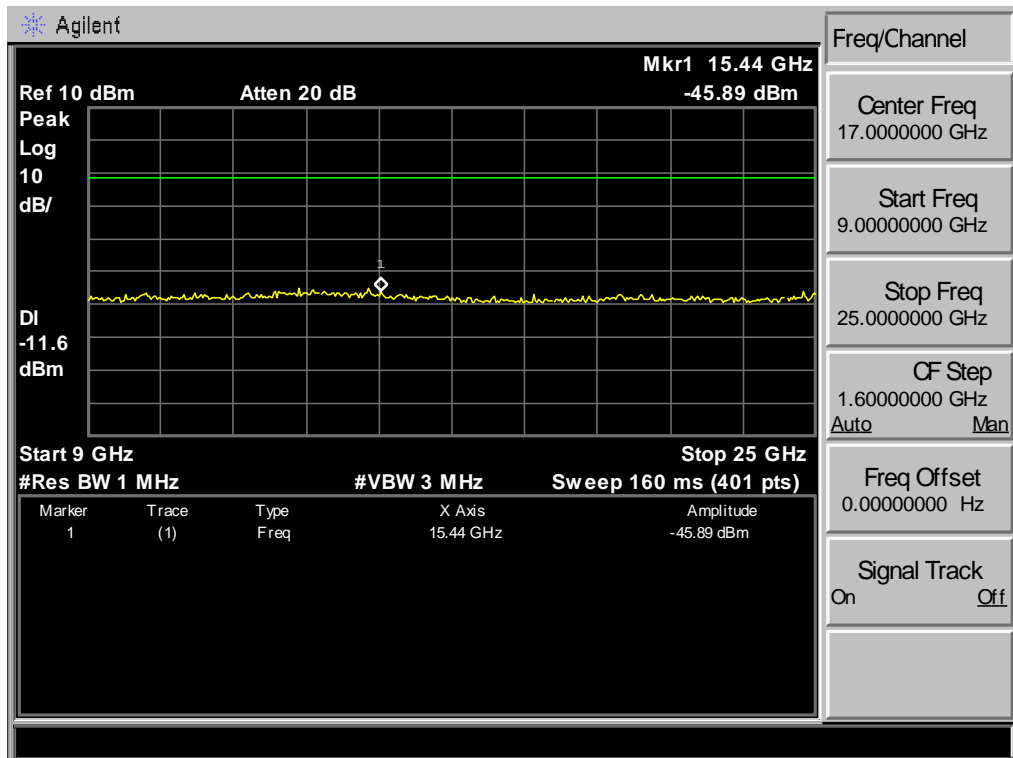


## 6 BAND EDGE COMPLIANCE TEST

### 6.1 Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits

### 6.2 Block Diagram of Test setup

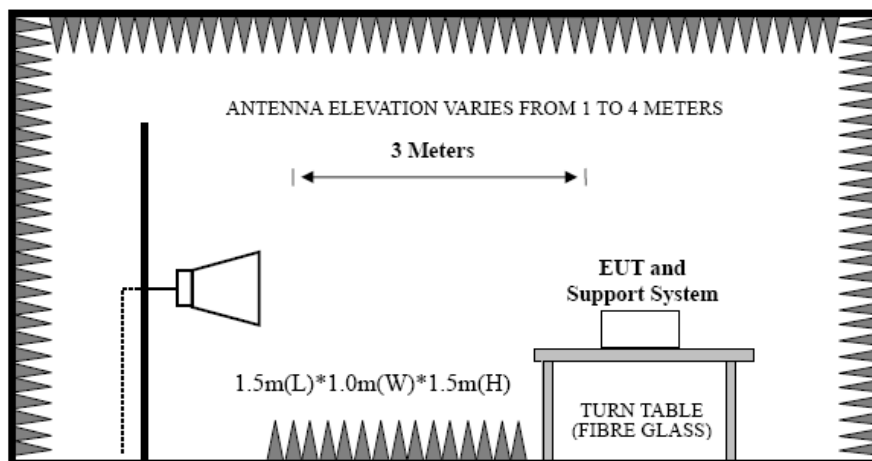

### 6.3 Test Procedure

1. The EUT is placed on a turntable, which is 1.5m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

Peak : RBW = 1MHz, VBW = 1MHz, Detector=PEAK detector, Sweep time = auto.


AV : RBW = 1MHz, VBW = 10Hz, Detector=PEAK detector, Sweep time = auto.

### 6.4 Test Result

Pass (The testing data was attached in the next pages.)

- Note:
- 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
  - 2、 The frequency 2402MHz and 2480 MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

### 6.5 Test Data

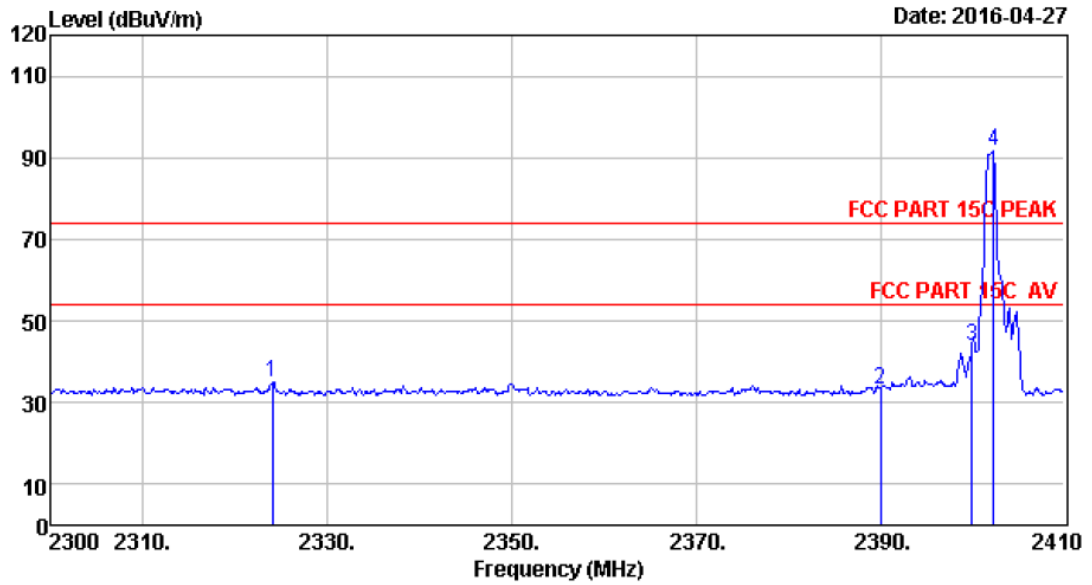


```

Site no.       : 966 1# chamber           Data no.  : 1111
Dis. / Ant.    : 3m ANT 1-18G           Ant. pol. : HORIZONTAL
Limit         : FCC PART 15C PEAK
Env. / Ins.    : Temp:23.6';Humi:56%;Press:101.52kPa
Engineer      : Tony
EUT           : Portable Bluetooth Speaker
Power         : DC 18V From Adapter Input AC 120V/60Hz
M/N           : DS4
Test Mode     : GFSK TX 2402MHz
    
```

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2323.98	27.73	6.54	34.60	35.27	34.94	74.00	39.06	Peak
2	2389.98	27.64	6.62	34.62	33.62	33.26	74.00	40.74	Peak
3	2399.99	27.61	6.62	34.64	44.18	43.77	74.00	30.23	Peak
4	2402.30	27.61	6.62	34.64	91.89	91.48	74.00	-17.48	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

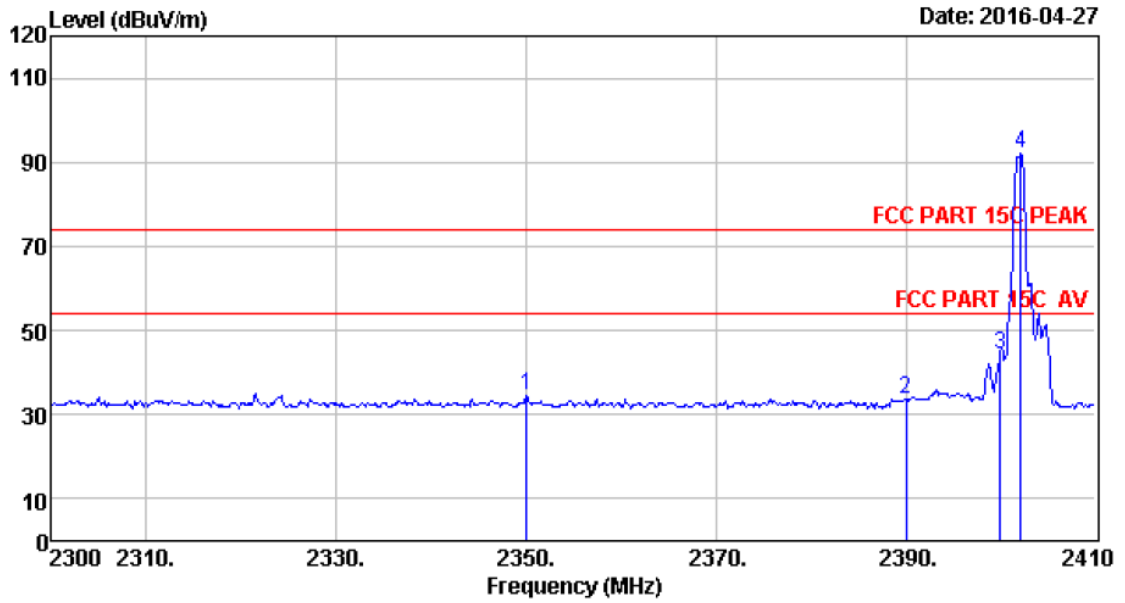


Site no. : 966 1# chamber                      Data no. : 1112  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : DS4  
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2350.05	27.70	6.56	34.57	34.79	34.48	74.00	39.52	Peak
2	2389.98	27.64	6.62	34.62	34.07	33.71	74.00	40.29	Peak
3	2399.99	27.61	6.62	34.64	44.90	44.49	74.00	29.51	Peak
4	2402.08	27.61	6.62	34.64	92.40	91.99	74.00	-17.99	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




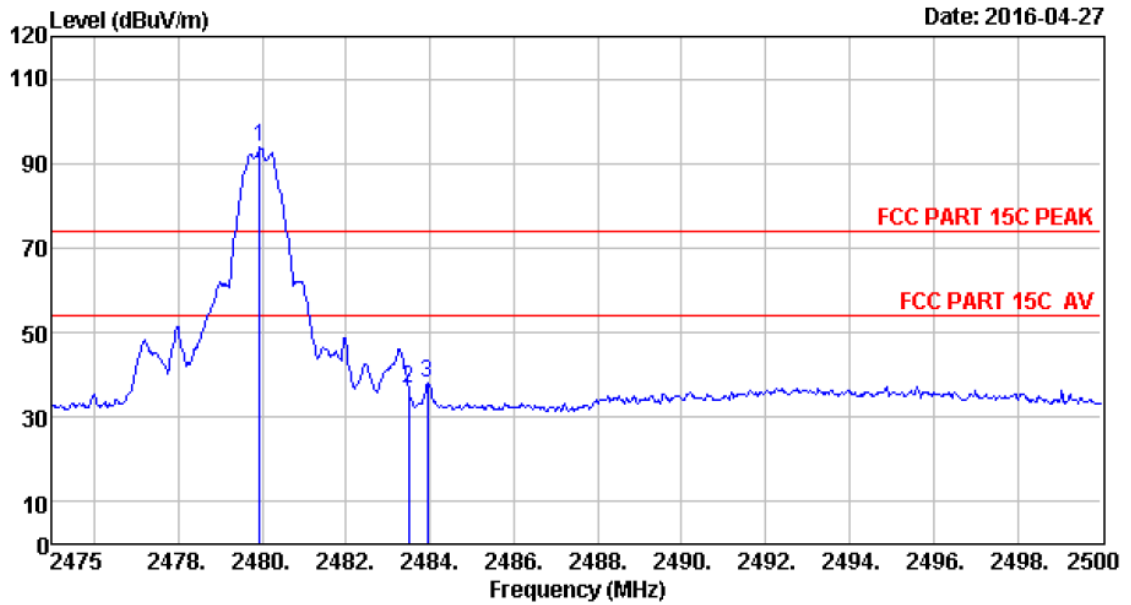

Site no. : 966 1# chamber                      Data no. : 1113  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : DS4  
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.95	27.58	6.71	35.11	94.58	93.76	74.00	-19.76	Peak
2	2483.50	27.58	6.71	35.11	37.36	36.54	74.00	37.46	Peak
3	2483.95	27.58	6.71	35.11	38.72	37.90	74.00	36.10	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

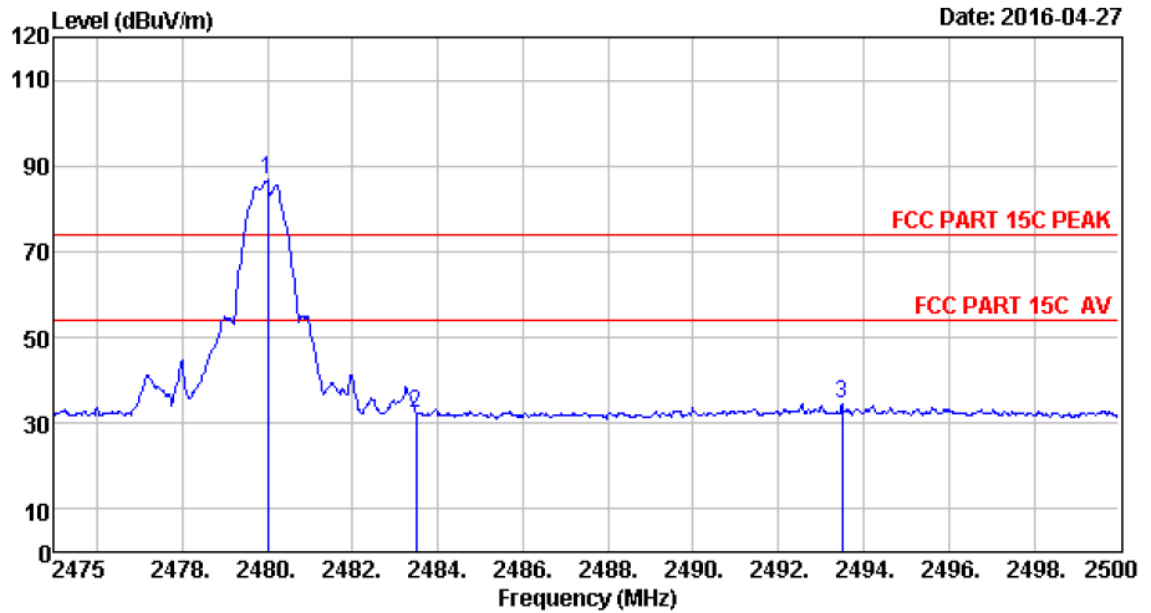

Site no. : 966 1# chamber Data no. : 1114  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : Portable Bluetooth Speaker  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : DS4  
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	87.63	86.81	74.00	-12.81	Peak
2	2483.50	27.58	6.71	35.11	33.22	32.40	74.00	41.60	Peak
3	2493.50	27.58	6.73	35.24	35.58	34.65	74.00	39.35	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

## 7 6dB Bandwidth Test

### 7.1 Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

### 7.2 Test Procedure


- 1, Connected the EUT's antenna port to spectrum analyzer device.
- 2, Follow the test procedure as described in KDB 558074
  - (1). Set resolution bandwidth (RBW) = 100 kHz.
  - (2). Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
  - (3). Detector = Peak.
  - (4). Trace mode = max hold.
  - (5). Sweep = auto couple.
  - (6). Allow the trace to stabilize.
  - (7). Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 7.3 Test Result


EUT: Bluetooth Speaker			
M/N: DS4			
Test date: 2016-05-09		Tested by: Tony.Tang	
Test site: RF Site			
Test Mode	CH	6dB bandwidth ( MHz )	Limit (KHz)
BT 4.0-BLE GFSK	CH1	0.727	>500
	CH20	0.700	>500
	CH40	0.701	>500
Conclusion : PASS			

### 7.4 Test Data


Test Mode: BT 4.0-BLE GFSK 2402MHz

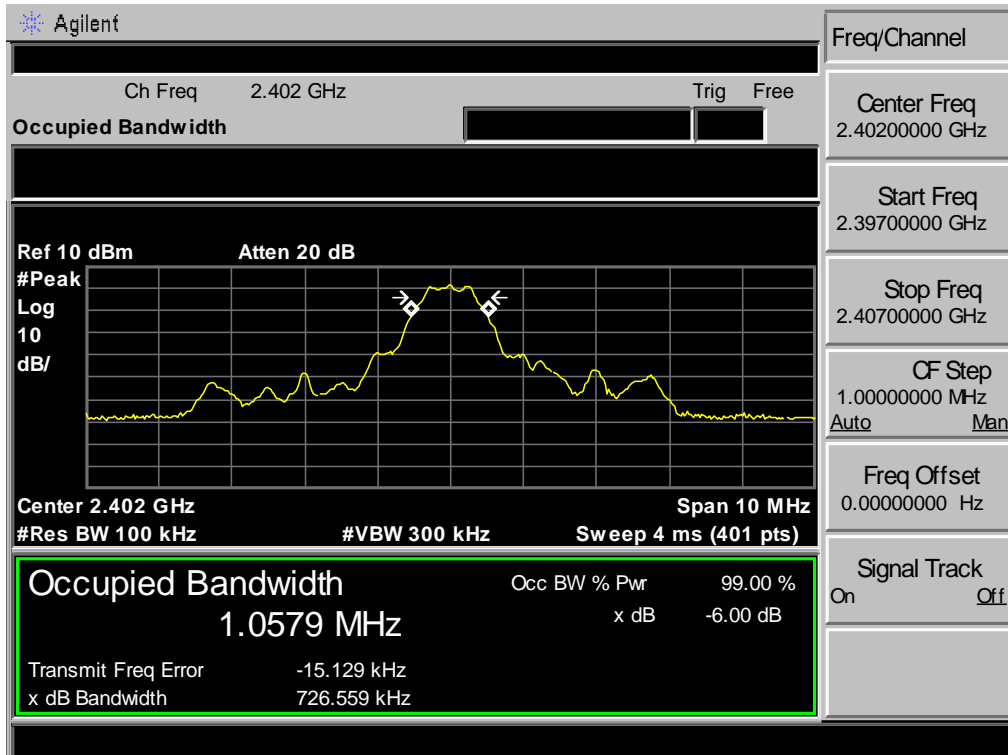

Test Mode: BT 4.0-BLE GFSK 2440MHz

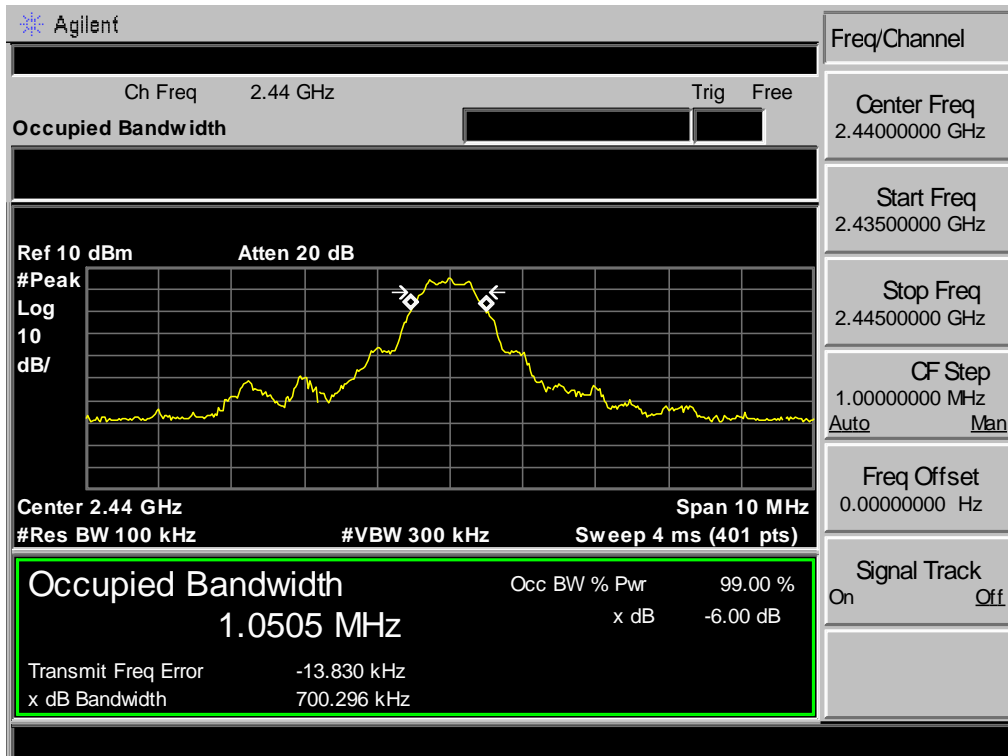

Test Mode: BT 4.0-BLE GFSK 2480MHz

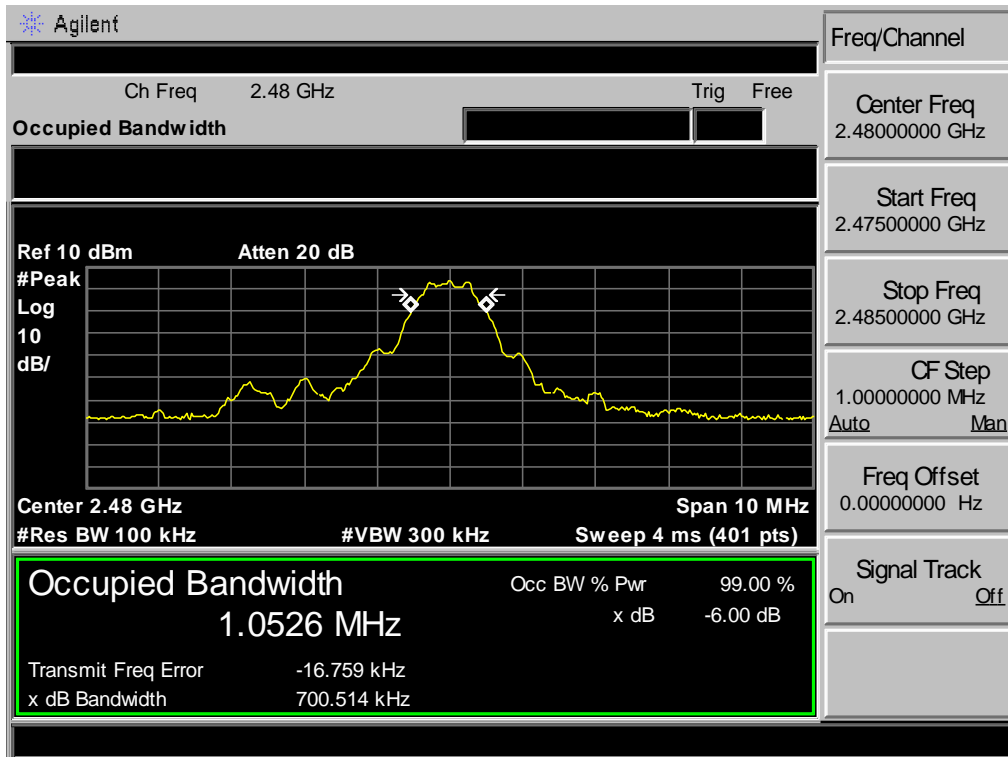

## 8 OUTPUT POWER TEST

### 8.1 Limit

For systems using digital modulation in the 2400—2483.5MHz, The Peak out put Power shall not exceed 1W(30dBm)

### 8.2 Test Procedure

#### 8.3 Test Procedure

- 1, Connected the EUT's antenna port to spectrum analyzer device.
- 2, Follow the test procedure as described in KDB 558074
  - (1). Set the RBW  $\geq$  DTS bandwidth.
  - (2). Set VBW  $\geq$  3 x RBW.
  - (3). Set span  $\geq$  3 x RBW.
  - (4). Sweep time = auto couple.
  - (5). Detector = peak.
  - (6). Trace mode = max hold.
  - (7). Allow trace to fully stabilize.
  - (8). Use peak marker function to determine the peak amplitude level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offs

### 8.4 Test Result

EUT: Bluetooth Speaker			
M/N:DS4			
Test date: 2016-04-29		Test site: 3m Chamber	Tested by: Tony Tang
Pass			
Test Mode	CH	Peak output Power ( dBm )	Limit (dBm)
BT 4.0-BLE GFSK	CH1	3.19	30
	CH20	3.97	30
	CH40	2.29	30
Conclusion : PASS			


### 8.5 Test Data

Test Mode: BT 4.0-BLE GFSK 2402MHz



Date: 29 APR 2016 14:09:54


Test Mode: BT 4.0-BLE GFSK 2440MHz

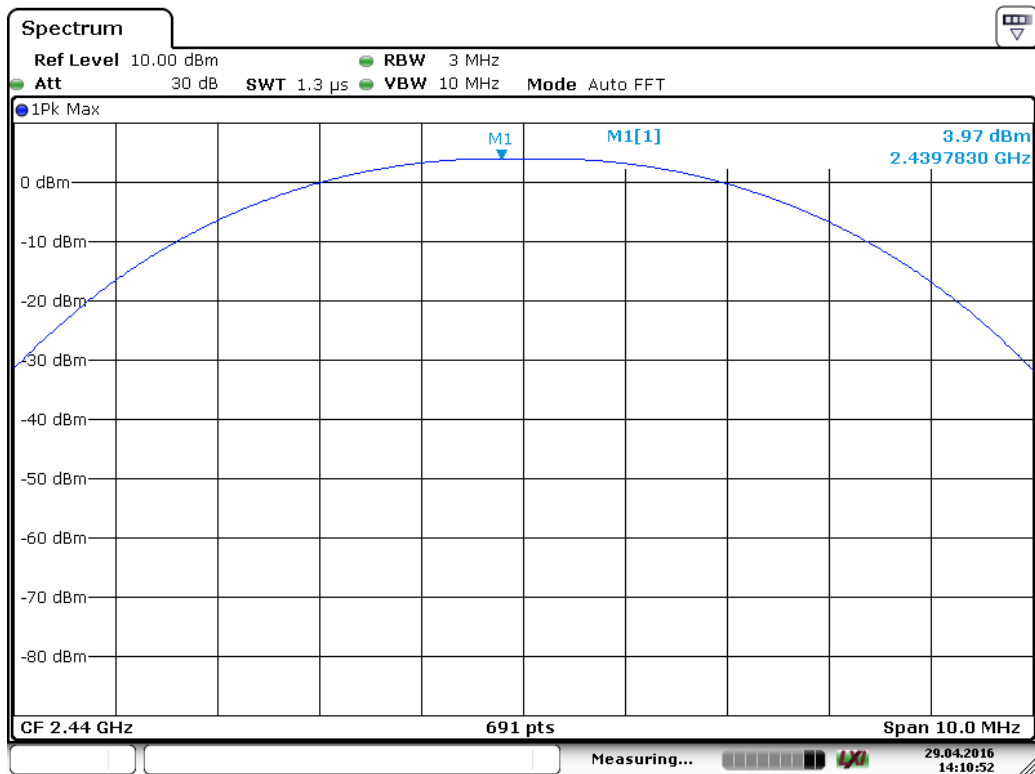

Date: 29 APR 2016 14:10:52



Test Mode: BT 4.0-BLE GFSK 2480MHz

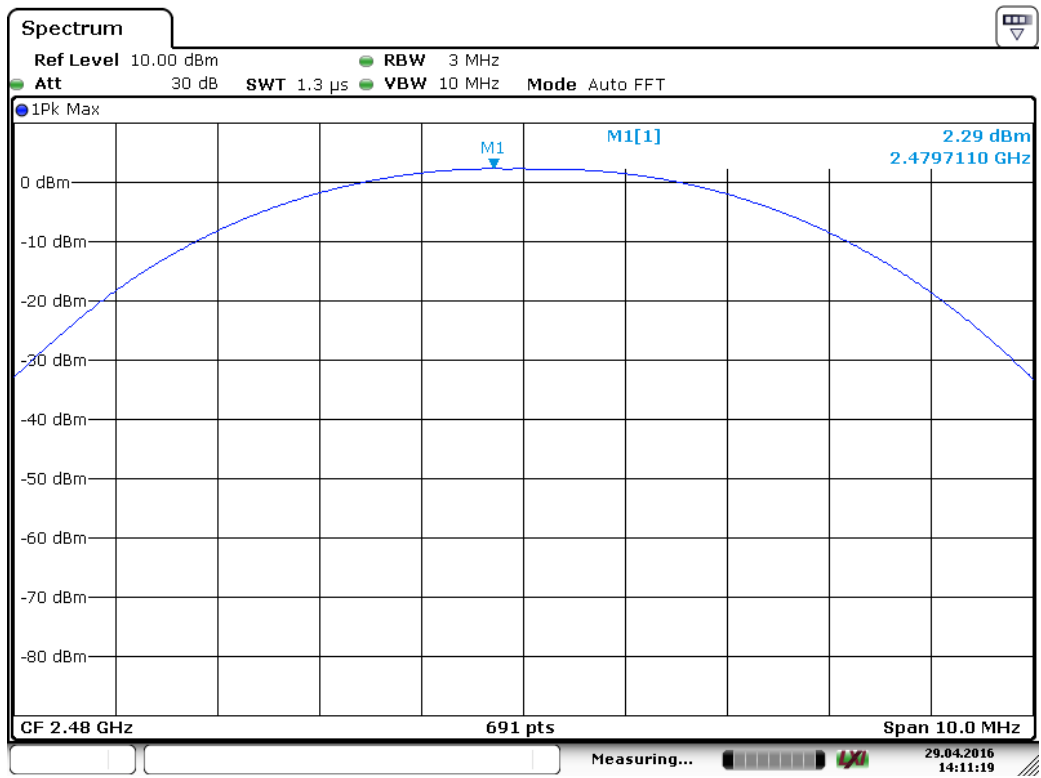

Date:29.APR.2016 14:11:19

## 9 POWER SPECTRAL DENSITY TEST

### 9.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

### 9.2 Test Procedure


- 1, Connected the EUT's antenna port to spectrum analyzer device.
  
- 2, Follow the test procedure as described in KDB 558074
  - (1). Set analyzer center frequency to DTS channel center frequency.
  - (2). Set the span to 1.5 times the DTS bandwidth.
  - (3). Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
  - (4). Set the VBW  $\geq 3 \text{ RBW}$ .
  - (5). Detector = peak.
  - (6). Sweep time = auto couple.
  - (7). Trace mode = max hold.
  - (8). Allow trace to fully stabilize.
  - (9). Use the peak marker function to determine the maximum amplitude level.
  - (10). If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 9.3 Test Result


EUT: Bluetooth Speaker			
M/N: DS4			
Test date: 2016-05-09		Test site: 3m Chamber	Tested by: Tony Tang
Pass			
Test Mode	CH	Power density (dBm/3kHz )	Limit (dBm/3kHz)
BT 4.0-BLE GFSK	CH1	-12.90	8
	CH20	-9.55	8
	CH40	-11.35	8
Conclusion : PASS			

### 9.4 Test Data


Test Mode: BT 4.0-BLE GFSK 2402MHz

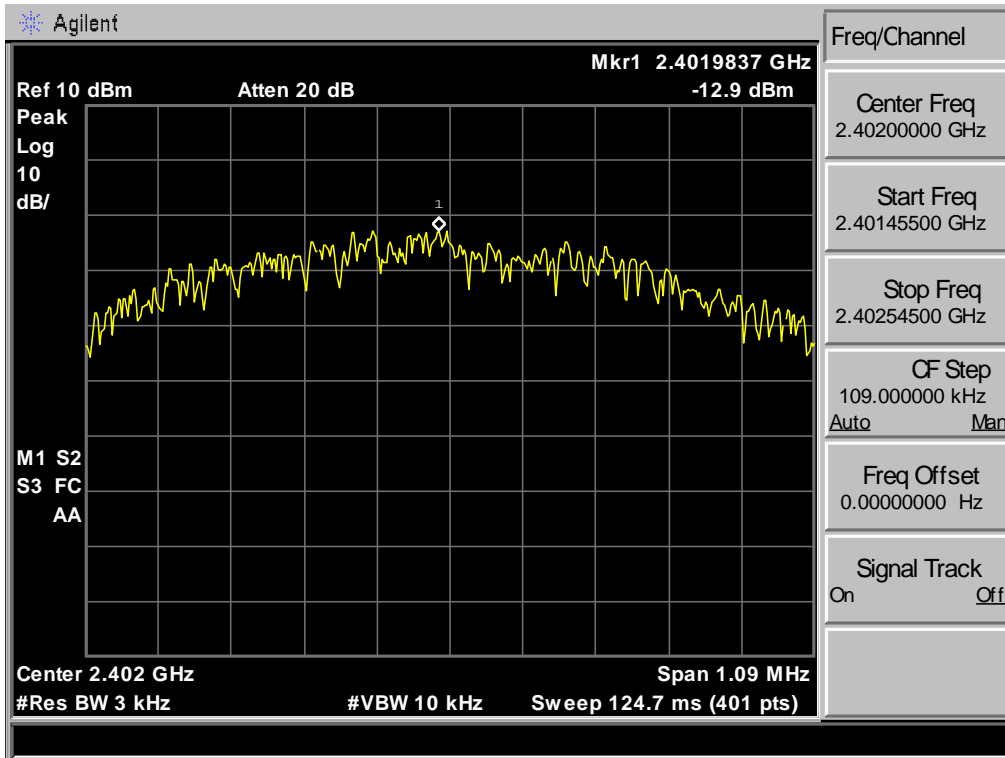

Test Mode: BT 4.0-BLE GFSK 2440MHz

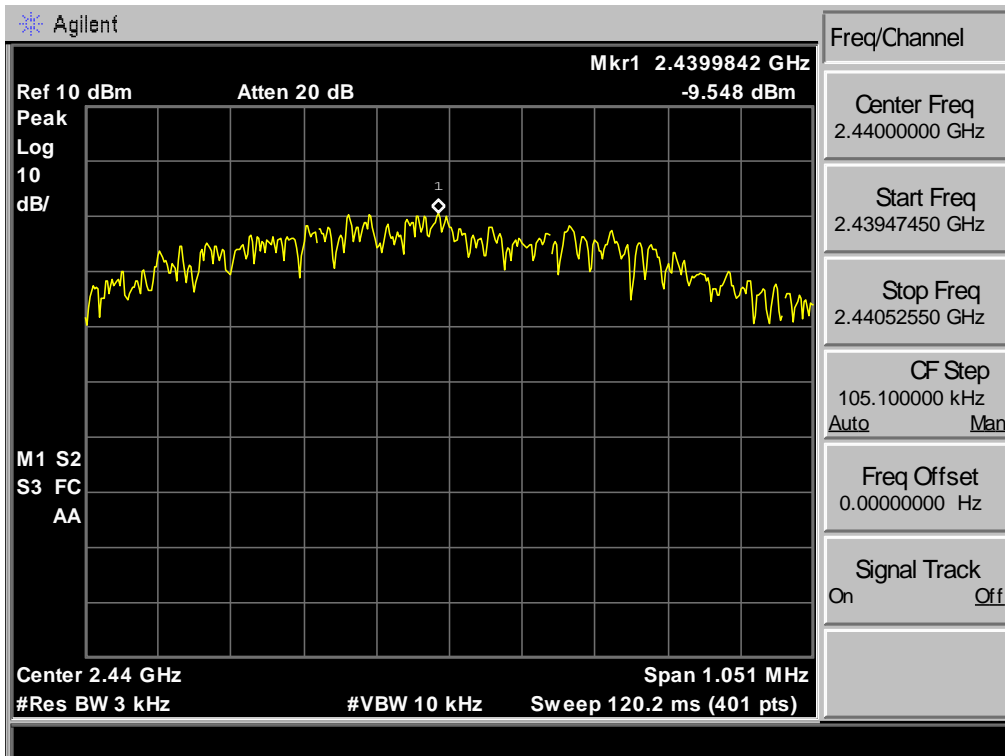

Test Mode: BT 4.0-BLE GFSK 2480MHz

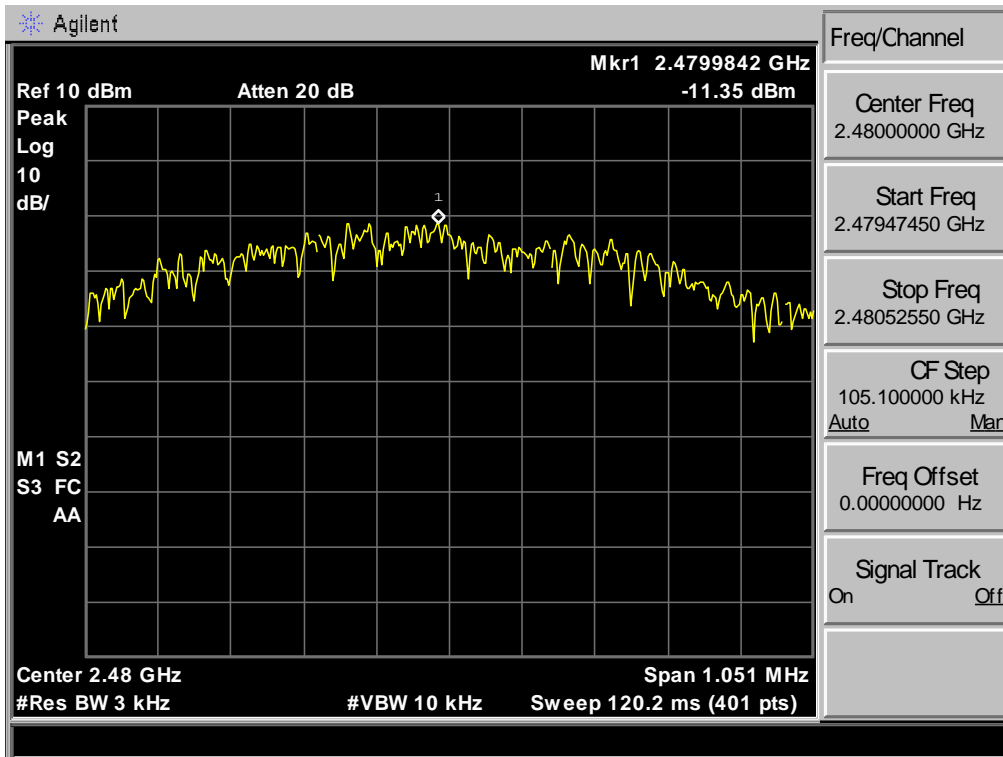

## 10 ANTENNA REQUIREMENTS

### 10.1 Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 10.2 Result

The antennas used for this product are integral Patch Antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 0dBi.