

FCC TEST REPORT
FOR
Microlab Electronics Co.,Ltd
Bluetooth Stereo Headset
Model No.: T3
Additional No.: /

Prepared for : Microlab Electronics Co.,Ltd
Address : South Baozi Rd., Shenzhen Microlab Industrial Park, ShenZhen, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : June 05, 2017
Number of tested samples : 1
Serial number : Prototype
Date of Test : June 05, 2017~June 21, 2017
Date of Report : July 07, 2017

FCC TEST REPORT

FCC CFR 47 PART 15 C(15.247): 2016

Report Reference No. : **LCS170629057AE**

Date of Issue..... : July 07, 2017

Testing Laboratory Name..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure : Full application of Harmonised standards ■
Partial application of Harmonised standards □
Other standard testing method □

Applicant's Name..... : **Microlab Electronics Co.,Ltd**

Address..... : South Baozi Rd., Shenzhen Microlab Industrial Park, ShenZhen, China

Test Specification

Standard : FCC CFR 47 PART 15 C(15.247): 2016

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description. : **Bluetooth Stereo Headset**

Trade Mark..... : N/A

Model/ Type reference : T3

Ratings..... : DC 3.7V by Lithium ion polymer battery (400mAh)

Recharge Voltage: DC 5.0V/0.2A

Result : **Positive**

Compiled by:




Aking Jin/ File administrators

Supervised by:



Dick Su/ Technique principal

Approved by:

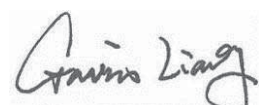

Gavin Liang/ Manager

FCC -- TEST REPORT

| | |
|---|---------------------------------------|
| Test Report No. : LCS170629057AE | <u>July 07, 2017</u> Date of issue |
|---|---------------------------------------|

| |
|---|
| Type / Model..... : T3 EUT..... : Bluetooth Stereo Headset |
| Applicant..... : Microlab Electronics Co.,Ltd Address..... : South Baozi Rd., Shenzhen Microlab Industrial Park, ShenZhen, China Telephone..... : / Fax..... : / |
| Manufacturer..... : Microlab Electronics Co.,Ltd Address..... : South Baozi Rd., Shenzhen Microlab Industrial Park, ShenZhen, China Telephone..... : / Fax..... : / |
| Factory..... : Microlab Electronics Co.,Ltd Address..... : South Baozi Rd., Shenzhen Microlab Industrial Park, ShenZhen, China Telephone..... : / Fax..... : / |

| | |
|--------------------|-----------------|
| Test Result | Positive |
|--------------------|-----------------|

The test report merely corresponds to the test sample.
 It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

| Revision | Issue Date | Revisions | Revised By |
|----------|---------------|---------------|-------------|
| 00 | July 07, 2017 | Initial Issue | Gavin Liang |
| | | | |
| | | | |

TABLE OF CONTENTS

| Description | Page |
|---|-----------|
| 1. GENERAL INFORMATION | 6 |
| 1.1 Description of Device (EUT)..... | 6 |
| 1.2 Support equipment List | 6 |
| 1.3 External I/O Cable | 6 |
| 1.4 Description of Test Facility | 6 |
| 1.5 Statement of the Measurement Uncertainty..... | 7 |
| 1.6 Measurement Uncertainty | 7 |
| 1.7 Description of Test Modes | 7 |
| 1.8. Frequency of Channels..... | 8 |
| 2. TEST METHODOLOGY | 9 |
| 2.1 EUT Configuration..... | 9 |
| 2.2 EUT Exercise | 9 |
| 2.3 General Test Procedures..... | 9 |
| 3. SYSTEM TEST CONFIGURATION | 10 |
| 3.1 Justification | 10 |
| 3.2 EUT Exercise Software | 10 |
| 3.3 Special Accessories | 10 |
| 3.4 Block Diagram/Schematics | 10 |
| 3.5 Equipment Modifications | 10 |
| 3.6 Test Setup..... | 10 |
| 4. SUMMARY OF TEST RESULTS..... | 11 |
| 5. SUMMARY OF TEST EQUIPMENT | 12 |
| 6. MEASUREMENT RESULTS | 13 |
| 6.1 Peak Power..... | 13 |
| 6.2 Frequency Separation and 20 dB Bandwidth..... | 17 |
| 6.3 Number of Hopping Frequency | 23 |
| 6.4 Time of Occupancy (Dwell Time) | 25 |
| 6.5 Conducted Spurious Emissions and Band Edges Test..... | 29 |
| 6.6 Restricted Band Emission Limit | 36 |
| 6.7. AC Power line conducted emissions..... | 49 |
| 6.8. Band-edge measurements for radiated emissions..... | 52 |
| 6.9. Pseudorandom frequency hopping sequence..... | 57 |
| 6.10. ANTENNA REQUIREMENT..... | 58 |
| 7. TEST SETUP PHOTOGRAPHS OF EUT | 59 |
| 8. EXTERIOR PHOTOGRAPHS OF THE EUT | 59 |
| 9. INTERIOR PHOTOGRAPHS OF THE EUT..... | 59 |

1. GENERAL INFORMATION

1.1 Description of Device (EUT)

| | |
|-------------------------|---|
| EUT | : Bluetooth Stereo Headset |
| Model Number | : T3 |
| Model Declaration | : / |
| Test Model | : T3 |
| Hardware version | : T3-C85 |
| Software version | : BSH10-C35 |
| Power Supply | : DC 3.7V by Lithium ion polymer battery (400mAh) Recharge Voltage: DC 5.0V/0.2A |
| Bluetooth Technology | |
| Operation frequency | : 2402MHz-2480MHz |
| Modulation Type | : GFSK,π/4DQPSK, 8DPSK |
| Bluetooth Version | : 4.1 (Not support BLE) |
| Channel Number | : 79 Channels |
| Channel Spacing | : 1MHz |
| Antenna Type | : PCB Antenna |
| Antenna Gain | : 2.0dBi (Max.) |
| Extreme temp. Tolerance | : -10°C to +55°C |

1.2 Support equipment List

| Manufacturer | Description | Model | Serial Number | Certificate |
|--------------|---------------|----------|---------------|-------------|
| Lenovo | PC | Ideapad | A131101550 | DOC |
| Lenovo | Power adapter | CPA-A090 | 36200414 | DOC |

1.3 External I/O Cable

| I/O Port Description | Quantity | Cable |
|----------------------|----------|-------|
| Micro USB Port | 1 | N/A |
| AUX Input Port | 1 | N/A |

1.4 Description of Test Facility

CNAS Registration Number. is L4595.

FCC Registration Number. is 899208.

Industry Canada Registration Number. is 9642A-1.

ESMD Registration Number. is ARCB0108.

UL Registration Number. is 100571-492.

TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6 Measurement Uncertainty

| Test Item | Frequency Range | Uncertainty | Note |
|------------------------|-----------------|-------------|------|
| Radiation Uncertainty | 9KHz~30MHz | 3.10dB | (1) |
| | 30MHz~200MHz | 2.96dB | (1) |
| | 200MHz~1000MHz | 3.10dB | (1) |
| | 1GHz~26.5GHz | 3.80dB | (1) |
| | 26.5GHz~40GHz | 3.90dB | (1) |
| Conduction Uncertainty | 150kHz~30MHz | 1.63dB | (1) |
| Power disturbance | 30MHz~300MHz | 1.60dB | (1) |

- (1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

1.7 Description of Test Modes

Bluetooth operates in the unlicensed ISM Band at 2.4GHz. With basic data rate feature, the data rates can be up to 1 Mb/s by modulating the RF carrier using GFSK techniques. The EUT works in the X-axis, Y-axis, Z-axis. The following operating modes were applied for the related test items. All test modes were tested, only the result of the worst case was recorded in the report.

| Mode of Operations | Frequency Range (MHz) | Data Rate (Mbps) |
|------------------------|-----------------------|------------------|
| BT V 4.1 | 2402 | 1/2/3 |
| | 2441 | 1/2/3 |
| | 2480 | 1/2/3 |
| For Conducted Emission | | |
| Test Mode | | TX Mode |
| For Radiated Emission | | |
| Test Mode | | TX Mode |

Worst-case mode and channel used for 150 kHz-30 MHz power line conducted emissions was the mode and channel with the highest output power that was determined to be TX (1Mbps).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be TX(1Mbps-Low Channel).

Pre-test AC conducted emission at both power adapter and charge from PC mode, recorded worst case.

Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/60Hz, recorded worst case.

1.8. Frequency of Channels

Bluetooth V4.1

| Channel | Frequency(MHz) | Channel | Frequency(MHz) |
|---------|----------------|---------|----------------|
| 1 | 2402 | 41 | 2442 |
| 2 | 2403 | --- | --- |
| 3 | 2404 | --- | --- |
| --- | --- | 77 | 2478 |
| --- | --- | 78 | 2479 |
| 39 | 2440 | 79 | 2480 |
| 40 | 2441 | | |

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR PART 15C 15.207, 15.209, 15.247 and DA 00-705.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209, 15.247 under the FCC Rules Part 15 Subpart C.

2.3 General Test Procedures

2.3.1 Conducted Emissions

The EUT is directly placed on the ground. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turntable, which is directly placed on the ground. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013

3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a continuous transmits condition.

3.2 EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software (InstallBlueSuite2_4_8) provided by application.

3.3 Special Accessories

N/A.

3.4 Block Diagram/Schematics

Please refer to the related document.

3.5 Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6 Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

| Applied Standard: FCC Part 15 Subpart C | | |
|---|--|-----------|
| FCC Rules | Description of Test | Result |
| §15.247(b)(1) | Maximum Conducted Output Power | Compliant |
| §15.247(c) | Frequency Separation And 20 dB Bandwidth | Compliant |
| §15.247(a)(1)(ii) | Number Of Hopping Frequency | Compliant |
| §15.247(a)(1)(iii) | Time Of Occupancy (Dwell Time) | Compliant |
| §15.209, §15.205 | Conducted Spurious Emissions and Band Edges Test | Compliant |
| §15.209, §15.247(d) | Radiated and Conducted Spurious Emissions | Compliant |
| §15.205 | Emissions at Restricted Band | Compliant |
| §15.207(a) | Conducted Emissions | Compliant |
| §15.203 | Antenna Requirements | Compliant |
| §15.247(i)§2.1093 | RF Exposure | Compliant |


5. SUMMARY OF TEST EQUIPMENT

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------|--------------------------|--------------------|----------------------------------|-------------|------------|------------|
| 1 | Power Sensor | R&S | NRV-Z51 | 100458 | 2017-06-17 | 2018-06-16 |
| 2 | Power Sensor | R&S | NRV-Z32 | 10057 | 2017-06-17 | 2018-06-16 |
| 3 | Power Meter | R&S | NRVS | 100444 | 2017-06-17 | 2018-06-16 |
| 4 | DC Filter | MPE | 23872C | N/A | 2017-06-17 | 2018-06-16 |
| 5 | RF Cable | Harbour Industries | 1452 | N/A | 2017-06-17 | 2018-06-16 |
| 6 | SMA Connector | Harbour Industries | 9625 | N/A | 2017-06-17 | 2018-06-16 |
| 7 | Spectrum Analyzer | Agilent | N9020A | MY50510140 | 2016-10-27 | 2017-10-26 |
| 8 | Signal analyzer | Agilent | E4448A(External mixers to 40GHz) | US44300469 | 2017-06-15 | 2018-06-14 |
| 9 | RF Cable | Hubersuhne | Sucoflex104 | FP2RX2 | 2017-06-17 | 2018-06-16 |
| 10 | 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M | 03CH03-HY | 2017-06-17 | 2018-06-16 |
| 11 | Amplifier | SCHAFFNER | COA9231A | 18667 | 2017-06-17 | 2018-06-16 |
| 12 | Amplifier | Agilent | 8449B | 3008A02120 | 2017-06-15 | 2018-06-14 |
| 13 | Amplifier | MITEQ | AMF-6F-260400 | 9121372 | 2017-06-15 | 2018-06-14 |
| 14 | Loop Antenna | R&S | HFH2-Z2 | 860004/001 | 2017-06-17 | 2018-06-16 |
| 15 | By-log Antenna | SCHWARZBECK | VULB9163 | 9163-470 | 2017-06-09 | 2018-06-08 |
| 16 | Horn Antenna | EMCO | 3115 | 6741 | 2017-06-09 | 2018-06-08 |
| 17 | Horn Antenna | SCHWARZBECK | BBHA9170 | BBHA9170154 | 2017-06-09 | 2018-06-08 |
| 18 | RF Cable-R03m | Jye Bao | RG142 | CB021 | 2017-06-17 | 2018-06-16 |
| 19 | RF Cable-HIGH | SUHNER | SUCOFLEX 106 | 03CH03-HY | 2017-06-17 | 2018-06-16 |
| 20 | EMI Test Receiver | ROHDE & SCHWARZ | ESCI | 101142 | 2017-06-17 | 2018-06-16 |
| 21 | Artificial Mains | ROHDE & SCHWARZ | ENV216 | 101288 | 2017-06-17 | 2018-06-16 |
| 22 | EMI Test Software | AUDIX | E3 | N/A | 2017-06-17 | 2018-06-16 |

6. MEASUREMENT RESULTS

6.1 Peak Power

6.1.1 Block Diagram of Test Setup

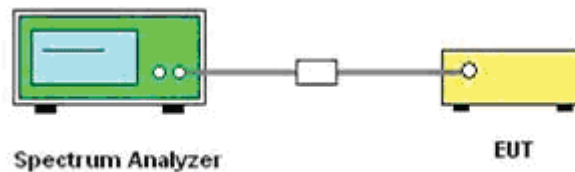

6.1.2 Limit

According to §15.247(b)(1), For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

6.1.3 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer.

According to ANSI C63.10:2013 Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices; this is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:

- a) Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW \geq RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.

6.1.4 Test Results

| Test Mode | Channel | Frequency (MHz) | Measured Maximum Peak Power (dBm) | Limits (dBm) | Verdict |
|---------------|---------|-----------------|-----------------------------------|--------------|---------|
| GFSK | 0 | 2402 | 3.507 | 30 | PASS |
| | 39 | 2441 | 4.894 | | |
| | 78 | 2480 | 4.701 | | |
| $\pi/4$ DQPSK | 0 | 2402 | 1.149 | 21 | PASS |
| | 39 | 2441 | 2.962 | | |
| | 78 | 2480 | 2.754 | | |
| 8DPSK | 0 | 2402 | 1.835 | 21 | PASS |
| | 39 | 2441 | 3.428 | | |
| | 78 | 2480 | 3.257 | | |



Remark:

- 1. Test results including cable loss;*
- 2. please refer to following plots;*
- 3. Measured output power at difference Packet Type for each mode and recorded worst case for each mode.*
- 4. Worst case data at DH5 for GFSK, $\pi/4$ DQPSK, 8DPSK modulation type;*

Maximum Peak Output Power



GFSK

$\pi/4$ DQPSK

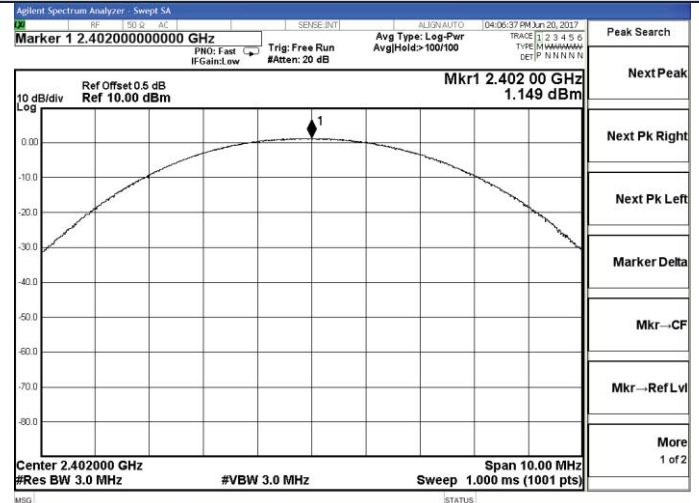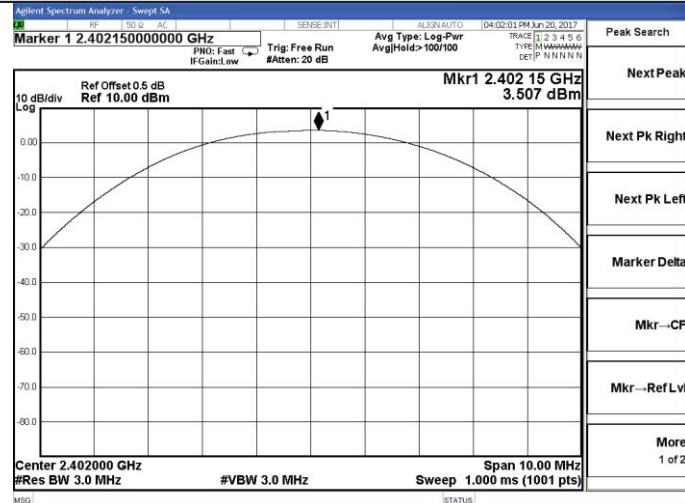



Channel 0 / 2402 MHz

Channel 0 / 2402 MHz

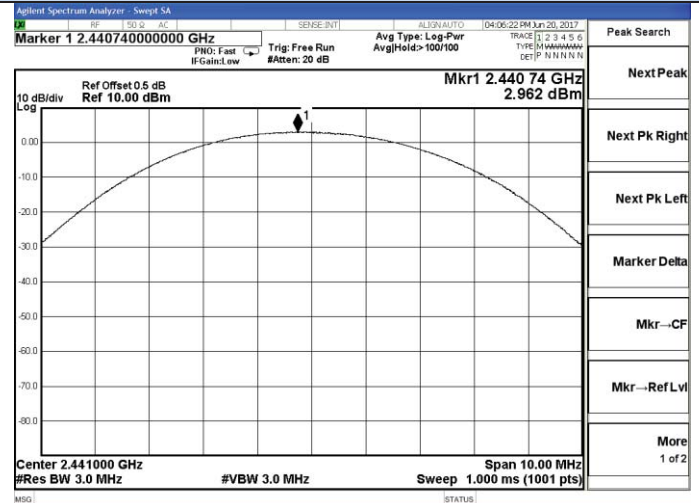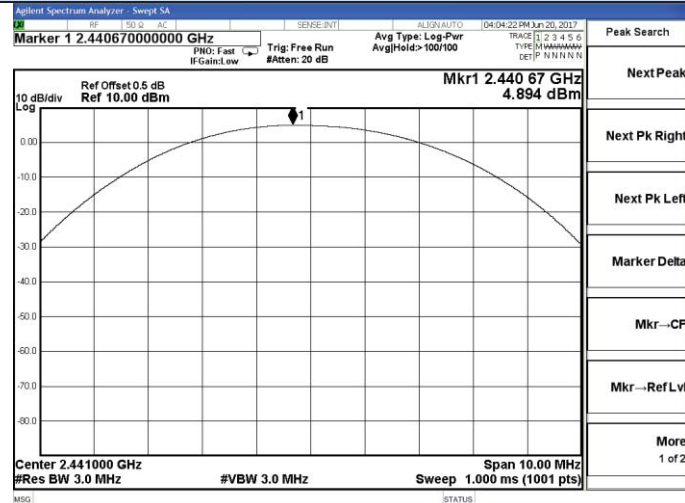

Channel 39 / 2441 MHz

Channel 39 / 2441 MHz

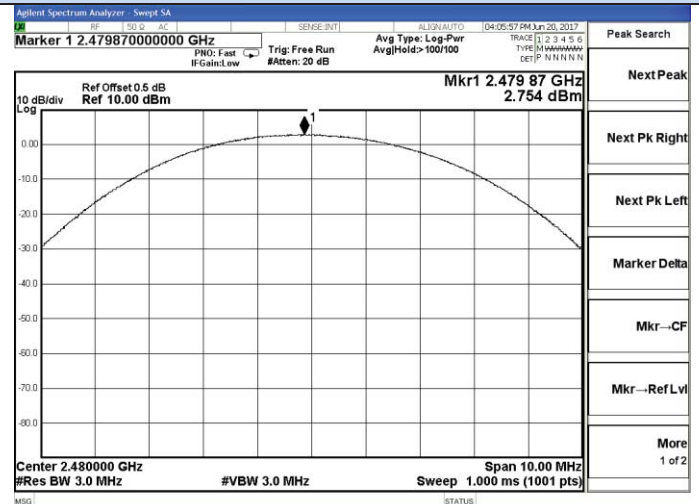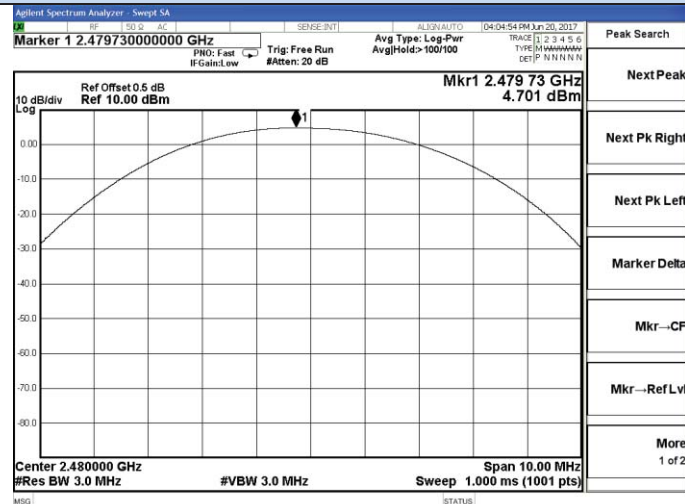


Channel 78 / 2480 MHz

Channel 78 / 2480 MHz


Maximum Peak Output Power

8DPSK

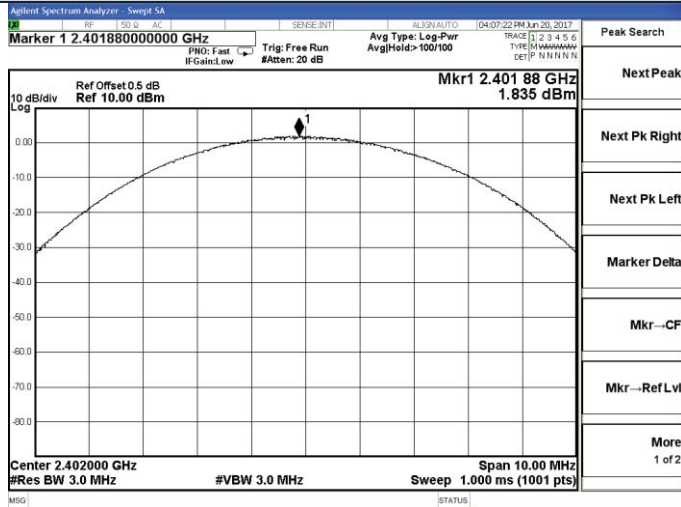


- Peak Search
- Next Peak
- Next Pk Right
- Next Pk Left
- Marker Delta
- Mkr--CF
- Mkr--Ref Lvl
- More 1 of 2

Channel 0 / 2402 MHz

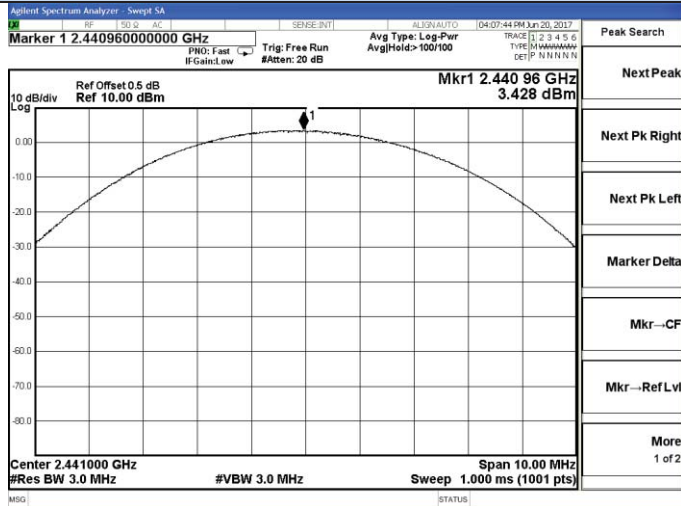

- Peak Search
- Next Peak
- Next Pk Right
- Next Pk Left
- Marker Delta
- Mkr--CF
- Mkr--Ref Lvl
- More 1 of 2

Channel 39 / 2441 MHz

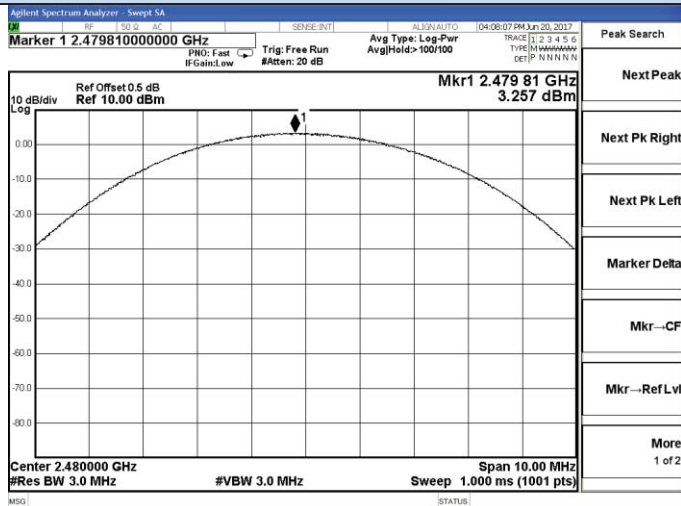

- Peak Search
- Next Peak
- Next Pk Right
- Next Pk Left
- Marker Delta
- Mkr--CF
- Mkr--Ref Lvl
- More 1 of 2


Channel 78 / 2480 MHz

6.2 Frequency Separation and 20 dB Bandwidth

6.2.1 Limit

According to §15.247(c) or A8.1(a), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

6.2.2 Block Diagram of Test Setup

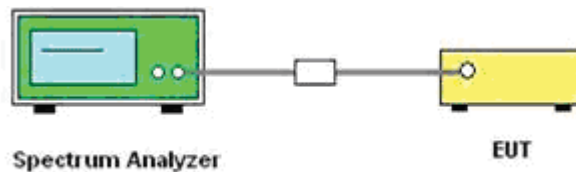

6.2.3 Test Procedure

Frequency separation test procedure :

- 1). Place the EUT on the table and set it in transmitting mode.
- 2). Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- 3). Set center frequency of Spectrum Analyzer = middle of hopping channel.
- 4). Set the Spectrum Analyzer as RBW = 100 kHz, VBW = 300 kHz, Span = wide enough to capture the peaks of two adjacent channels, Sweep = auto.
- 5). Max hold, mark 2 peaks of hopping channel and record the 2 peaks frequency.

20dB bandwidth test procedure:

- 1). Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel.
- 2). RBW $\geq 1\%$ of the 20 dB bandwidth, VBW \geq RBW.
- 3). Detector function = peak.
- 4). Trace = max hold.

6.2.4 Test Results

| The Measurement Result With 1Mbps For GFSK Modulation | | | | |
|--|----------------------|--------------------------|-------------|--------|
| Channel | 20dB Bandwidth (KHz) | Channel Separation (MHz) | Limit (KHz) | Result |
| Low | 873.7 | 1.000 | 873.7 | Pass |
| Middle | 873.8 | | 873.8 | Pass |
| High | 873.0 | | 873.0 | Pass |
| The Measurement Result With 2Mbps For $\pi/4$-DQPSK Modulation | | | | |
| Channel | 20dB Bandwidth (KHz) | Channel Separation (MHz) | Limit (KHz) | Result |
| Low | 1203.0 | 1.000 | 802.00 | Pass |
| Middle | 1285.0 | | 856.67 | Pass |
| High | 1214.0 | | 809.33 | Pass |
| The Measurement Result With 3Mbps For 8-DPSK Modulation | | | | |
| Channel | 20dB Bandwidth (KHz) | Channel Separation (MHz) | Limit (KHz) | Result |
| Low | 1207.0 | 1.000 | 804.67 | Pass |
| Middle | 1202.0 | | 801.33 | Pass |
| High | 1210.0 | | 806.67 | Pass |



Remark:

1. Test results including cable loss;
2. please refer to following plots;
3. Measured at difference Packet Type for each mode and recorded worst case for each mode.
4. Worst case data at DH5 for GFSK, $\pi/4$ -DQPSK, 8DPSK modulation type;

Frequency Separation



GFSK

$\pi/4$ -DQPSK

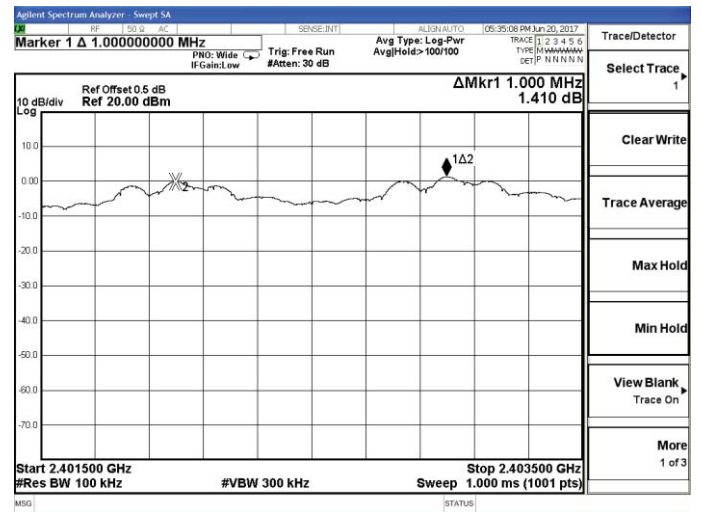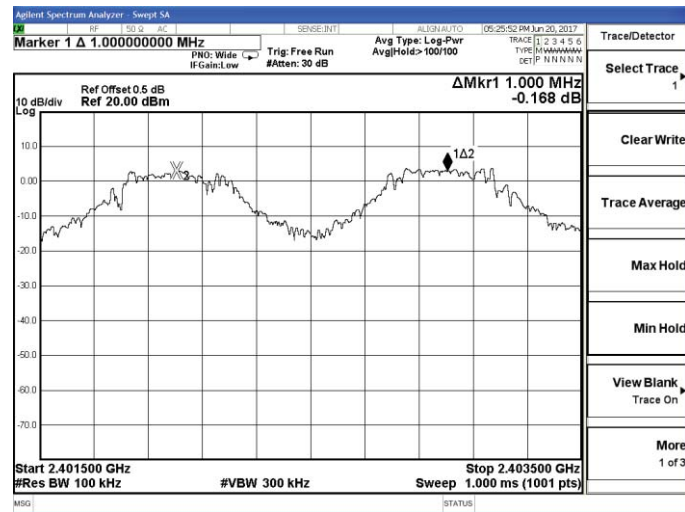



Channel 0 / 2402 MHz

Channel 0 / 2402 MHz

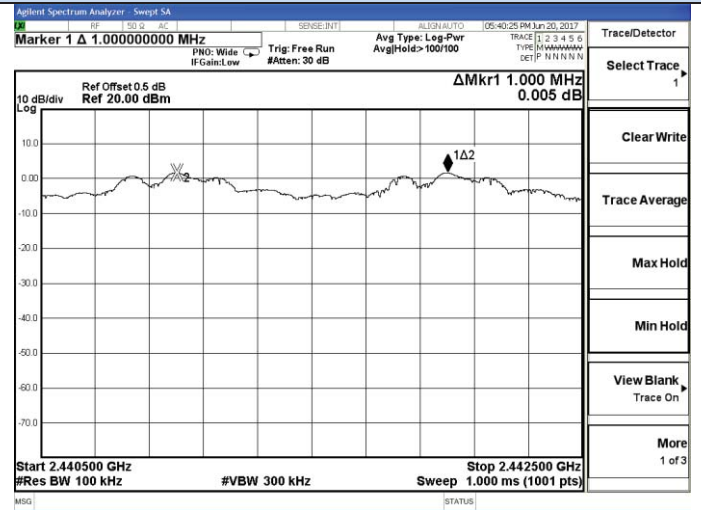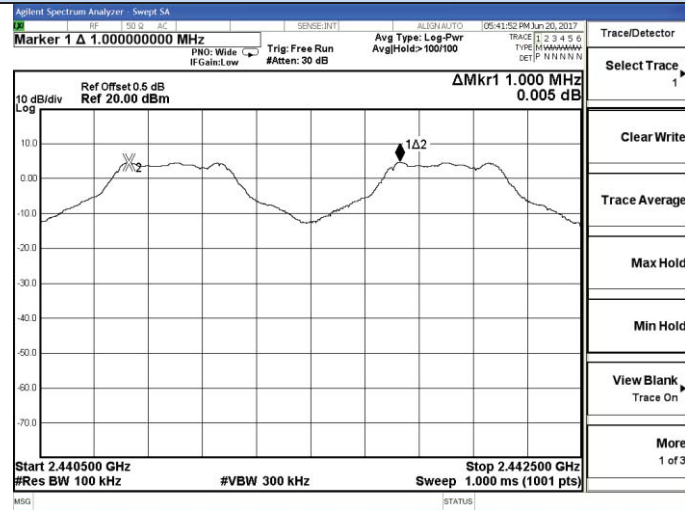

Channel 39 / 2441 MHz

Channel 39 / 2441 MHz

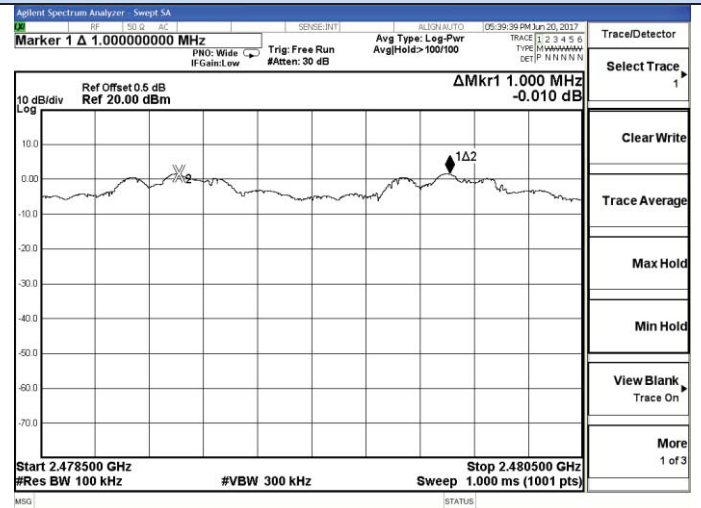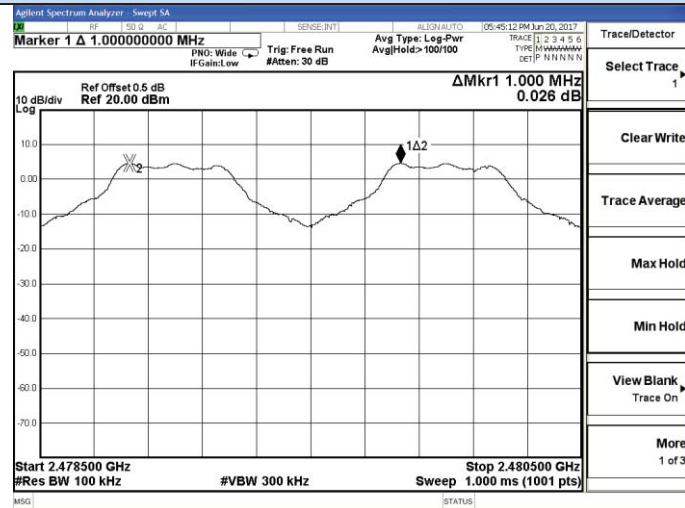


Channel 78 / 2480 MHz


Channel 78 / 2480 MHz

Frequency Separation


8DPSK

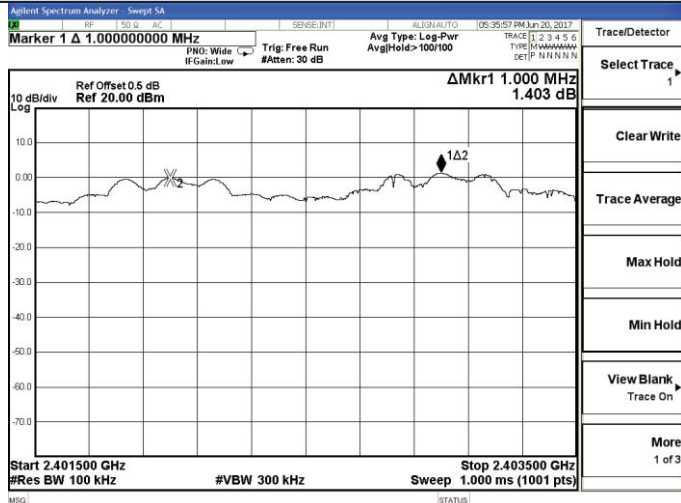

Channel 0 / 2402 MHz

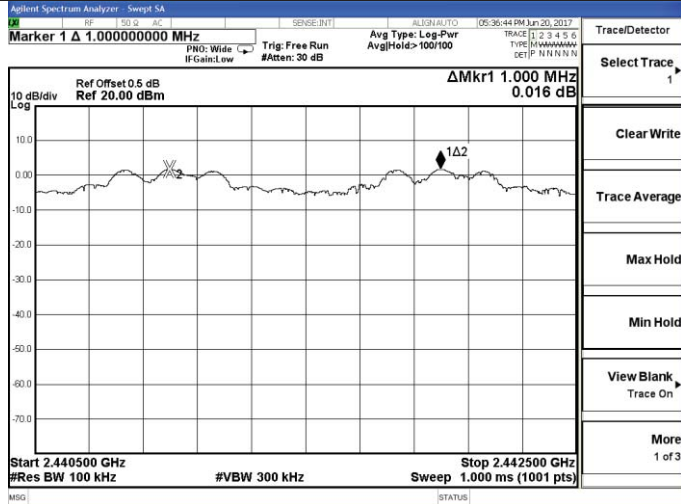

Channel 39 / 2441 MHz


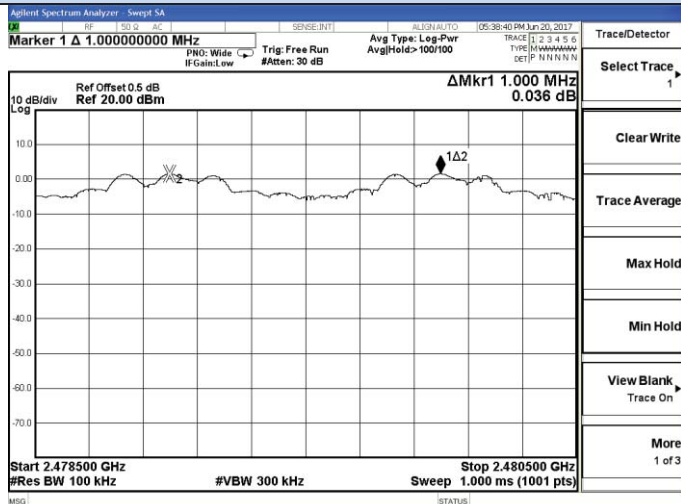


Channel 78 / 2480 MHz

20dB Bandwidth



GFSK

$\pi/4$ -DQPSK

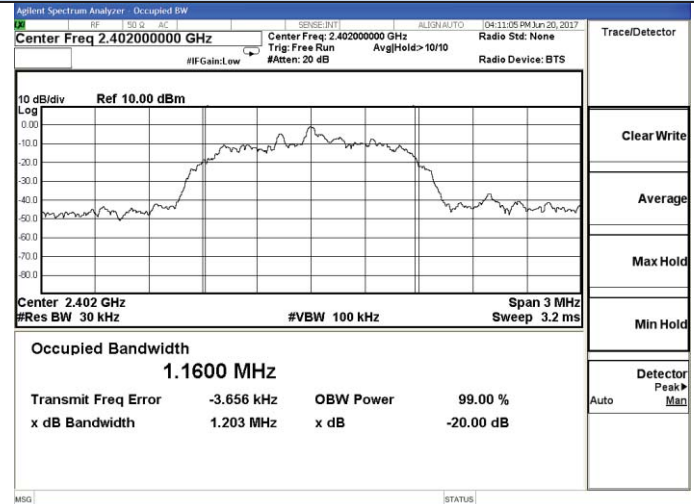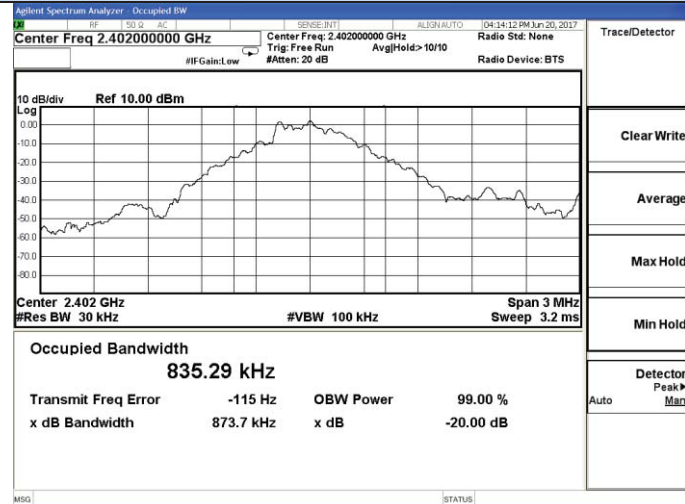



Channel 0 / 2402 MHz

Channel 0 / 2402 MHz

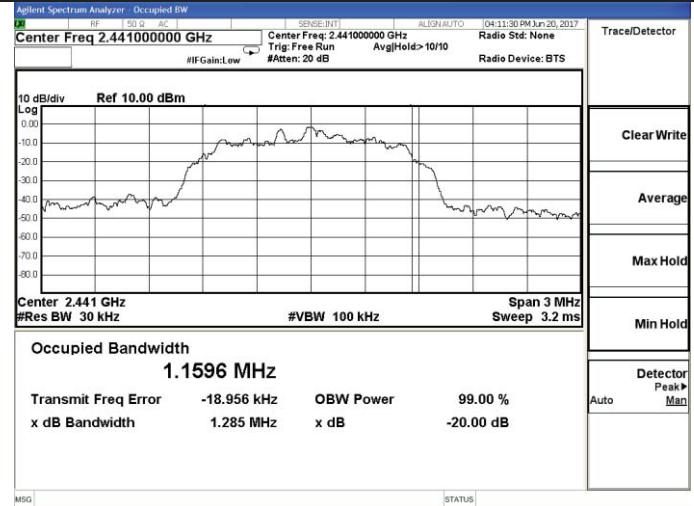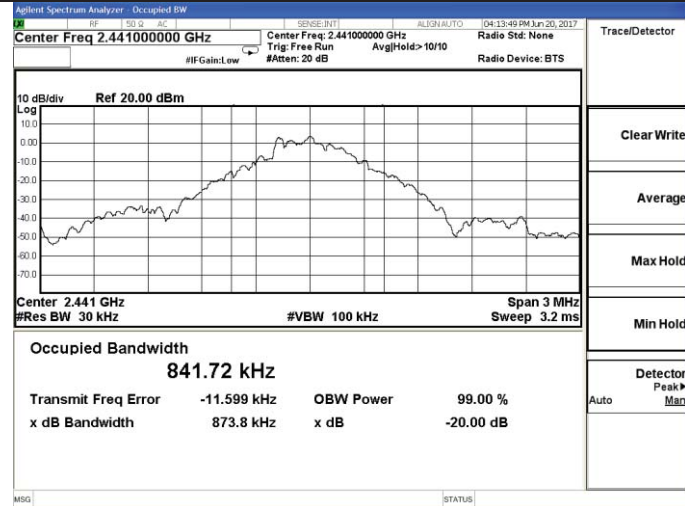

Channel 39 / 2441 MHz

Channel 39 / 2441 MHz

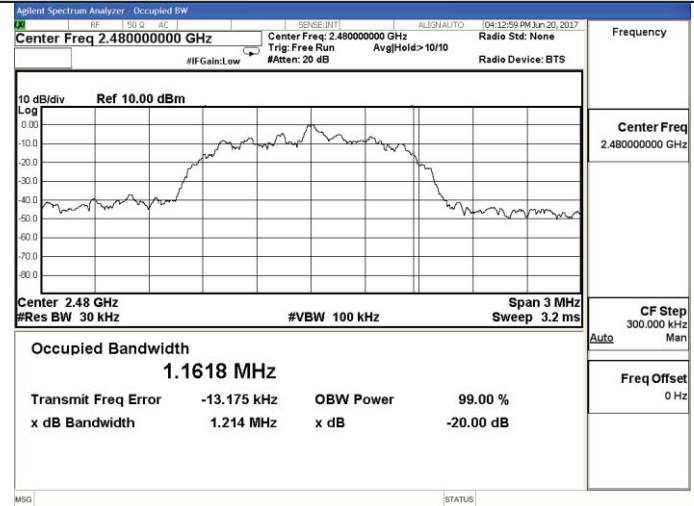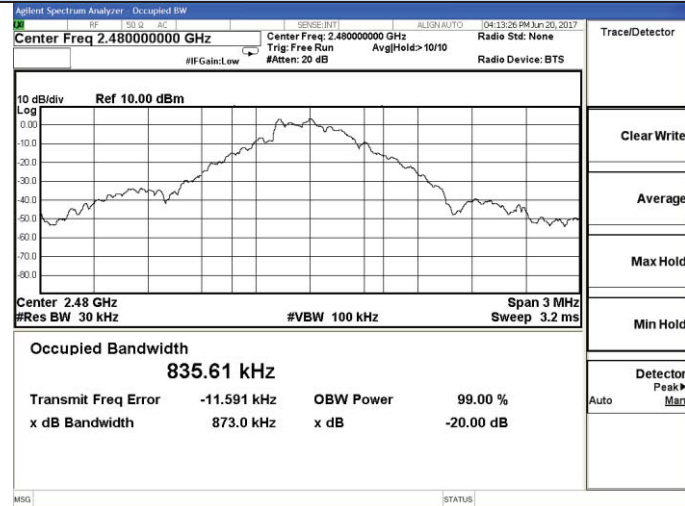


Channel 78 / 2480 MHz

Channel 78 / 2480 MHz


Test Plot of Test Result

8DPSK

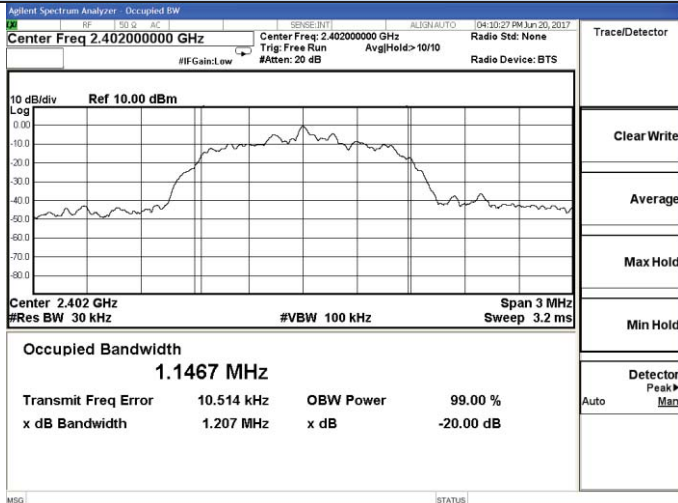


- Trace/Detector
- Clear Write
- Average
- Max Hold
- Min Hold
- Detector Peak Man

Channel 0 / 2402 MHz

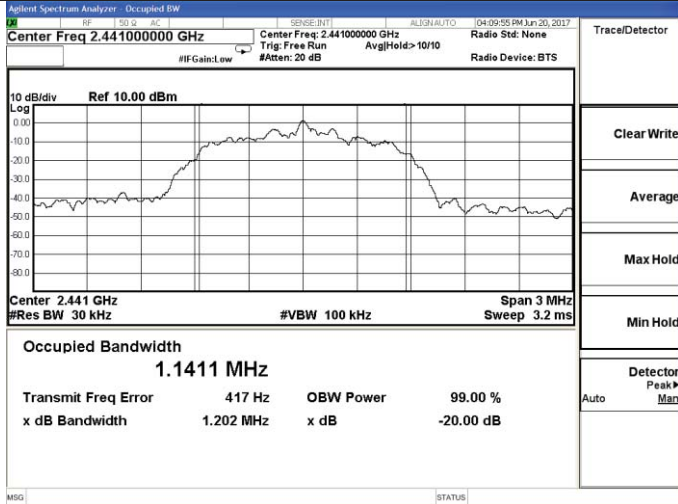

- Trace/Detector
- Clear Write
- Average
- Max Hold
- Min Hold
- Detector Peak Man

Channel 39 / 2441 MHz

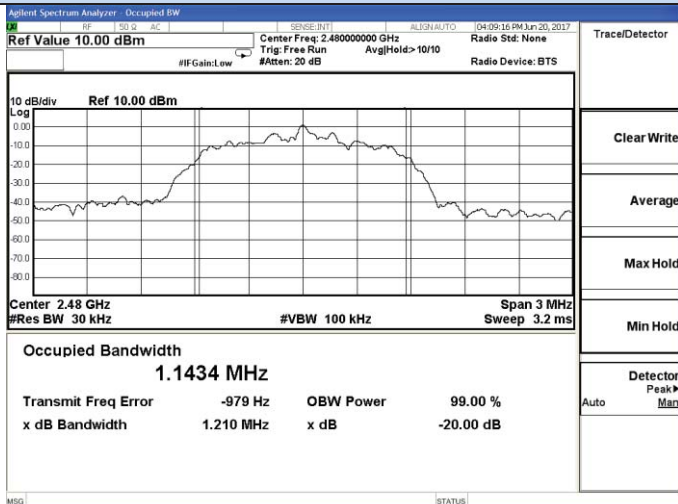

- Trace/Detector
- Clear Write
- Average
- Max Hold
- Min Hold
- Detector Peak Man


Channel 78 / 2480 MHz

6.3 Number of Hopping Frequency

6.3.1 Limit

According to §15.247(a)(1)(ii) or A8.1 (d), Frequency hopping systems operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels.

6.3.2 Block Diagram of Test Setup

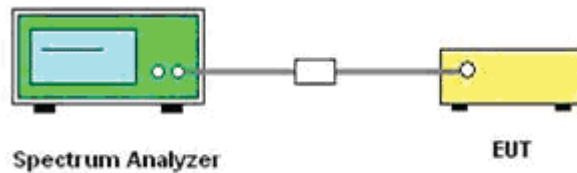

6.3.3 Test Procedure


- 1). Place the EUT on the table and set it in transmitting mode.
- 2). Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- 3). Set Spectrum Analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 4). Set the Spectrum Analyzer as RBW, VBW=1MHz.
- 5). Max hold, view and count how many channel in the band.

6.3.4 Test Results

| The Measurement Result With The Worst Case of 1Mbps For GFSK Modulation | | | |
|---|--------------------------------|-------------|--------|
| Total No. of Hopping Channel | Measurement Result (No. of Ch) | Limit (MHz) | Result |
| | 79 | ≥15 | Pass |

Note: The test data refer to the following page.

Number Of Hopping Frequency

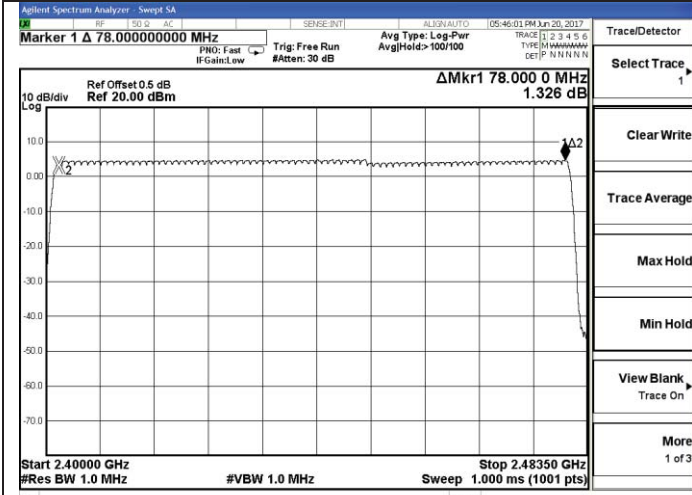


GFSK

6.4 Time of Occupancy (Dwell Time)

6.4.1 Limit

According to §15.247(a)(1)(iii) or A8.1 (d), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

6.4.2 Block Diagram of Test Setup

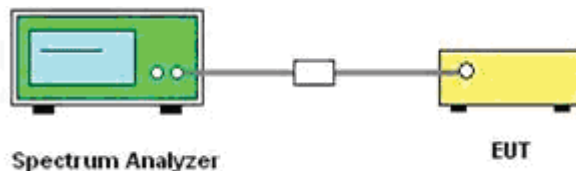

6.4.3 Test Procedure

- 1). Place the EUT on the table and set it in transmitting mode.
- 2). Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- 3). Set center frequency of Spectrum Analyzer = operating frequency.
- 4). Set the Spectrum Analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
- 5). Repeat above procedures until all frequency measured was complete.

6.4.4 Test Results

The Dwell Time=Burst Width*Total Hops. The detailed calculations are showed as follows:

The duration for dwell time calculation: $0.4[s] \times \text{hopping number} = 0.4[s] \times 79[\text{ch}] = 31.6[s \cdot \text{ch}]$;

The burst width [ms/hop/ch], which is directly measured, refers to the duration on one channel hop.

The hops per second for all channels: The selected EUT Conf uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600 [ch*hop/s] for all channels. So the final hopping rate for all channels is $1600/6 = 266.67 [\text{ch} \cdot \text{hop}/\text{s}]$

The hops per second on one channel: $266.67 [\text{ch} \cdot \text{hops}/\text{s}] / 79 [\text{ch}] = 3.38 [\text{hop}/\text{s}]$;

The total hops for all channels within the dwell time calculation duration: $3.38 [\text{hop}/\text{s}] \times 31.6[s \cdot \text{ch}] = 106.67 [\text{hop} \cdot \text{ch}]$;

The dwell time for all channels hopping: $106.67 [\text{hop} \cdot \text{ch}] \times \text{Burst Width} [\text{ms}/\text{hop}/\text{ch}]$.

| Mode | Frequency (MHz) | Burst Type | Pulse Width (ms) | Dwell Time (ms) | Limit (ms) | Verdict |
|-----------|-----------------|------------|------------------|-----------------|------------|---------|
| GFSK | 2441 | DH1 | 0.388 | 124.16 | 400 | PASS |
| | | DH3 | 1.640 | 262.40 | | |
| | | DH5 | 2.896 | 308.91 | | |
| π/4-DQPSK | 2441 | 2DH1 | 0.396 | 126.72 | 400 | PASS |
| | | 2DH3 | 1.656 | 264.96 | | |
| | | 2DH5 | 2.880 | 307.20 | | |
| 8DPSK | 2441 | 3DH1 | 0.400 | 128.00 | 400 | PASS |
| | | 3DH3 | 1.656 | 264.96 | | |
| | | 3DH5 | 2.864 | 305.49 | | |



Remark:

1. *Test results including cable loss;*
2. *please refer to following plots;*
3. *Measured at difference Packet Type for each mode and recorded woest case for each mode.*
4. *Worst case data at DH5 for GFSK, $\pi/4$ -DQPSK ,8DPSK modulation type;*
5. *Dwell Time Calculate formula:*
 - DH1: Dwell time=Pulse time (ms) \times (1600 \div 2 \div 79) \times 31.6 Second*
 - DH3: Dwell time=Pulse time (ms) \times (1600 \div 4 \div 79) \times 31.6 Second*
 - DH5: Dwell time=Pulse Time (ms) \times (1600 \div 6 \div 79) \times 31.6 Second*
6. *Measured at low, middle and high channel, recorded worst at middle channel;*

Dwell time



GFSK

$\pi/4$ -DQPSK

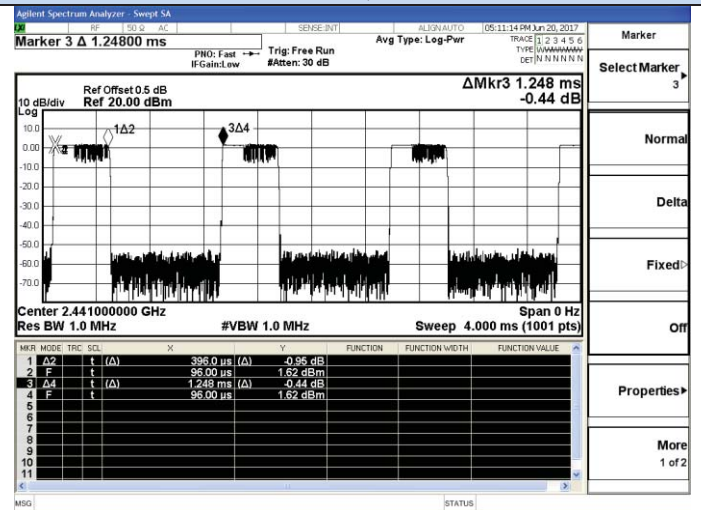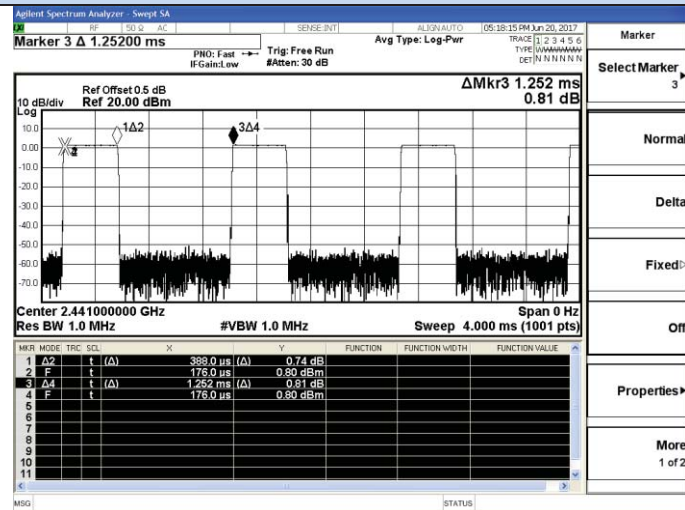



Channel 39 / 2441 MHz - DH1

Channel 39 / 2441 MHz - 2DH1

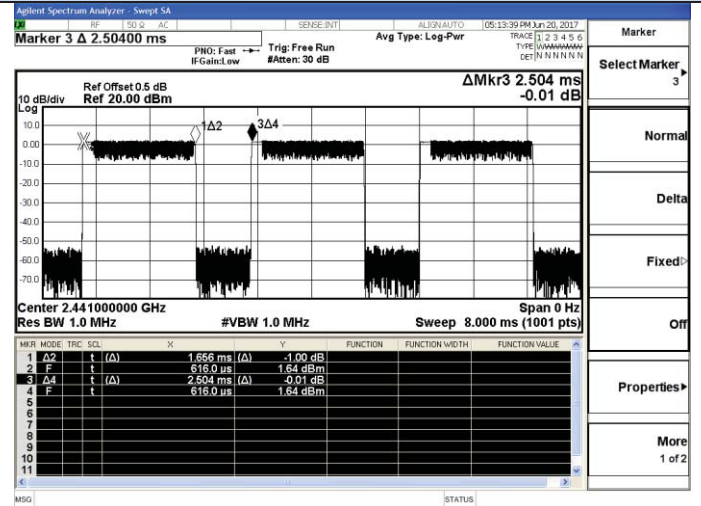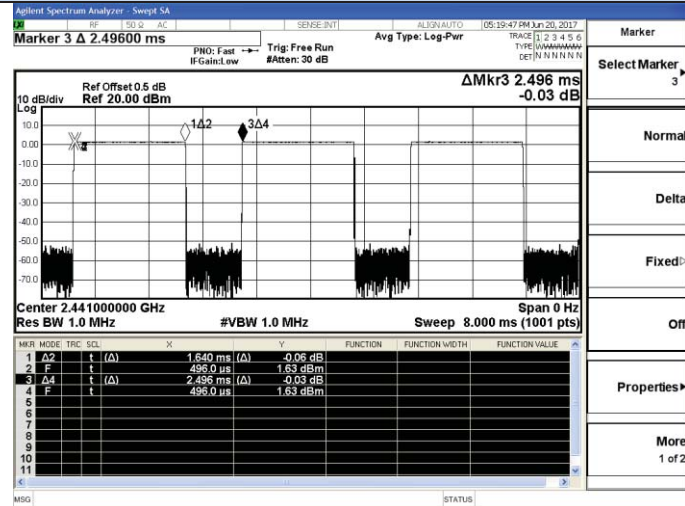

Channel 39 / 2441 MHz - DH3

Channel 39 / 2441 MHz - 2DH3

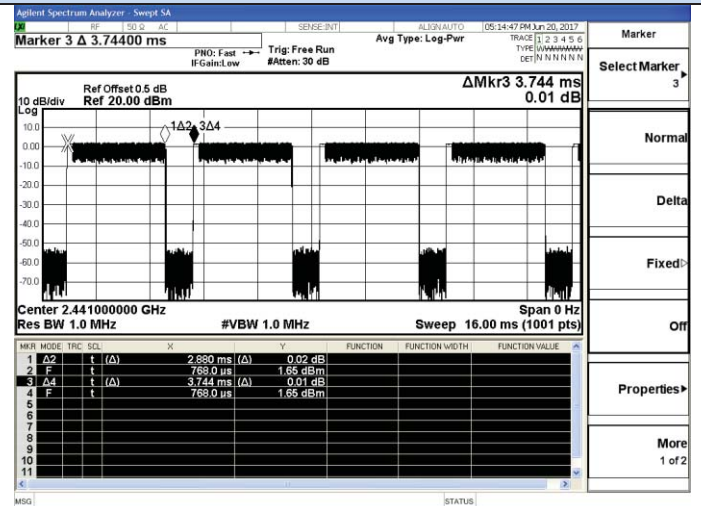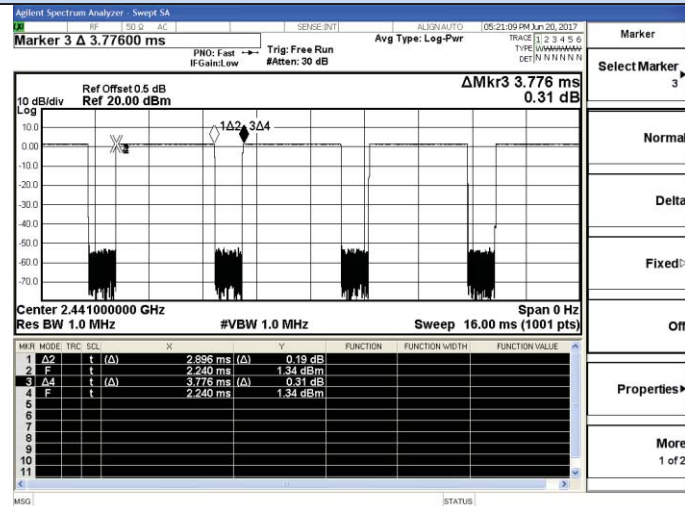


Channel 39 / 2441 MHz - DH5


Channel 39 / 2441 MHz - 2DH5

Dwell time


8DPSK

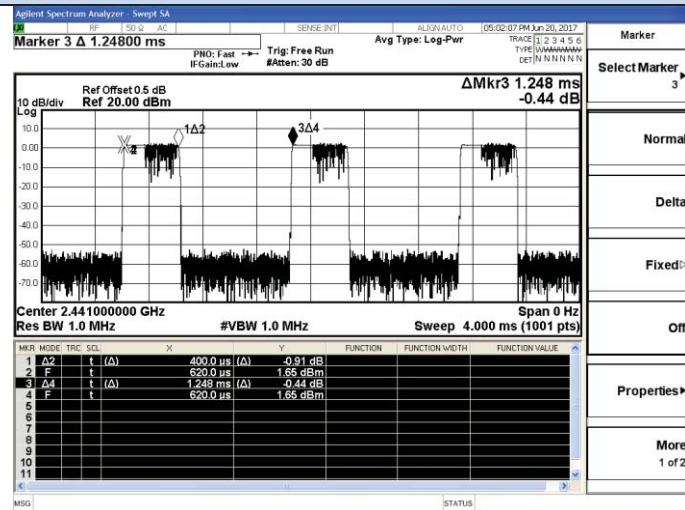

Channel 39 / 2441 MHz - 3DH1

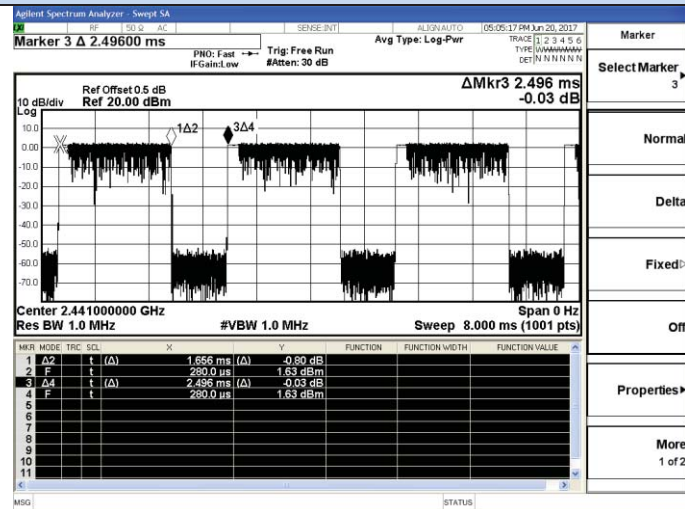

Channel 39 / 2441 MHz - 3DH3

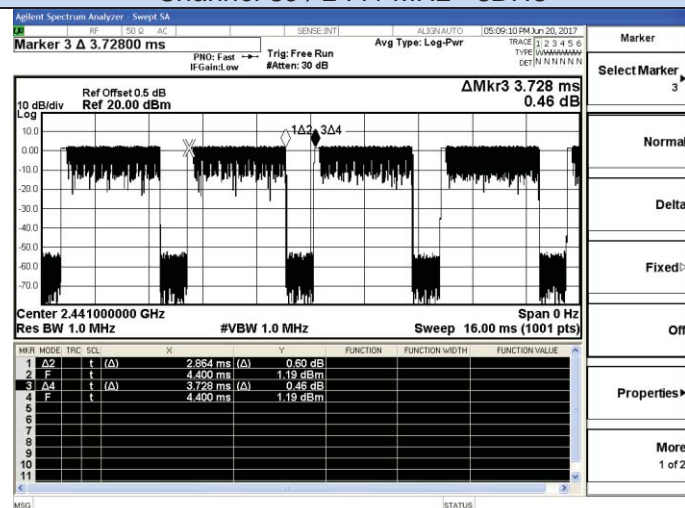


Channel 39 / 2441 MHz - 3DH5

6.5 Conducted Spurious Emissions and Band Edges Test

6.5.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

6.5.2 Block Diagram of Test Setup

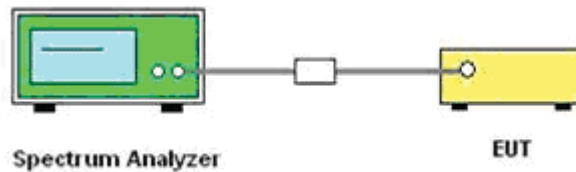

6.5.3 Test Procedure

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 300 KHz.

Measurements are made over the 9 kHz to 26.5GHz range with the transmitter set to the lowest, middle, and highest channels

6.5.4 Test Results of Conducted Spurious Emissions


No non-compliance noted. Only record the worst test result in this report. The test data refer to the following page.

| Test Mode | Channel | Frequency (MHz) | Reading Frequency (MHz) | Conducted Spurious Emission (dBm) | Limits (dBc) | Verdict |
|----------------|---------|-----------------|-------------------------|-----------------------------------|--------------|---------|
| GFSK | 0 | 2402 | 2557.9 | -43.144 | <20 | PASS |
| | | | 3312.5 | -56.027 | | |
| | 39 | 2441 | 2597.0 | -42.115 | <20 | PASS |
| | | | 5390.1 | -55.329 | | |
| | 78 | 2480 | 1886.1 | -52.217 | <20 | PASS |
| | | | 2636.1 | -42.812 | | |
| $\pi/4$ -DQPSK | 0 | 2402 | 2557.9 | -46.336 | <20 | PASS |
| | | | 5706.1 | -55.468 | | |
| | 39 | 2441 | 1886.1 | -51.711 | <20 | PASS |
| | | | 3158.8 | -56.148 | | |
| | 78 | 2480 | 2636.1 | -41.852 | <20 | PASS |
| | | | 6137.4 | -54.643 | | |
| 8DPSK | 0 | 2402 | 2557.9 | -44.555 | <20 | PASS |
| | | | 3185.3 | -56.774 | | |
| | 39 | 2441 | 2597.0 | -46.140 | <20 | PASS |
| | | | 4687.9 | -56.342 | | |
| | 78 | 2480 | 2636.1 | -42.768 | <20 | PASS |
| | | | 5861.1 | -55.578 | | |


Remark:

1. Test results including cable loss (0.5dB);
2. please refer to following plots;
3. Measured at difference Packet Type for each mode and recorded worst case for each mode.
4. Worst case data at DH5 for GFSK, $\pi/4$ -DQPSK, 8DPSK modulation type;

RF Conducted Spurious Emissions
GFSK - Channel 0 / 2402 MHz

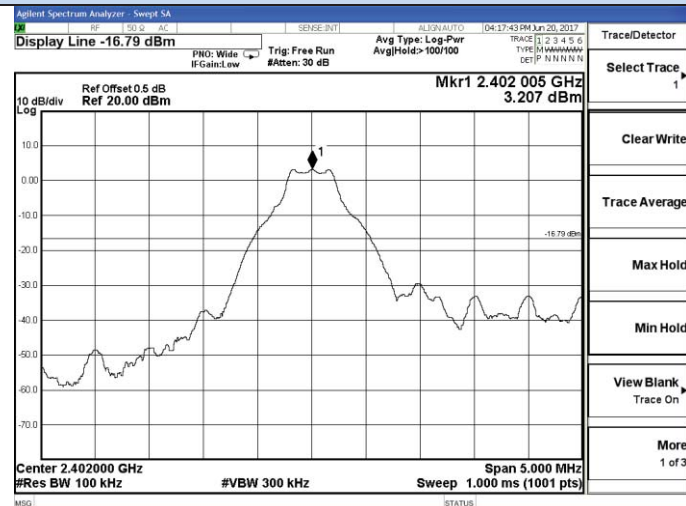


2399.5 - 2404.5 MHz

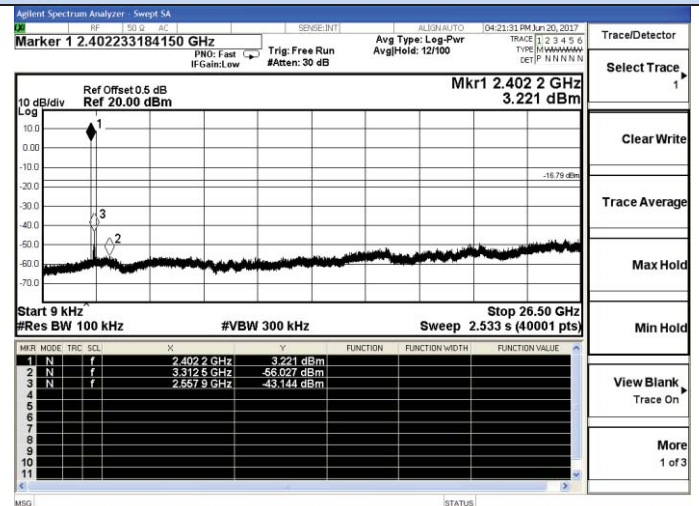


9 KHz - 26.5 GHz

GFSK - Channel 39 / 2441 MHz

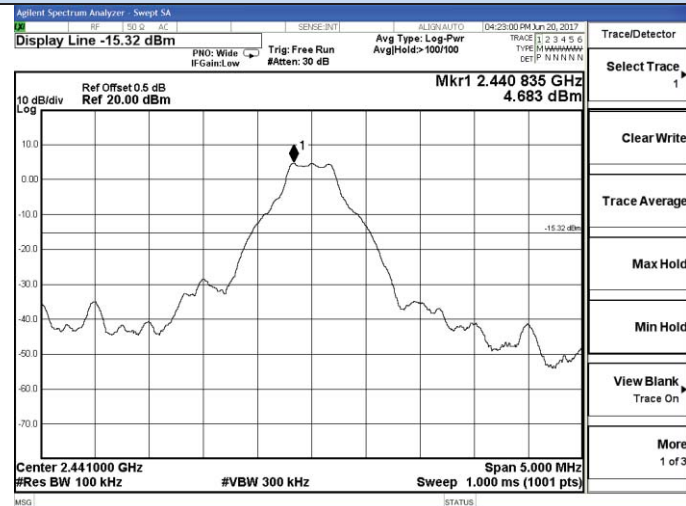


2438.5 - 2443.5 MHz

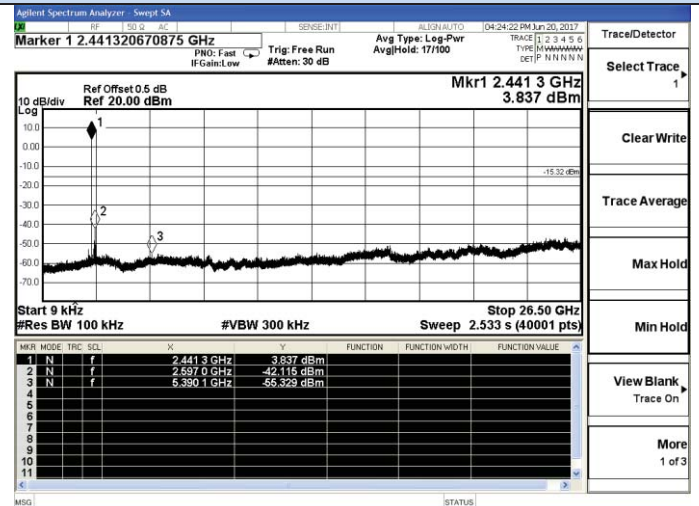


9 KHz - 26.5 GHz

GFSK - Channel 78 / 2480 MHz

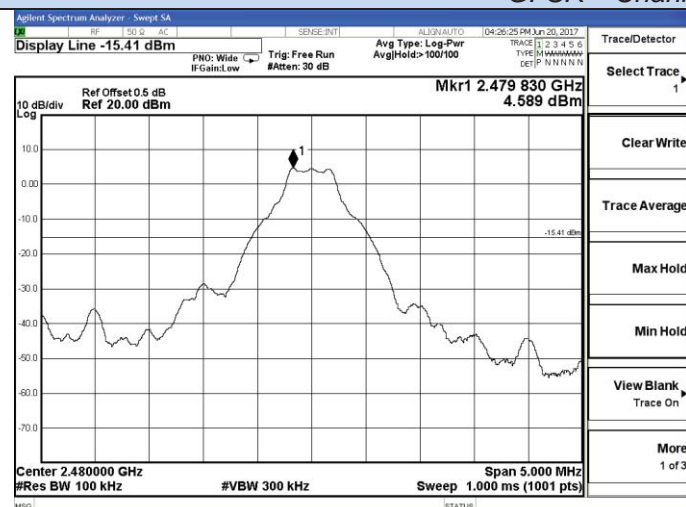


2477.5 - 2482.5 MHz

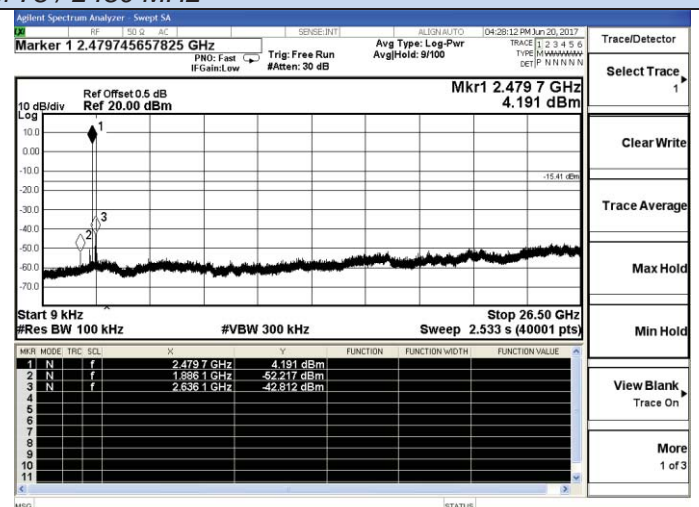


9 KHz - 26.5 GHz

RF Conducted Spurious Emissions
 $\pi/4$ -DQPSK - Channel 0 / 2402 MHz

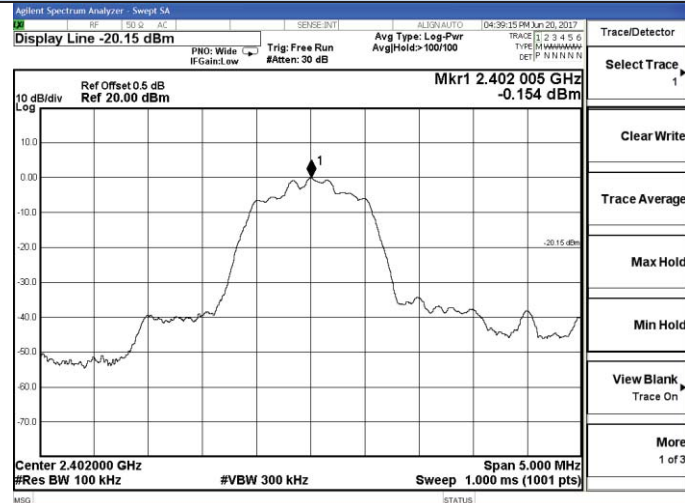


2399.5 – 2404.5 MHz

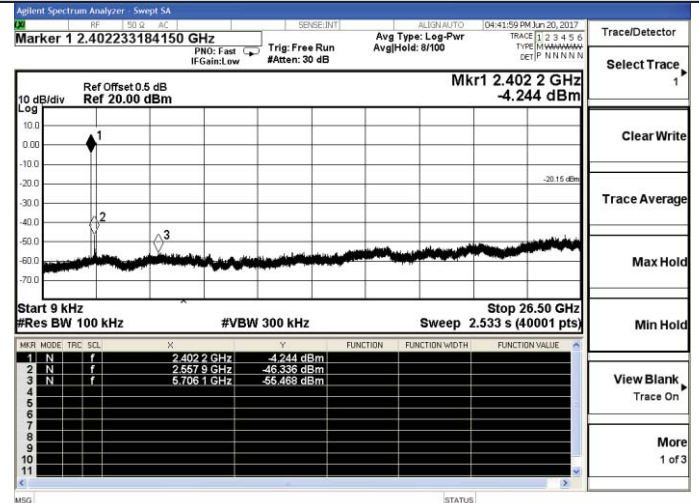


9 KHz – 26.5 GHz

$\pi/4$ -DQPSK - Channel 39 / 2441 MHz

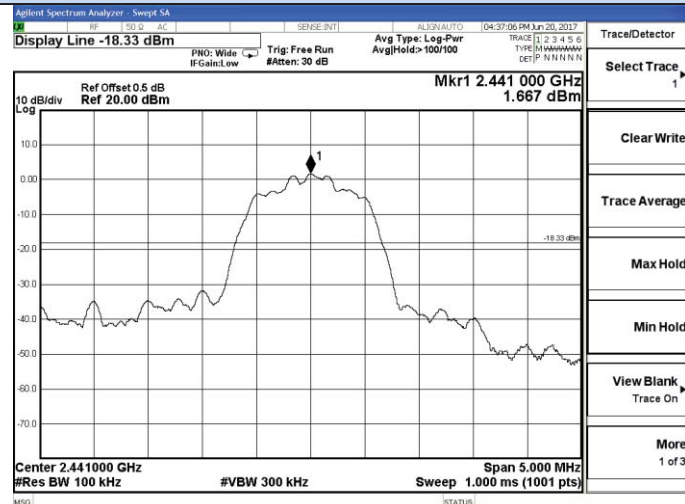


2438.5 – 2443.5 MHz

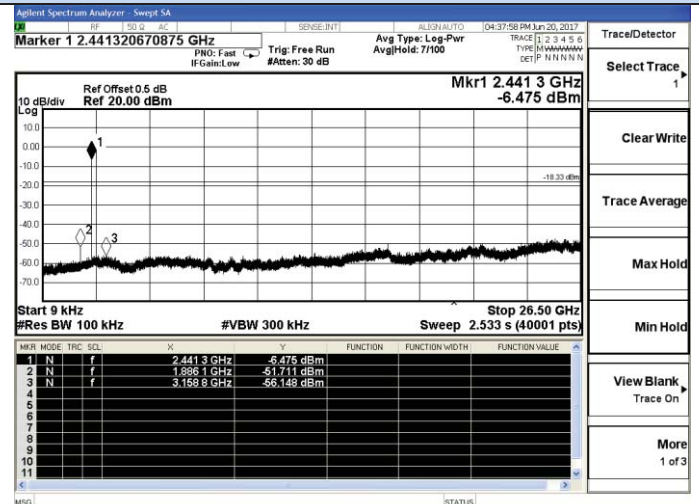


9 KHz – 26.5 GHz

$\pi/4$ -DQPSK - Channel 78 / 2480 MHz

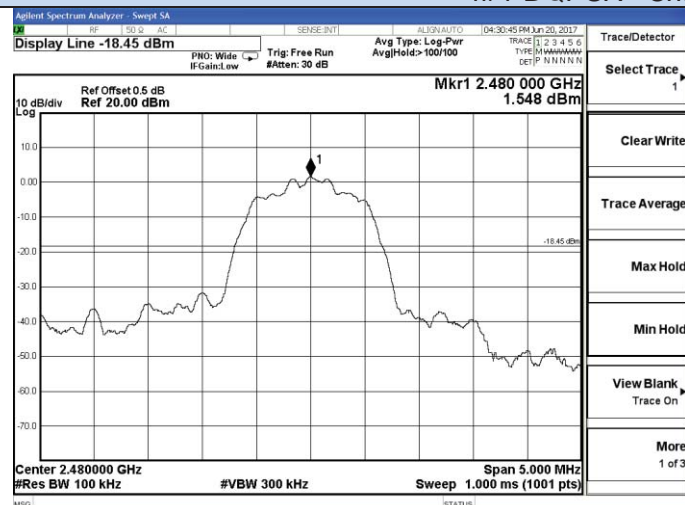


2477.5 – 2482.5 MHz

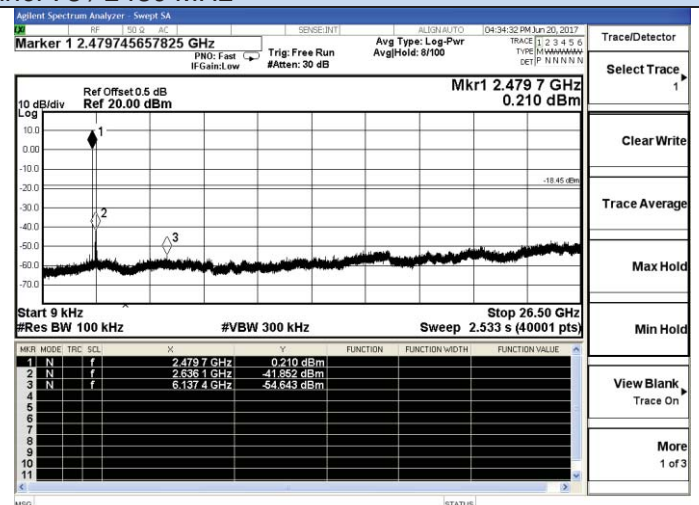


9 KHz – 26.5 GHz

RF Conducted Spurious Emissions
8DPSK - Channel 0 / 2402 MHz

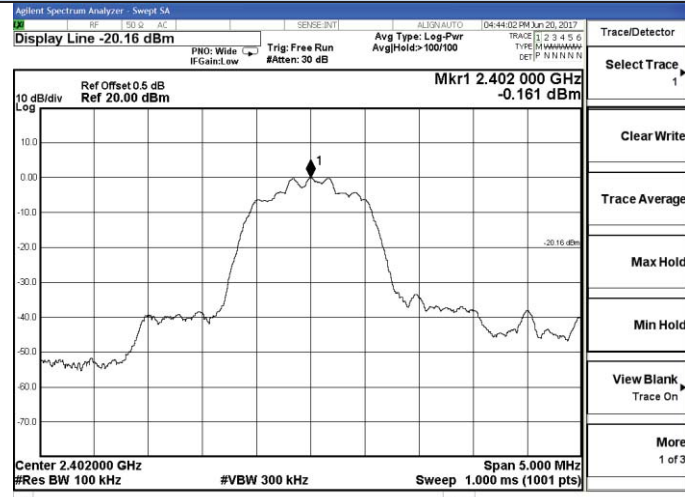


2399.5 – 2404.5 MHz

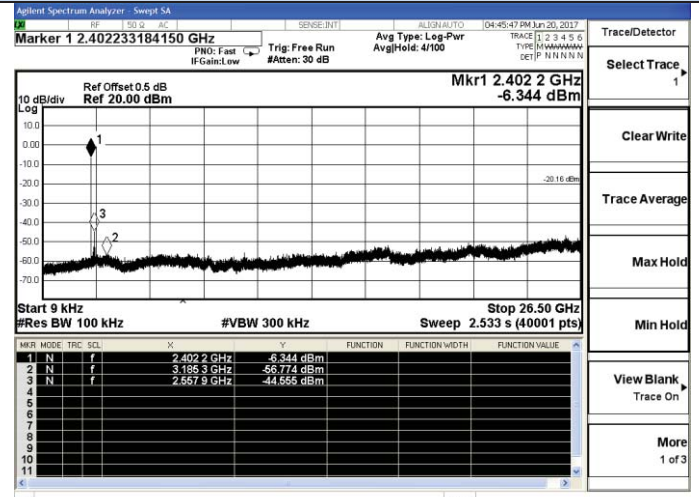


9 KHz – 26.5 GHz

8DPSK - Channel 39 / 2441 MHz

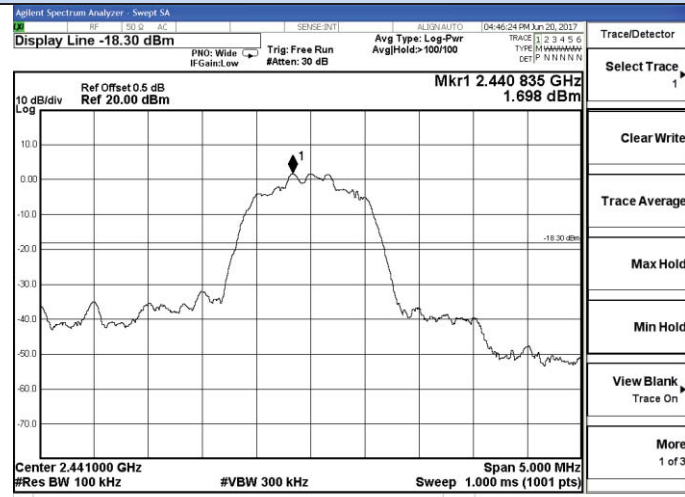


2438.5 – 2443.5 MHz

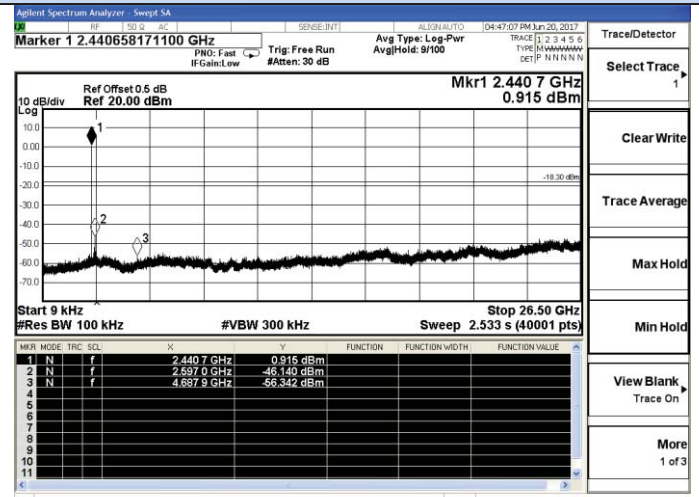


9 KHz – 26.5 GHz

8DPSK - Channel 78 / 2480 MHz

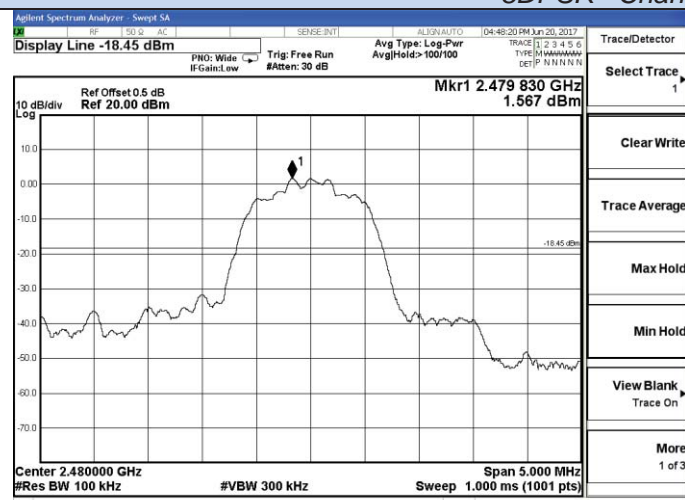

2477.5 – 2482.5 MHz


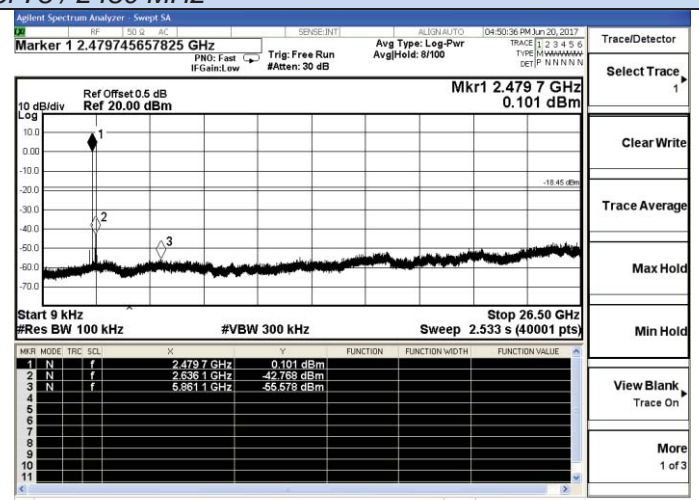


9 KHz – 26.5 GHz

Band-edge for RF conducted emissions



GFSK

$\pi/4$ -DQPSK

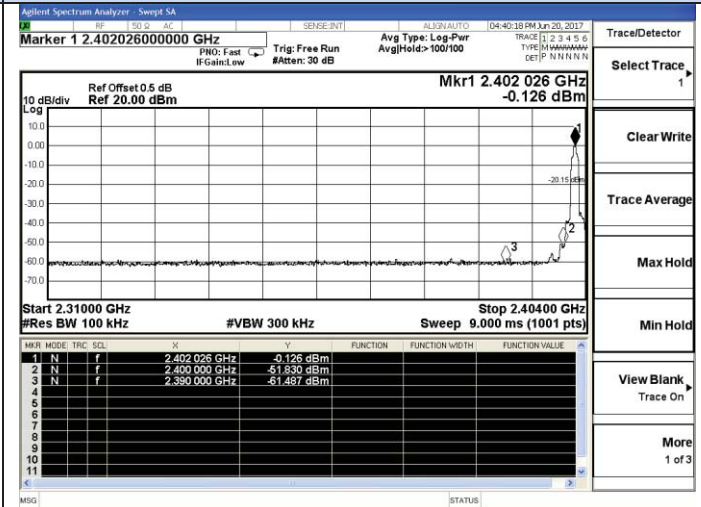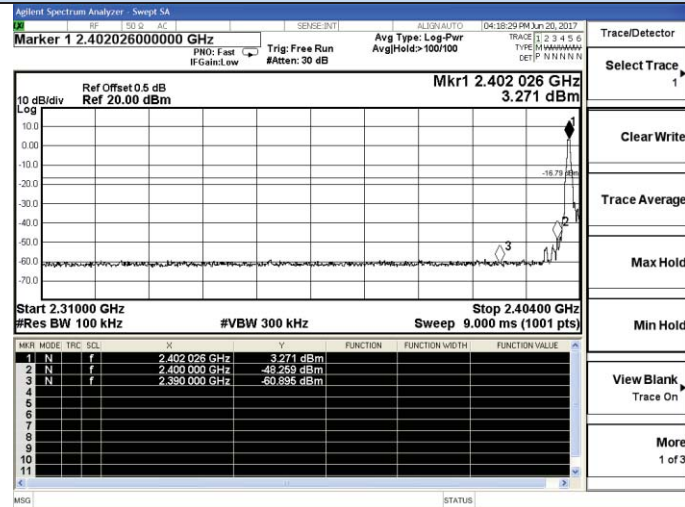



Channel 0 / 2402 MHz – Non-Hopping

Channel 0 / 2402 MHz – Non-Hopping

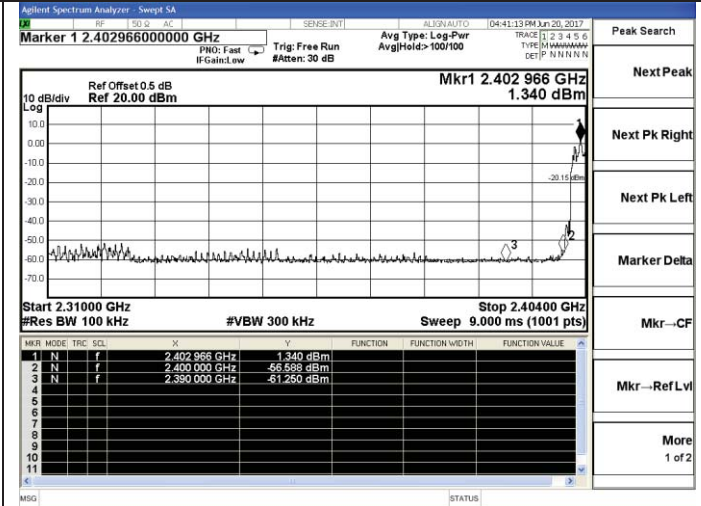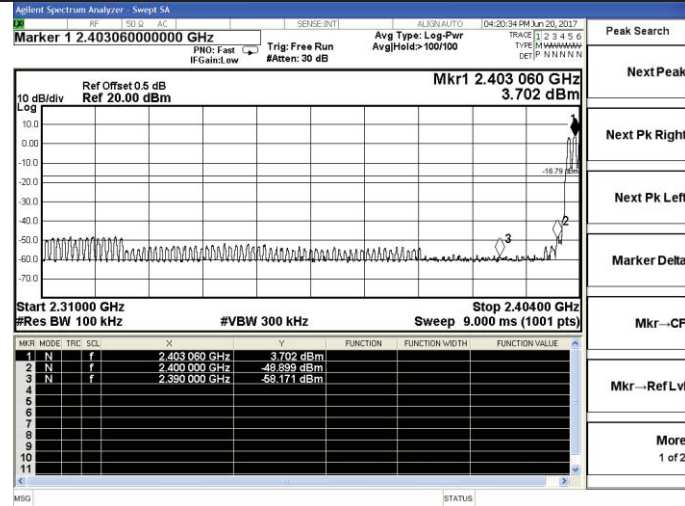

Channel 0 / 2402 MHz – Hopping

Channel 0 / 2402 MHz – Hopping

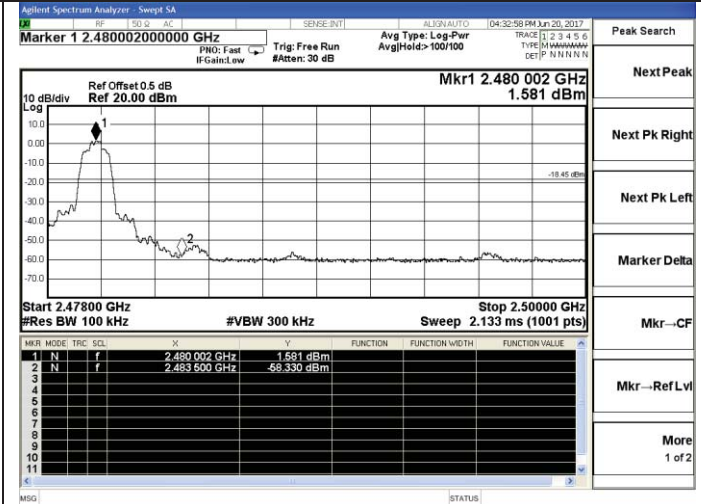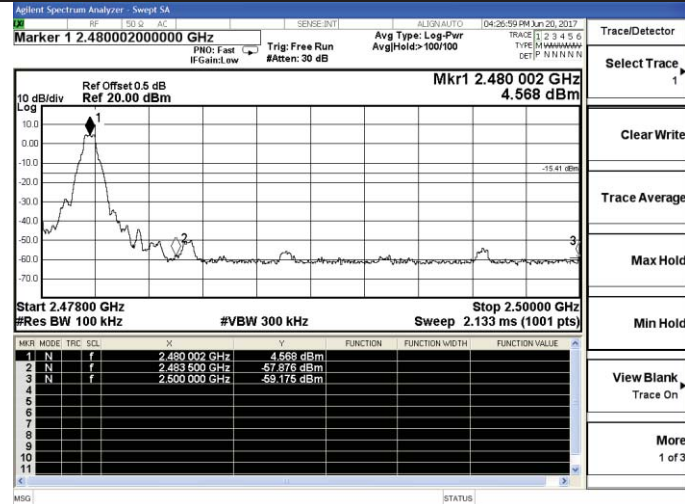



Channel 78 / 2480 MHz – Non-Hopping

Channel 78 / 2480 MHz – Non-Hopping

Band-edge for RF conducted emissions

GFSK



$\pi/4$ -DQPSK

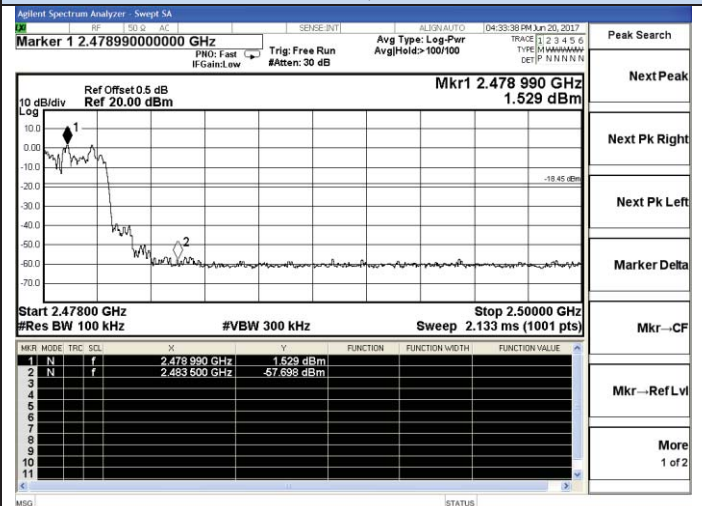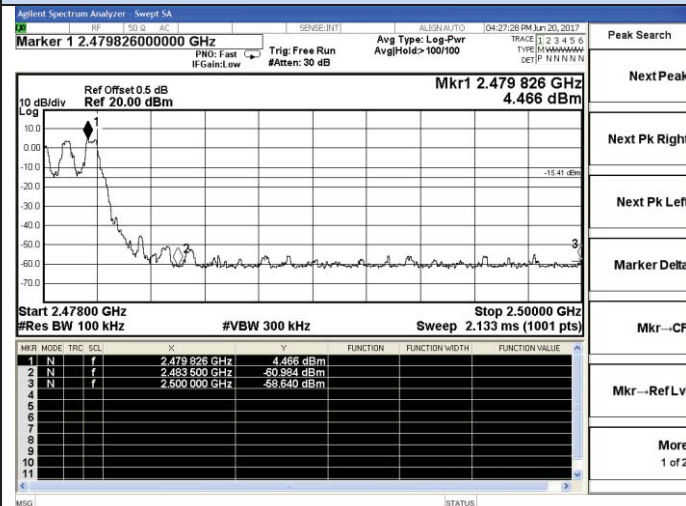

Channel 78 / 2480 MHz - Hopping



Channel 78 / 2480 MHz - Hopping

8DPSK

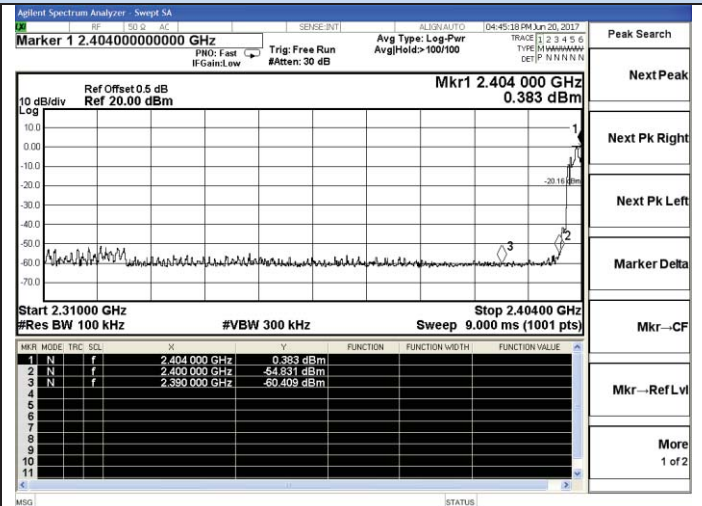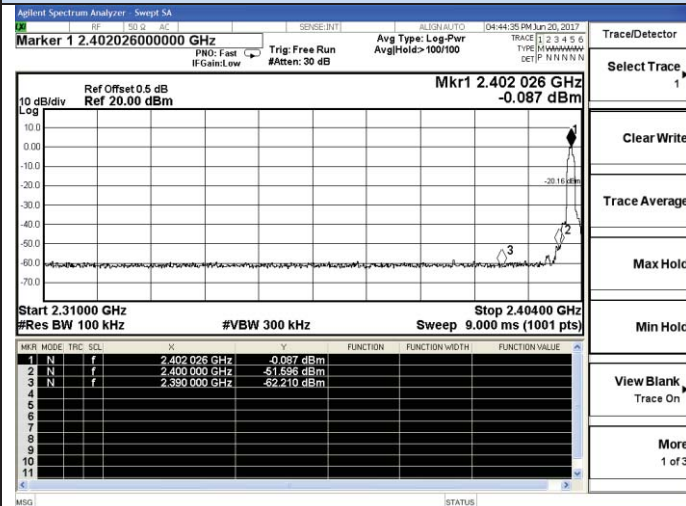

Channel 0 / 2402 MHz - Non-Hopping

Channel 0 / 2402 MHz - Hopping

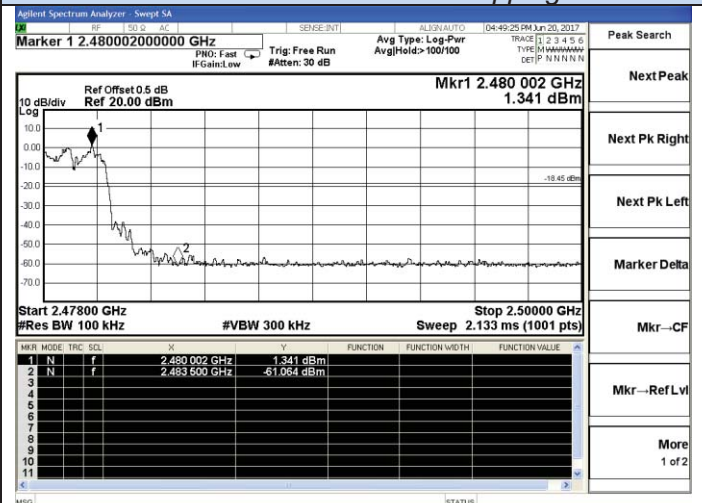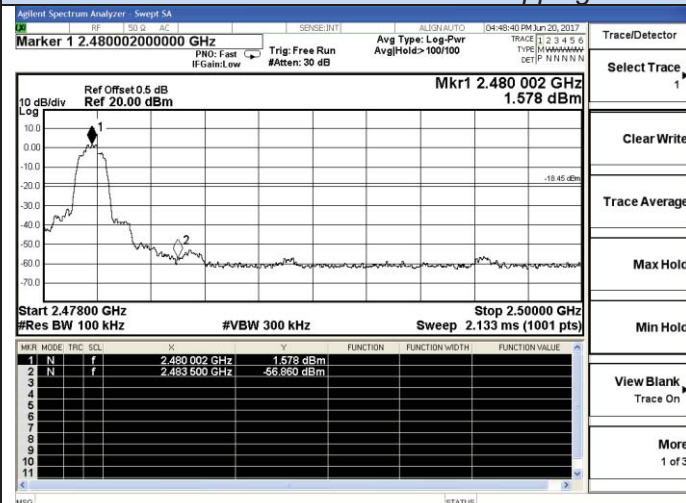

Channel 78 / 2480 MHz - Non-Hopping

Channel 78 / 2480 MHz - Hopping

6.6 Restricted Band Emission Limit

6.6.1. Standard Applicable

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| \1\ 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293. | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | (12) |
| 13.36-13.41 | | | |

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

6.6.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter | Setting |
|---|---|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10 th carrier harmonic |
| RB / VB (Emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average |

| Receiver Parameter | Setting |
|------------------------|--|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG |
| Start ~ Stop Frequency | 150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB/VB 120kHz/1MHz for QP |

6.6.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.


Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.


Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.


6.6.4. Test Setup Layout

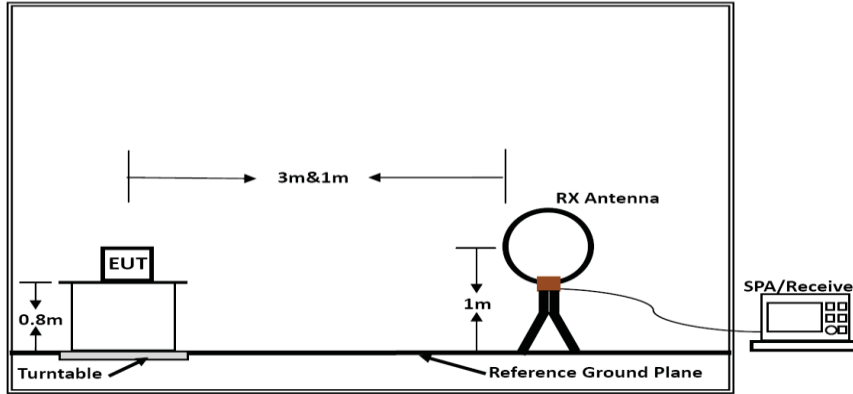

Below 30MHz

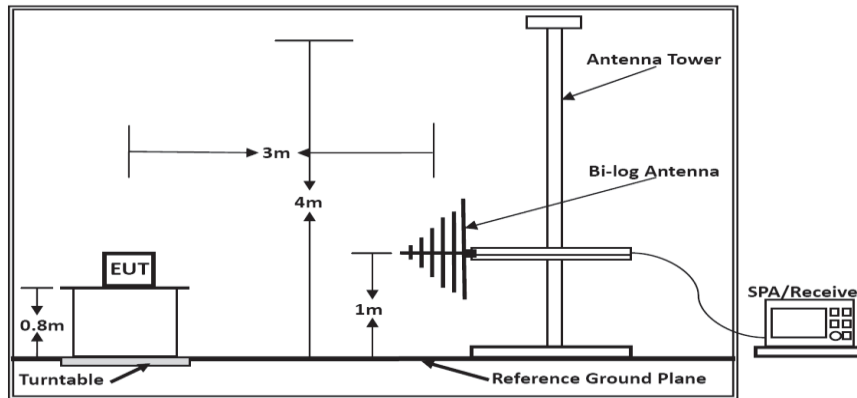

Below 1GHz

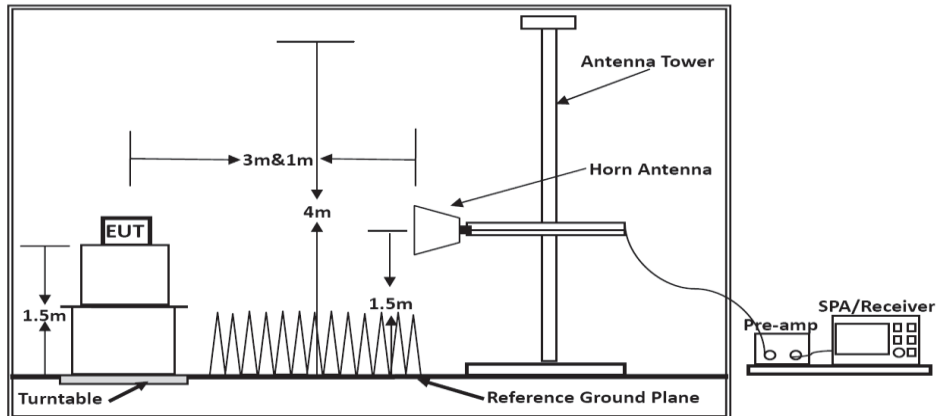

Above 1GHz

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log(\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);
 Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

6.6.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

6.6.6. Results of Radiated Emissions (9 kHz~30MHz)

| | | | |
|---------------|-----------|----------------|-----|
| Temperature | 25°C | Humidity | 60% |
| Test Engineer | Aking Jin | Configurations | BT |

| Freq. (MHz) | Level (dBuV) | Over Limit (dB) | Over Limit (dBuV) | Remark |
|-------------|--------------|-----------------|-------------------|----------|
| - | - | - | - | See Note |

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.

PASS.

Only record the worst test result in this report.

The test data please refer to following page.

Below 1GHz (The worst mode-Low Channel)

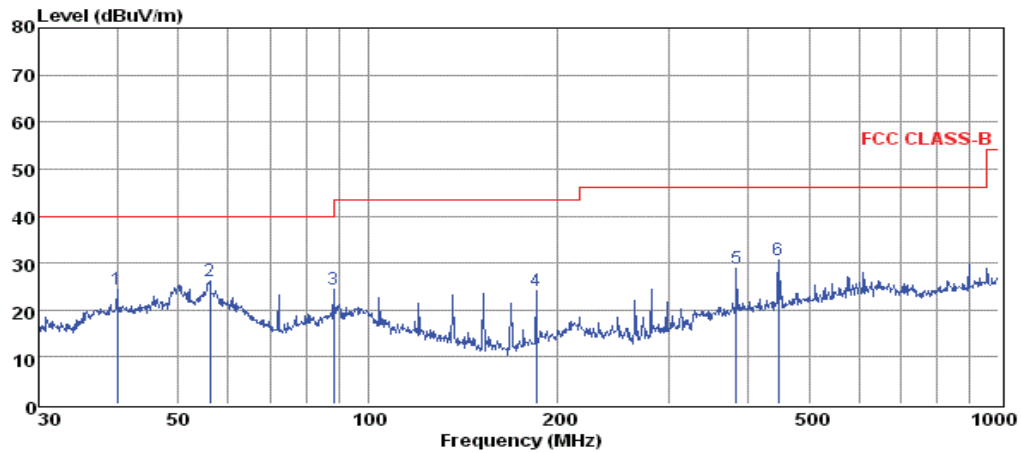


pol:

VERTICAL

| | Freq | Reading | CabLos | Antfac | Measured | Limit | Over | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
| | MHz | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 39.99 | 10.40 | 0.38 | 13.58 | 24.36 | 40.00 | -15.64 | QP |
| 2 | 56.00 | 12.64 | 0.47 | 12.95 | 26.06 | 40.00 | -13.94 | QP |
| 3 | 88.03 | 12.40 | 0.68 | 11.27 | 24.35 | 43.50 | -19.15 | QP |
| 4 | 184.49 | 13.20 | 0.70 | 10.08 | 23.98 | 43.50 | -19.52 | QP |
| 5 | 383.93 | 13.08 | 1.13 | 14.68 | 28.89 | 46.00 | -17.11 | QP |
| 6 | 447.98 | 13.72 | 1.27 | 15.57 | 30.56 | 46.00 | -15.44 | QP |

- Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db blow the official limit are not reported

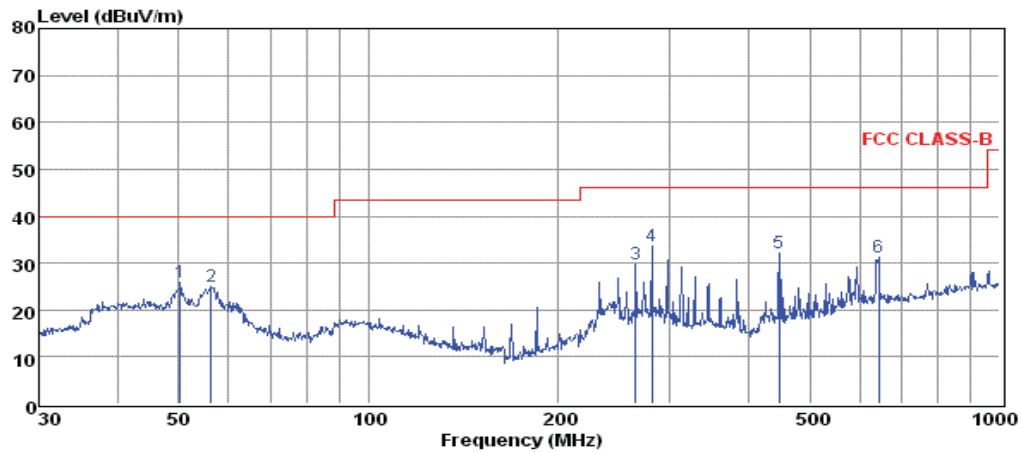

pol:

HORIZONTAL

| | Freq | Reading | CabLos | Antfac | Measured | Limit | Over | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
| | MHz | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 50.23 | 11.95 | 0.54 | 13.24 | 25.73 | 40.00 | -14.27 | QP |
| 2 | 56.20 | 11.48 | 0.47 | 12.94 | 24.89 | 40.00 | -15.11 | QP |
| 3 | 264.75 | 16.62 | 1.03 | 12.20 | 29.85 | 46.00 | -16.15 | QP |
| 4 | 281.01 | 19.99 | 1.06 | 12.69 | 33.74 | 46.00 | -12.26 | QP |
| 5 | 447.98 | 15.16 | 1.27 | 15.57 | 32.00 | 46.00 | -14.00 | QP |
| 6 | 642.86 | 10.94 | 1.55 | 18.60 | 31.09 | 46.00 | -14.91 | QP |

- Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db blow the official limit are not reported

Above 1GHz:

The result for GFSK, Channel 0 / 2402 MHz

| Freq. MHz | Reading dBuv | Ant. Fac dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|-----------|--------------|---------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4804.00 | 54.96 | 33.06 | 35.04 | 3.94 | 56.92 | 74.00 | -17.08 | Peak | Horizontal |
| 4804.00 | 42.82 | 33.06 | 35.04 | 3.94 | 44.78 | 54.00 | -9.22 | Average | Horizontal |
| 4804.00 | 54.56 | 33.06 | 35.04 | 3.94 | 56.52 | 74.00 | -17.48 | Peak | Vertical |
| 4804.00 | 39.29 | 33.06 | 35.04 | 3.94 | 41.25 | 54.00 | -12.75 | Average | Vertical |
| 7206.00 | 52.73 | 34.25 | 36.11 | 4.45 | 55.32 | 74.00 | -18.68 | Peak | Horizontal |
| 7206.00 | 38.45 | 34.25 | 36.11 | 4.45 | 41.04 | 54.00 | -12.96 | Average | Horizontal |
| 7206.00 | 49.53 | 34.25 | 36.11 | 4.45 | 52.12 | 74.00 | -21.88 | Peak | Vertical |
| 7206.00 | 38.26 | 34.25 | 36.11 | 4.45 | 40.85 | 54.00 | -13.15 | Average | Vertical |
| 9608.00 | 50.17 | 35.14 | 37.23 | 4.62 | 52.70 | 74.00 | -21.30 | Peak | Horizontal |
| 9608.00 | 39.32 | 35.14 | 37.23 | 4.62 | 41.85 | 54.00 | -12.15 | Average | Horizontal |
| 9608.00 | 48.90 | 35.14 | 37.23 | 4.62 | 51.43 | 74.00 | -22.57 | Peak | Vertical |
| 9608.00 | 36.61 | 35.14 | 37.23 | 4.62 | 39.14 | 54.00 | -14.86 | Average | Vertical |
| 12010.00 | 46.39 | 36.11 | 38.14 | 5.21 | 49.57 | 74.00 | -24.43 | Peak | Horizontal |
| 12010.00 | 36.99 | 36.11 | 38.14 | 5.21 | 40.17 | 54.00 | -13.83 | Average | Horizontal |
| 12010.00 | 48.64 | 36.11 | 38.14 | 5.21 | 51.82 | 74.00 | -22.18 | Peak | Vertical |
| 12010.00 | 37.81 | 36.11 | 38.14 | 5.21 | 40.99 | 54.00 | -13.01 | Average | Vertical |
| 14430.00 | 46.67 | 37.18 | 39.21 | 5.59 | 50.23 | 74.00 | -23.77 | Peak | Horizontal |
| 14430.00 | 36.83 | 37.18 | 39.21 | 5.59 | 40.39 | 54.00 | -13.61 | Average | Horizontal |
| 14430.00 | 47.08 | 37.18 | 39.21 | 5.59 | 50.64 | 74.00 | -23.36 | Peak | Vertical |
| 14430.00 | 37.25 | 37.18 | 39.21 | 5.59 | 40.81 | 54.00 | -13.19 | Average | Vertical |
| 16835.00 | 49.65 | 38.22 | 40.17 | 5.91 | 53.61 | 74.00 | -20.39 | Peak | Horizontal |
| 16835.00 | 38.38 | 38.22 | 40.17 | 5.91 | 42.34 | 54.00 | -11.66 | Average | Horizontal |
| 16835.00 | 50.32 | 38.22 | 40.17 | 5.91 | 54.28 | 74.00 | -19.72 | Peak | Vertical |
| 16835.00 | 37.68 | 38.22 | 40.17 | 5.91 | 41.64 | 54.00 | -12.36 | Average | Vertical |

The result for GFSK, Channel 39 / 2441 MHz

| Freq. MHz | Reading dBuv | Ant. Fac dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|-----------|--------------|---------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4882.00 | 57.33 | 33.16 | 35.15 | 3.96 | 59.30 | 74.00 | -14.70 | Peak | Horizontal |
| 4882.00 | 41.57 | 33.16 | 35.15 | 3.96 | 43.54 | 54.00 | -10.46 | Average | Horizontal |
| 4882.00 | 54.26 | 33.16 | 35.15 | 3.96 | 56.23 | 74.00 | -17.77 | Peak | Vertical |
| 4882.00 | 40.13 | 33.16 | 35.15 | 3.96 | 42.10 | 54.00 | -11.90 | Average | Vertical |
| 7323.00 | 47.94 | 34.32 | 36.19 | 4.48 | 50.55 | 74.00 | -23.45 | Peak | Horizontal |
| 7323.00 | 39.16 | 34.32 | 36.19 | 4.48 | 41.77 | 54.00 | -12.23 | Average | Horizontal |
| 7323.00 | 48.62 | 34.32 | 36.19 | 4.48 | 51.23 | 74.00 | -22.77 | Peak | Vertical |
| 7323.00 | 38.85 | 34.32 | 36.19 | 4.48 | 41.46 | 54.00 | -12.54 | Average | Vertical |
| 9764.00 | 49.94 | 35.23 | 37.31 | 4.65 | 52.51 | 74.00 | -21.49 | Peak | Horizontal |
| 9764.00 | 36.76 | 35.23 | 37.31 | 4.65 | 39.33 | 54.00 | -14.67 | Average | Horizontal |
| 9764.00 | 52.06 | 35.23 | 37.31 | 4.65 | 54.63 | 74.00 | -19.37 | Peak | Vertical |
| 9764.00 | 40.76 | 35.23 | 37.31 | 4.65 | 43.33 | 54.00 | -10.67 | Average | Vertical |
| 12205.00 | 49.60 | 36.19 | 38.26 | 5.26 | 52.79 | 74.00 | -21.21 | Peak | Horizontal |
| 12205.00 | 38.25 | 36.19 | 38.26 | 5.26 | 41.44 | 54.00 | -12.56 | Average | Horizontal |
| 12205.00 | 47.68 | 36.19 | 38.26 | 5.26 | 50.87 | 74.00 | -23.13 | Peak | Vertical |
| 12205.00 | 38.59 | 36.19 | 38.26 | 5.26 | 41.78 | 54.00 | -12.22 | Average | Vertical |
| 14646.00 | 48.97 | 37.27 | 39.29 | 5.63 | 52.58 | 74.00 | -21.42 | Peak | Horizontal |
| 14646.00 | 32.80 | 37.27 | 39.29 | 5.63 | 36.41 | 54.00 | -17.59 | Average | Horizontal |
| 14646.00 | 50.66 | 37.27 | 39.29 | 5.63 | 54.27 | 74.00 | -19.73 | Peak | Vertical |
| 14646.00 | 36.63 | 37.27 | 39.29 | 5.63 | 40.24 | 54.00 | -13.76 | Average | Vertical |
| 17087.00 | 46.99 | 38.30 | 40.25 | 5.95 | 50.99 | 74.00 | -23.01 | Peak | Horizontal |
| 17087.00 | 36.03 | 38.30 | 40.25 | 5.95 | 40.03 | 54.00 | -13.97 | Average | Horizontal |
| 17087.00 | 47.28 | 38.30 | 40.25 | 5.95 | 51.28 | 74.00 | -22.72 | Peak | Vertical |
| 17087.00 | 38.43 | 38.30 | 40.25 | 5.95 | 42.43 | 54.00 | -11.57 | Average | Vertical |

The result for GFSK, Channel 78 / 2480 MHz

| Freq. MHz | Reading dBuv | Ant. Fac dB/m | Pre. Fac dB | Cab. Los dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|-----------|--------------|---------------|-------------|-------------|-----------------|--------------|-----------|---------|------------|
| 4960.00 | 57.85 | 33.26 | 35.14 | 3.98 | 59.95 | 74.00 | -14.05 | Peak | Horizontal |
| 4960.00 | 42.41 | 33.26 | 35.14 | 3.98 | 44.51 | 54.00 | -9.49 | Average | Horizontal |
| 4960.00 | 54.58 | 33.26 | 35.14 | 3.98 | 56.68 | 74.00 | -17.32 | Peak | Vertical |
| 4960.00 | 39.50 | 33.26 | 35.14 | 3.98 | 41.60 | 54.00 | -12.40 | Average | Vertical |
| 7440.00 | 48.00 | 34.39 | 36.27 | 4.52 | 50.64 | 74.00 | -23.36 | Peak | Horizontal |
| 7440.00 | 38.82 | 34.39 | 36.27 | 4.52 | 41.46 | 54.00 | -12.54 | Average | Horizontal |
| 7440.00 | 50.16 | 34.39 | 36.27 | 4.52 | 52.80 | 74.00 | -21.20 | Peak | Vertical |
| 7440.00 | 39.60 | 34.39 | 36.27 | 4.52 | 42.24 | 54.00 | -11.76 | Average | Vertical |
| 9920.00 | 50.04 | 35.31 | 37.38 | 4.69 | 52.66 | 74.00 | -21.34 | Peak | Horizontal |
| 9920.00 | 37.69 | 35.31 | 37.38 | 4.69 | 40.31 | 54.00 | -13.69 | Average | Horizontal |
| 9920.00 | 48.65 | 35.31 | 37.38 | 4.69 | 51.27 | 74.00 | -22.73 | Peak | Vertical |
| 9920.00 | 42.58 | 35.31 | 37.38 | 4.69 | 45.20 | 54.00 | -8.80 | Average | Vertical |
| 12400.00 | 47.33 | 36.28 | 38.33 | 5.31 | 50.59 | 74.00 | -23.41 | Peak | Horizontal |
| 12400.00 | 39.29 | 36.28 | 38.33 | 5.31 | 42.55 | 54.00 | -11.45 | Average | Horizontal |
| 12400.00 | 49.03 | 36.28 | 38.33 | 5.31 | 52.29 | 74.00 | -21.71 | Peak | Vertical |
| 12400.00 | 40.23 | 36.28 | 38.33 | 5.31 | 43.49 | 54.00 | -10.51 | Average | Vertical |
| 14880.00 | 46.07 | 37.33 | 39.37 | 5.68 | 49.71 | 74.00 | -24.29 | Peak | Horizontal |
| 14880.00 | 38.25 | 37.33 | 39.37 | 5.68 | 41.89 | 54.00 | -12.11 | Average | Horizontal |
| 14880.00 | 46.55 | 37.33 | 39.37 | 5.68 | 50.19 | 74.00 | -23.81 | Peak | Vertical |
| 14880.00 | 37.75 | 37.33 | 39.37 | 5.68 | 41.39 | 54.00 | -12.61 | Average | Vertical |
| 17360.00 | 49.33 | 38.38 | 40.32 | 5.99 | 53.38 | 74.00 | -20.62 | Peak | Horizontal |
| 17360.00 | 35.74 | 38.38 | 40.32 | 5.99 | 39.79 | 54.00 | -14.21 | Average | Horizontal |
| 17360.00 | 47.96 | 38.38 | 40.32 | 5.99 | 52.01 | 74.00 | -21.99 | Peak | Vertical |
| 17360.00 | 36.87 | 38.38 | 40.32 | 5.99 | 40.92 | 54.00 | -13.08 | Average | Vertical |

The result for $\pi/4$ -DQPSK, Channel 0 / 2402 MHz

| Freq. MHz | Reading dBuv | Ant. Fac dB/m | Pre. Fac dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|-----------|--------------|---------------|-------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4804.00 | 54.32 | 33.06 | 35.04 | 3.94 | 56.28 | 74.00 | -17.72 | Peak | Horizontal |
| 4804.00 | 42.68 | 33.06 | 35.04 | 3.94 | 44.64 | 54.00 | -9.36 | Average | Horizontal |
| 4804.00 | 56.39 | 33.06 | 35.04 | 3.94 | 58.35 | 74.00 | -15.65 | Peak | Vertical |
| 4804.00 | 41.85 | 33.06 | 35.04 | 3.94 | 43.81 | 54.00 | -10.19 | Average | Vertical |
| 7206.00 | 52.28 | 34.25 | 36.11 | 4.45 | 54.87 | 74.00 | -19.13 | Peak | Horizontal |
| 7206.00 | 38.13 | 34.25 | 36.11 | 4.45 | 40.72 | 54.00 | -13.28 | Average | Horizontal |
| 7206.00 | 49.96 | 34.25 | 36.11 | 4.45 | 52.55 | 74.00 | -21.45 | Peak | Vertical |
| 7206.00 | 37.67 | 34.25 | 36.11 | 4.45 | 40.26 | 54.00 | -13.74 | Average | Vertical |
| 9608.00 | 52.45 | 35.14 | 37.23 | 4.62 | 54.98 | 74.00 | -19.02 | Peak | Horizontal |
| 9608.00 | 36.53 | 35.14 | 37.23 | 4.62 | 39.06 | 54.00 | -14.94 | Average | Horizontal |
| 9608.00 | 53.40 | 35.14 | 37.23 | 4.62 | 55.93 | 74.00 | -18.07 | Peak | Vertical |
| 9608.00 | 39.60 | 35.14 | 37.23 | 4.62 | 42.13 | 54.00 | -11.87 | Average | Vertical |
| 12010.00 | 48.84 | 36.11 | 38.14 | 5.21 | 52.02 | 74.00 | -21.98 | Peak | Horizontal |
| 12010.00 | 37.17 | 36.11 | 38.14 | 5.21 | 40.35 | 54.00 | -13.65 | Average | Horizontal |
| 12010.00 | 49.26 | 36.11 | 38.14 | 5.21 | 52.44 | 74.00 | -21.56 | Peak | Vertical |
| 12010.00 | 36.62 | 36.11 | 38.14 | 5.21 | 39.80 | 54.00 | -14.20 | Average | Vertical |
| 14430.00 | 49.67 | 37.18 | 39.21 | 5.59 | 53.23 | 74.00 | -20.77 | Peak | Horizontal |
| 14430.00 | 34.63 | 37.18 | 39.21 | 5.59 | 38.19 | 54.00 | -15.81 | Average | Horizontal |
| 14430.00 | 48.41 | 37.18 | 39.21 | 5.59 | 51.97 | 74.00 | -22.03 | Peak | Vertical |
| 14430.00 | 37.07 | 37.18 | 39.21 | 5.59 | 40.63 | 54.00 | -13.37 | Average | Vertical |
| 16835.00 | 50.81 | 38.22 | 40.17 | 5.91 | 54.77 | 74.00 | -19.23 | Peak | Horizontal |
| 16835.00 | 36.44 | 38.22 | 40.17 | 5.91 | 40.40 | 54.00 | -13.60 | Average | Horizontal |
| 16835.00 | 52.59 | 38.22 | 40.17 | 5.91 | 56.55 | 74.00 | -17.45 | Peak | Vertical |
| 16835.00 | 39.05 | 38.22 | 40.17 | 5.91 | 43.01 | 54.00 | -10.99 | Average | Vertical |

This report shall not be reproduced except in full, without the written approval of Shenzhen LCS Compliance Testing Laboratory Ltd.

The result for $\pi/4$ -DQPSK, Channel 39 / 2441 MHz

| Freq. MHz | Reading dBuv | Ant. Fac dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|-----------|--------------|---------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4882.00 | 60.29 | 33.16 | 35.15 | 3.96 | 62.26 | 74.00 | -11.74 | Peak | Horizontal |
| 4882.00 | 41.94 | 33.16 | 35.15 | 3.96 | 43.91 | 54.00 | -10.09 | Average | Horizontal |
| 4882.00 | 55.62 | 33.16 | 35.15 | 3.96 | 57.59 | 74.00 | -16.41 | Peak | Vertical |
| 4882.00 | 39.78 | 33.16 | 35.15 | 3.96 | 41.75 | 54.00 | -12.25 | Average | Vertical |
| 7323.00 | 50.78 | 34.32 | 36.19 | 4.48 | 53.39 | 74.00 | -20.61 | Peak | Horizontal |
| 7323.00 | 40.04 | 34.32 | 36.19 | 4.48 | 42.65 | 54.00 | -11.35 | Average | Horizontal |
| 7323.00 | 50.90 | 34.32 | 36.19 | 4.48 | 53.51 | 74.00 | -20.49 | Peak | Vertical |
| 7323.00 | 37.90 | 34.32 | 36.19 | 4.48 | 40.51 | 54.00 | -13.49 | Average | Vertical |
| 9764.00 | 48.44 | 35.23 | 37.31 | 4.65 | 51.01 | 74.00 | -22.99 | Peak | Horizontal |
| 9764.00 | 39.03 | 35.23 | 37.31 | 4.65 | 41.60 | 54.00 | -12.40 | Average | Horizontal |
| 9764.00 | 48.80 | 35.23 | 37.31 | 4.65 | 51.37 | 74.00 | -22.63 | Peak | Vertical |
| 9764.00 | 39.70 | 35.23 | 37.31 | 4.65 | 42.27 | 54.00 | -11.73 | Average | Vertical |
| 12205.00 | 49.97 | 36.19 | 38.26 | 5.26 | 53.16 | 74.00 | -20.84 | Peak | Horizontal |
| 12205.00 | 38.03 | 36.19 | 38.26 | 5.26 | 41.22 | 54.00 | -12.78 | Average | Horizontal |
| 12205.00 | 49.14 | 36.19 | 38.26 | 5.26 | 52.33 | 74.00 | -21.67 | Peak | Vertical |
| 12205.00 | 38.59 | 36.19 | 38.26 | 5.26 | 41.78 | 54.00 | -12.22 | Average | Vertical |
| 14646.00 | 48.91 | 37.27 | 39.29 | 5.63 | 52.52 | 74.00 | -21.48 | Peak | Horizontal |
| 14646.00 | 35.41 | 37.27 | 39.29 | 5.63 | 39.02 | 54.00 | -14.98 | Average | Horizontal |
| 14646.00 | 48.31 | 37.27 | 39.29 | 5.63 | 51.92 | 74.00 | -22.08 | Peak | Vertical |
| 14646.00 | 35.11 | 37.27 | 39.29 | 5.63 | 38.72 | 54.00 | -15.28 | Average | Vertical |
| 17087.00 | 48.37 | 38.30 | 40.25 | 5.95 | 52.37 | 74.00 | -21.63 | Peak | Horizontal |
| 17087.00 | 38.15 | 38.30 | 40.25 | 5.95 | 42.15 | 54.00 | -11.85 | Average | Horizontal |
| 17087.00 | 52.20 | 38.30 | 40.25 | 5.95 | 56.20 | 74.00 | -17.80 | Peak | Vertical |
| 17087.00 | 36.22 | 38.30 | 40.25 | 5.95 | 40.22 | 54.00 | -13.78 | Average | Vertical |

The result for $\pi/4$ -DQPSK, Channel 78 / 2480 MHz

| Freq. MHz | Reading dBuv | Ant. Fac dB/m | Pre. Fac. dB | Cab. Los dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|-----------|--------------|---------------|--------------|-------------|-----------------|--------------|-----------|---------|------------|
| 4960.00 | 57.64 | 33.26 | 35.14 | 3.98 | 59.74 | 74.00 | -14.26 | Peak | Horizontal |
| 4960.00 | 42.05 | 33.26 | 35.14 | 3.98 | 44.15 | 54.00 | -9.85 | Average | Horizontal |
| 4960.00 | 53.09 | 33.26 | 35.14 | 3.98 | 55.19 | 74.00 | -18.81 | Peak | Vertical |
| 4960.00 | 40.46 | 33.26 | 35.14 | 3.98 | 42.56 | 54.00 | -11.44 | Average | Vertical |
| 7440.00 | 51.72 | 34.39 | 36.27 | 4.52 | 54.36 | 74.00 | -19.64 | Peak | Horizontal |
| 7440.00 | 38.87 | 34.39 | 36.27 | 4.52 | 41.51 | 54.00 | -12.49 | Average | Horizontal |
| 7440.00 | 48.15 | 34.39 | 36.27 | 4.52 | 50.79 | 74.00 | -23.21 | Peak | Vertical |
| 7440.00 | 35.44 | 34.39 | 36.27 | 4.52 | 38.08 | 54.00 | -15.92 | Average | Vertical |
| 9920.00 | 50.81 | 35.31 | 37.38 | 4.69 | 53.43 | 74.00 | -20.57 | Peak | Horizontal |
| 9920.00 | 36.34 | 35.31 | 37.38 | 4.69 | 38.96 | 54.00 | -15.04 | Average | Horizontal |
| 9920.00 | 49.77 | 35.31 | 37.38 | 4.69 | 52.39 | 74.00 | -21.61 | Peak | Vertical |
| 9920.00 | 37.80 | 35.31 | 37.38 | 4.69 | 40.42 | 54.00 | -13.58 | Average | Vertical |
| 12400.00 | 49.15 | 36.28 | 38.33 | 5.31 | 52.41 | 74.00 | -21.59 | Peak | Horizontal |
| 12400.00 | 36.86 | 36.28 | 38.33 | 5.31 | 40.12 | 54.00 | -13.88 | Average | Horizontal |
| 12400.00 | 47.92 | 36.28 | 38.33 | 5.31 | 51.18 | 74.00 | -22.82 | Peak | Vertical |
| 12400.00 | 39.20 | 36.28 | 38.33 | 5.31 | 42.46 | 54.00 | -11.54 | Average | Vertical |
| 14880.00 | 48.20 | 37.33 | 39.37 | 5.68 | 51.84 | 74.00 | -22.16 | Peak | Horizontal |
| 14880.00 | 36.72 | 37.33 | 39.37 | 5.68 | 40.36 | 54.00 | -13.64 | Average | Horizontal |
| 14880.00 | 49.06 | 37.33 | 39.37 | 5.68 | 52.70 | 74.00 | -21.30 | Peak | Vertical |
| 14880.00 | 36.48 | 37.33 | 39.37 | 5.68 | 40.12 | 54.00 | -13.88 | Average | Vertical |
| 17360.00 | 48.41 | 38.38 | 40.32 | 5.99 | 52.46 | 74.00 | -21.54 | Peak | Horizontal |
| 17360.00 | 36.35 | 38.38 | 40.32 | 5.99 | 40.40 | 54.00 | -13.60 | Average | Horizontal |
| 17360.00 | 48.64 | 38.38 | 40.32 | 5.99 | 52.69 | 74.00 | -21.31 | Peak | Vertical |
| 17360.00 | 35.07 | 38.38 | 40.32 | 5.99 | 39.12 | 54.00 | -14.88 | Average | Vertical |

This report shall not be reproduced except in full, without the written approval of Shenzhen LCS Compliance Testing Laboratory Ltd.

The result for 8DPSK, Channel 0 / 2402 MHz

| Freq. MHz | Reading dBuv | Ant. Fac dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|-----------|--------------|---------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4804.00 | 55.58 | 33.06 | 35.04 | 3.94 | 57.54 | 74.00 | -16.46 | Peak | Horizontal |
| 4804.00 | 42.55 | 33.06 | 35.04 | 3.94 | 44.51 | 54.00 | -9.49 | Average | Horizontal |
| 4804.00 | 54.79 | 33.06 | 35.04 | 3.94 | 56.75 | 74.00 | -17.25 | Peak | Vertical |
| 4804.00 | 41.15 | 33.06 | 35.04 | 3.94 | 43.11 | 54.00 | -10.89 | Average | Vertical |
| 7206.00 | 49.49 | 34.25 | 36.11 | 4.45 | 52.08 | 74.00 | -21.92 | Peak | Horizontal |
| 7206.00 | 37.71 | 34.25 | 36.11 | 4.45 | 40.30 | 54.00 | -13.70 | Average | Horizontal |
| 7206.00 | 46.90 | 34.25 | 36.11 | 4.45 | 49.49 | 74.00 | -24.51 | Peak | Vertical |
| 7206.00 | 36.66 | 34.25 | 36.11 | 4.45 | 39.25 | 54.00 | -14.75 | Average | Vertical |
| 9608.00 | 50.58 | 35.14 | 37.23 | 4.62 | 53.11 | 74.00 | -20.89 | Peak | Horizontal |
| 9608.00 | 35.60 | 35.14 | 37.23 | 4.62 | 38.13 | 54.00 | -15.87 | Average | Horizontal |
| 9608.00 | 50.19 | 35.14 | 37.23 | 4.62 | 52.72 | 74.00 | -21.28 | Peak | Vertical |
| 9608.00 | 38.10 | 35.14 | 37.23 | 4.62 | 40.63 | 54.00 | -13.37 | Average | Vertical |
| 12010.00 | 49.64 | 36.11 | 38.14 | 5.21 | 52.82 | 74.00 | -21.18 | Peak | Horizontal |
| 12010.00 | 35.57 | 36.11 | 38.14 | 5.21 | 38.75 | 54.00 | -15.25 | Average | Horizontal |
| 12010.00 | 51.02 | 36.11 | 38.14 | 5.21 | 54.20 | 74.00 | -19.80 | Peak | Vertical |
| 12010.00 | 37.37 | 36.11 | 38.14 | 5.21 | 40.55 | 54.00 | -13.45 | Average | Vertical |
| 14430.00 | 48.90 | 37.18 | 39.21 | 5.59 | 52.46 | 74.00 | -21.54 | Peak | Horizontal |
| 14430.00 | 36.53 | 37.18 | 39.21 | 5.59 | 40.09 | 54.00 | -13.91 | Average | Horizontal |
| 14430.00 | 49.82 | 37.18 | 39.21 | 5.59 | 53.38 | 74.00 | -20.62 | Peak | Vertical |
| 14430.00 | 36.71 | 37.18 | 39.21 | 5.59 | 40.27 | 54.00 | -13.73 | Average | Vertical |
| 16835.00 | 49.25 | 38.22 | 40.17 | 5.91 | 53.21 | 74.00 | -20.79 | Peak | Horizontal |
| 16835.00 | 34.04 | 38.22 | 40.17 | 5.91 | 38.00 | 54.00 | -16.00 | Average | Horizontal |
| 16835.00 | 48.63 | 38.22 | 40.17 | 5.91 | 52.59 | 74.00 | -21.41 | Peak | Vertical |
| 16835.00 | 35.60 | 38.22 | 40.17 | 5.91 | 39.56 | 54.00 | -14.44 | Average | Vertical |

The result for 8DPSK, Channel 39 / 2441 MHz

| Freq. MHz | Reading dBuv | Ant. Fac dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|-----------|--------------|---------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4882.00 | 58.40 | 33.16 | 35.15 | 3.96 | 60.37 | 74.00 | -13.63 | Peak | Horizontal |
| 4882.00 | 44.07 | 33.16 | 35.15 | 3.96 | 46.04 | 54.00 | -7.96 | Average | Horizontal |
| 4882.00 | 54.97 | 33.16 | 35.15 | 3.96 | 56.94 | 74.00 | -17.06 | Peak | Vertical |
| 4882.00 | 39.50 | 33.16 | 35.15 | 3.96 | 41.47 | 54.00 | -12.53 | Average | Vertical |
| 7323.00 | 53.61 | 34.32 | 36.19 | 4.48 | 56.22 | 74.00 | -17.78 | Peak | Horizontal |
| 7323.00 | 37.24 | 34.32 | 36.19 | 4.48 | 39.85 | 54.00 | -14.15 | Average | Horizontal |
| 7323.00 | 48.79 | 34.32 | 36.19 | 4.48 | 51.40 | 74.00 | -22.60 | Peak | Vertical |
| 7323.00 | 36.74 | 34.32 | 36.19 | 4.48 | 39.35 | 54.00 | -14.65 | Average | Vertical |
| 9764.00 | 51.35 | 35.23 | 37.31 | 4.65 | 53.92 | 74.00 | -20.08 | Peak | Horizontal |
| 9764.00 | 37.72 | 35.23 | 37.31 | 4.65 | 40.29 | 54.00 | -13.71 | Average | Horizontal |
| 9764.00 | 50.95 | 35.23 | 37.31 | 4.65 | 53.52 | 74.00 | -20.48 | Peak | Vertical |
| 9764.00 | 40.43 | 35.23 | 37.31 | 4.65 | 43.00 | 54.00 | -11.00 | Average | Vertical |
| 12205.00 | 50.52 | 36.19 | 38.26 | 5.26 | 53.71 | 74.00 | -20.29 | Peak | Horizontal |
| 12205.00 | 35.25 | 36.19 | 38.26 | 5.26 | 38.44 | 54.00 | -15.56 | Average | Horizontal |
| 12205.00 | 49.76 | 36.19 | 38.26 | 5.26 | 52.95 | 74.00 | -21.05 | Peak | Vertical |
| 12205.00 | 38.02 | 36.19 | 38.26 | 5.26 | 41.21 | 54.00 | -12.79 | Average | Vertical |
| 14646.00 | 48.91 | 37.27 | 39.29 | 5.63 | 52.52 | 74.00 | -21.48 | Peak | Horizontal |
| 14646.00 | 36.36 | 37.27 | 39.29 | 5.63 | 39.97 | 54.00 | -14.03 | Average | Horizontal |
| 14646.00 | 47.46 | 37.27 | 39.29 | 5.63 | 51.07 | 74.00 | -22.93 | Peak | Vertical |
| 14646.00 | 38.22 | 37.27 | 39.29 | 5.63 | 41.83 | 54.00 | -12.17 | Average | Vertical |
| 17087.00 | 46.71 | 38.30 | 40.25 | 5.95 | 50.71 | 74.00 | -23.29 | Peak | Horizontal |
| 17087.00 | 39.32 | 38.30 | 40.25 | 5.95 | 43.32 | 54.00 | -10.68 | Average | Horizontal |
| 17087.00 | 48.67 | 38.30 | 40.25 | 5.95 | 52.67 | 74.00 | -21.33 | Peak | Vertical |
| 17087.00 | 35.64 | 38.30 | 40.25 | 5.95 | 39.64 | 54.00 | -14.36 | Average | Vertical |

The result for 8DPSK, Channel 78 / 2480 MHz

| Freq. MHz | Reading dBuv | Ant. Fac dB/m | Pre. Fac dB | Cab. Los dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|-----------|--------------|---------------|-------------|-------------|-----------------|--------------|-----------|---------|------------|
| 4960.00 | 57.44 | 33.26 | 35.14 | 3.98 | 59.54 | 74.00 | -14.46 | Peak | Horizontal |
| 4960.00 | 43.99 | 33.26 | 35.14 | 3.98 | 46.09 | 54.00 | -7.91 | Average | Horizontal |
| 4960.00 | 56.72 | 33.26 | 35.14 | 3.98 | 58.82 | 74.00 | -15.18 | Peak | Vertical |
| 4960.00 | 38.37 | 33.26 | 35.14 | 3.98 | 40.47 | 54.00 | -13.53 | Average | Vertical |
| 7440.00 | 47.51 | 34.39 | 36.27 | 4.52 | 50.15 | 74.00 | -23.85 | Peak | Horizontal |
| 7440.00 | 40.72 | 34.39 | 36.27 | 4.52 | 43.36 | 54.00 | -10.64 | Average | Horizontal |
| 7440.00 | 45.96 | 34.39 | 36.27 | 4.52 | 48.60 | 74.00 | -25.40 | Peak | Vertical |
| 7440.00 | 38.48 | 34.39 | 36.27 | 4.52 | 41.12 | 54.00 | -12.88 | Average | Vertical |
| 9920.00 | 51.43 | 35.31 | 37.38 | 4.69 | 54.05 | 74.00 | -19.95 | Peak | Horizontal |
| 9920.00 | 34.39 | 35.31 | 37.38 | 4.69 | 37.01 | 54.00 | -16.99 | Average | Horizontal |
| 9920.00 | 50.45 | 35.31 | 37.38 | 4.69 | 53.07 | 74.00 | -20.93 | Peak | Vertical |
| 9920.00 | 39.18 | 35.31 | 37.38 | 4.69 | 41.80 | 54.00 | -12.20 | Average | Vertical |
| 12400.00 | 47.22 | 36.28 | 38.33 | 5.31 | 50.48 | 74.00 | -23.52 | Peak | Horizontal |
| 12400.00 | 38.55 | 36.28 | 38.33 | 5.31 | 41.81 | 54.00 | -12.19 | Average | Horizontal |
| 12400.00 | 50.38 | 36.28 | 38.33 | 5.31 | 53.64 | 74.00 | -20.36 | Peak | Vertical |
| 12400.00 | 39.07 | 36.28 | 38.33 | 5.31 | 42.33 | 54.00 | -11.67 | Average | Vertical |
| 14880.00 | 49.34 | 37.33 | 39.37 | 5.68 | 52.98 | 74.00 | -21.02 | Peak | Horizontal |
| 14880.00 | 35.77 | 37.33 | 39.37 | 5.68 | 39.41 | 54.00 | -14.59 | Average | Horizontal |
| 14880.00 | 46.94 | 37.33 | 39.37 | 5.68 | 50.58 | 74.00 | -23.42 | Peak | Vertical |
| 14880.00 | 37.70 | 37.33 | 39.37 | 5.68 | 41.34 | 54.00 | -12.66 | Average | Vertical |
| 17360.00 | 49.55 | 38.38 | 40.32 | 5.99 | 53.60 | 74.00 | -20.40 | Peak | Horizontal |
| 17360.00 | 36.55 | 38.38 | 40.32 | 5.99 | 40.60 | 54.00 | -13.40 | Average | Horizontal |
| 17360.00 | 48.75 | 38.38 | 40.32 | 5.99 | 52.80 | 74.00 | -21.20 | Peak | Vertical |
| 17360.00 | 36.45 | 38.38 | 40.32 | 5.99 | 40.50 | 54.00 | -13.50 | Average | Vertical |

Notes:

- 1). Measuring frequencies from 9k~10th harmonic (ex. 26GHz), No emission found between lowest internal used/generated frequency to 30 MHz.
- 2). Radiated emissions measured in frequency range from 9k~10th harmonic (ex. 26GHz) were made with an instrument using Peak detector mode.
- 3). 18~25GHz at least have 20dB margin. No recording in the test report.

6.7. AC Power line conducted emissions


6.7.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

| Frequency Range (MHz) | Limits (dBµV) | |
|-----------------------|---------------|----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

* Decreasing linearly with the logarithm of the frequency

6.7.2 Block Diagram of Test Setup

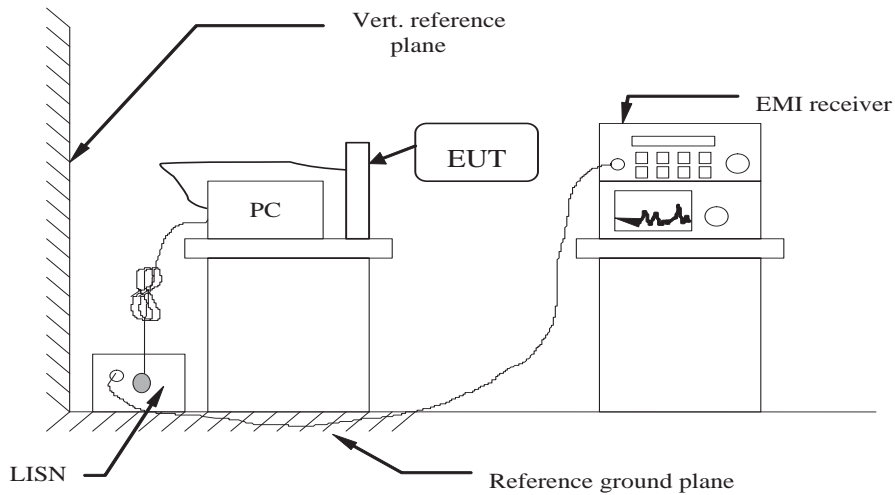


6.7.3 Test Results


PASS.

The test data please refer to following page.

AC Conducted Emission of power adapter @ AC 120V/60Hz @ GFSK (worst case)

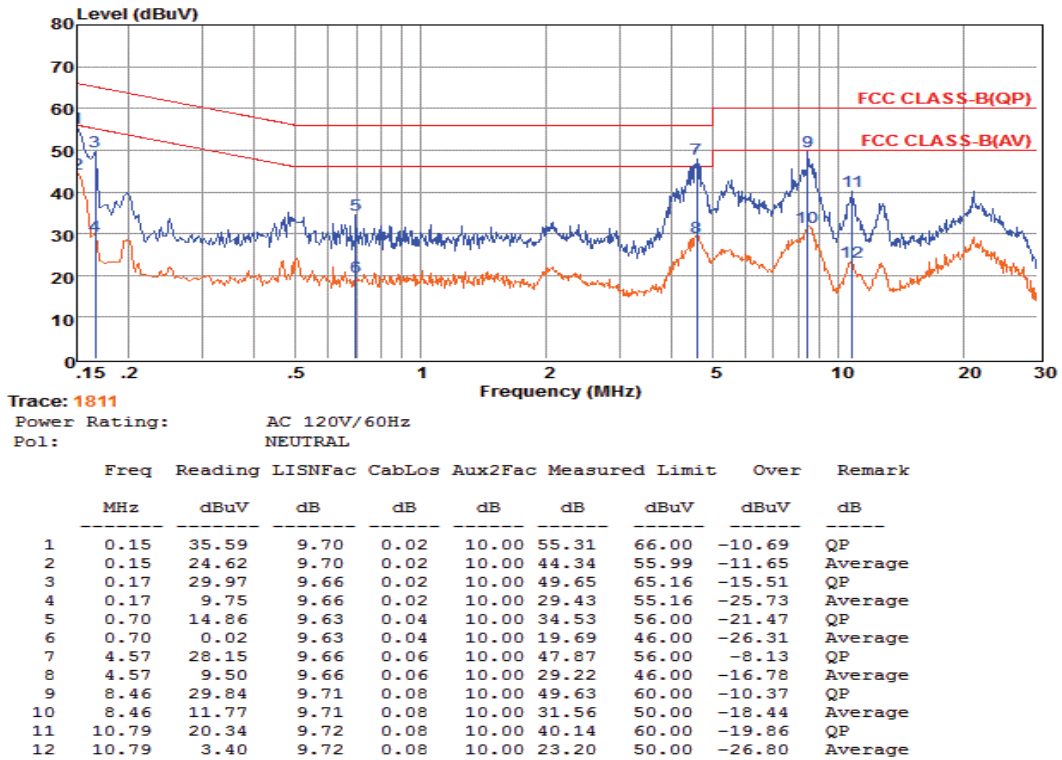


Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac+LISNFac
 2. The emission levels that are 20dB below the official limit are not reported.

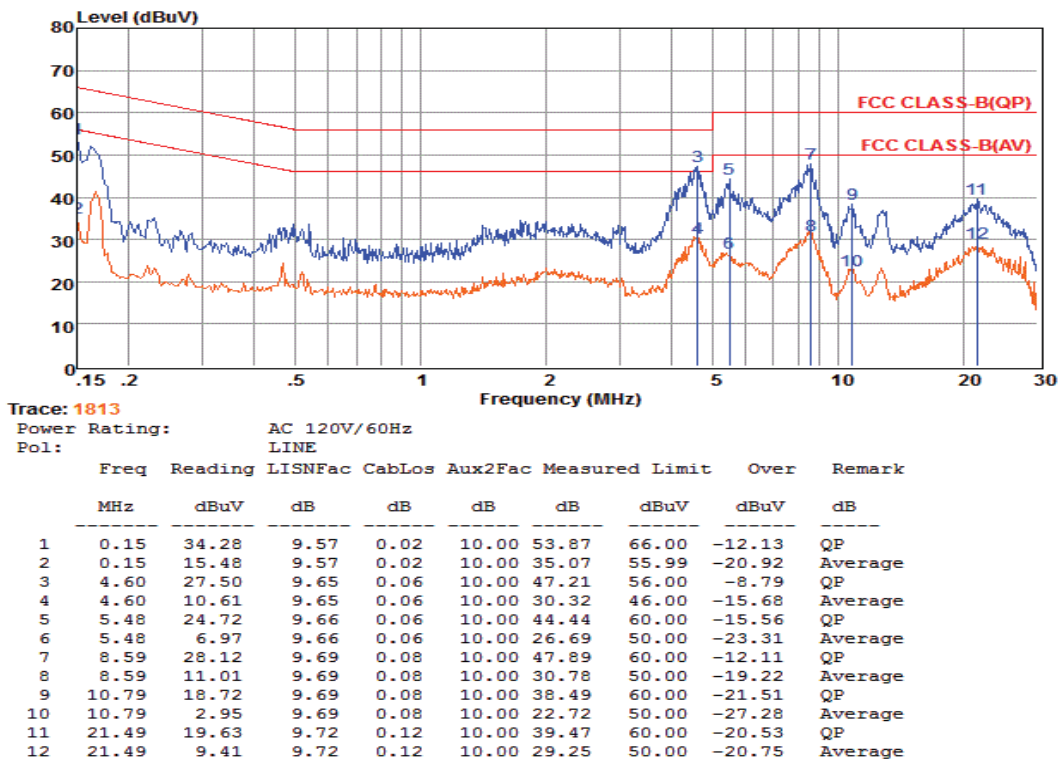

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac+LISNFac
 2. The emission levels that are 20dB below the official limit are not reported.

AC Conducted Emission of power adapter @ AC 240V/60Hz @ GFSK (worst case)

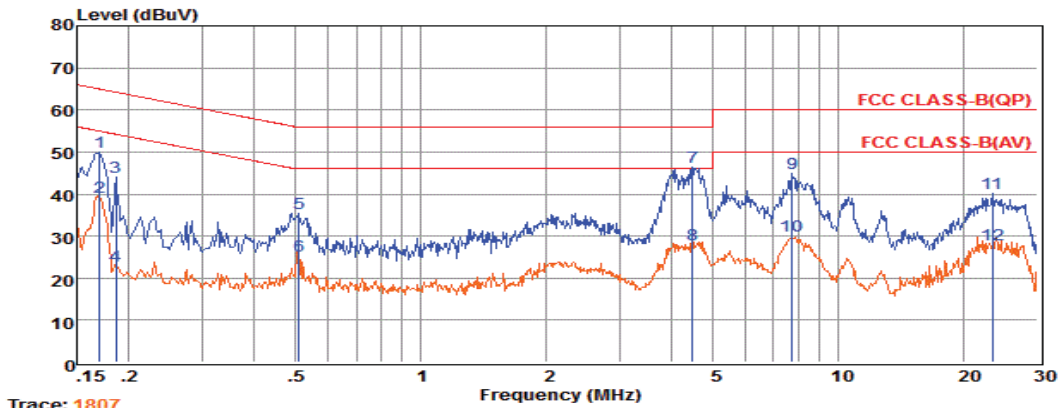


Trace: 1807

Power Rating: AC 240V/60Hz

Pol: LINE

| | Freq | Reading | LISNFac | CabLos | Aux2Fac | Measured | Limit | Over | Remark |
|----|-------|---------|---------|--------|---------|----------|-------|--------|---------|
| | MHz | dBuV | dB | dB | dB | dB | dBuV | dBuV | dB |
| 1 | 0.17 | 30.25 | 9.60 | 0.02 | 10.00 | 49.87 | 64.94 | -15.07 | QP |
| 2 | 0.17 | 19.64 | 9.60 | 0.02 | 10.00 | 39.26 | 54.94 | -15.68 | Average |
| 3 | 0.19 | 24.31 | 9.62 | 0.02 | 10.00 | 43.95 | 64.20 | -20.25 | QP |
| 4 | 0.19 | 3.24 | 9.62 | 0.02 | 10.00 | 22.88 | 54.19 | -31.31 | Average |
| 5 | 0.51 | 15.75 | 9.62 | 0.04 | 10.00 | 35.41 | 56.00 | -20.59 | QP |
| 6 | 0.51 | 5.58 | 9.62 | 0.04 | 10.00 | 25.24 | 46.00 | -20.76 | Average |
| 7 | 4.48 | 26.66 | 9.65 | 0.06 | 10.00 | 46.37 | 56.00 | -9.63 | QP |
| 8 | 4.48 | 8.10 | 9.65 | 0.06 | 10.00 | 27.81 | 46.00 | -18.19 | Average |
| 9 | 7.77 | 25.10 | 9.68 | 0.07 | 10.00 | 44.85 | 60.00 | -15.15 | QP |
| 10 | 7.77 | 10.24 | 9.68 | 0.07 | 10.00 | 29.99 | 50.00 | -20.01 | Average |
| 11 | 23.39 | 20.35 | 9.71 | 0.13 | 10.00 | 40.19 | 60.00 | -19.81 | QP |
| 12 | 23.39 | 8.00 | 9.71 | 0.13 | 10.00 | 27.84 | 50.00 | -22.16 | Average |

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac+LISNFac
 2. The emission levels that are 20dB below the official limit are not reported.

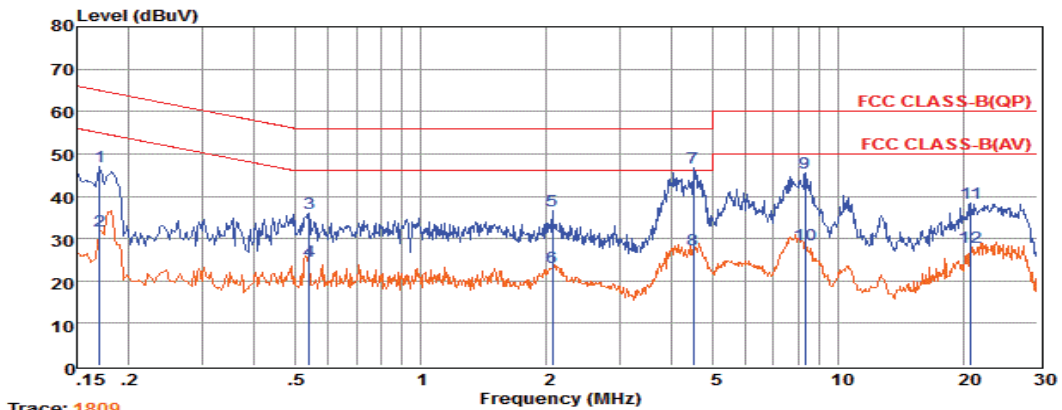

Trace: 1809

Power Rating: AC 240V/60Hz

Pol: NEUTRAL

| | Freq | Reading | LISNFac | CabLos | Aux2Fac | Measured | Limit | Over | Remark |
|----|-------|---------|---------|--------|---------|----------|-------|--------|---------|
| | MHz | dBuV | dB | dB | dB | dB | dBuV | dBuV | dB |
| 1 | 0.17 | 27.25 | 9.65 | 0.02 | 10.00 | 46.92 | 64.94 | -18.02 | QP |
| 2 | 0.17 | 12.05 | 9.65 | 0.02 | 10.00 | 31.72 | 54.94 | -23.22 | Average |
| 3 | 0.54 | 16.19 | 9.62 | 0.04 | 10.00 | 35.85 | 56.00 | -20.15 | QP |
| 4 | 0.54 | 5.12 | 9.62 | 0.04 | 10.00 | 24.78 | 46.00 | -21.22 | Average |
| 5 | 2.07 | 16.80 | 9.63 | 0.05 | 10.00 | 36.48 | 56.00 | -19.52 | QP |
| 6 | 2.07 | 3.63 | 9.63 | 0.05 | 10.00 | 23.31 | 46.00 | -22.69 | Average |
| 7 | 4.50 | 26.97 | 9.66 | 0.06 | 10.00 | 46.69 | 56.00 | -9.31 | QP |
| 8 | 4.50 | 7.72 | 9.66 | 0.06 | 10.00 | 27.44 | 46.00 | -18.56 | Average |
| 9 | 8.32 | 25.71 | 9.70 | 0.07 | 10.00 | 45.48 | 60.00 | -14.52 | QP |
| 10 | 8.32 | 8.75 | 9.70 | 0.07 | 10.00 | 28.52 | 50.00 | -21.48 | Average |
| 11 | 20.81 | 18.42 | 9.86 | 0.12 | 10.00 | 38.40 | 60.00 | -21.60 | QP |
| 12 | 20.81 | 7.87 | 9.86 | 0.12 | 10.00 | 27.85 | 50.00 | -22.15 | Average |

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac+LISNFac
 2. The emission levels that are 20dB below the official limit are not reported.


***Note: Pre-scan all modes and recorded the worst case results in this report (GFSK)

6.8. Band-edge measurements for radiated emissions

6.8.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.8.2. Test Setup Layout

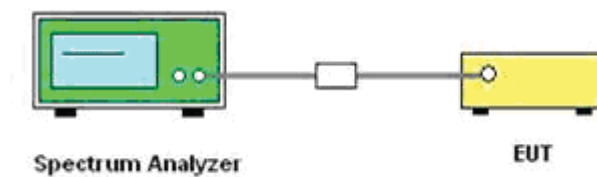

6.8.3. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of Spectrum Analyzer.

6.8.4. Test Procedures

According to KDB 412172 section 1.1 Field Strength Approach (linear terms):

$$\text{eirp} = p_t \times g_t = (E \times d)^2/30$$

Where:

p_t = transmitter output power in watts,

g_t = numeric gain of the transmitting antenna (unitless),

E = electric field strength in V/m,

d = measurement distance in meters (m).

$$\text{erp} = \text{eirp}/1.64 = (E \times d)^2/(30 \times 1.64)$$

Where all terms are as previously defined.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=1/B for Peak detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)

8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Compare the resultant electric field strength level to the applicable regulatory limit.
11. Perform radiated spurious emission test duress until all measured frequencies were complete.

6.8.5. Test Results

| GFSK – Non-Hopping | | | | | | | |
|---------------------------|-----------------------|--------------------|-------------------------------|--|----------|----------------|---------|
| Frequency (MHz) | Conducted Power (dBm) | Antenna Gain (dBi) | Ground Reflection Factor (dB) | Covert Radiated E Level At 3m (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
| 2310.000 | -51.088 | 2.0 | 0.0 | 46.142 | Peak | 74.00 | PASS |
| 2310.000 | -62.644 | 2.0 | 0.0 | 34.586 | Average | 54.00 | PASS |
| 2390.000 | -50.514 | 2.0 | 0.0 | 46.716 | Peak | 74.00 | PASS |
| 2390.000 | -62.169 | 2.0 | 0.0 | 35.061 | Average | 54.00 | PASS |
| 2483.500 | -49.660 | 2.0 | 0.0 | 47.570 | Peak | 74.00 | PASS |
| 2483.500 | -61.558 | 2.0 | 0.0 | 35.672 | Average | 54.00 | PASS |
| 2500.000 | -50.818 | 2.0 | 0.0 | 46.412 | Peak | 74.00 | PASS |
| 2500.000 | -62.025 | 2.0 | 0.0 | 35.205 | Average | 54.00 | PASS |

| $\pi/4$DQPSK – Non-Hopping | | | | | | | |
|--|-----------------------|--------------------|-------------------------------|--|----------|----------------|---------|
| Frequency (MHz) | Conducted Power (dBm) | Antenna Gain (dBi) | Ground Reflection Factor (dB) | Covert Radiated E Level At 3m (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
| 2310.000 | -52.839 | 2.0 | 0.0 | 44.391 | Peak | 74.00 | PASS |
| 2310.000 | -62.778 | 2.0 | 0.0 | 34.452 | Average | 54.00 | PASS |
| 2390.000 | -51.671 | 2.0 | 0.0 | 45.559 | Peak | 74.00 | PASS |
| 2390.000 | -62.333 | 2.0 | 0.0 | 34.897 | Average | 54.00 | PASS |
| 2483.500 | -50.496 | 2.0 | 0.0 | 46.734 | Peak | 74.00 | PASS |
| 2483.500 | -61.502 | 2.0 | 0.0 | 35.728 | Average | 54.00 | PASS |
| 2500.000 | -51.123 | 2.0 | 0.0 | 46.107 | Peak | 74.00 | PASS |
| 2500.000 | -62.054 | 2.0 | 0.0 | 35.176 | Average | 54.00 | PASS |


| 8DPSK – Non-Hopping | | | | | | | |
|----------------------------|-----------------------|--------------------|-------------------------------|--|----------|----------------|---------|
| Frequency (MHz) | Conducted Power (dBm) | Antenna Gain (dBi) | Ground Reflection Factor (dB) | Covert Radiated E Level At 3m (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
| 2310.000 | -51.414 | 2.0 | 0.0 | 45.816 | Peak | 74.00 | PASS |
| 2310.000 | -62.746 | 2.0 | 0.0 | 34.484 | Average | 54.00 | PASS |
| 2390.000 | -52.237 | 2.0 | 0.0 | 44.993 | Peak | 74.00 | PASS |
| 2390.000 | -62.261 | 2.0 | 0.0 | 34.969 | Average | 54.00 | PASS |
| 2483.500 | -49.987 | 2.0 | 0.0 | 47.243 | Peak | 74.00 | PASS |
| 2483.500 | -61.572 | 2.0 | 0.0 | 35.658 | Average | 54.00 | PASS |
| 2500.000 | -51.420 | 2.0 | 0.0 | 45.810 | Peak | 74.00 | PASS |
| 2500.000 | -61.820 | 2.0 | 0.0 | 35.410 | Average | 54.00 | PASS |

Remark:


- 1. Measured at difference Packet Type for each mode and recorded worst case for each mode.*
- 2. Worst case data at DH5 for GFSK, $\pi/4$ DQPSK, 8DPSK modulation type;*
- 3. Measured at Hopping and Non-Hopping mode, recorded worst at Non-Hopping mode.*
- 4. The other emission levels were very low against the limit.*
- 5. The average measurement was not performed when the peak measured data under the limit of average detection.*
- 6. Set the Spectrum/receiver as RBW=1MHz/VBW=330Hz/Sweep time=Auto/Detector=Peak when measured the data of average.*

Band-edge measurements for radiated emissions


GFSK

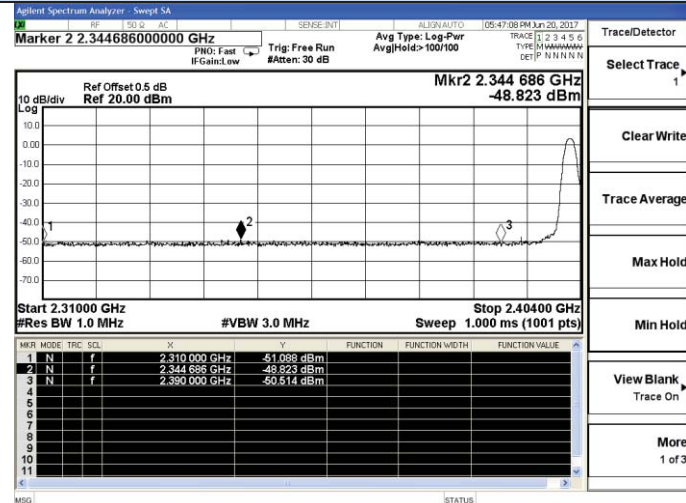


π/4DQPSK

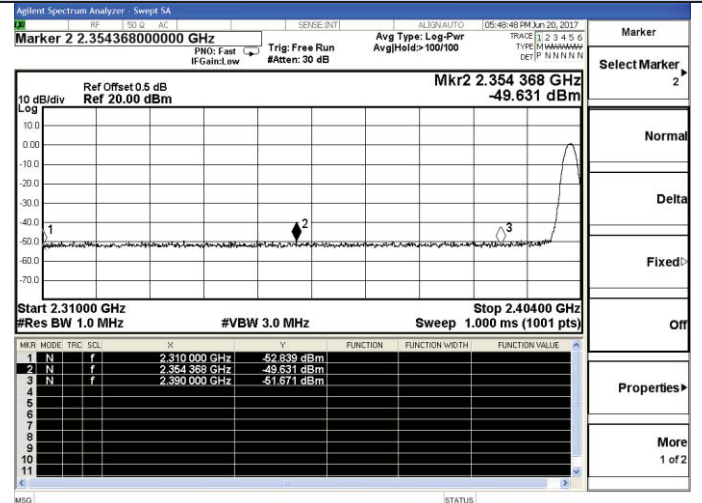


Channel 0 / 2402 MHz – Non-Hopping – Peak

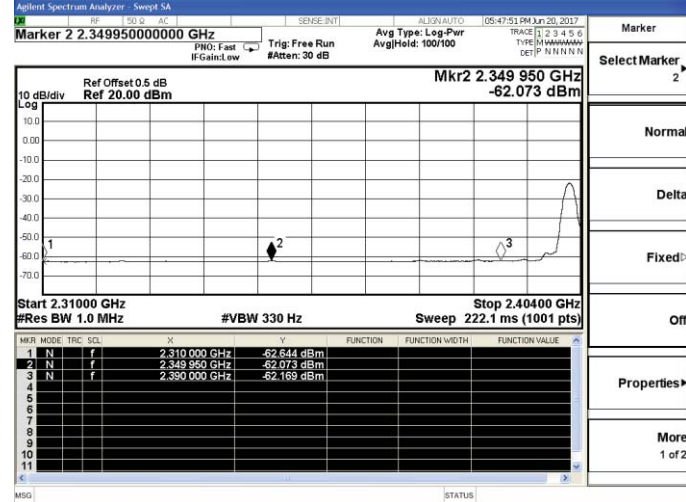


Channel 0 / 2402 MHz – Non-Hopping – Peak

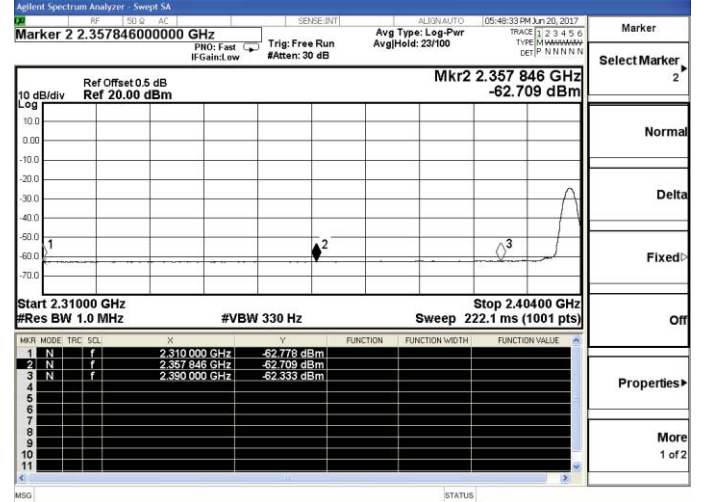

Channel 0 / 2402 MHz – Non-Hopping – Average


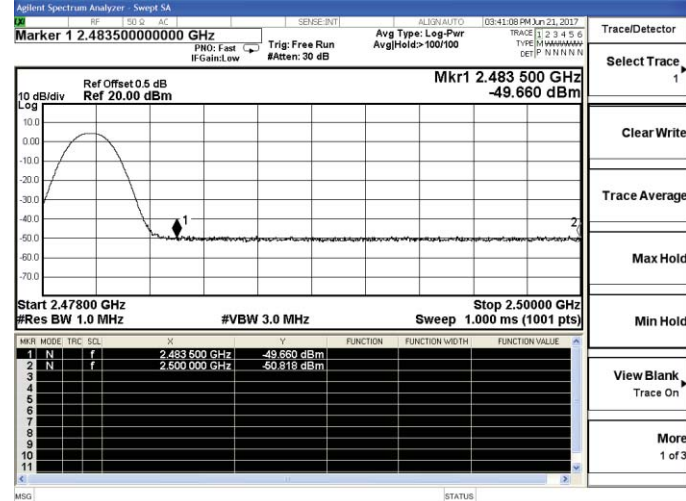


Channel 0 / 2402 MHz – Non-Hopping – Average

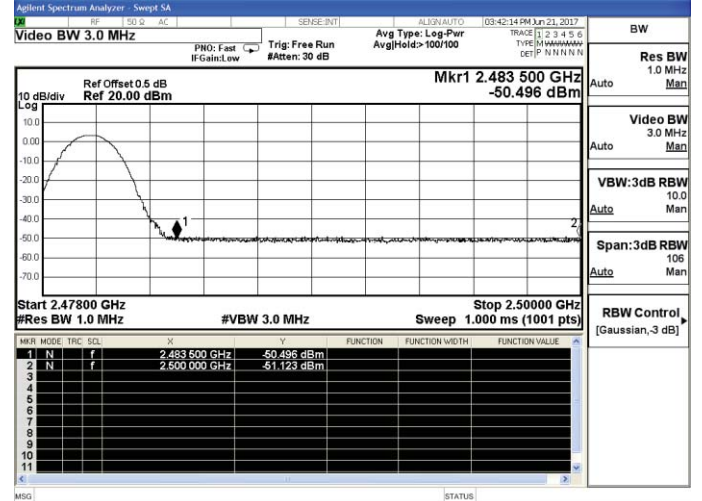



Channel 78 / 2480 MHz – Non-Hopping – Peak

Channel 78 / 2480 MHz – Non-Hopping – Peak

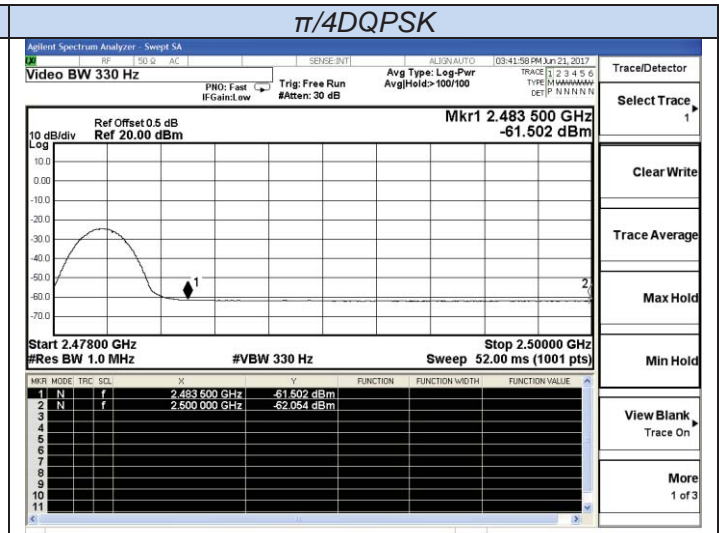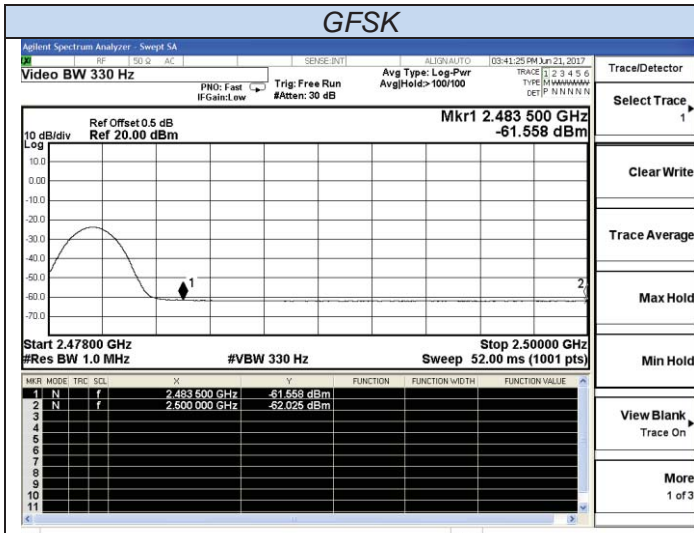



Channel 78 / 2480 MHz – Non-Hopping – Average

Channel78 / 2480 MHz – Non-Hopping – Average

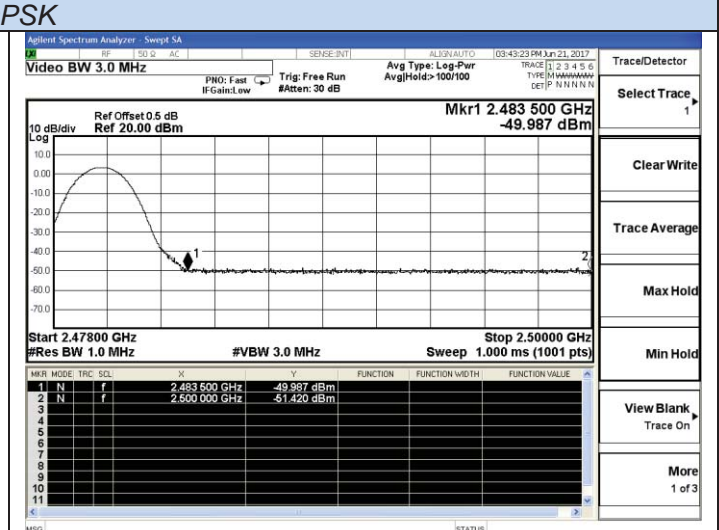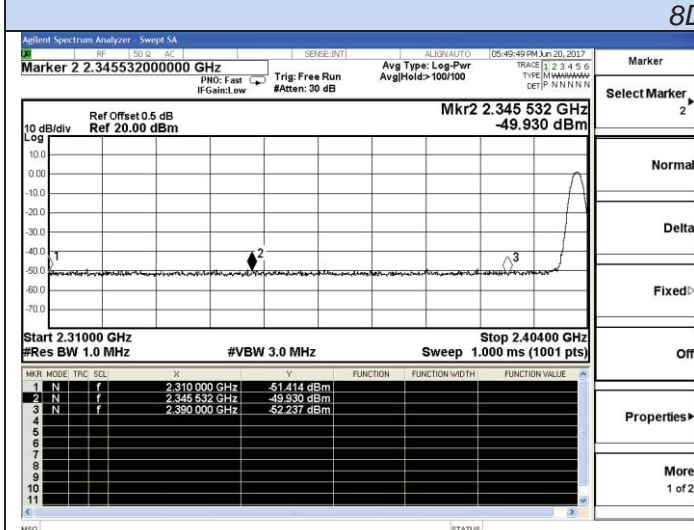

Channel 0 / 2402 MHz – Non-Hopping – Peak

Channel 78 / 2480 MHz – Non-Hopping – Peak

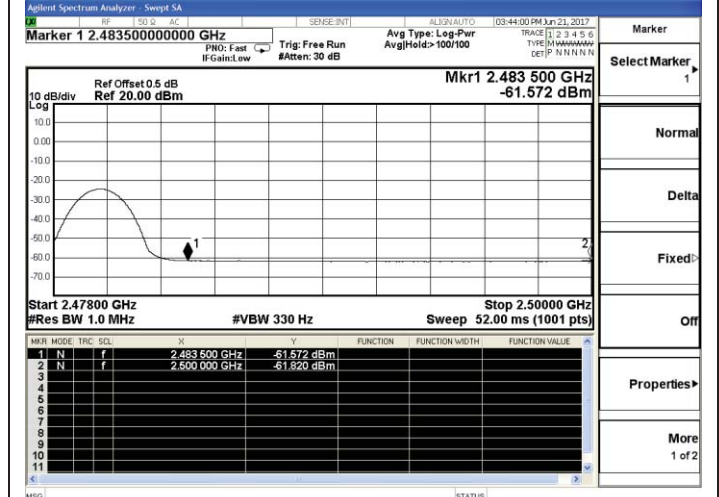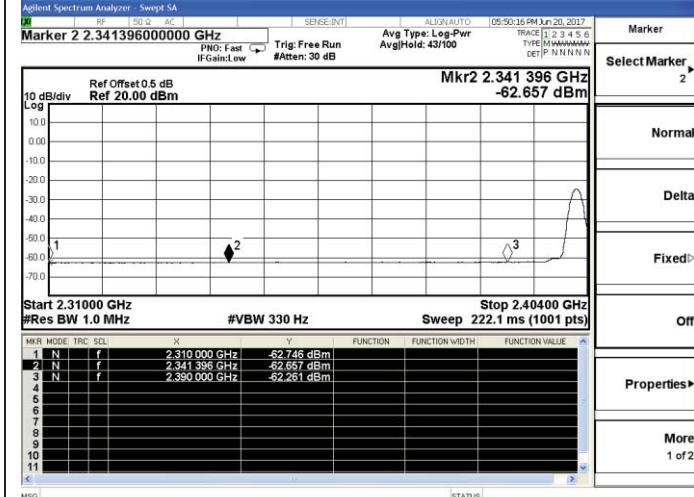

Channel 0 / 2402 MHz – Non-Hopping – Average

Channel78 / 2480 MHz – Non-Hopping – Average

6.9. Pseudorandom frequency hopping sequence

6.9.1 Standard Applicable


For 47 CFR Part 15C sections 15.247 (a) (1) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

6.9.2 EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros:8(non-inverted signal)

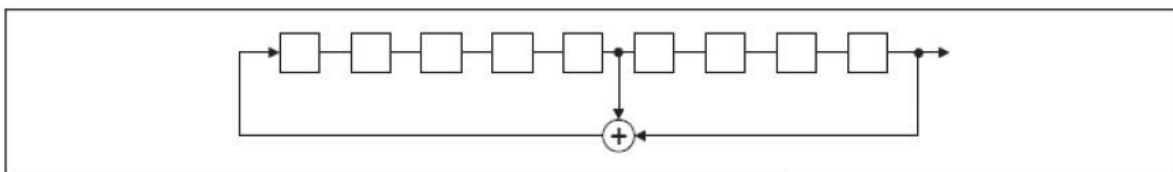

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

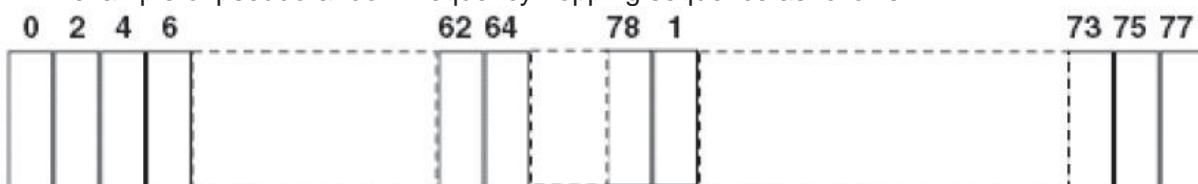

Each frequency used equally one the average by each transmitter.
The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

6.10. ANTENNA REQUIREMENT

6.10.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

6.10.2 Antenna Connected Construction

6.10.2.1. Standard Applicable

According to § 15.203 & RSS-Gen, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.10.2.2. Antenna Connector Construction

The directional gains of antenna used for transmitting is 2.0dBi, and the antenna is a PCB antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

6.10.2.3. Results: Compliance.

7. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

8. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

9. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----