

Dates of Tests: July 12 ~ July 18, 2016
Test Report S/N: LR500111607B
Test Site : LTA CO., LTD.

CERTIFICATION OF COMPLIANCE

FCC ID.

ORI-INT-NODE-HP

APPLICANT

KMW Inc.

Equipment Class	:	Digital Transmission System (DTS)
Manufacturing Description	:	Zigbee module
Manufacturer	:	KMW Inc.
Model name	:	INT NODE HP
Host model name	:	SFX600-H500158Z
Test Device Serial No.:	:	Identical prototype
Rule Part(s)	:	FCC Part 15.247 Subpart C ; ANSI C-63.10-2013
Frequency Range	:	2405 MHz ~ 2480 MHz
Max. Output Power	:	Max 21.34 dBm – Conducted
Data of issue	:	July 22, 2016

This test report is issued under the authority of:



Yong-Cheol, Wang / Manager

The test was supervised by:



Jung-won, Seo / Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION	-----	3
2. INFORMATION ABOUT TEST ITEM	-----	4
3. TEST REPORT	-----	5
3.1 SUMMARY OF TESTS	-----	5
3.2 TECHNICAL CHARACTERISTICS TEST	-----	6
3.2.1 6 dB BANDWIDTH	-----	6
3.2.2 PEAK OUTPUT POWER	-----	9
3.2.3 POWER SPECTRAL DENSITY	-----	12
3.2.4 BAND EDGE	-----	15
3.2.5 CONDUCTED SPURIOUS EMISSIONS	-----	18
3.2.6 RADIATED SPURIOUS EMISSIONS	-----	21
3.2.7 AC CONDUCTED EMISSIONS	-----	33
 APPENDIX		
APPENDIX TEST EQUIPMENT USED FOR TESTS	-----	41

1. General information

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2016-09-30	ECT accredited Lab.
RRA	KOREA	KR0049	-	EMC accredited Lab.
FCC	U.S.A	610755	2017-04-21	FCC filing
FCC	U.S.A	649054	2017-04-13	FCC CAB
VCCI	JAPAN	R2133(10 m), C2307	2017-06-21	VCCI registration
VCCI	JAPAN	T-2009	2016-12-23	VCCI registration
VCCI	JAPAN	G-563	2018-12-13	VCCI registration
IC	CANADA	5799A-1	UPDATING	IC filing
KOLAS	KOREA	NO.551	2017-01-08	KOLAS accredited Lab.

2. Information about test item

2-1 Client & Manufacturer

Company name : KMW Inc.
 Address : 183-6, Yeongcheon-ro, Dongtan-myeon, Hwaseong-si, Gyeonggi-do,
 Republic of Korea
 Tel / Fax : TEL No : +82-31-370-8833 / FAX No : +82-31-370-8153

2-2 Manufacturers

Company name : KMW Inc.
 Address : 1942, Wireseong-ro, Ipjang-myeon, Seobuk-gu, Cheonan-si,
 Chungcheongnam-do, Republic of Korea

Company name : KMW VIETNAM CO.,LTD
 Address : Lot C, Dong Van I Industrial Zone, Yen Bac Commune, Duy Tien
 District, Ha Nam Province, Viet Nam

2-3 Equipment Under Test (EUT)

Trade name : KMW Inc.
 Model name : INT NODE V0.2 HP
 Host model name : SFX600-H500158Z
 Serial number : Identical prototype
 Date of receipt : July 11, 2016
 EUT condition : Pre-production, not damaged
 Antenna type : IFA antenna - Max Gain 2.13 dBi
 Frequency Range : 2405 MHz ~ 2480 MHz
 RF output power : Max 21.34 dBm – Conducted
 Number of channels : 16
 Type of Modulation : Direct Sequence Spread Spectrum(DSSS)
 Power Source : 15 Vdc
 Firmware Version : V1.0.0

2-3 Tested frequency

Zigbee	LOW	MID	HIGH
Frequency (MHz)	2405	2440	2480

2-4 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
Notebook	CR720	MS-1736	MSI

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)	Transmitter Peak Output Power	< 1 Watt		C
15.247(d)	Transmitter Power Spectral Density	< 8 dBm @ 3 kHz		C
15.247(d)	Band Edge	> 20 dBc		C
15.209	Field Strength of Harmonics	Emission	Radiated	C
15.207	AC Conducted Emissions	Emissions	Conducted	C
15.203	Antenna requirement	-	-	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

→ Antenna Requirement

The KMW Inc. FCC ID: ORI-INT-NODE-HP unit complies with the requirement of §15.203.

The antenna type is IFA Antenna

The sample was tested according to the following specification:

*FCC Parts 15.247; ANSI C-63.10-2013

*FCC KDB Publication No. 558074 v03r05

*FCC TCB Workshop 2012, April

3.2 Technical Characteristics Test

3.2.1 6 dB Bandwidth

Procedure:

The bandwidth at 6 dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

Span = 5 MHz

VBW = 100 kHz (VBW $\geq$ RBW)

Sweep = auto

Trace = max hold

Detector function = peak

Measurement Data : **Complies**

Frequency (MHz)	Test Results	
	Measured Bandwidth (MHz)	Result
2405	1.34	Complies
2440	1.32	Complies
2480	1.35	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:

6 dB Bandwidth > 500 kHz

Measurement Setup



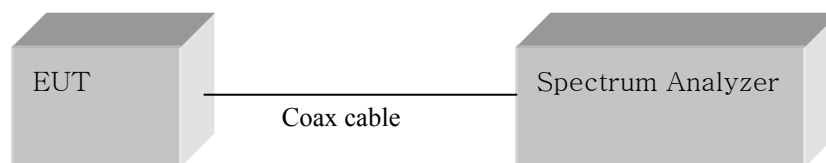


Figure 1: Measurement setup for the carrier frequency separation


Low Channel

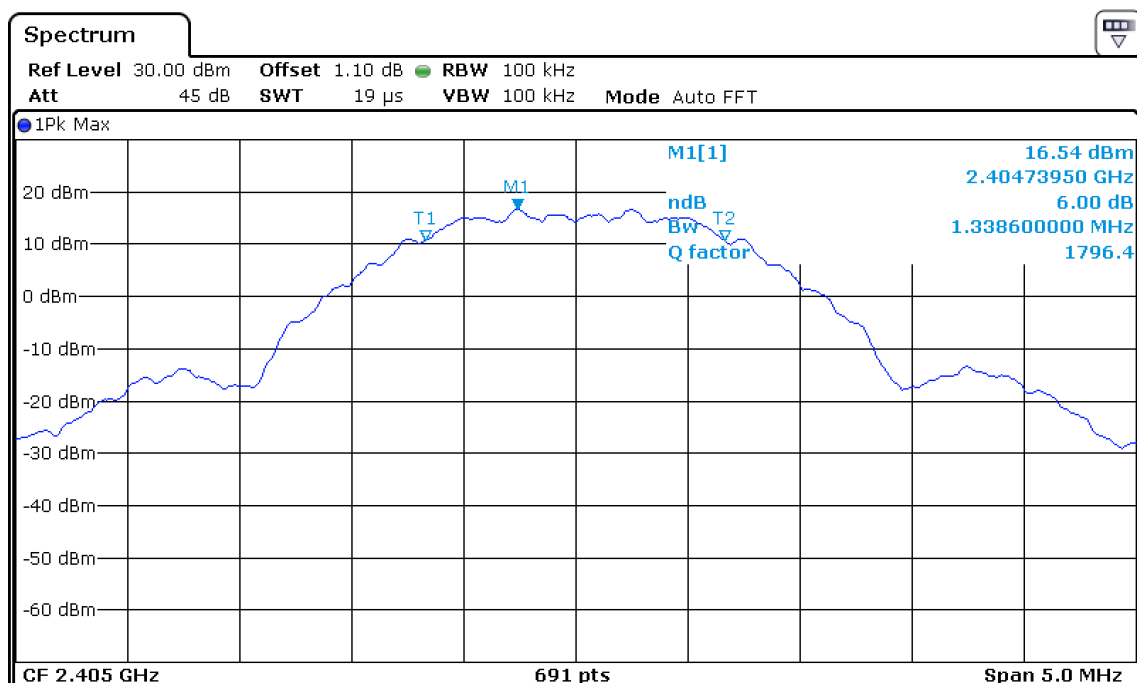

Middle Channel

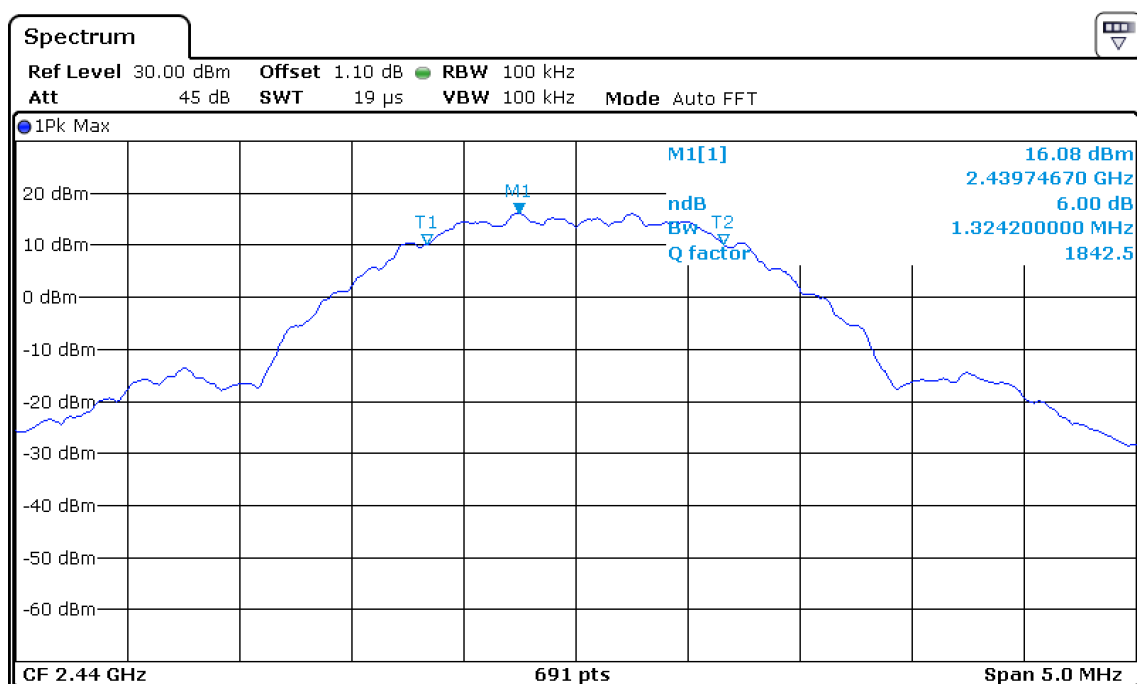

High Channel

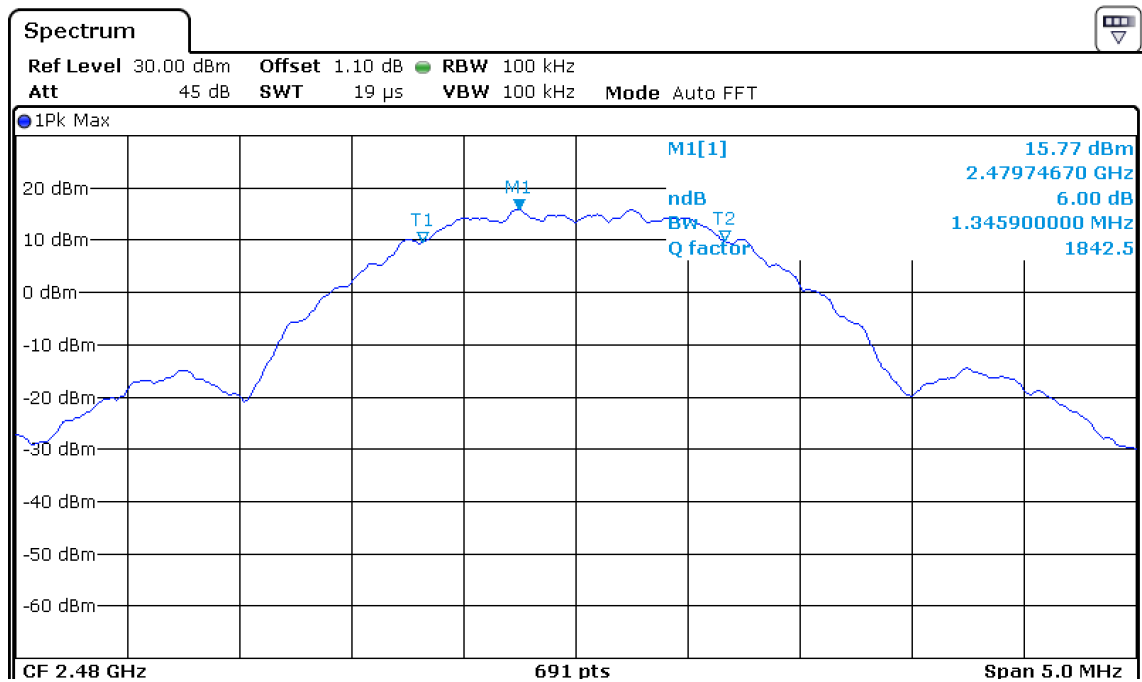

3.2.2 Peak Output Power Measurement

Procedure:

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT. The spectrum analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth. The EUT was operating in transmit mode at the appropriate center frequency.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 1MHz

Span = auto

VBW = 1MHz (VBW $\geq$ RBW)

Sweep = auto

Detector function = peak

Measurement Data (Port 1) : **Complies**

Frequency (MHz)	Test Results		
	dBm	W	Result
2405	21.34	0.136	Complies
2440	20.85	0.122	Complies
2480	20.56	0.114	Complies

- See next pages for actual measured spectrum plots.


Minimum Standard:

Peak output power	< 1 W
-------------------	-------


Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


Low Channel

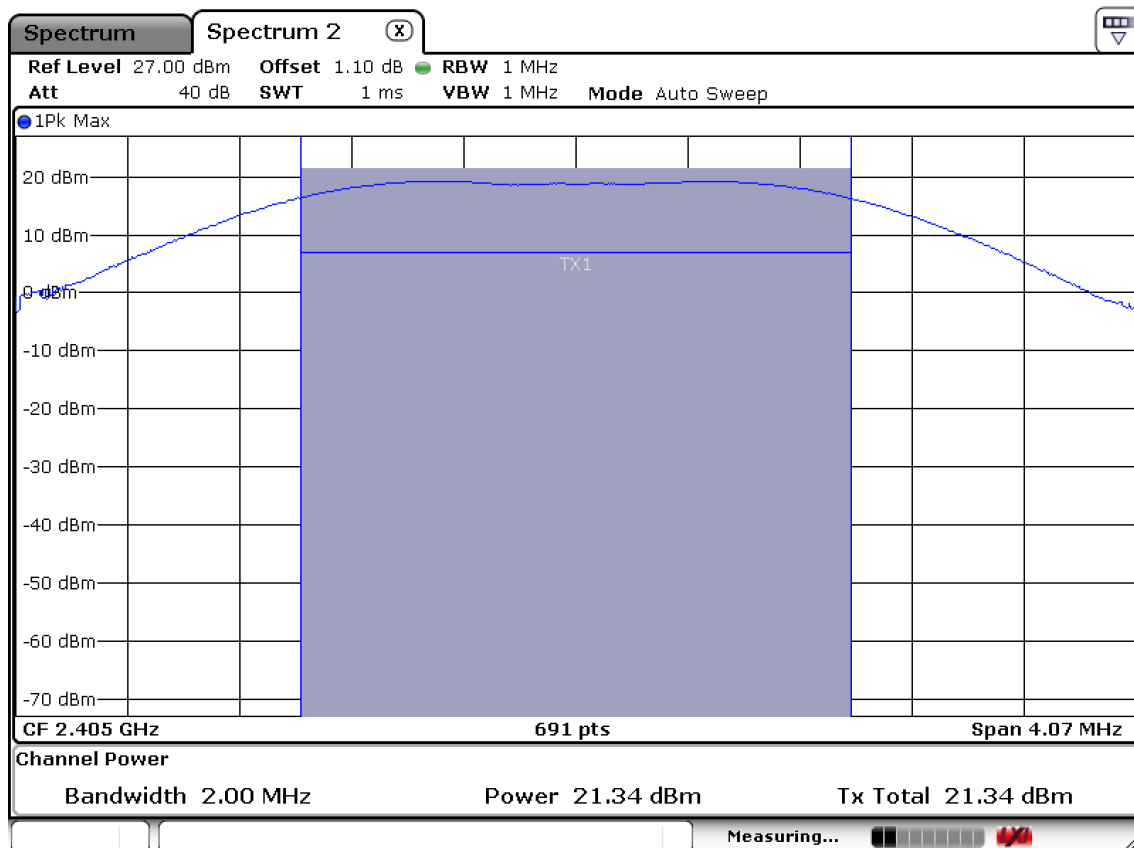

Middle Channel

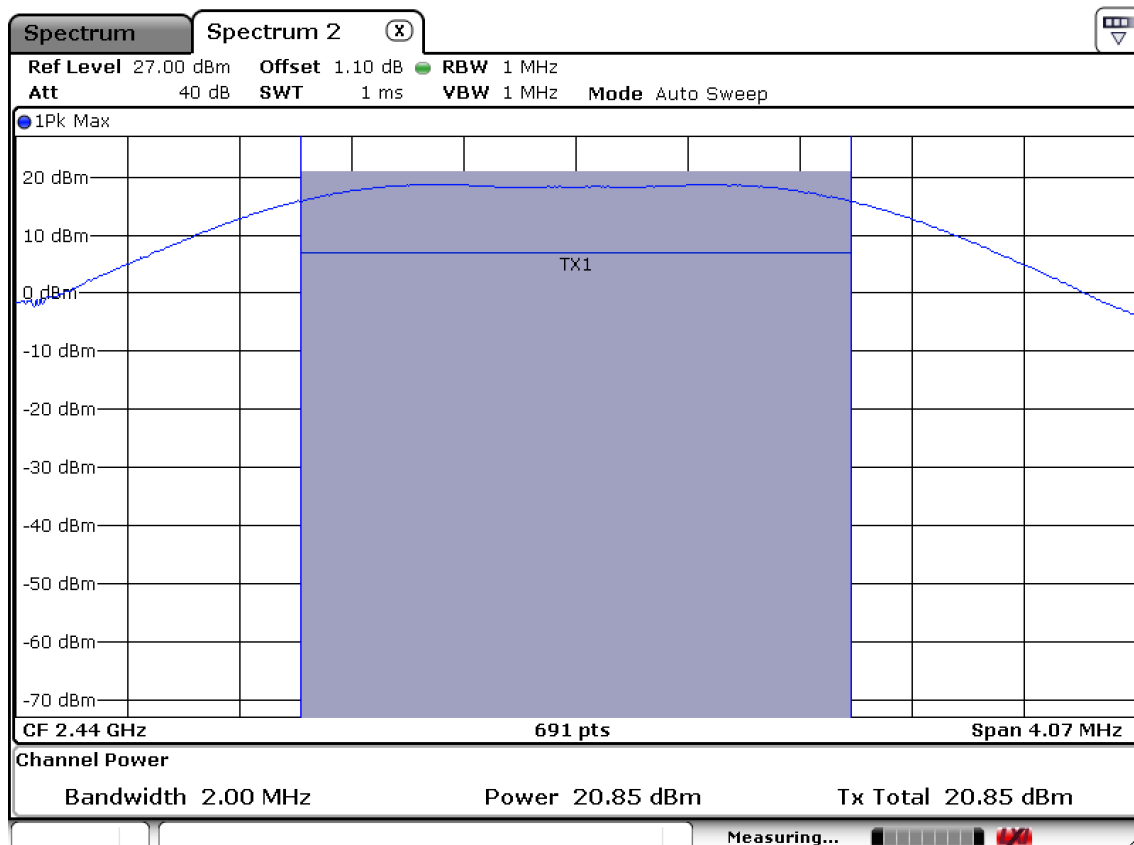

High Channel

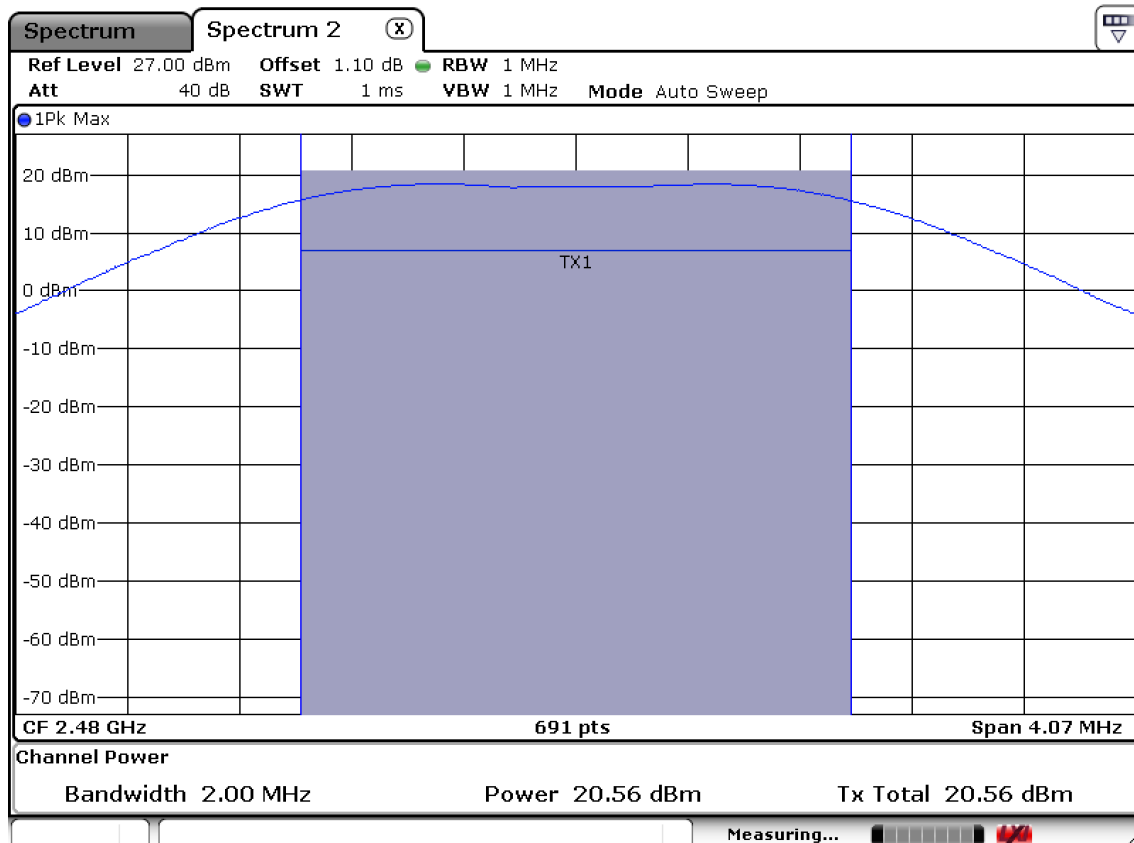

3.2.3 Power Spectral Density

Procedure:

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The spectrum analyzer is set to:

RBW = 3 kHz

Span = 300 kHz

VBW = 3 kHz

Sweep = auto

Detector function = peak

Trace = max hold

Measurement Data (Port 1) : **Complies**

Frequency (MHz)	Test Results	
	dBm	Result
2405	6.27	Complies
2440	7.84	Complies
2480	7.52	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:


Power Spectral Density	< 8 dBm @ 3 kHz BW
------------------------	--------------------

Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

Power Density Measurement


Low Channel

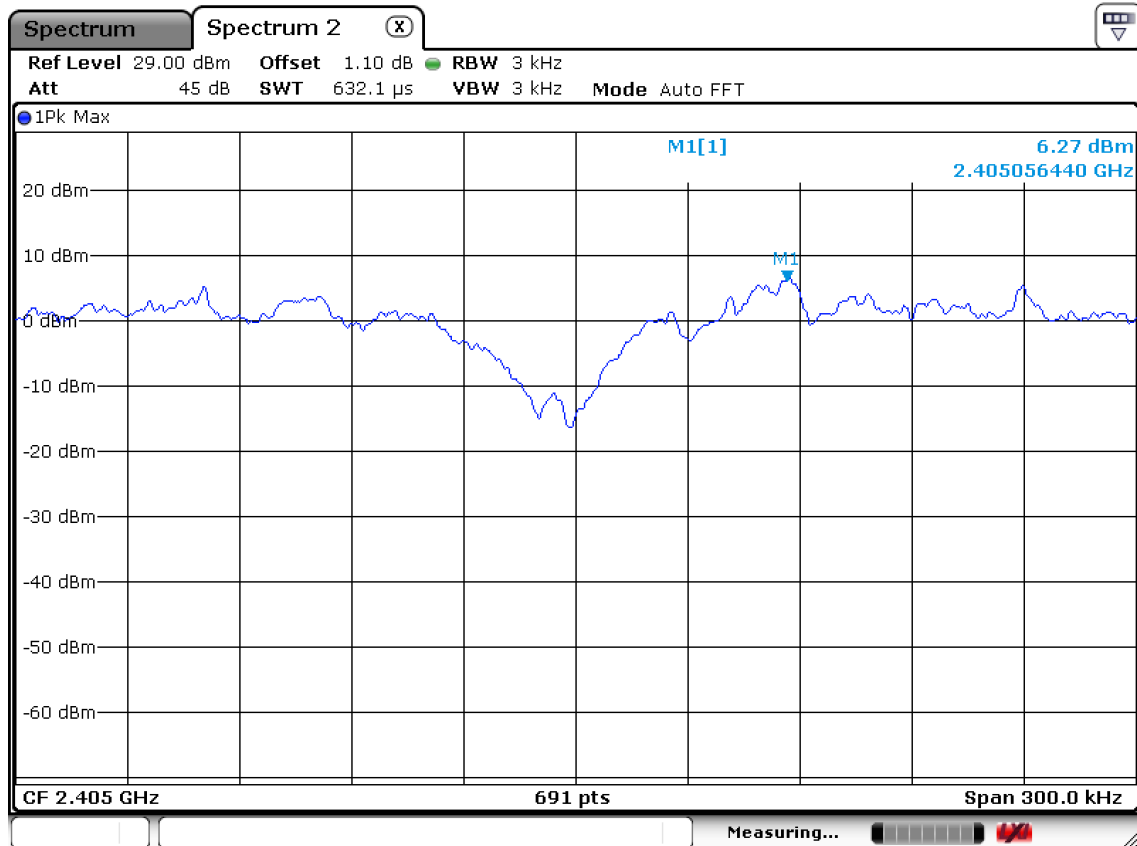

Middle Channel

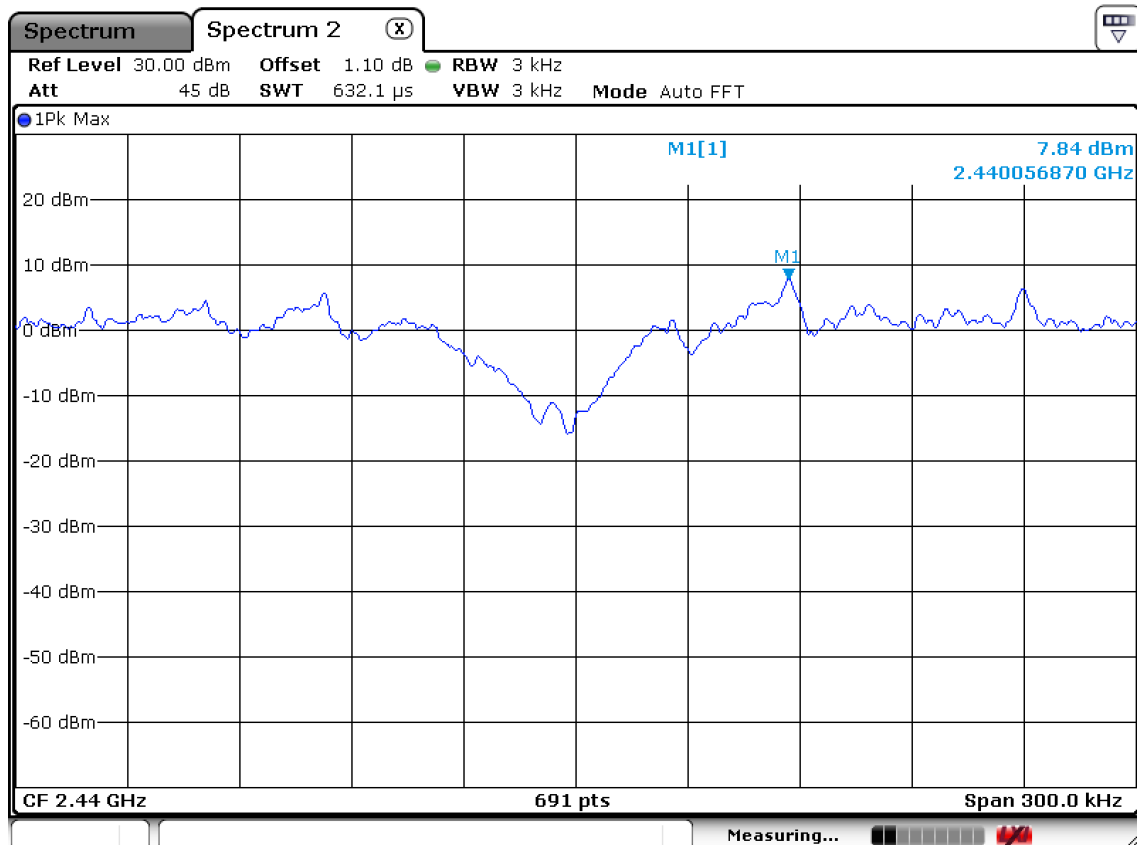

High Channel

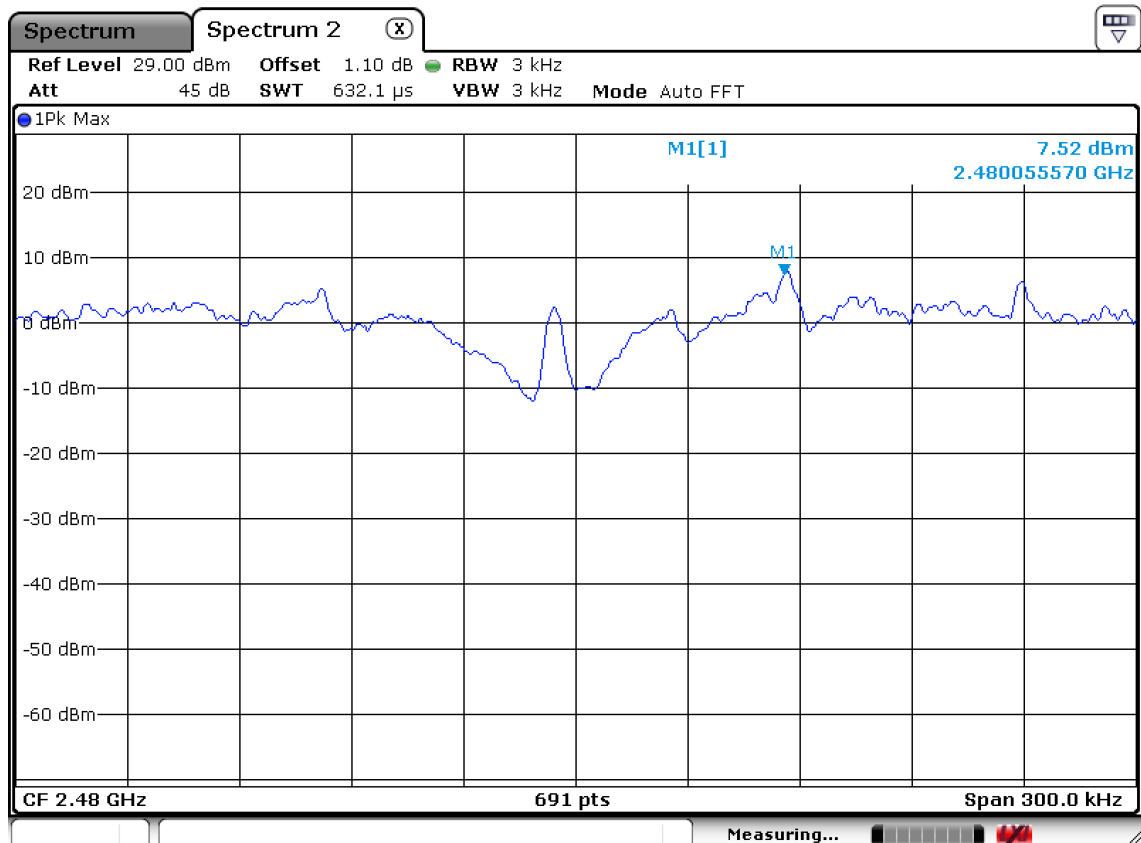

3.2.4 Band - edge

Procedure:

The bandwidth at 20 dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 100 kHz

Span = 40 MHz

Detector function = peak

Trace = max hold

Sweep = auto

Radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a)

The spectrum analyzer is set to:

Center frequency = the highest, the lowest channels

PEAK:

RBW = VBW = 1 MHz, Sweep=Auto

Average:

RBW = 1 MHz, VBW=10 Hz, Sweep=Auto

Measurement Distance:

3 m

Polarization:


Horizontal / Vertical

Measurement Data: Complies


- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	> 20 dBc
--------------------------	----------

Band edge Lower edge

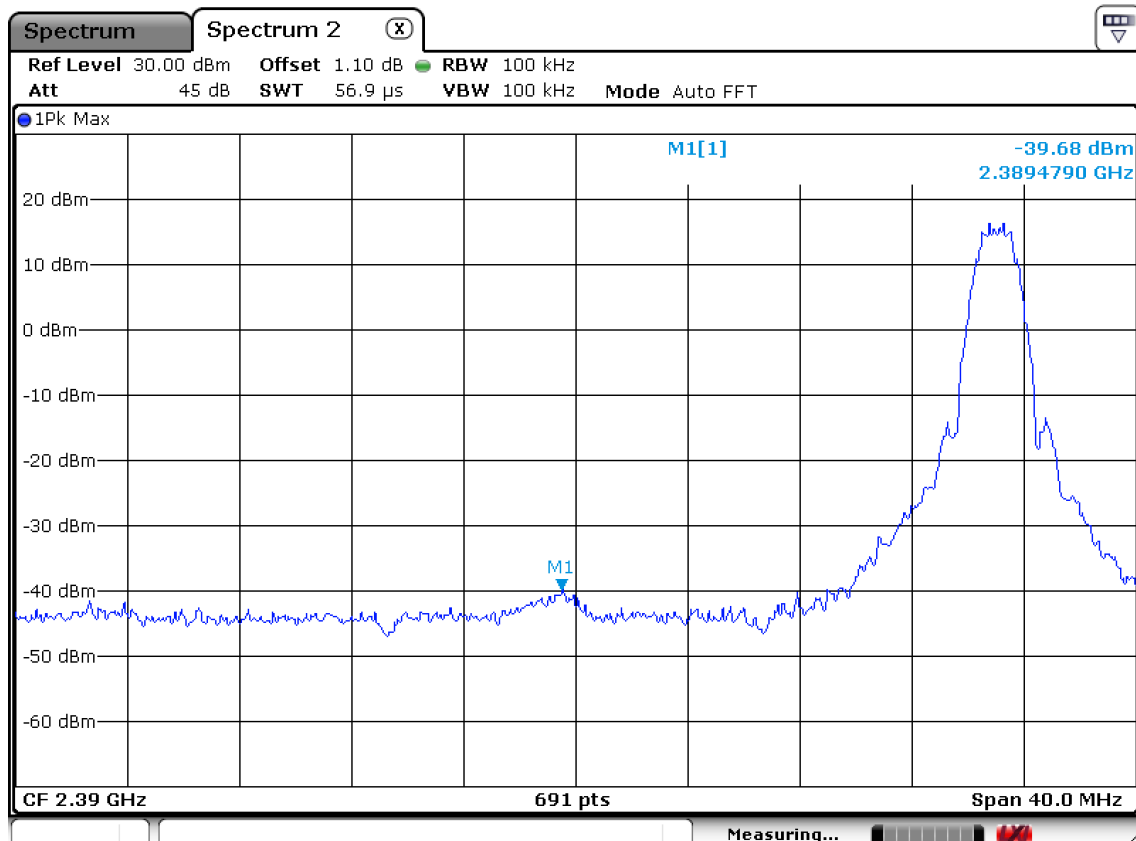

Upper edge

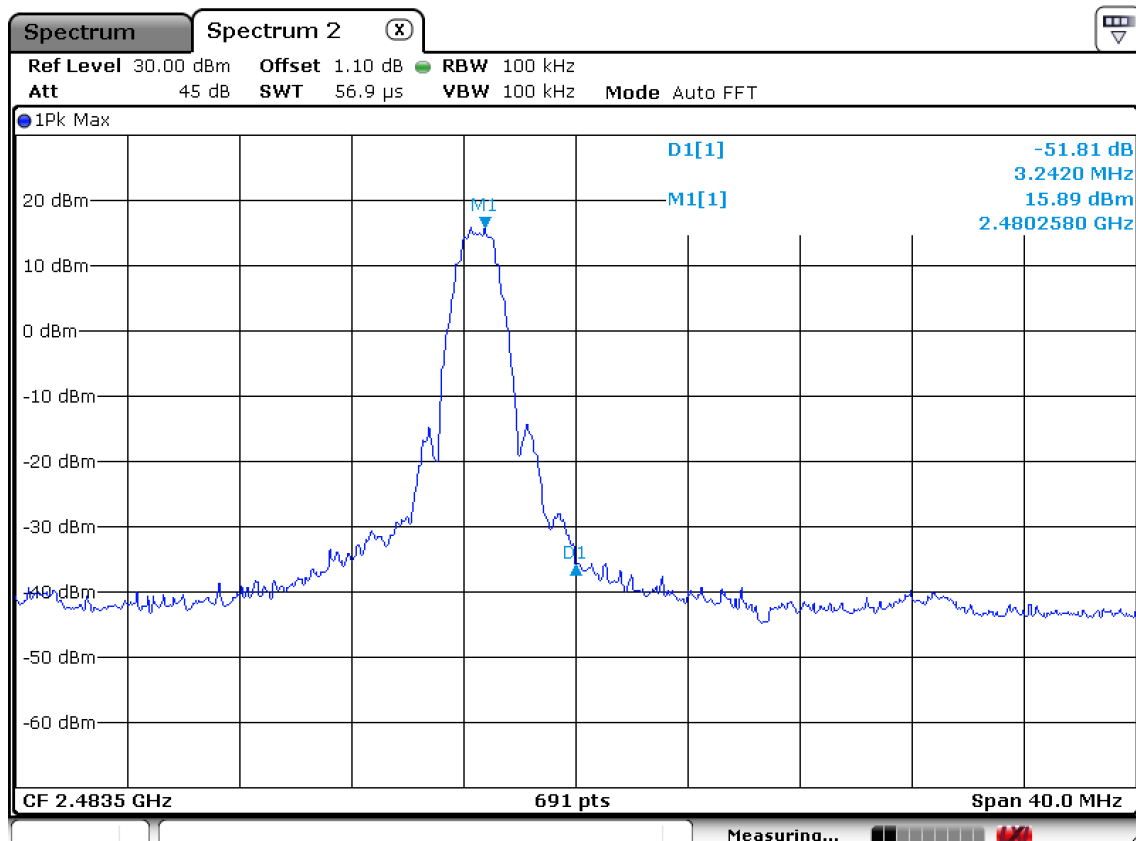

Radiated Band-edges in the restricted band 2310-2390 MHz measurement

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp. Gain + Cable Loss						
2371.7	32.0	45.7	V	27.86	22.92	54.0	74.0	36.94	50.64	17.06	23.36

Radiated Band-edges in the restricted band 2483.5-2500 MHz measurement

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp. Gain + Cable Loss	AV / Peak		AV / Peak		AV / Peak	
2483.5	44.26	61.07	V	27.86	22.92	54.0	74.0	49.2	67.94	4.8	6.06

Note : This EUT was tested in 3 orthogonal positions and the worst-case data was presented

3.2.5 Conducted Spurious Emissions

Procedure:

The test follows KDB558074. The conducted spurious emissions were measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, set the marker on the peak of any spurious emission recorded.

The spectrum analyzer is set to:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions

RBW = 100 kHz

Sweep = auto

VBW = 100 kHz

Detector function = peak

Trace = max hold

Measurement Data: Complies

- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.


Minimum Standard:	> 20 dBc
--------------------------	----------

Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

Unwanted Emission – Low Channel


Frequency Range = 30 MHz ~ 26.5 GHz

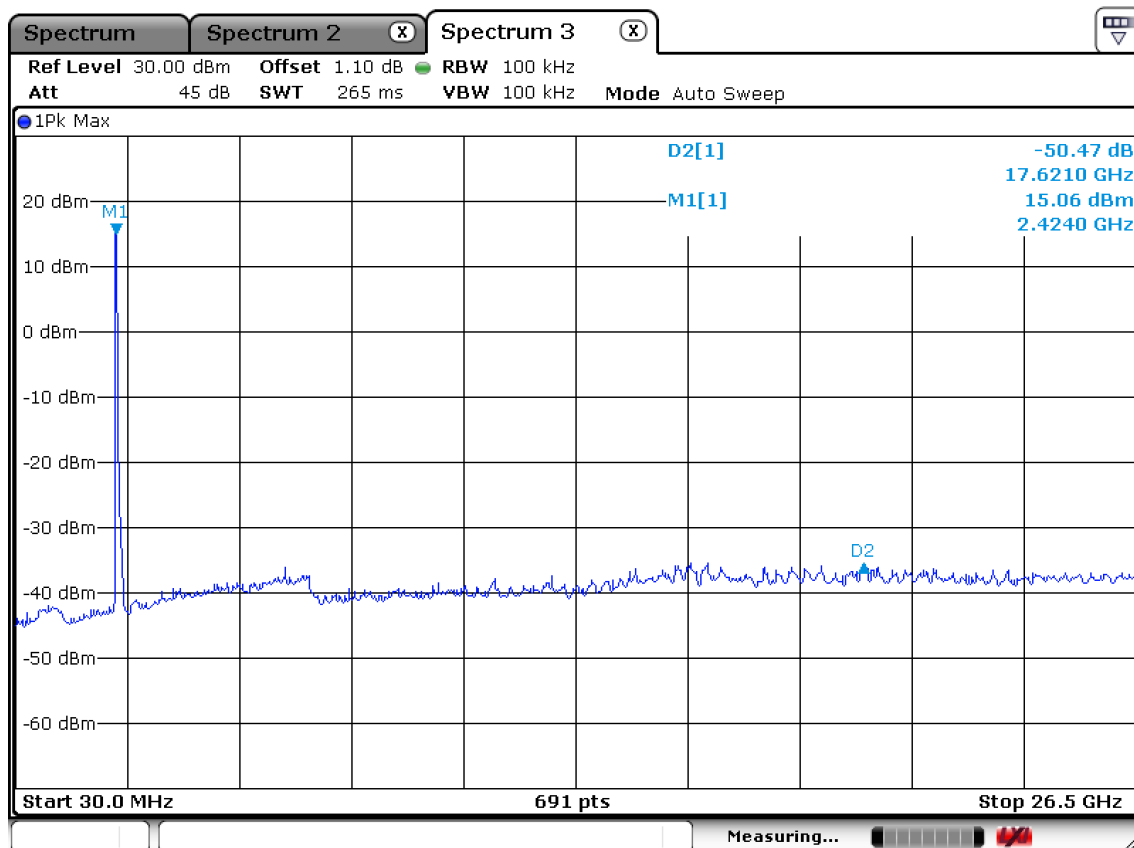

Middle Channel

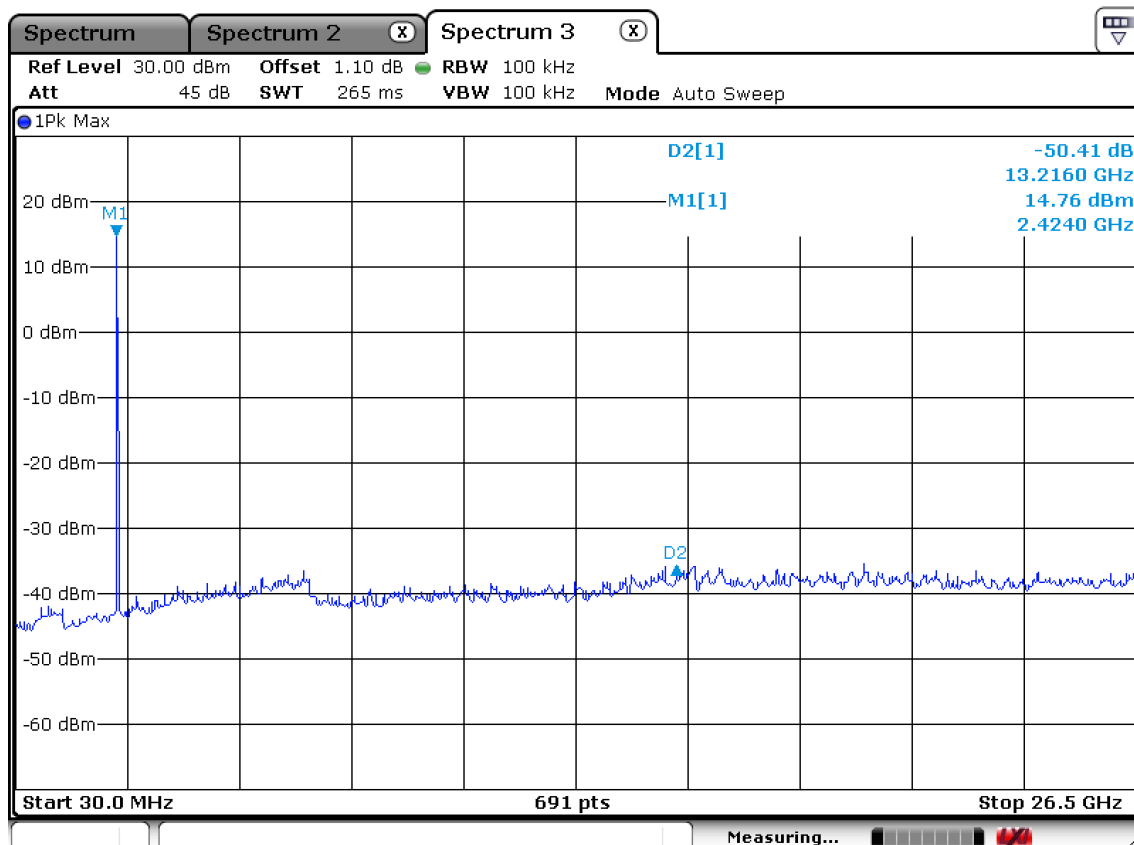

High Channel

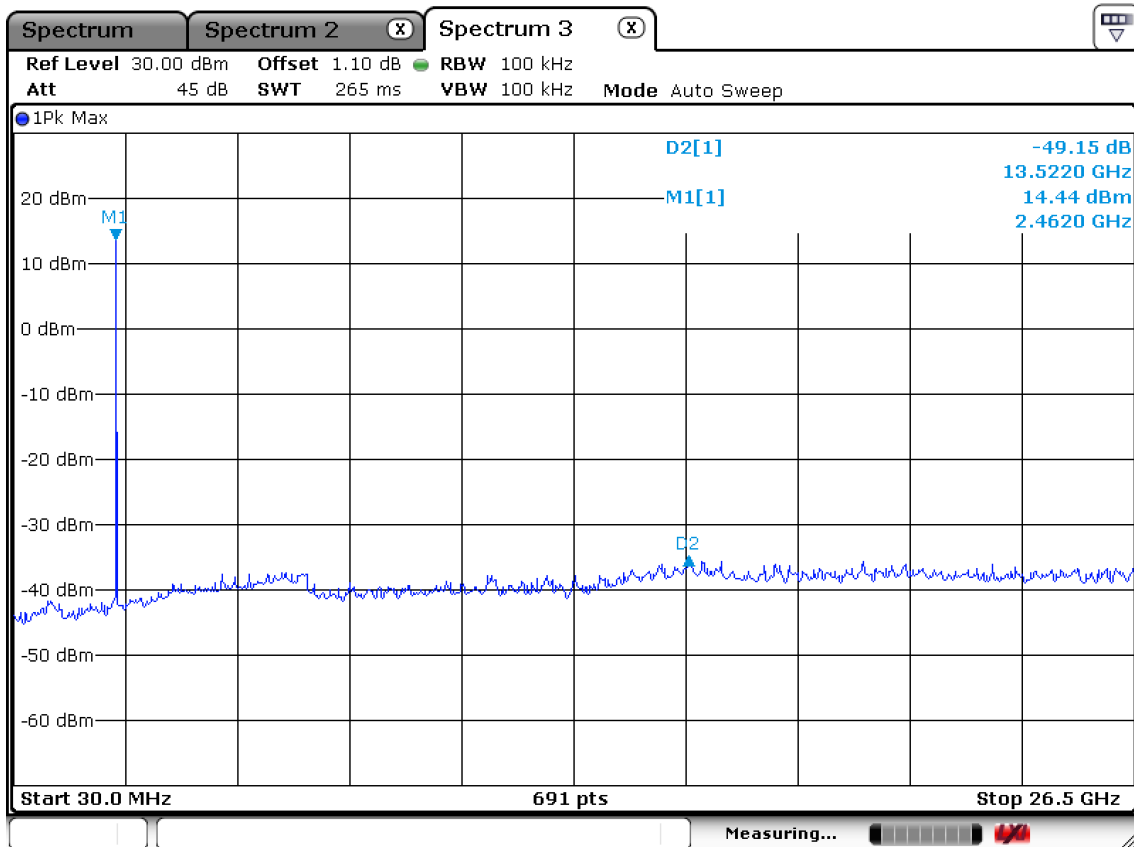

3.2.6 Radiated Spurious Emissions

Procedure:

The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 9 kHz ~ 10th harmonic.

RBW = 100 kHz (30 MHz ~ 1 GHz)

= 1 MHz (1 GHz ~ 10th harmonic)

Span = 100 MHz


Trace = max hold

VBW $\geq$ RBW


Detector function = peak

Sweep = auto


below 30 MHz

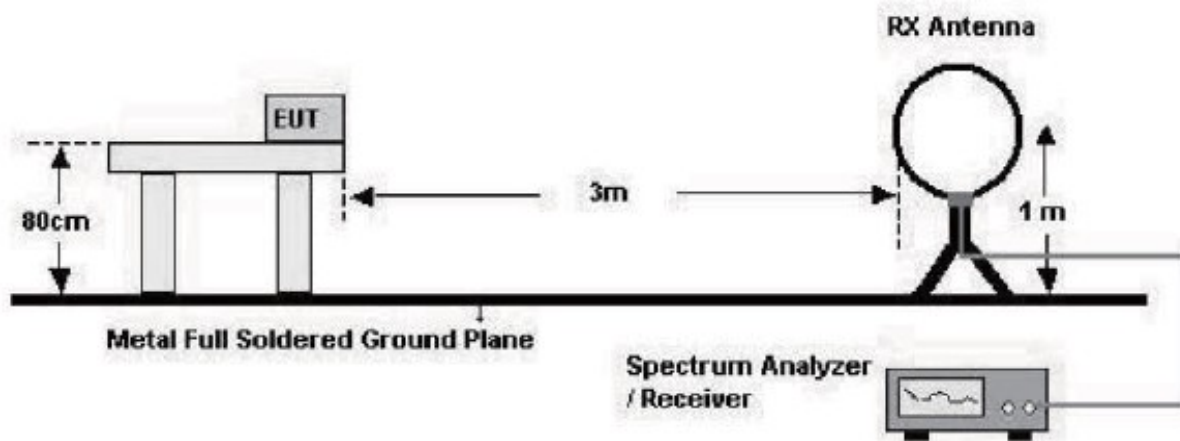

below 1 GHz (30 MHz to 1 GHz)

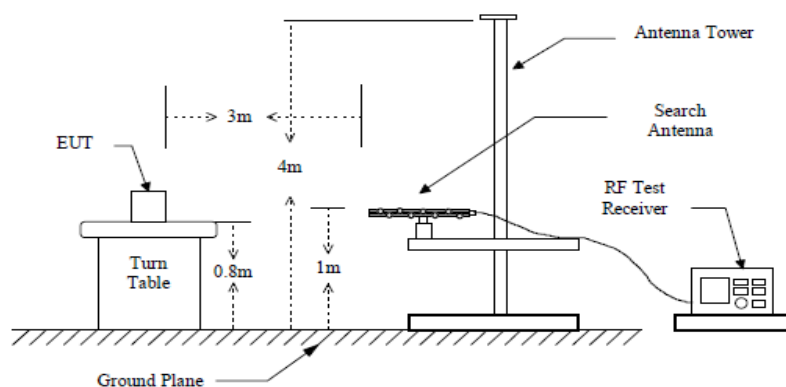

above 1 GHz

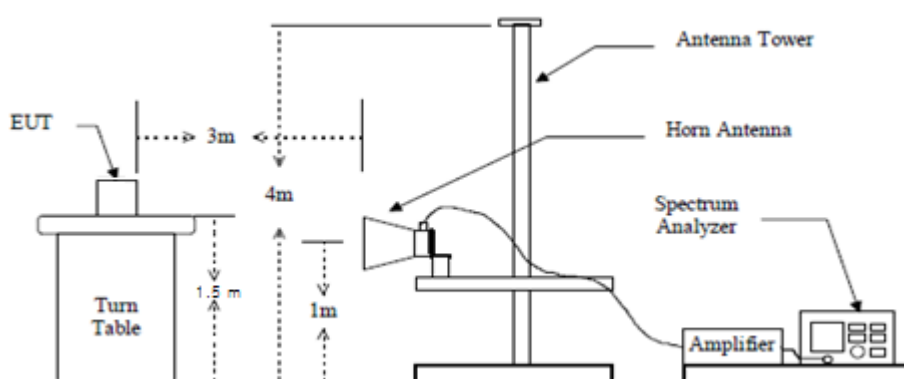

Measurement Data: Complies

- See next pages for actual measured data.
- No other emissions were detected at a level greater than 20 dB below limit include from 9 kHz to 30 MHz.

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3 m
0.009 ~ 0.490	2400/F(kHz) (@ 300 m)
0.490 ~ 1.705	24000/F(kHz) (@ 30 m)
1.705 ~ 30	30(@ 30 m)
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Measurement Data : (Above 1 GHz)

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp.Gain+Cable	AV/Peak		AV/Peak		AV / Peak	
5739.9	30.0	54.76	V	32.21	17.87	54.0	74.0	44.3	69.1	9.7	4.9
5752.3	30.4	57.3	V	32.21	17.87	54.0	74.0	44.8	71.7	9.2	2.3
5739.7	30.3	56.9	V	32.21	17.87	54.0	74.0	44.6	71.2	9.4	2.8

- No other emissions were detected at a level greater than 20 dB below limit.

Measurement Data: (9 kHz – 30 MHz)

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp.Gain+Cable	AV / Peak		AV / Peak		AV / Peak	
-	-	-	-	-	-	-	-	-	-	-	-
No emissions were detected at a level greater than 20 dB below limit.											
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-

*No emissions were detected at a level greater than 20 dB below limit.

Radiated Emissions (Below 1 GHz) – 2.4 GHz Zigbee(Low) mode

4, Songjuro236Beon-gil, Yangji-myeon,
Cheoin-gu, Youngin-si, Gyeonggi-do,
449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: INT NODE V0.2 HP

TEST MODE: 2.4GHz Zigbee(Low) mode


Temp Humi : 27 / 41

Tested by: BANG Y H

Data: 128

Level (dBuV/m)

Date: 2016-07-26

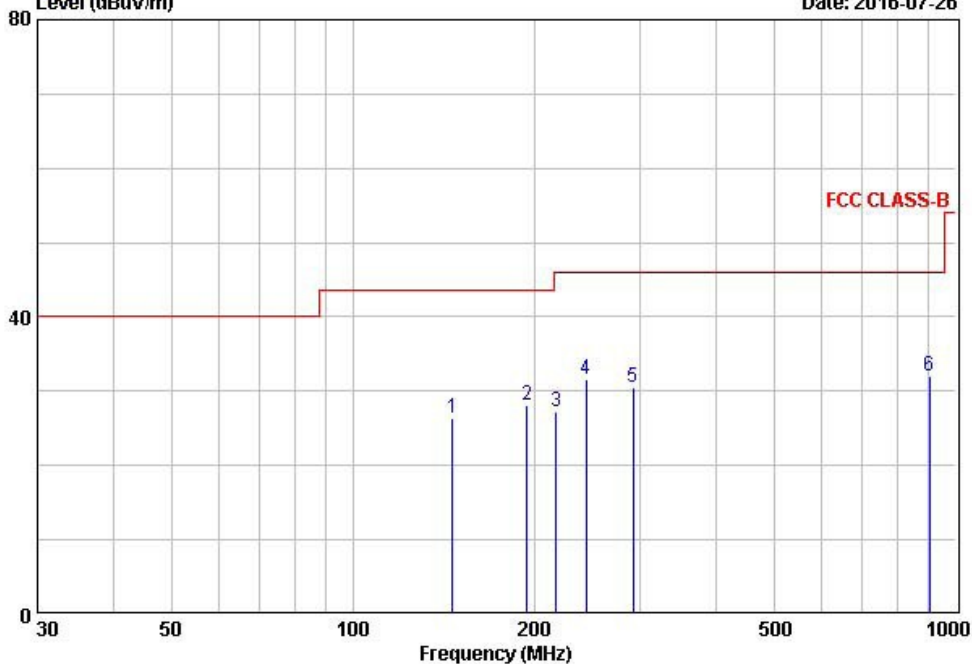

	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dBuV/m	dB/m	dBuV/m	QP	dB	cm	deg	
1	146.42	40.40	-13.92	26.48	43.50	17.02	100	54	VERTICAL
2	194.32	44.10	-15.93	28.17	43.50	15.33	100	93	VERTICAL
3	217.68	42.60	-15.27	27.33	46.00	18.67	100	99	VERTICAL
4	243.99	45.50	-13.84	31.66	46.00	14.34	400	49	HORIZONTAL
5	291.45	42.40	-11.97	30.43	46.00	15.57	314	17	HORIZONTAL
6	903.40	28.90	3.16	32.06	46.00	13.94	214	11	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emissions (Below 1 GHz) – 2.4GHz Zigbee(Middle) mode

4, Songjuro236Beon-gil, Yangji-myeon,
Cheoin-gu, Youngin-si, Gyeonggi-do,
449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: INT NODE V0.2 HP

TEST MODE: 2.4GHz Zigbee(Middle) mode


Temp Humi : 27 / 41

Tested by: BANG Y H

Data: 129

Level (dBuV/m)

Date: 2016-07-26

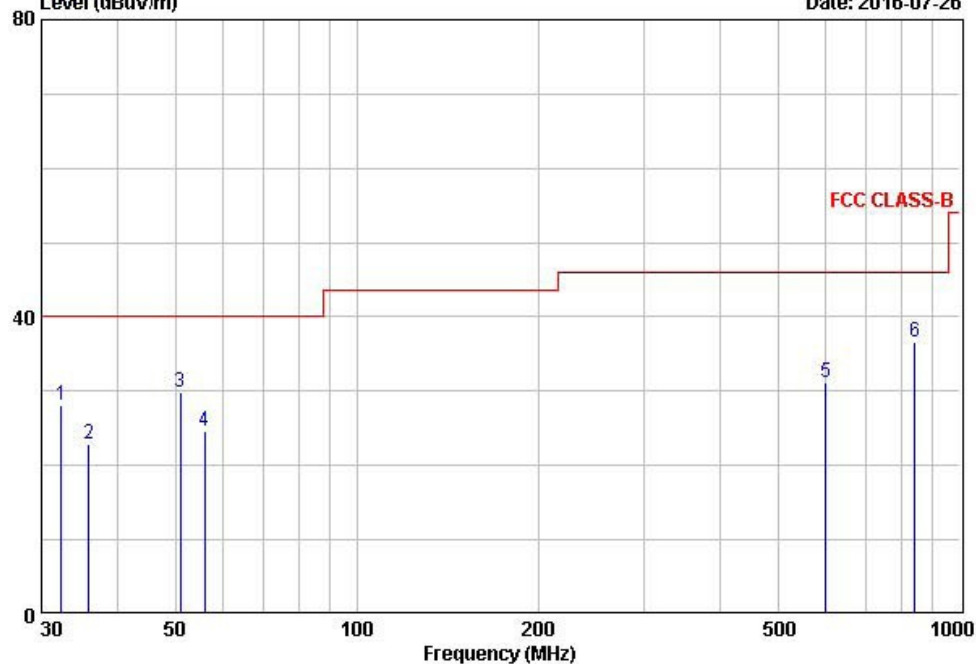

	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dBuV/m	dB/m	dBuV/m	QP	dB	cm	deg	
1	32.41	45.90	-17.68	28.22	40.00	11.78	100	89	VERTICAL
2	35.90	40.10	-17.18	22.92	40.00	17.08	100	14	VERTICAL
3	51.01	45.80	-16.00	29.80	40.00	10.20	100	98	VERTICAL
4	55.90	40.40	-15.78	24.62	40.00	15.38	100	157	VERTICAL
5	599.68	35.40	-4.15	31.25	46.00	14.75	100	96	VERTICAL
6	841.65	34.80	1.78	36.58	46.00	9.42	400	41	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emissions (Below 1 GHz) – 2.4GHz Zigbee(High) mode

4, Songjuro236Beon-gil, Yangji-myeon,
Cheoin-gu, Youngin-si, Gyeonggi-do,
449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: INT NODE V0.2 HP

TEST MODE: 2.4GHz Zigbee(High) mode


Temp Humi : 27 / 41

Tested by: BANG Y H

Data: 130

Level (dBuV/m)

Date: 2016-07-26

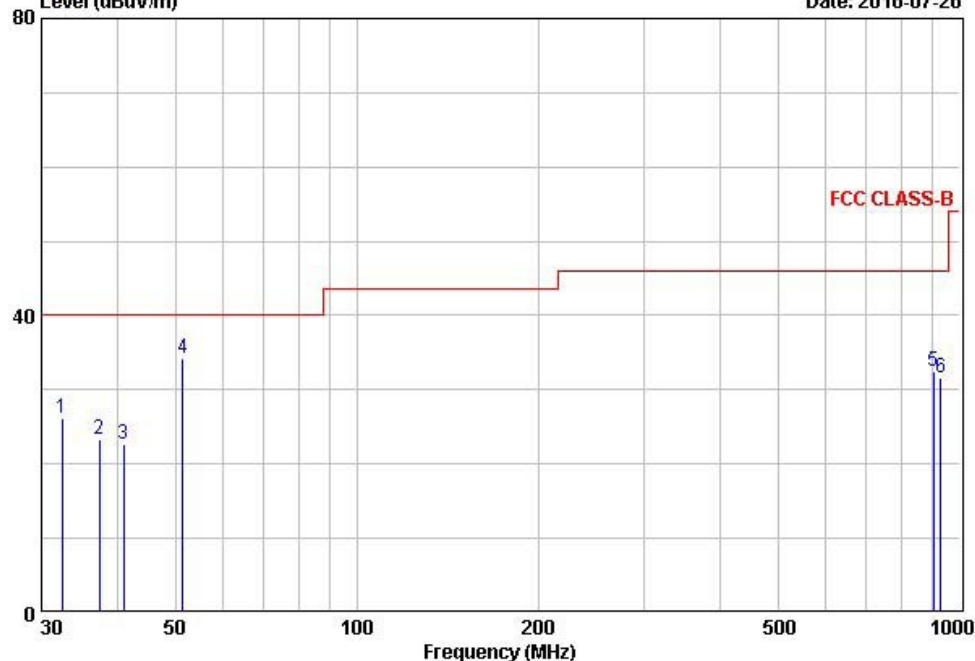

	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dBuV/m	dB/m	dBuV/m	QP	dB	cm	deg	
1	32.45	43.90	-17.67	26.23	40.00	13.77	100	98	VERTICAL
2	37.45	40.40	-17.03	23.37	40.00	16.63	100	82	VERTICAL
3	41.11	39.40	-16.66	22.74	40.00	17.26	100	236	VERTICAL
4	51.40	50.10	-15.98	34.12	40.00	5.88	100	81	VERTICAL
5	903.56	29.40	3.17	32.57	46.00	13.43	284	114	HORIZONTAL
6	930.11	27.80	3.74	31.54	46.00	14.46	231	13	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emissions (Above 1 GHz) – 2.4 GHz Zigbee(Low) mode

EMI I Chamber of LTA CO.,LTD.
 4, Songjuro236Beon-gil, Yangji-myeon,
 Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
 Tel :+82-31-3236008,9 www.ltalab.com
 Fax:+82-31-3236010


EUT/Model No.: INT NODE V0.2 HP

Test Mode: 2.4GHz Zigbee (LOW) mode

Tested by : BANG Y H

Temp/Humi: 22 / 50

Data: 106 File: D:\LTA_e3\3_backup\1GHz 이상\2016\CH1_ABOVE 1GHz_1607-1.EMI (107)
 Level (dBuV/m) Date: 2016-07-26 Time: 11:44:17

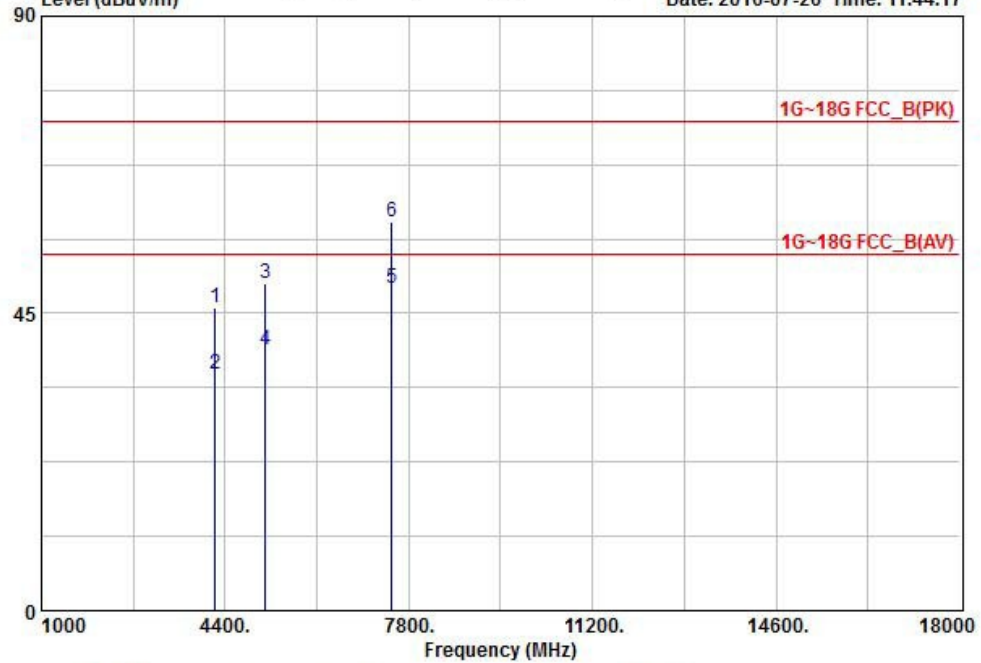

Freq	Reading	C.F	Result	Limit	Margin	Polarity
MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
1 4211.17	31.40	14.35	45.75	74.00	28.25	VERTICAL
2 4211.17	21.40	14.35	35.75	54.00	18.25	VERTICAL
3 5147.45	32.20	17.23	49.43	74.00	24.57	VERTICAL
4 5147.45	22.20	17.23	39.43	54.00	14.57	VERTICAL
5 7484.14	22.30	26.53	48.83	54.00	5.17	VERTICAL
6 7484.14	32.30	26.53	58.83	74.00	15.17	VERTICAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
 Blue : Vertical Black : Horizontal



EMI Chamber of LTA CO.,LTD.
4, Songjuro236Beon-gil, Yangji-myeon,
Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
Tel :+82-31-3236008,9 www.ltalab.com
Fax:+82-31-3236010

EUT/Model No.: INT NODE V0.2 HP

Test Mode: 2.4GHz Zigbee (LOW) mode

Tested by : BANG Y H

Temp/Humi: 22 / 50

Data: 107 File: D:\LTA_e3\3_backup\1GHz 이상\2016\CH1_ABOVE 1GHz_1607-1.EMI (107)
Level (dBuV/m) Date: 2016-07-26 Time: 11:47:07



Freq	Reading	C.F	Result	Limit	Margin	Polarity
MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
118124.45	30.10	13.12	43.22	74.00	30.78	HORIZONTAL
218124.45	20.10	13.12	33.22	54.00	20.78	HORIZONTAL
318211.16	20.50	13.18	33.68	54.00	20.32	HORIZONTAL
418211.16	30.50	13.18	43.68	74.00	30.32	HORIZONTAL
518451.41	21.10	13.36	34.46	54.00	19.54	HORIZONTAL
618451.41	31.10	13.36	44.46	74.00	29.54	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
Blue : Vertical Black : Horizontal

Radiated Emissions (Above 1 GHz) – 2.4 GHz Zigbee(Middle) mode

EMI I Chamber of LTA CO.,LTD.
 4, Songjuro236Beon-gil, Yangji-myeon,
 Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
 Tel :+82-31-3236008,9 www.ltalab.com
 Fax:+82-31-3236010


EUT/Model No. : INT NODE V0.2 HP

Test Mode: 2.4GHz Zigbee (Middle) mode

Tested by : BANG Y H

Temp/Humi: 22 / 50

Data: 109 File: D:\LTA_e3\3_backup\1GHz 이상\2016\CH1_ABOVE 1GHz_1607-1.EMI (110)
 Level (dBuV/m) Date: 2016-07-26 Time: 12:00:00

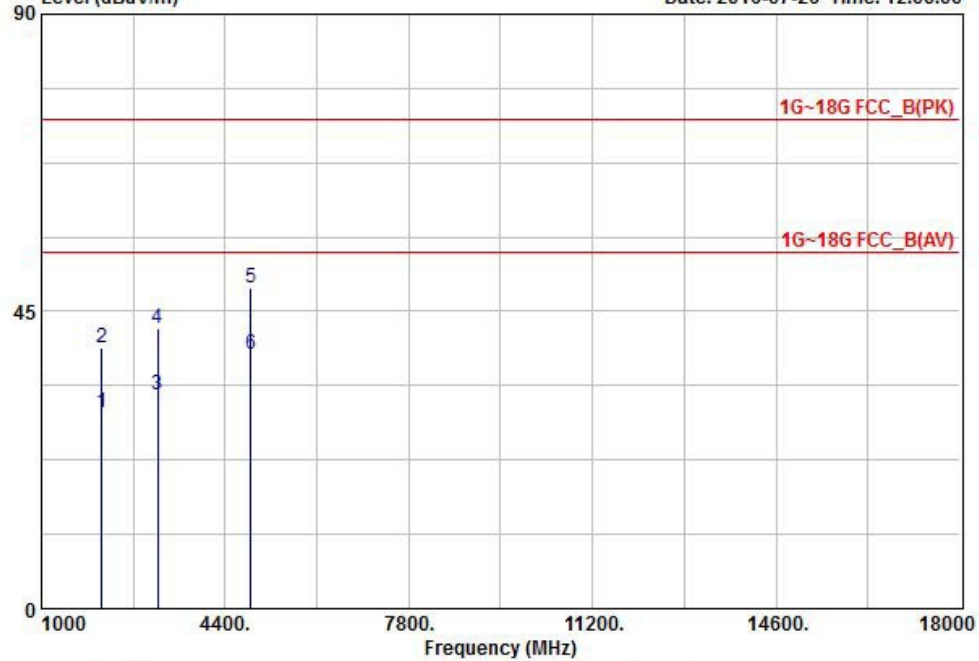

	Freq	Reading	C.F	Result	Limit	Margin	Polarity
	MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
1	2117.95	23.10	6.48	29.58	54.00	24.42	VERTICAL
2	2117.95	33.10	6.48	39.58	74.00	34.42	VERTICAL
3	3147.45	22.30	10.10	32.40	54.00	21.60	VERTICAL
4	3147.45	32.30	10.10	42.40	74.00	31.60	VERTICAL
5	4871.60	32.30	16.22	48.52	74.00	25.48	VERTICAL
6	4871.60	22.30	16.22	38.52	54.00	15.48	VERTICAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
 Blue : Vertical Black : Horizontal



EMI Chamber of LTA CO.,LTD.
4, Songjuro236Beon-gil, Yangji-myeon,
Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
Tel :+82-31-3236008,9 www.ltalab.com
Fax:+82-31-3236010

EUT/Model No. : INT NODE V0.2 HP

Test Mode: 2.4GHz Zigbee (Middle) mode

Tested by : BANG Y H

Temp/Humi: 22 / 50

Data: 110 File: D:\LTA_e3\3_backup\1GHz 이상\2016\CH1_ABOVE 1GHz_1607-1.EMI (110)
Level (dBuV/m) Date: 2016-07-26 Time: 12:02:05



Freq	Reading	C.F	Result	Limit	Margin	Polarity
MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
118145.10	32.20	13.13	45.33	74.00	28.67	HORIZONTAL
218145.10	22.20	13.13	35.33	54.00	18.67	HORIZONTAL
318241.45	32.30	13.21	45.51	74.00	28.49	HORIZONTAL
418241.45	22.30	13.21	35.51	54.00	18.49	HORIZONTAL
518348.40	32.40	13.29	45.69	74.00	28.31	HORIZONTAL
618348.40	22.40	13.29	35.69	54.00	18.31	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
Blue : Vertical Black : Horizontal

Radiated Emissions (Above 1 GHz) – 2.4 GHz Zigbee(High) mode

EMI I Chamber of LTA CO.,LTD.
4, Songjuro236Beon-gil, Yangji-myeon,
Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
Tel :+82-31-3236008,9 www.ltalab.com
Fax:+82-31-3236010


EUT/Model No. : INT NODE V0.2 HP

Test Mode: 2.4GHz Zigbee (High) mode

Tested by : BANG Y H

Temp/Humi: 22 / 50

Data: 111 File: D:\LTA_e3\3_backup\1GHz 이상\2016\CH1_ABOVE 1GHz_1607-1.EMI (111)
Level (dBuV/m) Date: 2016-07-26 Time: 12:08:50

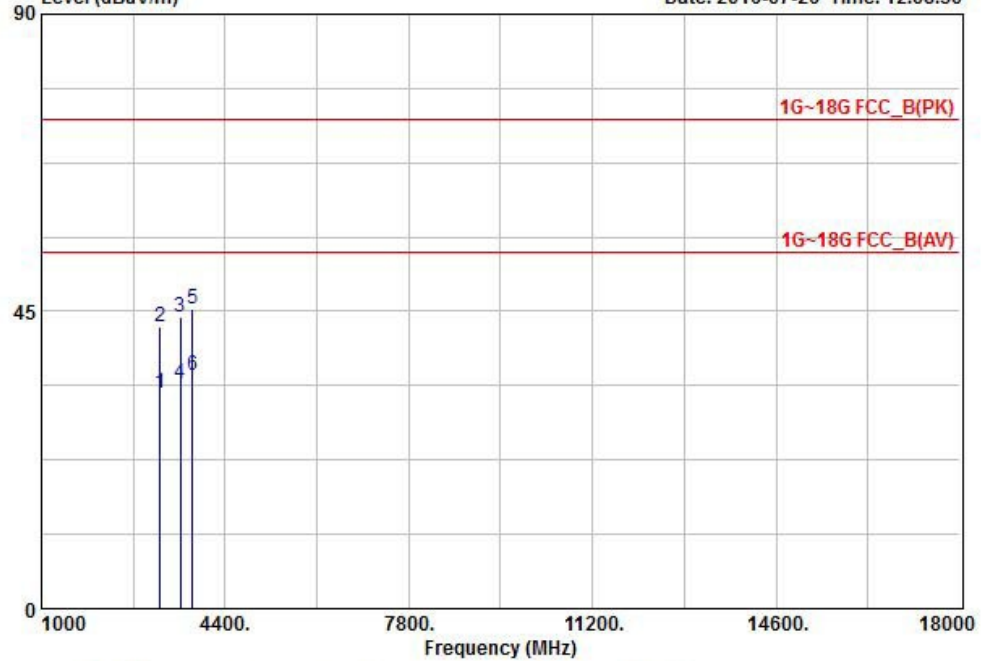

	Freq	Reading	C.F	Result	Limit	Margin	Polarity
	MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
1	3197.45	22.30	10.30	32.60	54.00	21.40	VERTICAL
2	3197.45	32.30	10.30	42.60	74.00	31.40	VERTICAL
3	3567.45	32.30	11.86	44.16	74.00	29.84	VERTICAL
4	3567.45	22.30	11.86	34.16	54.00	19.84	VERTICAL
5	3789.65	32.40	12.87	45.27	74.00	28.73	VERTICAL
6	3789.65	22.40	12.87	35.27	54.00	18.73	VERTICAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
Blue : Vertical Black : Horizontal



EMI Chamber of LTA CO.,LTD.
4, Songjuro236Beon-gil, Yangji-myeon,
Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
Tel :+82-31-3236008,9 www.ltalab.com
Fax:+82-31-3236010


EUT/Model No.: INT NODE V0.2 HP

Test Mode: 2.4GHz Zigbee (High) mode

Tested by : BANG Y H

Temp/Humi: 22 / 50

Data: 112 File: D:\LTA_e3\3_backup\1GHz 이상\2016\CH1_ABOVE 1GHz_1607-1.EMI (112)
Level (dBuV/m) Date: 2016-07-26 Time: 12:11:07

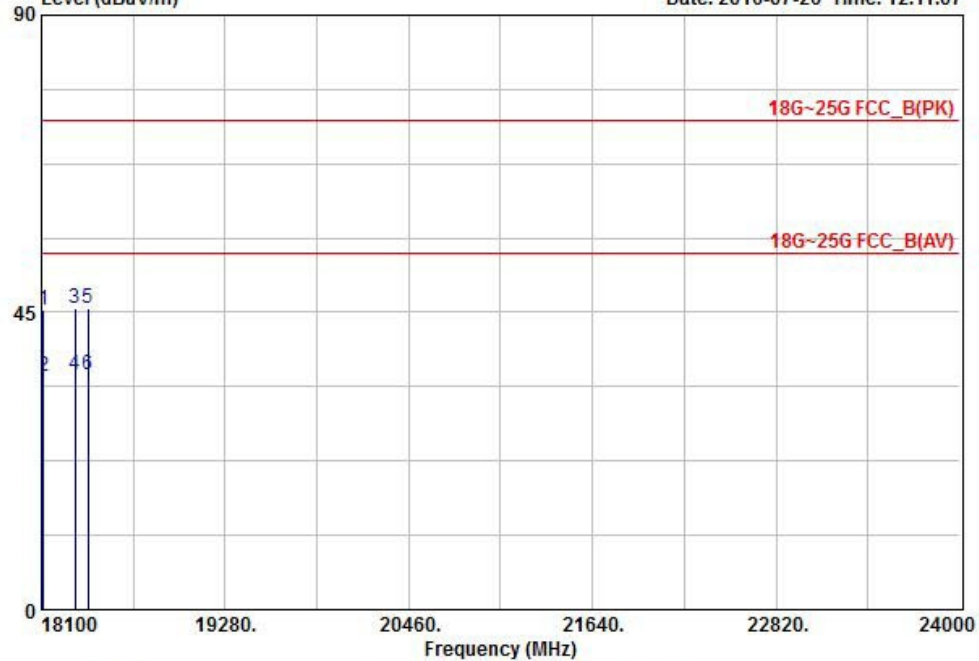

Freq	Reading	C.F	Result	Limit	Margin	Polarity
MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
118111.70	32.20	13.11	45.31	74.00	28.69	VERTICAL
218111.70	22.20	13.11	35.31	54.00	18.69	VERTICAL
318314.74	32.40	13.26	45.66	74.00	28.34	HORIZONTAL
418314.74	22.40	13.26	35.66	54.00	18.34	HORIZONTAL
518399.60	32.20	13.32	45.52	74.00	28.48	HORIZONTAL
618399.60	22.20	13.32	35.52	54.00	18.48	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
Blue : Vertical Black : Horizontal

3.2.6 AC Conducted Emissions

Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Measurement Data: Complies

- See next pages for actual measured spectrum plots.
- No emissions were detected at a level greater than 20 dB below limit.

Minimum Standard: FCC Part 15.207(a) / EN 55022

Class B

Frequency Range	quasi-peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

Conducted Emissions – 2.4 GHz Zigbee(LOW) mode + LINE


4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008, 9
Fax: +82-31-3236010

EUT / Model No. : INT NODE V0.2 HP	Phase : LINE
Test Mode : 2.4GHz Zigbee(LOW) mode	Test Power : 120 / 60
Temp. / Humi. : 25 / 50	Test Engineer : BANG Y H

Data: 670

File: D:\Conducted Data\2015\2016\LTA_Conduction_2016_07.EM6 (694)

Date: 2016-07-26

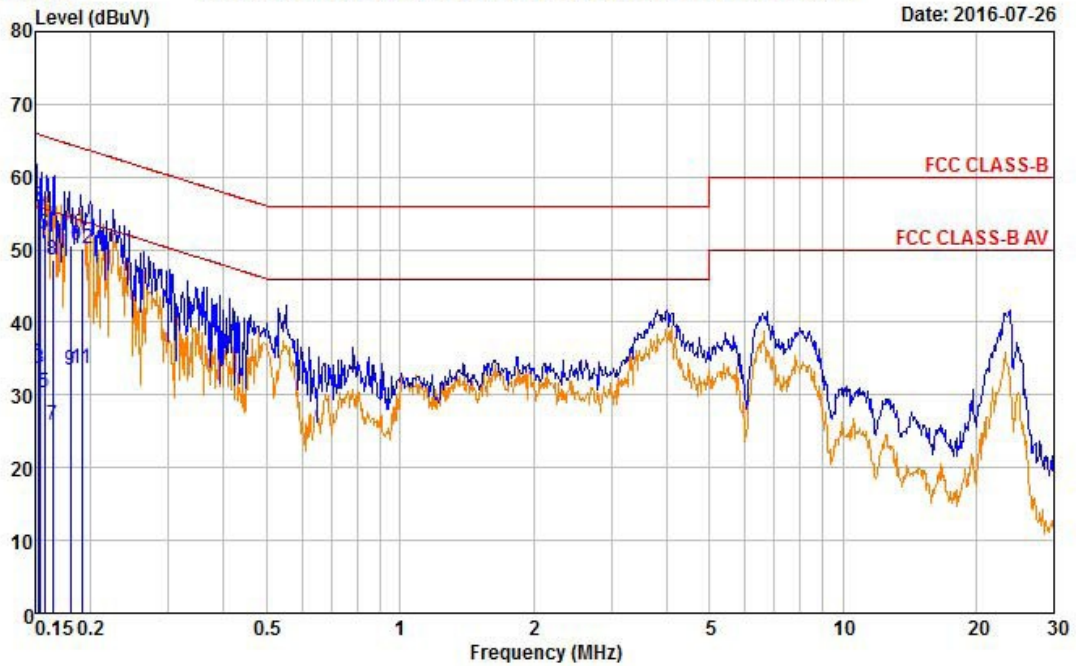

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.152	36.54	14.97	19.47	56.01	34.44	65.88	55.88	9.87	21.44
0.153	35.99	14.15	19.47	55.46	33.62	65.82	55.82	10.36	22.20
0.158	32.78	10.73	19.47	52.25	30.20	65.58	55.58	13.33	25.38
0.164	29.21	6.28	19.48	48.69	25.76	65.25	55.25	16.56	29.49
0.180	31.04	13.85	19.49	50.53	33.34	64.47	54.47	13.94	21.13
0.191	30.61	14.11	19.49	50.10	33.60	63.99	53.99	13.89	20.39

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted Emissions – 2.4 GHz Zigbee(LOW) mode + NEUTRAL


4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008, 9
Fax: +82-31-3236010

EUT / Model No. : INT NODE V0.2 HP	Phase : NEUTRAL
Test Mode : 2.4GHz Zigbee(LOW) mode	Test Power : 120 / 60
Temp. / Humi. : 25 / 50	Test Engineer : BANG Y H

Data: 674

File: D:\Conducted Data\2015\2016\LTA_Conduction_2016_07.EM6 (694)

Date: 2016-07-26

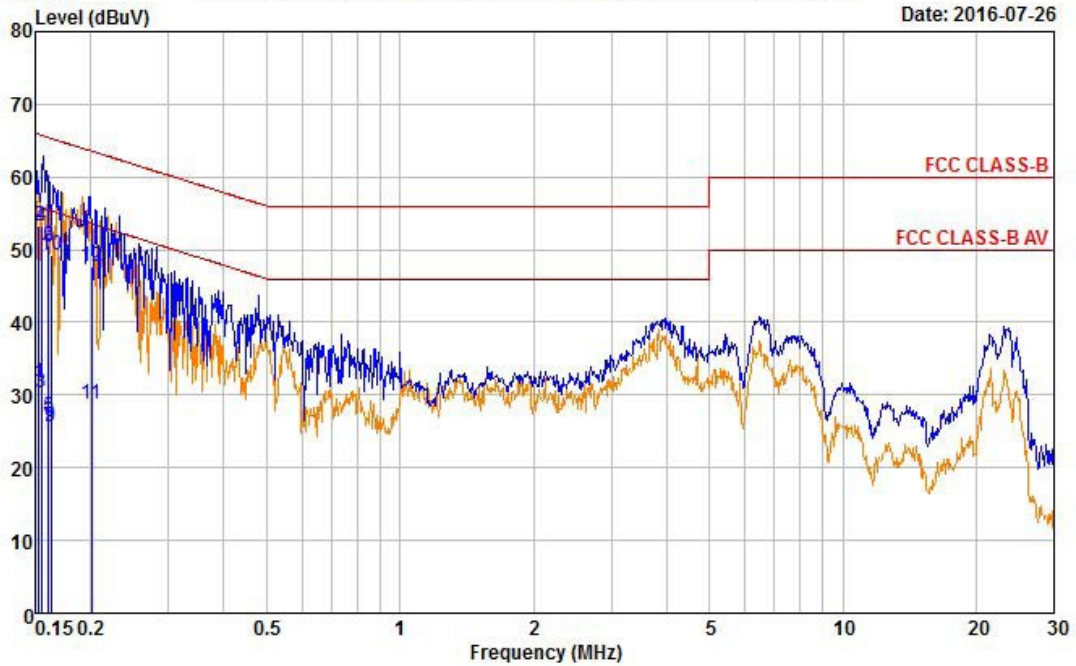

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV		dBuV	dBuV	dBuV	dBuV	dB	dB
0.153	33.86	12.07	19.48	53.34	31.55	65.83	55.83	12.49	24.28
0.155	33.74	10.89	19.48	53.22	30.37	65.73	55.73	12.51	25.36
0.161	31.09	7.37	19.49	50.58	26.86	65.43	55.43	14.85	28.57
0.161	30.86	6.09	19.49	50.35	25.58	65.42	55.42	15.07	29.84
0.162	29.80	6.09	19.49	49.29	25.58	65.34	55.34	16.05	29.76
0.201	28.21	9.32	19.51	47.72	28.83	63.56	53.56	15.84	24.73

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted Emissions – 2.4 GHz Zigbee(Middle) mode + LINE


4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008, 9
Fax: +82-31-3236010

EUT / Model No. : INT NODE V0.2 HP	Phase : LINE
Test Mode : 2.4GHz Zigbee(Middle) mode	Test Power : 120 / 60
Temp. / Humi. : 25 / 50	Test Engineer : BANG Y H

Data: 678

File: D:\Conducted Data\2015\2016\LTA_Conduction_2016_07.EM6 (694)

Date: 2016-07-26

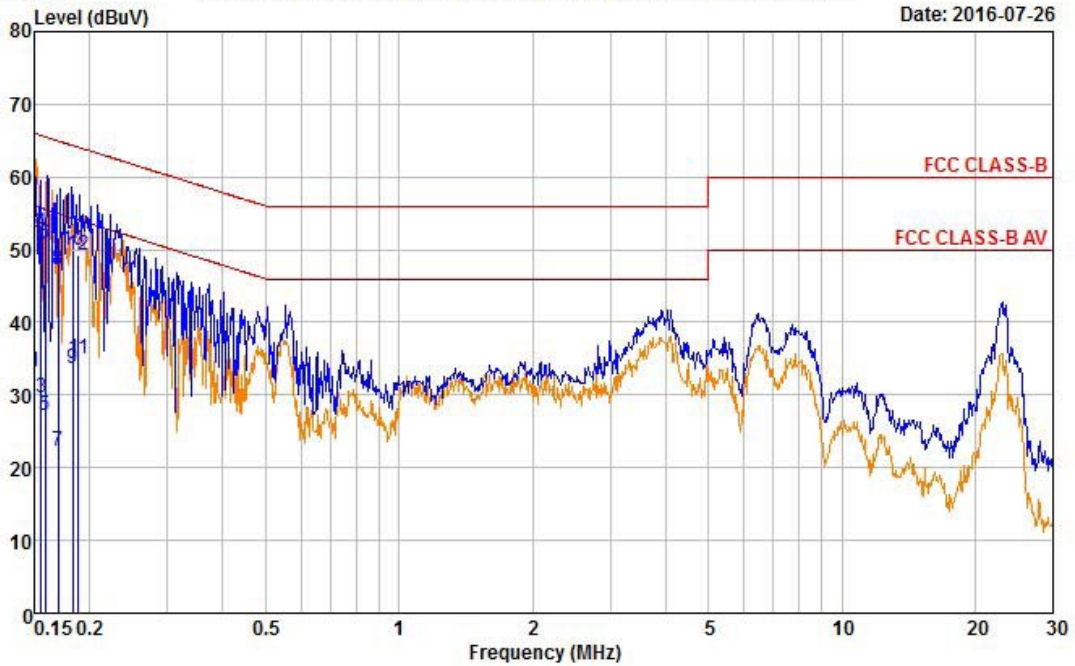

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV		dBuV	dBuV	dBuV	dBuV	dB	dB
0.151	32.80	13.68	19.47	52.27	33.15	65.97	55.97	13.70	22.82
0.155	32.91	10.24	19.47	52.38	29.71	65.71	55.71	13.33	26.00
0.159	31.35	7.72	19.47	50.82	27.19	65.51	55.51	14.69	28.32
0.170	27.67	2.72	19.49	47.16	22.21	64.98	54.98	17.82	32.77
0.183	30.37	14.10	19.49	49.86	33.59	64.33	54.33	14.47	20.74
0.188	29.79	15.42	19.49	49.28	34.91	64.10	54.10	14.82	19.19

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted Emissions – 2.4 GHz Zigbee(Middle) mode + NEUTRAL


4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT / Model No. : INT NODE V0.2 HP	Phase : NEUTRAL
Test Mode : 2.4GHz Zigbee(Middle) mode	Test Power : 120 / 60
Temp. / Humi. : 25 / 50	Test Engineer : BANG Y H

Data: 694

File: D:\Conducted Data\2015\2016\LTA_Conduction_2016_07.EM6 (694)

Date: 2016-07-26

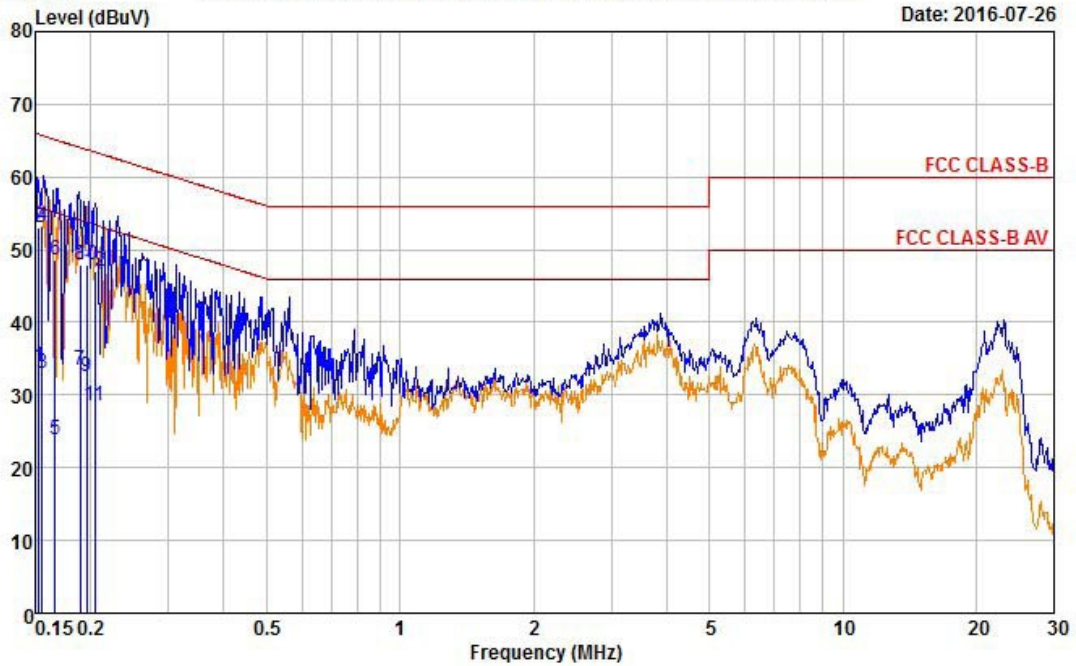

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV		dBuV	dBuV	dBuV	dBuV	dB	dB
0.153	33.62	14.44	19.48	53.10	33.92	65.83	55.83	12.73	21.91
0.156	33.89	13.40	19.48	53.37	32.88	65.70	55.70	12.33	22.82
0.166	29.13	4.37	19.50	48.63	23.87	65.16	55.16	16.53	31.29
0.189	28.31	14.00	19.50	47.81	33.50	64.06	54.06	16.25	20.56
0.196	28.36	13.00	19.50	47.86	32.50	63.80	53.80	15.94	21.30
0.204	27.49	8.95	19.51	47.00	28.46	63.44	53.44	16.44	24.98

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted Emissions – 2.4 GHz Zigbee(High) mode + LINE


4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT / Model No. : INT NODE V0.2 HP	Phase : LINE
Test Mode : 2.4GHz Zigbee(High) mode	Test Power : 120 / 60
Temp. / Humi. : 25 / 50	Test Engineer : BANG Y H

Data: 686

File: D:\Conducted Data\2015\2016\LTA_Conduction_2016_07.EM6 (694)

Date: 2016-07-26

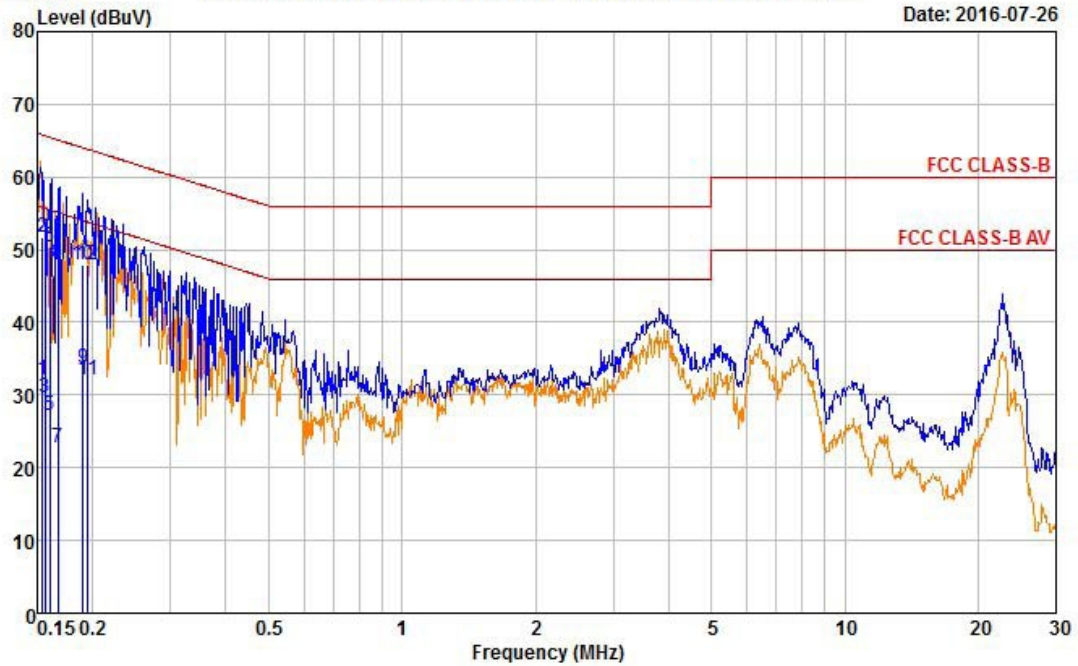

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.154	32.28	12.59	19.47	51.75	32.06	65.79	55.79	14.04	23.73
0.156	31.69	10.13	19.47	51.16	29.60	65.65	55.65	14.49	26.05
0.160	30.94	7.82	19.48	50.42	27.30	65.47	55.47	15.05	28.17
0.167	28.75	3.15	19.49	48.24	22.64	65.12	55.12	16.88	32.48
0.190	28.37	14.24	19.49	47.86	33.73	64.02	54.02	16.16	20.29
0.195	28.37	12.67	19.49	47.86	32.16	63.83	53.83	15.97	21.67

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted Emissions – 2.4 GHz Zigbee(High) mode + NEUTRAL


4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT / Model No. : INT NODE V0.2 HP	Phase : NEUTRAL
Test Mode : 2.4GHz Zigbee(High) mode	Test Power : 120 / 60
Temp. / Humi. : 25 / 50	Test Engineer : BANG Y H

Data: 690

File: D:\Conducted Data\2015\2016\LTA_Conduction_2016_07.EM6 (694)

Date: 2016-07-26

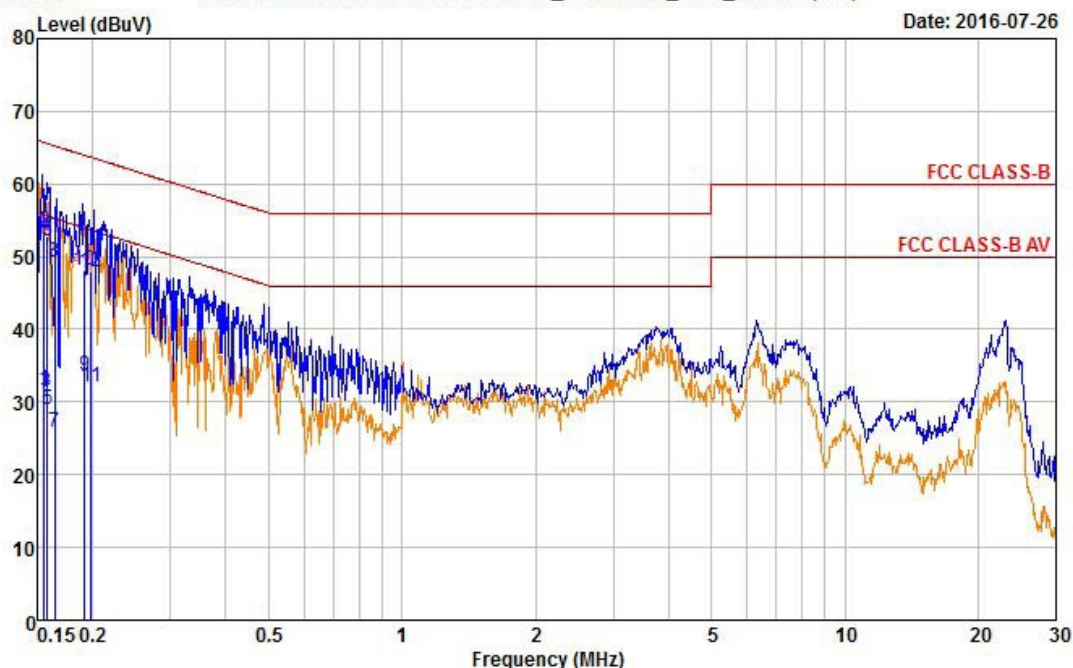

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV		dBuV	dBuV	dBuV	dBuV	dB	dB
0.156	34.04	12.26	19.48	53.52	31.74	65.70	55.70	12.18	23.96
0.158	33.24	11.87	19.48	52.72	31.35	65.59	55.59	12.87	24.24
0.158	32.65	9.56	19.48	52.13	29.04	65.56	55.56	13.43	26.52
0.164	29.68	6.40	19.49	49.17	25.89	65.25	55.25	16.08	29.36
0.192	28.55	14.12	19.50	48.05	33.62	63.97	53.97	15.92	20.35
0.199	28.47	12.48	19.50	47.97	31.98	63.66	53.66	15.69	21.68

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Interval	Last Cal. Date
1	Signal Analyzer (9 kHz ~ 30 GHz)	FSV30	100757	R&S	1 year	2016-03-22
2	Signal Generator (~ 3.2 GHz)	8648C	3623A02597	HP	1 year	2016-03-21
3	SYNTHESIZED CW GENERATOR	83711B	US34490456	HP	1 year	2016-03-21
4	Attenuator (3 dB)	8491A	37822	HP	1 year	2015-09-14
5	Attenuator (10 dB)	8491A	63196	HP	1 year	2015-09-14
6	Test Receiver (~ 30 MHz)	ESHS10	828404/009	R&S	1 year	2016-03-21
7	EMI Test Receiver (~ 7 GHz)	ESCI7	100722	R&S	1 year	2015-09-15
8	RF Amplifier (~ 1.3 GHz)	8447D OPT 010	2944A07684	HP	1 year	2015-09-14
9	RF Amplifier (1 ~ 26.5 GHz)	8449B	3008A02126	HP	1 year	2016-03-22
10	Horn Antenna (1 ~ 18 GHz)	3115	00114105	ETS	1 year	2016-04-21
11	DRG Horn (Small)	3116B	81109	ETS-Lindgren	1 year	2016-02-26
12	DRG Horn (Small)	3116B	133350	ETS-Lindgren	1 year	2016-02-26
13	TRILOG Antenna	VULB 9160	9160-3237	SCHWARZBECK	2 year	2015-04-21
14	Temp.Humidity Data Logger	SK-L200TH II A	00801	SATO	1 year	2016-03-22
15	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
16	Power Divider	11636A	06243	HP	1 year	2015-09-14
17	DC Power Supply	6674A	3637A01657	Agilent	-	-
18	Frequency Counter	5342A	2826A12411	HP	1 year	2016-03-21
19	Power Meter	EPM-441A	GB32481702	HP	1 year	2016-03-22
20	Power Sensor	8481A	3318A94972	HP	1 year	2016-01-05
21	Audio Analyzer	8903B	3729A18901	HP	1 year	2015-09-14
22	Modulation Analyzer	8901B	3749A05878	HP	1 year	2015-09-15
23	TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	1 year	2015-09-14
24	Stop Watch	HS-3	812Q08R	CASIO	2 year	2016-03-22
25	LISN	KNW-407	8-1430-1	Kyoritsu	1 year	2015-09-14
26	Two-Lime V-Network	ESH3-Z5	893045/017	R&S	1 year	2016-03-21
27	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	1 year	2016-03-21
28	Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	1 year	2016-03-21
29	Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	1 year	2016-03-21
30	Active Loop Antenna	FMZB1519	1519-031	SCHWARZBECK	2 year	2016-01-12
31	OSP120 BASE UNIT	OSP120	101230	R&S	1 year	2016-03-22
32	Signal Generator(100 kHz ~ 40 GHz)	SMB100A	177621	R&S	1 year	2016-03-22
33	Signal Analyzer (10 Hz ~ 40 GHz)	FSV40	101367	R&S	1 year	2016-03-22