

Measurement Results

1-1581/20-01-10_log1_conducted

[Test logging](#)

This addendum is electronically signed and valid without handwritten signature.
For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Document authorized:

Michael Dorongovski
Lab Manager
Radio Communications

Table of Content

EUT Summary	3
1. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps	4
2. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps	7
3. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps	10
4. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps	13
5. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps	15
6. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps	17
7. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps	19
8. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps	21
9. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps	23
10. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps	25
11. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps	28
12. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps	31
13. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps	34
14. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps	36
15. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps	38

EUT Summary

EUT DEFINITION	
Manufacturer	beyerdynamic GmbH & Co. KG
Type	SPACE
Kind	Bluetooth Speakerphone
Serial Number Setup Number	NI 1.0
Version SW FW HW	NI NI NI
Comment 1 2	FCC mode
Temperature [°C] Min Nom Max	-10 20 55
Voltage [V] Min Nom Max	3.4 3.7 4.2

EUT Common Settings BT Low Energy	
Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

1. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps

Test References	
TC Start	28.09.2021 14:05:35
Ambit Temp [°C] Humidity [rel%]	24.5 42
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2402 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.36 11.09 10
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

DTS Bandwidth

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	709	kHz	INFO

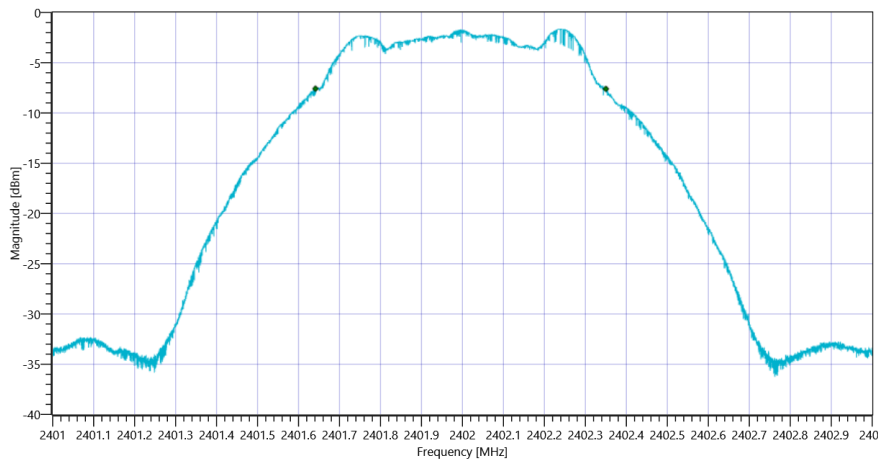


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.36 11.09 15
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	-0.79	dBm	PASS
Peak Power	---	1000	0.833681	mW	PASS
Frequency at Peak	---	---	2402.15	MHz	INFO

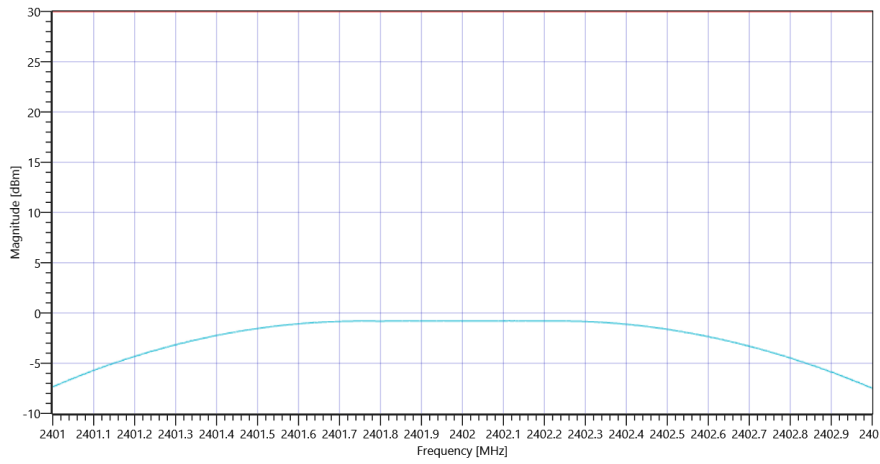

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps_28092021_140621.png

TEST FINISHED

General Verdict

PASS

2. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps

Test References	
TC Start	28.09.2021 14:22:10
Ambit Temp [°C] Humidity [rel%]	24.1 41
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2440 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.11 11.1 10
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

DTS Bandwidth

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	715	kHz	INFO

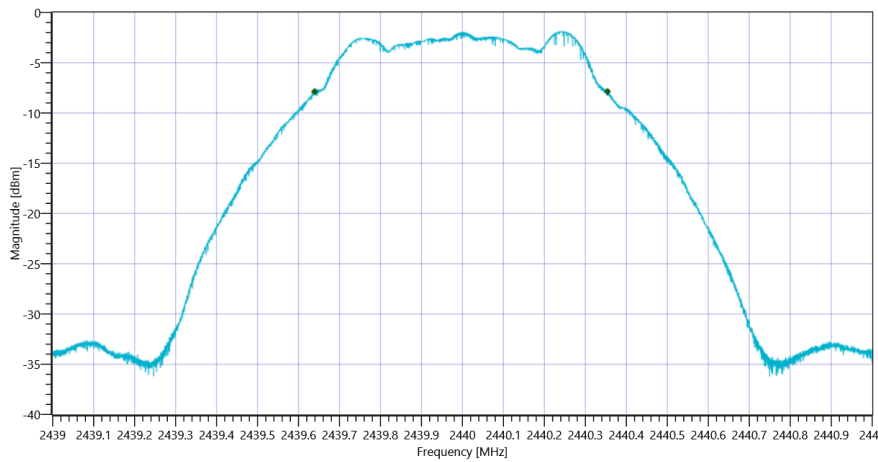


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.11 11.1 15
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	-0.99	dBm	PASS
Peak Power	---	1000	0.796159	mW	PASS
Frequency at Peak	---	---	2439.88	MHz	INFO

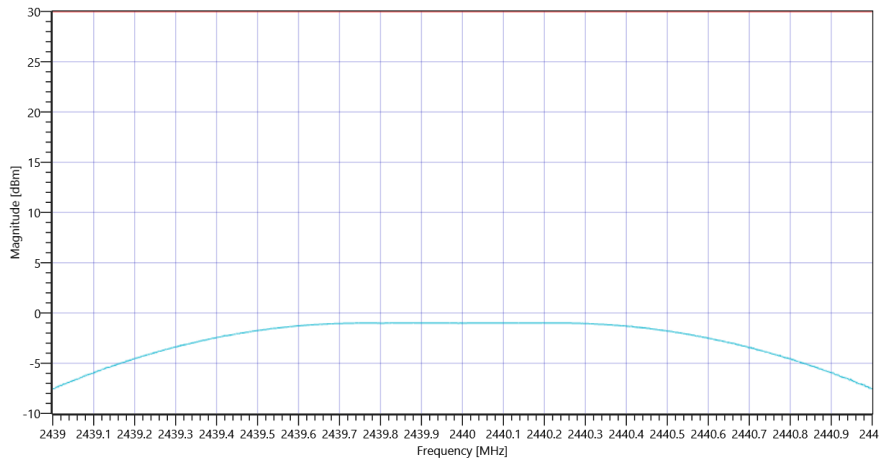

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps_28092021_142257.png

TEST FINISHED

General Verdict

PASS

3. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps

Test References	
TC Start	28.09.2021 15:04:25
Ambit Temp [°C] Humidity [rel%]	24.0 39
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2480 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.92 11.15 10
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

DTS Bandwidth

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	716	kHz	INFO

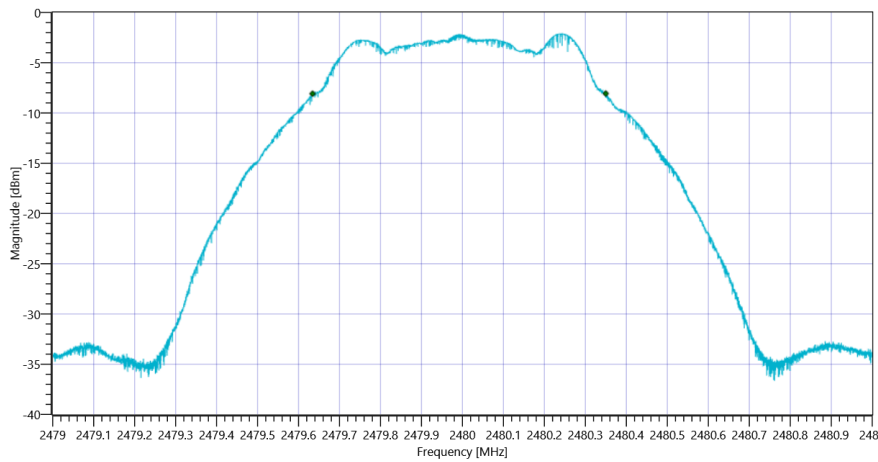


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.92 11.15 15
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	-1.12	dBm	PASS
Peak Power	---	1000	0.772681	mW	PASS
Frequency at Peak	---	---	2479.87	MHz	INFO

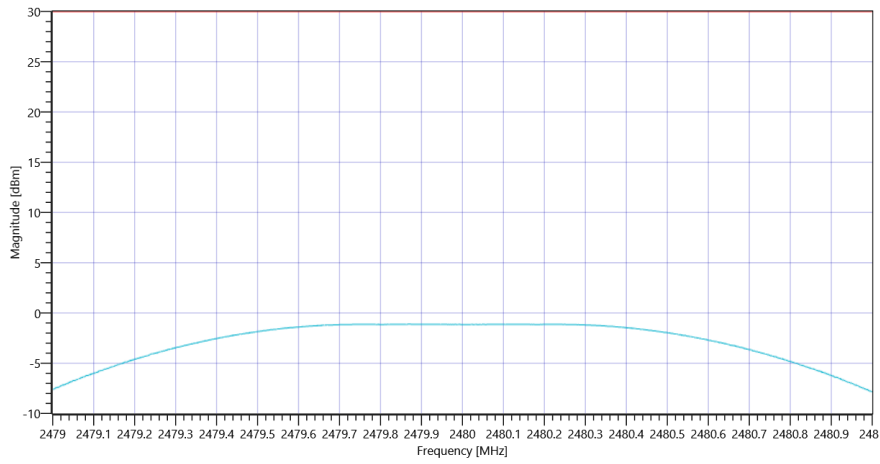

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps_28092021_150512.png

TEST FINISHED

General Verdict

PASS

4. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps

Test References	
TC Start	28.09.2021 14:06:27
Ambit Temp [°C] Humidity [rel%]	24.6 42
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2402 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.40 11.09 10
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	712	kHz	PASS

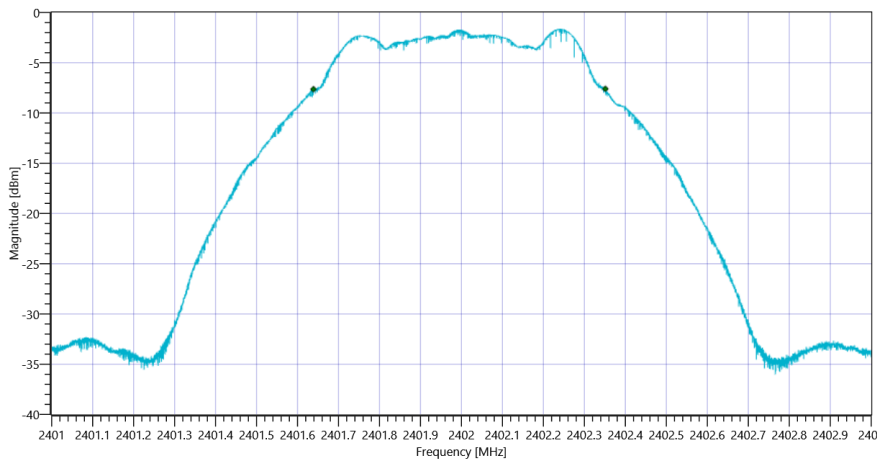

Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps_28092021_140655.png

TEST FINISHED

General Verdict

PASS

5. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps

Test References	
TC Start	28.09.2021 14:23:02
Ambit Temp [°C] Humidity [rel%]	24.1 41
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2440 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.05 11.1 10
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	713	kHz	PASS

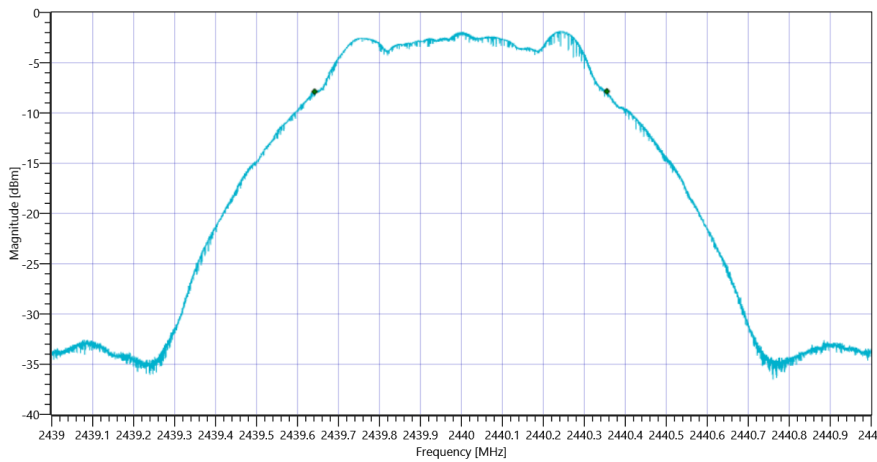

Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps_28092021_142331.png

TEST FINISHED

General Verdict

PASS

6. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps

Test References	
TC Start	28.09.2021 15:05:18
Ambit Temp [°C] Humidity [rel%]	24.1 39
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2480 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.98 11.15 10
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	712	kHz	PASS

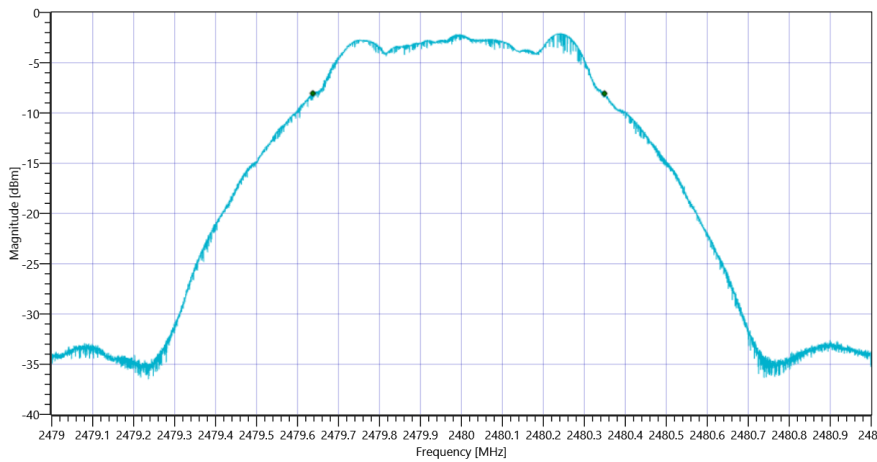

Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps_28092021_150547.png

TEST FINISHED

General Verdict

PASS

7. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps

Test References	
TC Start	28.09.2021 14:07:01
Ambit Temp [°C] Humidity [rel%]	24.5 41
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2402 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.27 11.09 10
Start [MHz] Stop [MHz]	2401.250 2402.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-16.42	dBm/3KHz	PASS

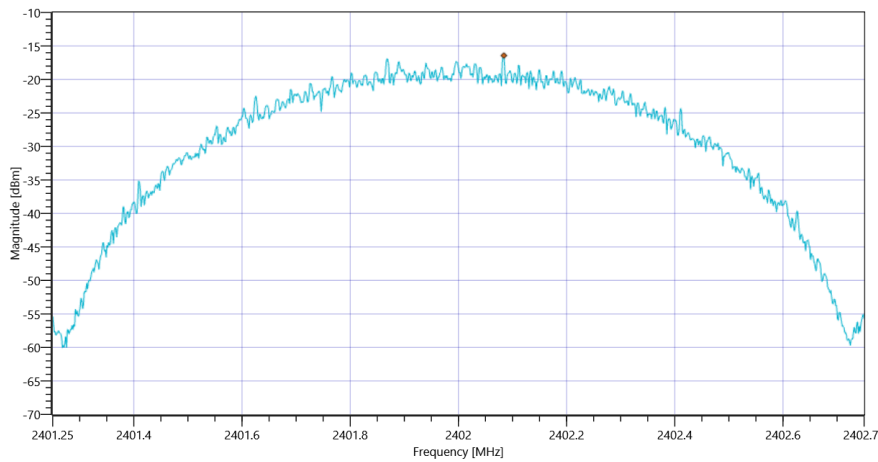

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps_28092021_140739.png

TEST FINISHED

General Verdict

PASS

8. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps

Test References	
TC Start	28.09.2021 14:23:37
Ambit Temp [°C] Humidity [rel%]	24.1 41
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2440 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.08 11.1 10
Start [MHz] Stop [MHz]	2439.250 2440.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-16.56	dBm/3KHz	PASS

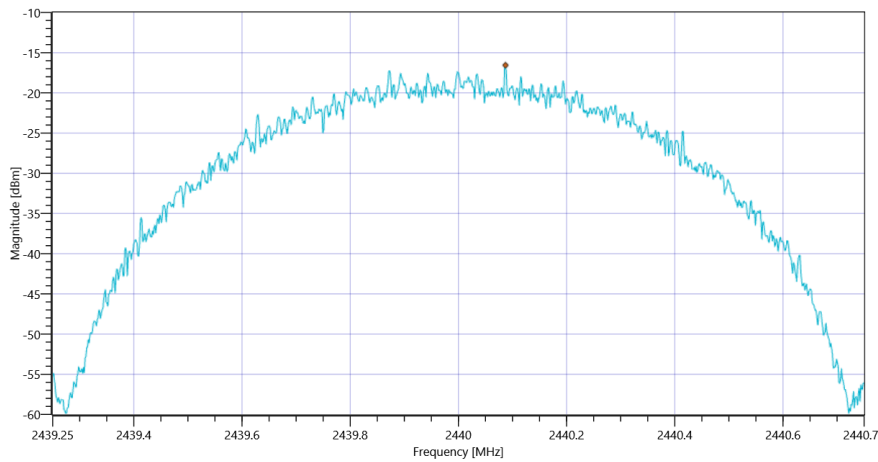

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps_28092021_142415.png

TEST FINISHED

General Verdict

PASS

9. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps

Test References	
TC Start	28.09.2021 15:05:52
Ambit Temp [°C] Humidity [rel%]	24.1 39
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2480 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.94 11.15 10
Start [MHz] Stop [MHz]	2479.250 2480.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-16.92	dBm/3KHz	PASS

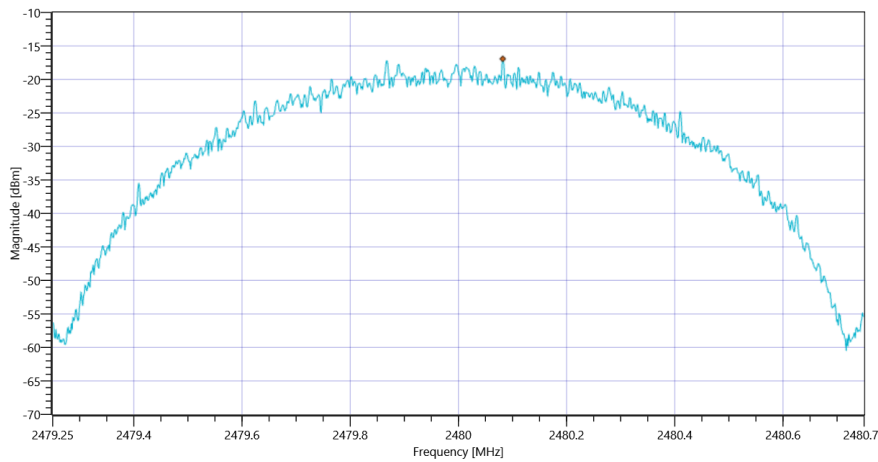

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps_28092021_150630.png

TEST FINISHED

General Verdict

PASS

10. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps

Test References	
TC Start	28.09.2021 14:07:44
Ambit Temp [°C] Humidity [rel%]	24.5 41
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2402 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.34 11.09 10
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1020.098	kHz	INFO
T1 99%	2400.000000	---	2401.4937	MHz	PASS
T2 99%	---	2483.500000	2402.5137	MHz	PASS

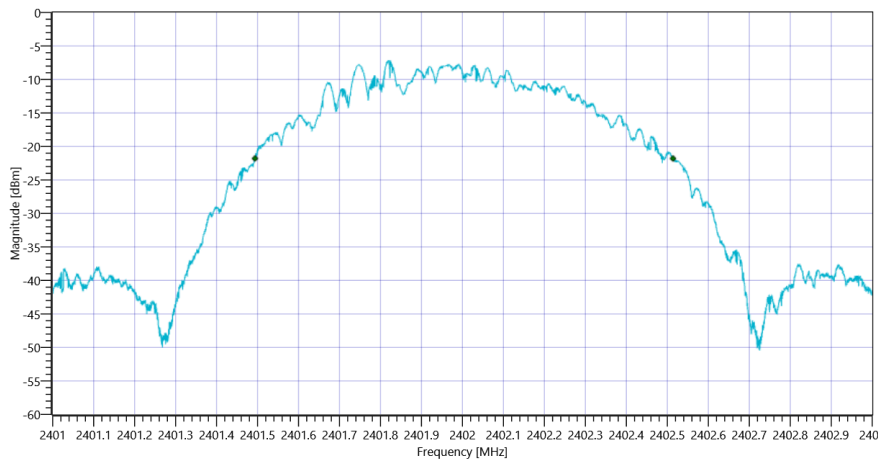


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 99PCT_28092021_140813.png

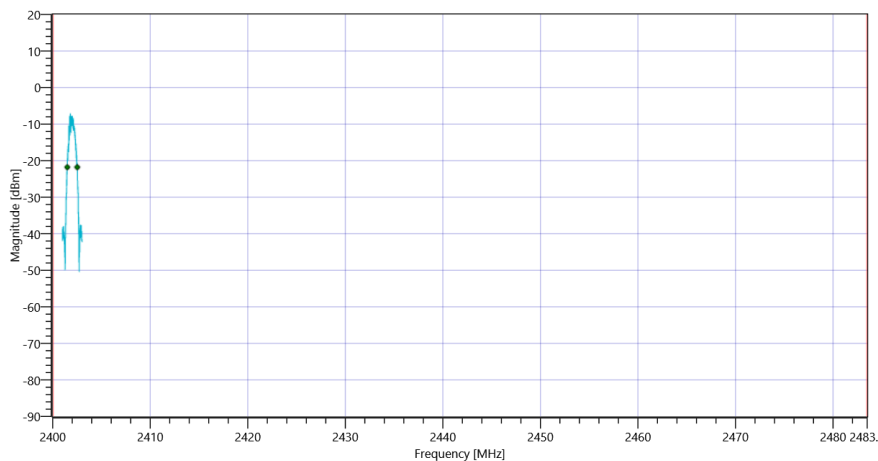


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_28092021_140820.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1158	kHz	INFO
T1 20DB	2400.000000	---	2401.4228	MHz	PASS
T2 20dB	---	2483.500000	2402.5804	MHz	PASS

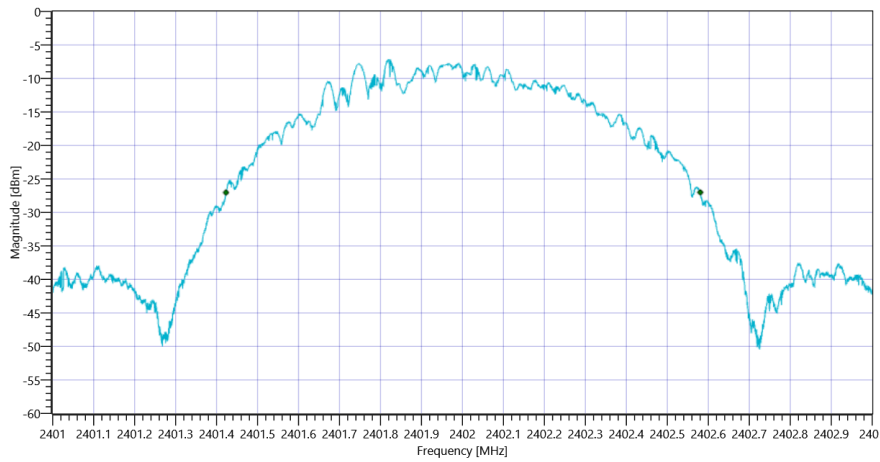

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 MspS 20dB_28092021_140827.png

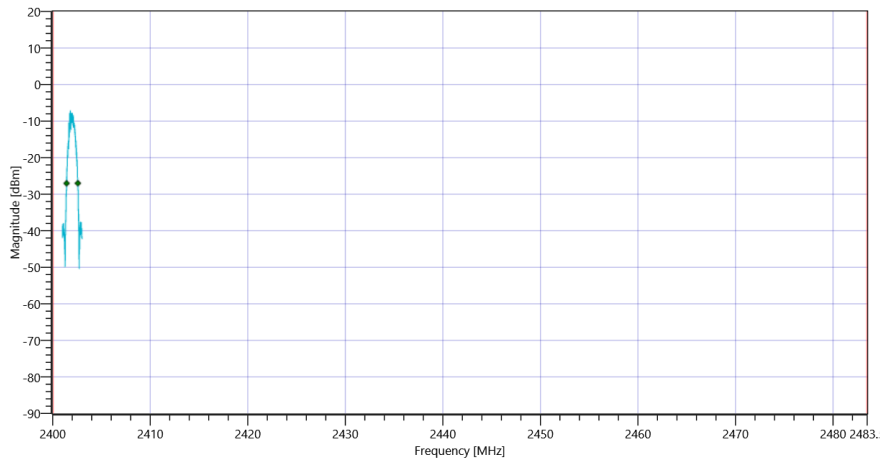

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 MspS_28092021_140833.png

TEST FINISHED

General Verdict

PASS

11. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps

Test References	
TC Start	28.09.2021 14:24:20
Ambit Temp [°C] Humidity [rel%]	24.1 41
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2440 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.11 11.1 10
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1018.698	kHz	INFO
T1 99%	2400.000000	---	2439.4979	MHz	PASS
T2 99%	---	2483.500000	2440.5165	MHz	PASS

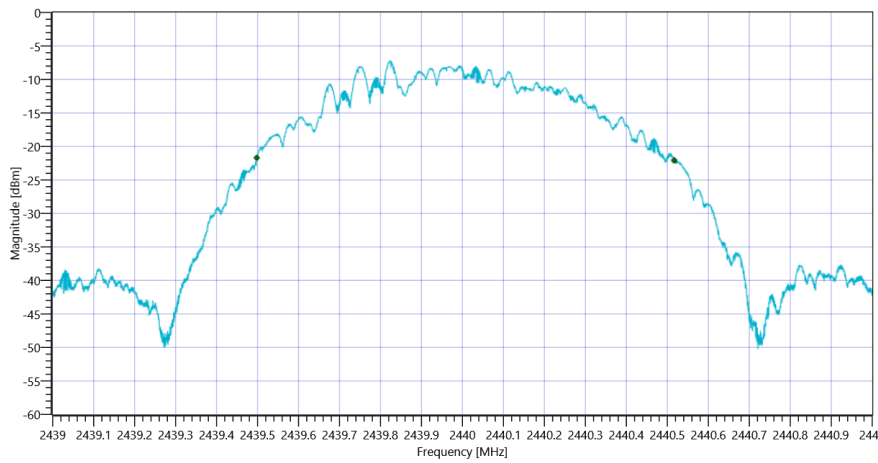


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 99PCT_28092021_142450.png

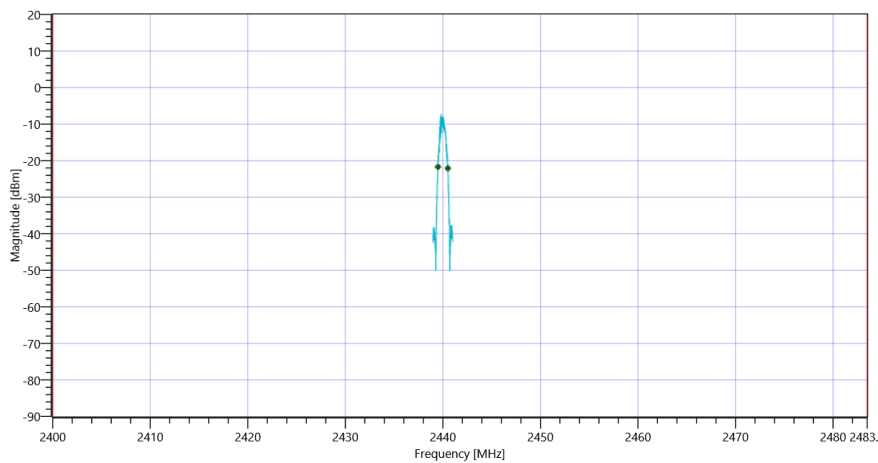


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_28092021_142456.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1155	kHz	INFO
T1 20DB	2400.000000	---	2439.4268	MHz	PASS
T2 20dB	---	2483.500000	2440.5820	MHz	PASS

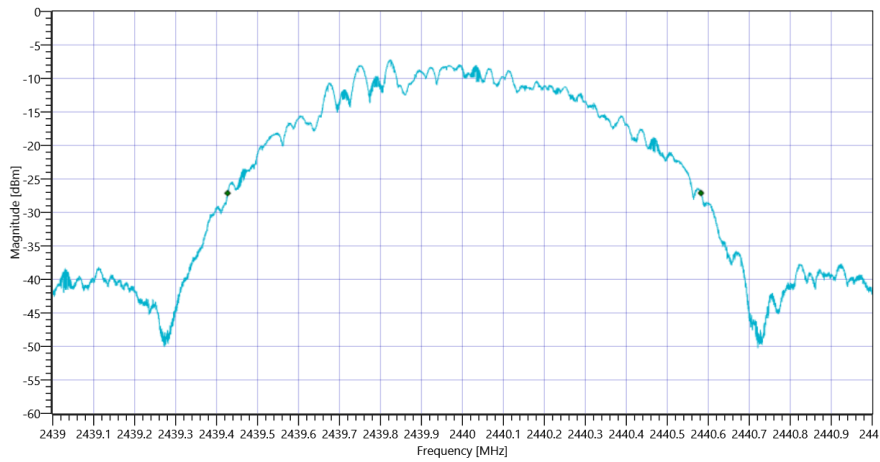

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 MspS 20dB_28092021_142503.png

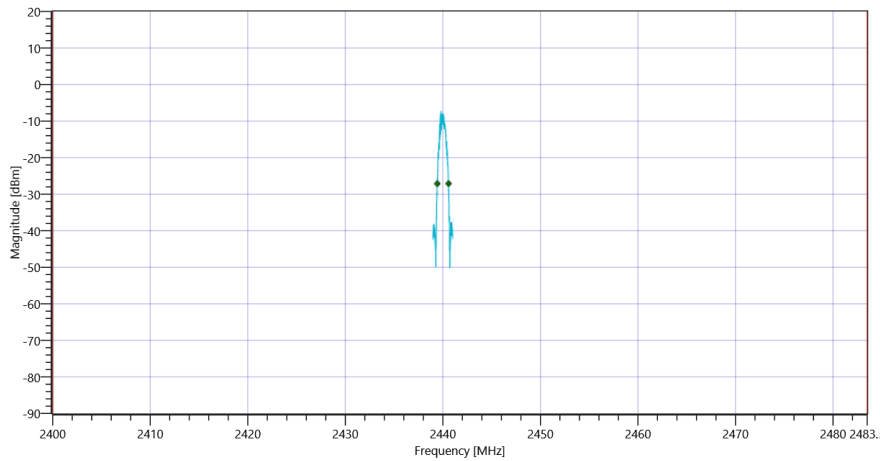

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 MspS_28092021_142509.png

TEST FINISHED

General Verdict

PASS

12. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps

Test References	
TC Start	28.09.2021 15:06:36
Ambit Temp [°C] Humidity [rel%]	24.1 39
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2480 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.92 11.15 10
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1020.098	kHz	INFO
T1 99%	2400.000000	---	2479.4929	MHz	PASS
T2 99%	---	2483.500000	2480.5129	MHz	PASS

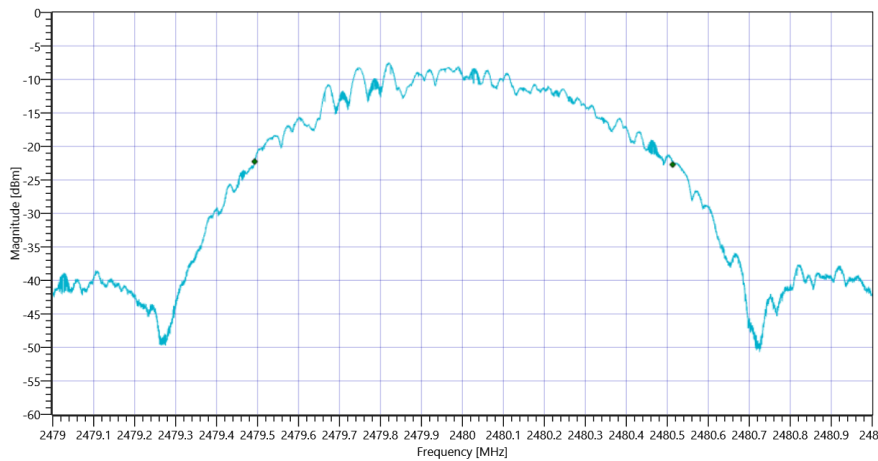


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 99PCT_28092021_150705.png

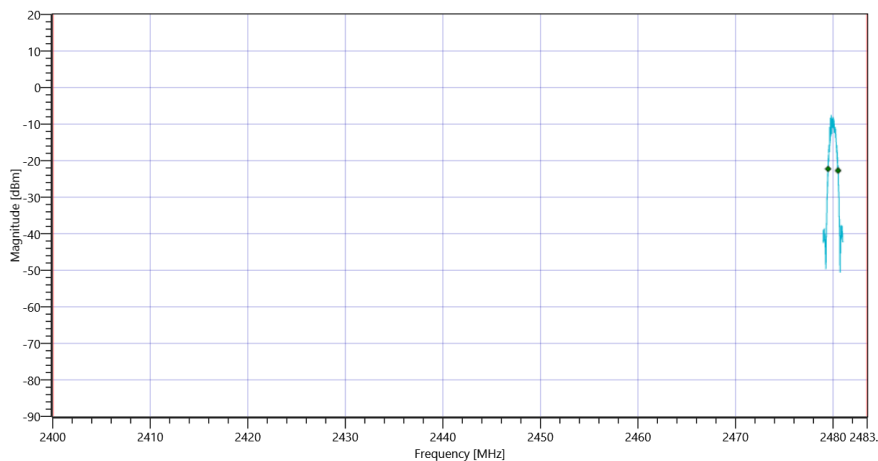


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_28092021_150712.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1158	kHz	INFO
T1 20DB	2400.000000	---	2479.4222	MHz	PASS
T2 20dB	---	2483.500000	2480.5800	MHz	PASS

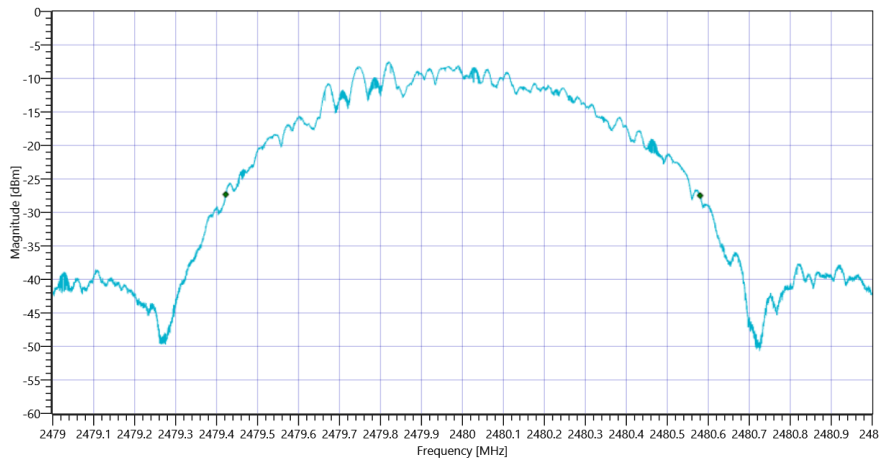

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 MspS 20dB_28092021_150719.png

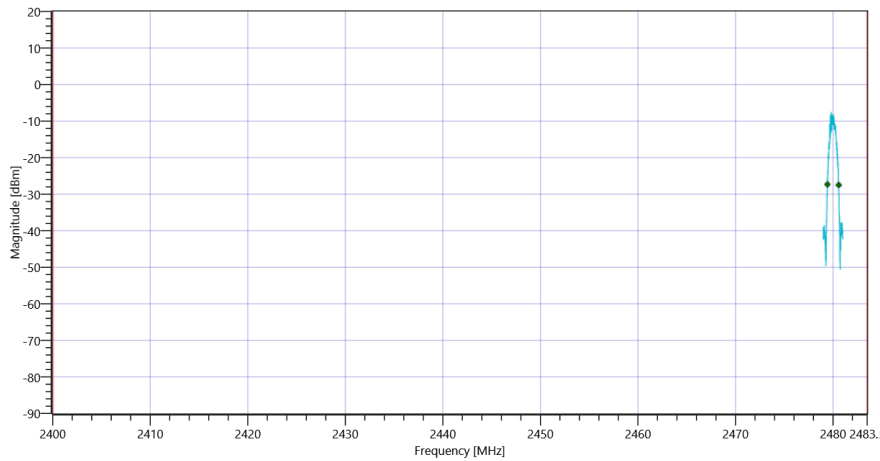

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 MspS 28092021_150725.png

TEST FINISHED

General Verdict

PASS

13. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps

Test References	
TC Start	28.09.2021 14:08:38
Ambit Temp [°C] Humidity [rel%]	24.5 41
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2402 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-0.68 0 15
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2402.33 MHz	---	---	-1.84	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 4804.5 MHz	0	---	20.3	dB	INFO

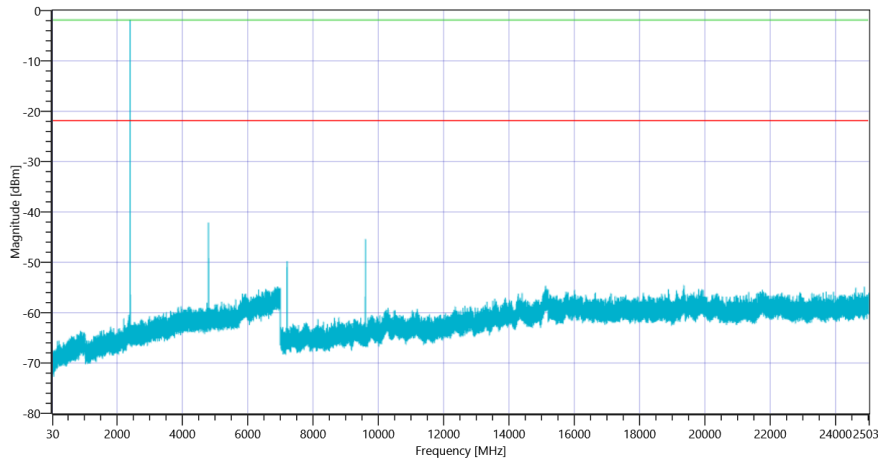

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2402_28092021_141410.png

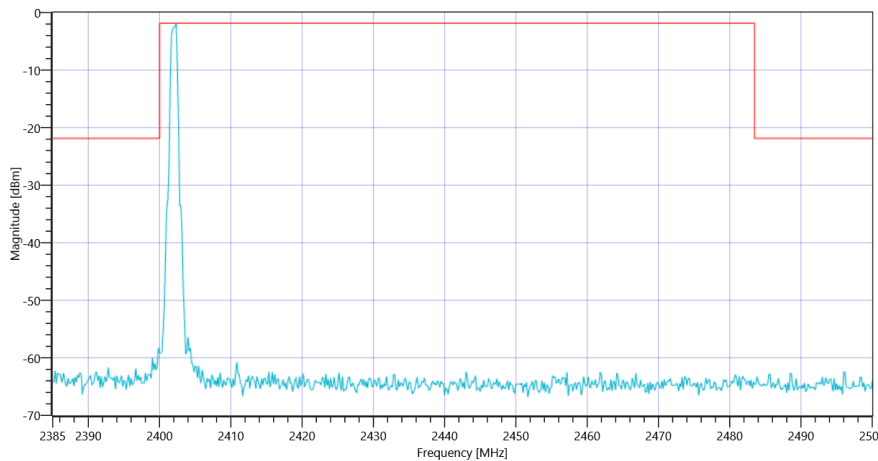

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2402_28092021_141416.png

TEST FINISHED

General Verdict

PASS

14. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps

Test References	
TC Start	28.09.2021 14:25:14
Ambit Temp [°C] Humidity [rel%]	24.1 41
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2440 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-0.90 0 15
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2440.33 MHz	---	---	-2.12	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 4879.5 MHz	0	---	20.82	dB	INFO

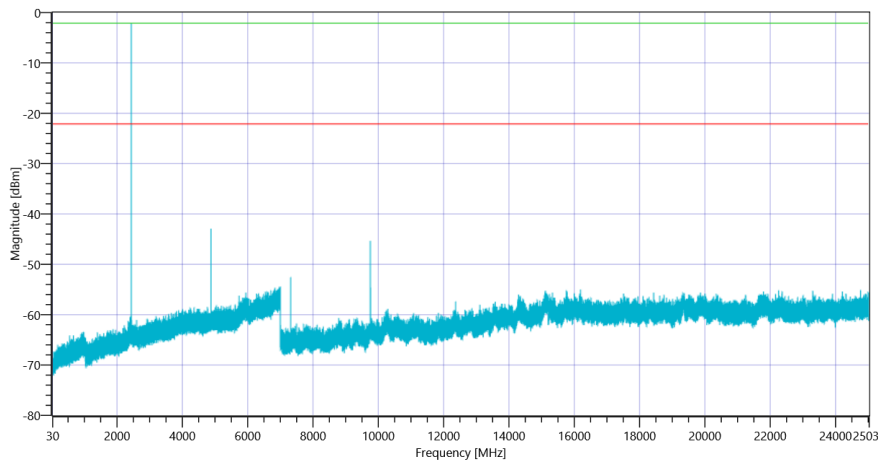

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2440_28092021_143047.png

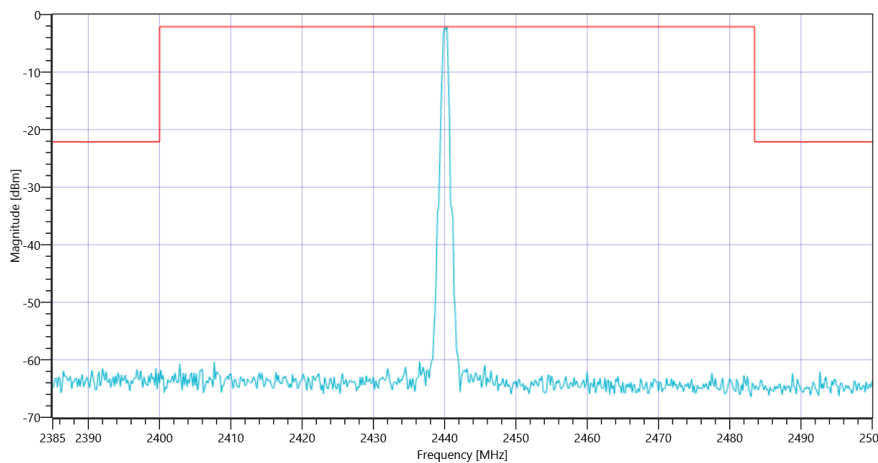

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2440_28092021_143052.png

TEST FINISHED

General Verdict

PASS

15. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps

Test References	
TC Start	28.09.2021 15:07:30
Ambit Temp [°C] Humidity [rel%]	24.1 39
System Version	3.0.1.8
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	1
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2480 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-1.11 0 15
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2480.33 MHz	---	---	-2.20	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-130.1	dB	INFO

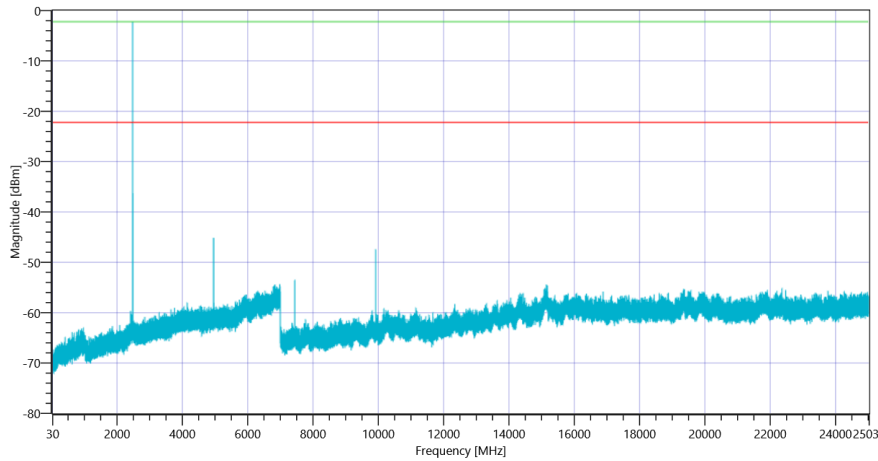

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2480_28092021_151302.png

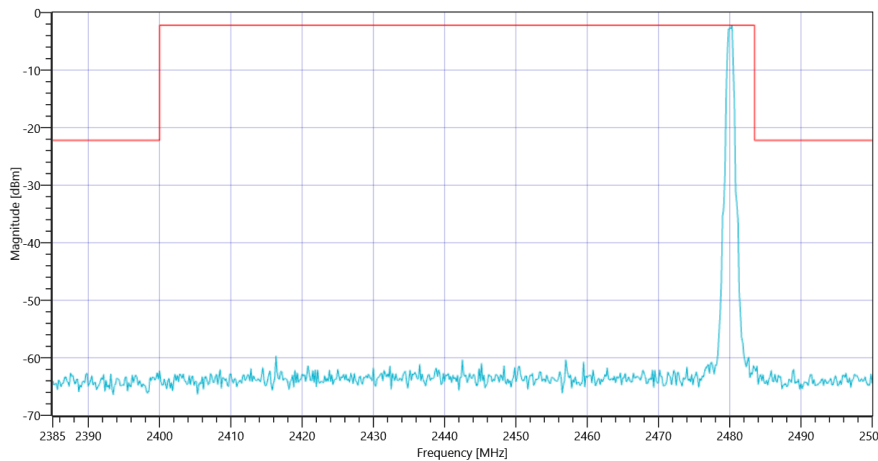

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2480_28092021_151307.png

TEST FINISHED

General Verdict

PASS

- END OF DOCUMENT -