

TEST REPORT

of

FCC CFR 47 part 1, 1.1307(b), 1.1310

FCC ID: OSLOKA-105W

Equipment Under Test : UNIT ASSY - WIRELESS CHARGING
Model Name : OKA-105W
Applicant : Omron Automotive Electronics Korea Co., Ltd.
Manufacturer : Omron Automotive Electronics Korea Co., Ltd.
Date of Receipt : 2018.06.12
Date of Test(s) : 2018.06.18 ~ 2018.07.04
Date of Issue : 2018.07.05

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Nancy Park

Date:

2018.07.05

Technical
Manager:



Jungmin Yang

Date:

2018.07.05

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

Table of contents

1. General information -----	3
2. Test Result -----	5

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

1. General information

1.1. Testing laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

-Wireless Div. 2FL, 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807

-Designation number: KR0150

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Phone No. : +82 31 688 0901

Fax No. : +82 31 688 0921

1.2. Details of applicant

Applicant : Omron Automotive Electronics Korea Co., Ltd.

Address : 790-12, Bogaewonsam-ro, Bogae-myeon, Anseong-si, Gyeonggi-do, South Korea, 17507

Contact Person : Nam, Sang-Il

Phone No. : +82 2 850 5789

1.3. Details of manufacturer

Company : Same as applicant

Address : Same as applicant

1.4. Description of EUT

Kind of Product	UNIT ASSY - WIRELESS CHARGING
Model Name	OKA-105W
Power Supply	DC 12.0 V
Frequency Range	111 kHz
Antenna Type	Inductive loop coil antenna

1.5. Declaration by the manufacturer

- The EUT has 3 loop coil antennas with one amplifier, and only one antenna can transmit at once.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

1.6. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Interval	Cal. Due
E-Field Probe	D.A.R.E!! Instruments	RadiSense 4	13I00444SNO04	Jun. 21, 2018	Annual	Jun. 21, 2019
Magnetic Field Sensor	HIOKI	1087-C1	3472	Dec. 26, 2017	Annual	Dec. 26, 2018
Magnetic Field Hitester	HIOKI	FT3470-50	120429926	May 24, 2018	Annual	May 24, 2019
Anechoic Chamber	SY Corporation	L x W x H (9.6 m x 6.4 m x 6.6 m)	N/A	N.C.R.	N/A	N.C.R.

► Support equipment

Description	Manufacturer	Model	FCC ID
Samsung Mobile Phone	Samsung Electronics Co., Ltd.	SM-G900L	A3LSMG900S

1.7. Worst case of test configurations

In order to check all kinds of possible configurations, EUT was evaluated with appropriate client and under each charging condition as below table.

EUT configuration	Description
Charging Mode with client device (Model: SM-G900L, FCC ID: A3LSMG900S)	1 % of battery
	50 % of battery
	99 % of battery

Note;

EUT was investigated with client device under normal charging condition as above then worst value was only reported.

1.8. Test report revision

Revision	Report number	Date of Issue	Description
0	F690501/RF-RTL012845	2018.07.05	Initial

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

2. Test Result

2.1. Test Setup

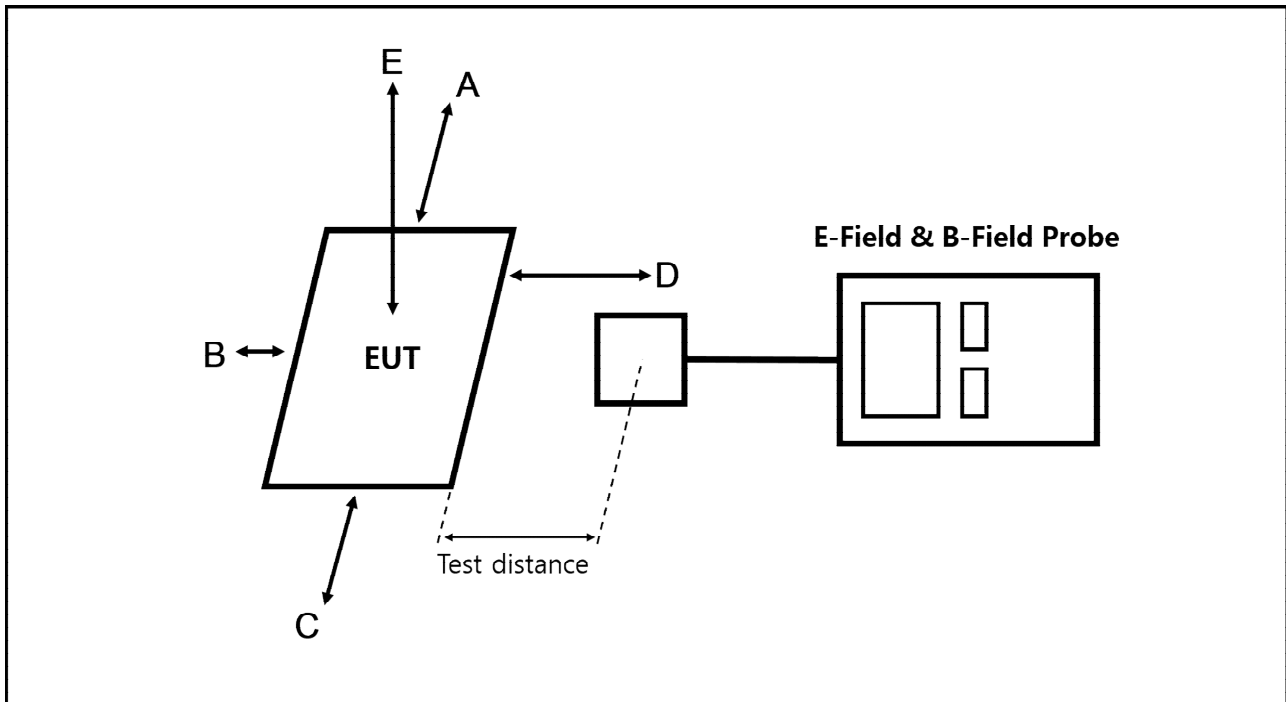

2.2. Measurement procedure

- The RF exposure test was performed in anechoic chamber.
- The minimum separation distance to user is 4 cm. Thus, the measurement probe was placed at test distance (4, 6, 8, 10, 13, 15 cm) which is between the edge of the charger and the geometric center of probe.
- The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- The EUT was measured according to the dictates of KDB 680106 D01 v03.

Note:

- Bottom of EUT shall be connected into the vehicle.
So these parts are not considered from MPE measurement.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

2.3. Equipment Approval Considerations item 5 b) of KDB 680106 D01 v03.

- (1) Power transfer frequency is less than 1 MHz.
 - The device operates at a frequency 111 kHz.
- (2) Output power from each primary coil is less than or equal to 15 watts.
 - Output power from primary coil: 5 watts.
- (3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
 - The transfer system including a charging system with multiple primary coils are to detect and allow only between individual pairs of coils.
- (4) Client device is placed directly in contact with the transmitter.
 - Client device is placed directly in contact with the transmitter.
- (5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
 - Mobile exposure conditions only.
- (6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50 % of the MPE limit.
 - Refer to following test results.
The EUT H-Field Strength levels at 15 cm < 50 % of the MPE H-Field Strength limit 1.63 A/m
 0.100 A/m (Max. at 15 cm) < 0.815 A/m

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

2.4. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

TABLE 1 - LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (minutes)
(A) Limits for Occupational /Control Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1 500			f/300	6
1 500-100 000			5	6
(B) Limits for General Population / Uncontrol Exposures				
<u>0.3-1.34</u>	<u>614</u>	<u>1.63</u>	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1 500			f/1 500	30
1 500-100 000			1.0	30

f = frequency in MHz

* = Plane wave equivalent power density

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

2.5. E and H field strength

Ambient temperature : (23 ± 1) °C
Relative humidity : 47 % R.H.

2.5.1. E-Field Strength at from the edges surrounding the EUT

Test Condition: 1 % battery status of client device

Frequency (kHz)	Distance (cm)	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	Limits (V/m)
111	15	6.59	7.26	6.84	8.04	10.80	614
	13	7.24	10.40	7.57	9.21	14.10	
	10	9.51	12.50	13.50	14.80	20.80	
	8	14.00	19.10	19.20	19.50	29.80	
	6	21.80	26.60	31.20	31.80	43.70	
	4	33.70	44.50	64.40	56.20	69.30	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

2.5.2. H-Field Strength at from the edges surrounding the EUT

Test Condition: 1 % battery status of client device

Frequency (kHz)	Distance (cm)	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	Limits (A/m)
111	15	0.06	0.06	0.05	0.02	0.10	1.63
	13	0.08	0.02	0.06	0.04	0.18	
	10	0.14	0.17	0.10	0.03	0.22	
	8	0.21	0.18	0.14	0.06	0.26	
	6	0.30	0.42	0.22	0.19	0.65	
	4	0.62	0.86	0.38	0.54	1.32	

Remark:

1. H-field strength (A/m) = B-field (μT) / 1.25
2. Each antenna was tested. As worst condition, Ant. 3 is reported.

- End of the Test Report -

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)