


# **Test setup photos of EUT**

# 1. Orthogonal plane of EUT

- The testing was set in the one orthogonal plane (x-axis) and measured.

**X- axis**

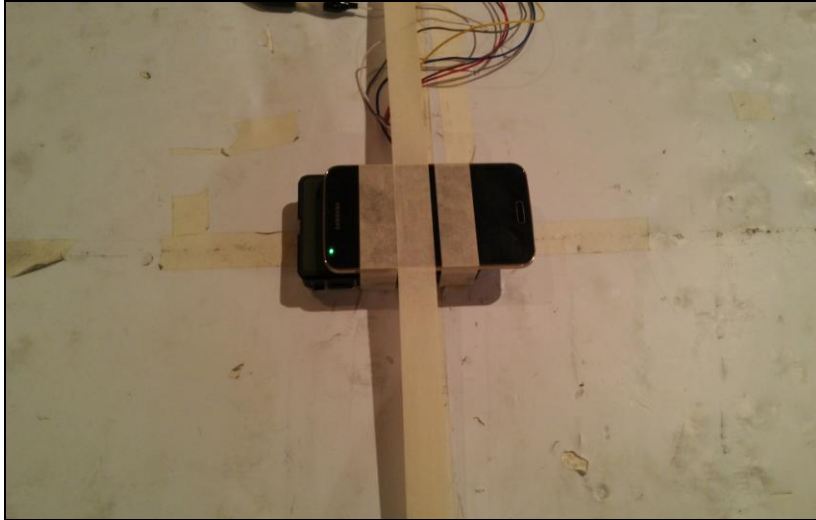

## 2. Radiated Field strength

Frequency range: 9 kHz ~ 30 MHz

Client device (SM-G900L)



### 3. Maximum Permissible Exposure

#### 3.1. As close as possible distance between the edge of the EUT and the center of probe

##### A. E-Field

Client device (SM-G900L)



##### B. H-Field

Client device (SM-G900L)



### 3.2. 20 cm Distance between the edge of the EUT and the center of probe

#### A. E-Field

Client device (SM-G900L)



#### B. H-Field

Client device (SM-G900L)

