


| | | | |
|-------------|-----------------|----------|----------------------------|
| Model | : aaaa | Standard | : EN 55022/07(ITE) Class B |
| Serial | : | Remark1 | : |
| Operator | : | Remark2 | : |
| AC Power | : AC 220V, 50Hz | Remark3 | : |
| Temp, Humid | : 23deg, 60% | Remark4 | : |

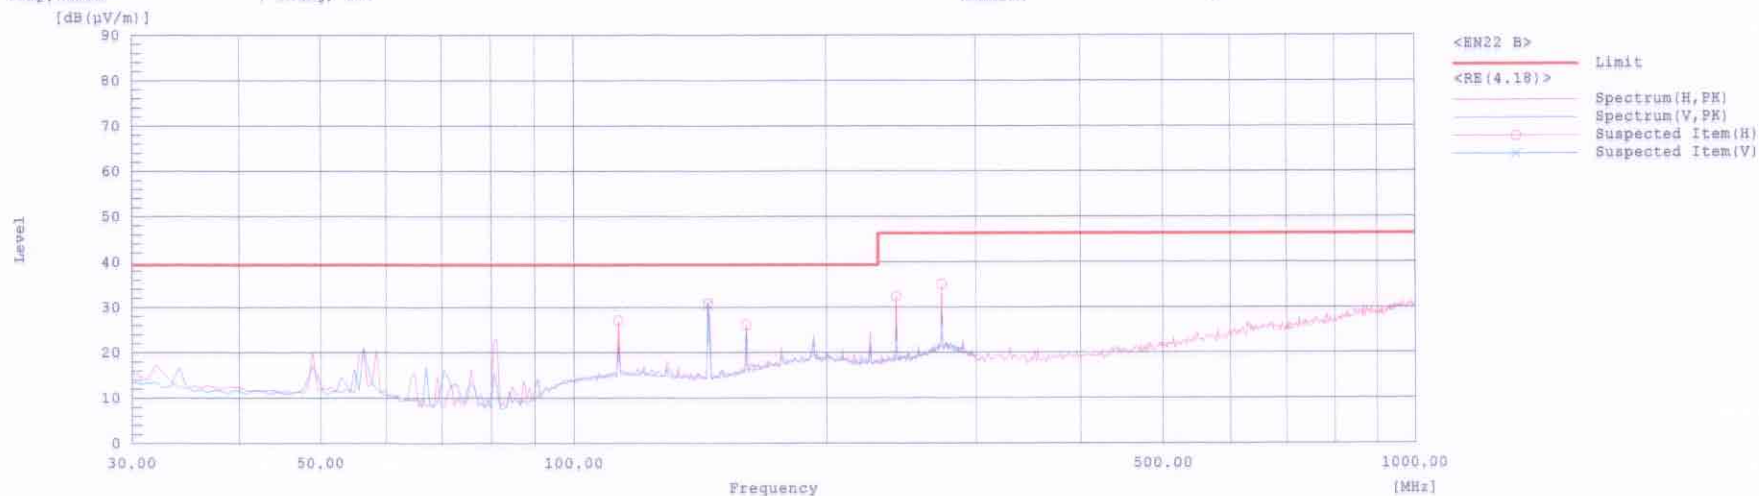

Spectrum Selection

| No. | Frequency [MHz] | (P) | Reading [dB(µV)] | c.f [dB(1/m)] | Result PK [dB(µV/m)] | Limit [dB(µV/m)] | Margin [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|------------------|---------------|----------------------|------------------|-------------|-------------|-----------|--------|
| 1 | 144.750 | H | 45.7 | -14.2 | 31.5 | 40.0 | 8.5 | 200.0 | 240.6 | |
| 2 | 144.750 | V | 45.4 | -14.2 | 31.2 | 40.0 | 8.8 | 200.0 | 136.1 | |
| 3 | 273.000 | H | 43.1 | -7.3 | 35.8 | 47.0 | 11.3 | 100.0 | 226.1 | |
| 4 | 241.275 | H | 43.2 | -10.1 | 33.1 | 47.0 | 13.9 | 100.0 | 239.1 | |
| 5 | 113.025 | H | 41.5 | -13.7 | 27.8 | 40.0 | 12.2 | 100.0 | 1.0 | |
| 6 | 160.950 | H | 39.4 | -12.6 | 26.8 | 40.0 | 13.2 | 100.0 | 150.5 | |