Operation Summary
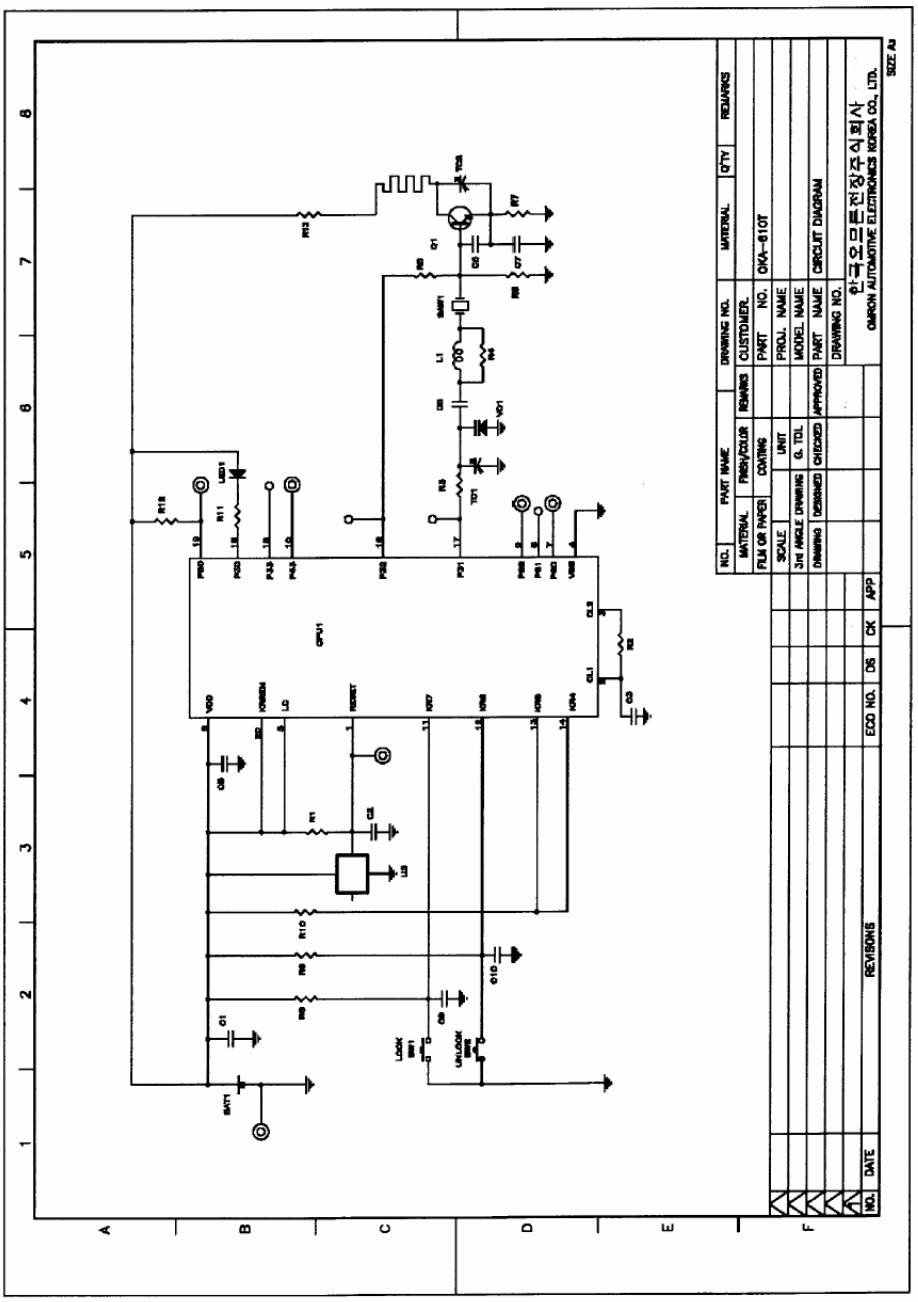
1. TX SW ON.
2. LED ON & DC 3V supplies to CPU
3. CPU works the Resonator & the Q1 (2SC3356)
4. Signal be amplified is sent to the Frequency Output.
5. Frequency Output transmits the Data to Receiver by Radio Frequency.