



BUREAU VERITAS

TEST REPORT No: (5214)233-0874

TEST REPORT

To:	JAKKS PACIFIC (H.K.) LIMITED	To:	-
Attn:	Horace Chau / Kin Yiu / Jessica Ho	Attn:	-
Address:	12/F, Wharf T&T Centre, 7 Canton Road, Tsim Sha Tsui, Kowloon, Hong Kong.	Address:	-
Fax:	--	Fax:	-
E-mail:	jphk-prodIntg@jakks.com.hk / sylviam@jakks.com.hk / jessicah@jakks.com.hk	E-mail:	-
Folder No.:	--		

Factory name:	ROOTLAND PLASTIC FACTORY
Location:	--
Product:	HERO PORTAL-HTTYD / HERO PORTAL-HTTYD Booster Pack (Colud Jumper and Meatlug) / HERO PORTAL- HTTYD Booster (Barf/ Belch and Hookfang) Model No.: 83436, 83461, 83462



Sample No:	(5214)233-0874
Test Date(s):	August 14, 2014 to August 18, 2014
Test Requested:	FCC Part 15 – 2012
Test Method:	ANSI C63.4 – 2009
FCC ID:	OTA83436

The results given in this report are related to the tested specimen of the described electrical apparatus.

CONCLUSION: The submitted sample was found to COMPLY with requirement of FCC Part 15 Subpart C.

Authorized Signature:

Reviewed by: Keith Yeung
Date: August 27, 2014

Approved by: Steven Tsang
Date: August 27, 2014



**BUREAU
VERITAS**

TEST REPORT No: (5214)233-0874

Test Result Summary

EMISSION TEST			
Test requirement: FCC Part 15 - 2012			
Test Condition	Test Method	Test Result	
		Pass	Failed
Radiated Emission Test, 9kHz to 1GHz	ANSI C63.4	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Frequency range of Fundamental Emission	ANSI C63.4	<input checked="" type="checkbox"/>	<input type="checkbox"/>
26dB Bandwidth of Fundamental Emission	ANSI C63.4	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Frequency Drift	ANSI C63.4	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Report Revision & Sample Re-submit History:

--



TEST REPORT No: (5214)233-0874

DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.
1	TELEVISION	LG	M197WAJ	905KCRN07566

NOTE: All power cords of the above support units are non-shielded (1.8m).



TEST REPORT No: (5214)233-0874

Location of the test laboratory

Radiated and Conducted emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009. An Open Area Test Site and Full Anechoic Chamber (FCC Listed Site, Registration No. 642151) are set up for investigation and located at:

BUREAU VERITAS HONG KONG LIMITED, EMC CENTRE

No. 2106-2107, 21/F., Westin Centre,
26 Hung To Road,
Kwun Tong, Kowloon,
Hong Kong

List of measuring equipment

Radiated Emission

EQUIPMENT	MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATION DUE
EMI TEST RECEIVER	R&S	ESCI	100379	20-JAN-2015
SIGNAL ANALYZER 40GHZ	R&S	FSV 40	100977	20-OCT-2014
LOOP ANTENNA	ETS-LINDGREN	6502	00102266	20-OCT-2014
BILOG ANTENNA	SCHAFFNER	CBL6112D	25229	14-SEP-2014
OPEN AREA TEST SITE	BVCPS	N/A	N/A	11-SEP-2014
ANECHOIC CHAMBER	ALBATROSS	M-CDC	80374004499B	06-JUL-2015
COAXIAL CABLE	SUHNER	N/A	N/A	23-SEP-2014

Frequency error and Frequency drift, Modulation bandwidth, Frequency stability

EQUIPMENT	MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATION DUE
EMI TEST RECEIVER	ROHDE & SCHWARZ	ESCI	100379	20-JAN-2015
SIGNAL ANALYZER 40GHZ	R&S	FSV 40	100977	20-OCT-2014
CLIMATIC CHAMBER	EMV	TH-22P2S	N/A	17-JUN-2015

Remarks:-

N/A : Not Applicable or Not Available

The measurement instrumentation uncertainty would be taking into consideration on each of the test result

TEST REPORT No: (5214)233-0874

Equipment Under Test [EUT]

Description of Sample:

Product: HERO PORTAL-HTTYD /
HERO PORTAL-HTTYD Booster Pack (Colud Jumper and Meatlug) /
HERO PORTAL-HTTYD Booster (Barf/ Belch and Hookfang)

Model No.: 83436, 83461, 83462

Model information: 83436 (TVG and Figure), 83461 (Figure only), 83462 (Figure only)

Additional Model name: --

Additional Model number: --

Additional Model Information: --

Power Supply: 6Vd.c. ("AA" size battery x 4)

Description of EUT Operation:

The Equipment Under Test (EUT) is a **JAKKS PACIFIC (H.K.) LIMITED** of RFID toy. The transceiver with 6 Tags is operating at 13.563MHz. The transceiver continues to transmit when buttons is turn to ON and the Passive Tags provoked the signal transmission when the transceiver track on them. Modulation by IC, and type is amplitude modulation.

The transceiver has different control:

1. Switch "ON/OFF" – ON/OFF control

Antenna Requirement (Section 15.203)

The EUT is use of a permanently antenna. The antenna consists of 43cm long wire. It is soldered on the PCB. The antenna is not replaceable or user serviceable. The requirements of S15.203 are met. There are no deviations or exceptions to the specifications.

Photo of Antenna



TEST REPORT No: (5214)233-0874

Test Results

Radiated Emissions (Fundamental)

Test Requirement: FCC Part 15 Section 15.225
 Test Method: ANSI C63.4
 Test Date(s): 2014-08-14
 Temperature: 31.0 °C
 Humidity: 75.0 %
 Atmospheric Pressure: 99.8 kPa
 Mode of Operation: Transmission mode
 Tested Voltage: 6Vd.c. ("AA" size battery x 4)

Test Procedure:


Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using new battery. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.

Location: The Roof, Westin Centre, 26 Hung To Road, Kwun Tong, Kowloon, Hong Kong

Test Setup: Open Area Test Site

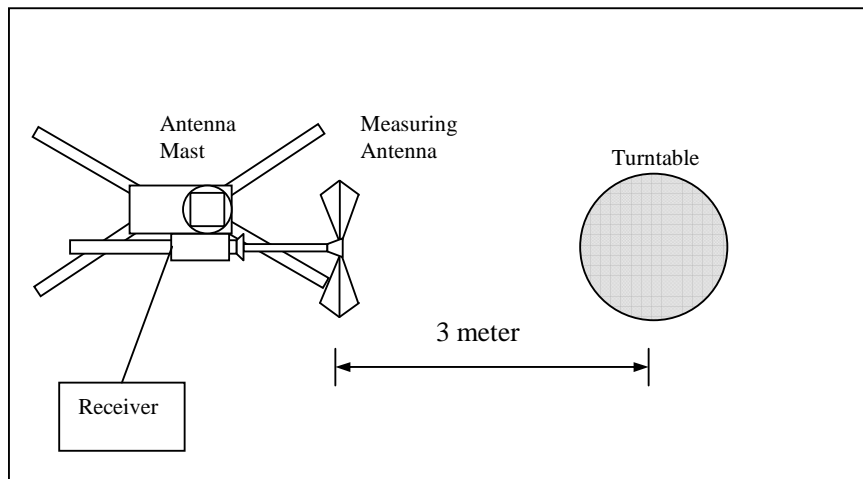



TEST REPORT No: (5214)233-0874

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.225]:

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission at 3m
13.553-13.567	124 dB μ V/m

Measurement Data

Test Result of (Transmission mode): PASS

Detection mode: Quasi-Peak

Frequency (MHz)	Polarity (H/V) and degree	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
13.563	V/0°	13.5	62.5	124.0	-61.5

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 100KHz
VBW = 300KHz



TEST REPORT No: (5214)233-0874

Radiated Emissions (9kHz – 1GHz)

Test Requirement: FCC Part 15 Section 15.209
 Test Method: ANSI C63.4

Test Date(s): 2014-08-14
 Temperature: 31.0 °C
 Humidity: 75.0 %
 Atmospheric Pressure: 99.8 kPa

Mode of Operation: Transmission mode
 Tested Voltage: 6Vd.c. ("AA" size battery x 4)

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [μV/m]	Measurement Distance m
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above960	500	3



**BUREAU
VERITAS**

TEST REPORT No: (5214)233-0874

Measurement Data

Test Result of (Transmission mode): PASS

Detection mode: Quasi-Peak

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
162.756	H	11.0	29.9	43.5	-13.6
189.882	H	10.7	28.0	43.5	-15.5
203.445	H	10.8	27.8	43.5	-15.7
217.008	H	10.6	28.2	46.0	-17.8
230.571	H	11.8	29.6	46.0	-16.4
244.134	H	13.5	31.5	46.0	-14.5
257.697	H	15.1	35.7	46.0	-10.3
271.260	H	14.2	34.6	46.0	-11.4
284.823	H	14.7	35.9	46.0	-10.1
298.386	H	14.9	32.0	46.0	-14.0
501.831	H	19.7	31.2	46.0	-14.8
515.394	H	19.8	33.5	46.0	-12.5
528.957	H	19.8	33.8	46.0	-12.2

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
162.756	V	11.0	21.5	43.5	-22.0
189.882	V	10.7	21.7	43.5	-21.8
203.445	V	10.8	21.4	43.5	-22.1
217.008	V	10.6	22.1	46.0	-23.9
230.571	V	11.8	22.2	46.0	-23.8
244.134	V	13.5	23.5	46.0	-22.5
257.697	V	15.1	27.1	46.0	-18.9
271.260	V	14.2	33.0	46.0	-13.0
284.823	V	14.7	35.2	46.0	-10.8
298.386	V	14.9	30.7	46.0	-15.3
501.831	V	19.7	39.9	46.0	-6.1
515.394	V	19.8	39.5	46.0	-6.5
528.957	V	19.8	33.6	46.0	-12.4

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 120KHz
VBW = 120KHz

26dB Bandwidth of Fundamental Emission

**BUREAU VERITAS HONG KONG LIMITED –
Kowloon Bay Office
1/F Pacific Trade Centre,
2 Kai Hing Road, Kowloon Bay,
Kowloon, HONG KONG**
Tel: +852 2331 0888
Fax: +852 2331 0889
www.cps.bureauveritas.com

This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. Our report is limited to the test samples identified herein. The results set forth in this report are not necessarily indicative or representative of the statistical quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof. You shall have thirty days from receipt of this report to request additional testing of the samples or to notify us of any errors or omissions relating to our report, provided, however, such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TEST REPORT No: (5214)233-0874

Test Requirement: FCC 47 CFR 15.225
 Test Method: ANSI C63.4
 Test Date(s): 2014-08-18
 Temperature: 24.0 °C
 Humidity: 53.0 %
 Atmospheric Pressure: 99.6 kPa
 Mode of Operation: Transmission mode
 Tested Voltage: 6Vd.c. ("AA" size battery x 4)

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Limits for 26dB Bandwidth of Fundamental Emission:

Frequency [MHz]	26dB Bandwidth [Hz]	Limits [MHz]
13.563108	924.00	within 13.553 – 13.567




BUREAU VERITAS

TEST REPORT No: (5214)233-0874

Measurement Data :

Test Result of 26dB Bandwidth of Fundamental Emission: PASS

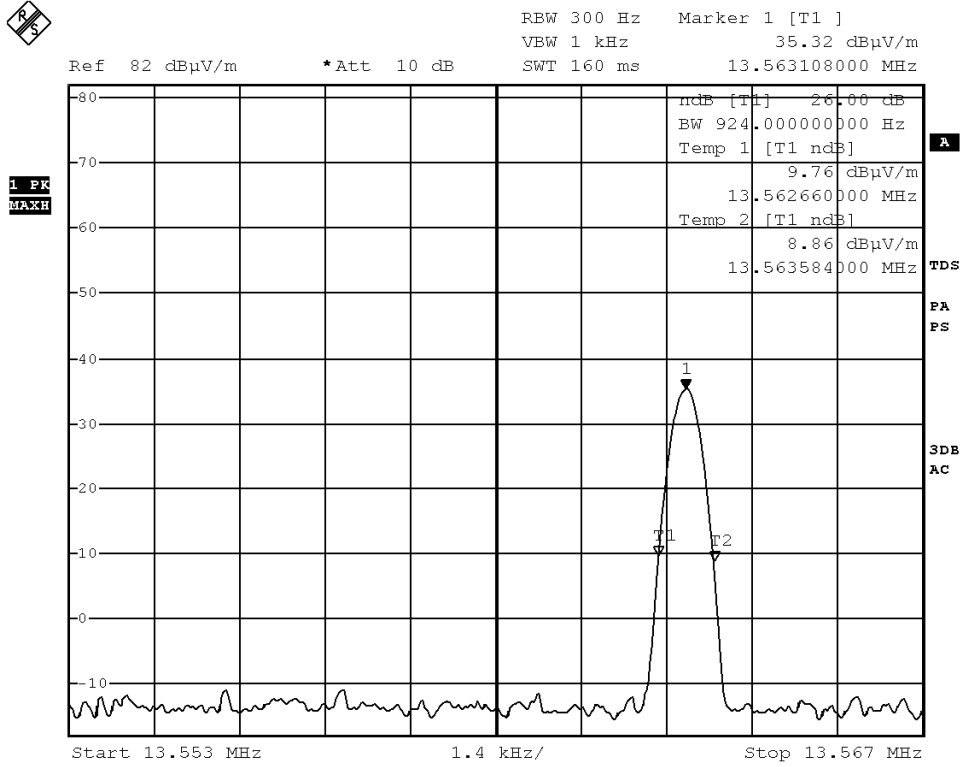



TEST REPORT No: (5214)233-0874

Frequency Drift

Test Requirement: FCC Part 15 Section 15.225
 Test Method: ANSI C63.4
 Test Date(s): 2014-08-18
 Temperature: 24.0 °C
 Humidity: 53.0 %
 Atmospheric Pressure: 99.6 kPa
 Mode of Operation: Transmission mode
 Tested Voltage: 6Vd.c. ("AA" size battery x 4)

Test Setup:

The EUT was placed at a site with temperature control and supplied with power for extreme voltage testing. Antenna with suitable frequency range was used during the test.

The test was performed in accordance with ANSI C63.4.

Location: Anechoic Chamber, No. 2106-2107, 21/F., Westin Centre, 26 Hung To Road, Kwun Tong, Kowloon, Hong Kong

Limit for Frequency Tolerance:

Maintained within +/- 0.01% of the operating frequency

Test Result of (Transmission mode): PASS

Test Condition		Nominal Transmit Frequency: 13.563MHz				
		Time				
		Start up	Two minutes after	Five minutes after	Ten minutes after	Frequency tolerance (%)
T _{nom} : 20°C	V _{nom} : 6.00V	13.56312	13.56312	13.56312	13.56312	N/A
T _{min} : -20°C	V _{nom} : 6.00V	13.56308	13.56308	13.56308	13.56308	-0.00029
T _{max} : 50°C	V _{nom} : 6.00V	13.56316	13.56316	13.56316	13.56316	0.00032

Remarks:-

N/A: Not Applicable or Not Available



**BUREAU
VERITAS**

TEST REPORT No: (5214)233-0874

Photographs of EUT

Front View of the product



Rear View of the product



Top View of the product



Bottom View of the product




Side View of the product



Side View of the product



Battery compartment

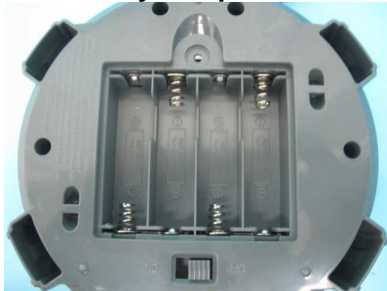

Battery Cover



TEST REPORT No: (5214)233-0874

Photographs of EUT


Internal View of the product



Internal View of the product




Inner Circuit Top View

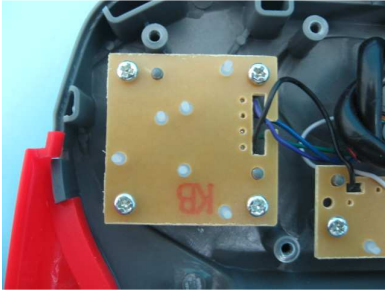

Inner Circuit Bottom View




Inner Circuit Top View

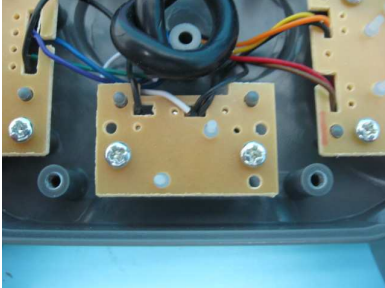


Inner Circuit Bottom View



Inner Circuit Top View

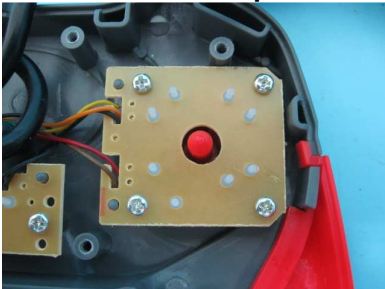

Inner Circuit Bottom View

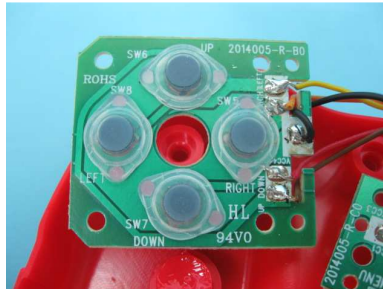

TEST REPORT No: (5214)233-0874

Photographs of EUT

Internal View of the product



Internal View of the product





**BUREAU
VERITAS**

TEST REPORT No: (5214)233-0874

Measurement of Radiated Emission Test Set Up



******* End of Report *******