

廠商會檢定中心

## **TEST REPORT**

Report No.	•	AW0041106(1)	Date :	17 Jul 2018

Application No. : LW018539(4)

Client : Kidztech Toys Manufacturing Limited

Room 1201, 12/F., Inter-Continental Plaza, 94 Granville Road, Tsim Sha Tsui East,

Kowloon, Hong Kong

Sample Description : One(1) item of submitted sample stated to be:

Sample Description	Model No.
1/6 R/C Yamaha Raptor 700R	84052

Radio Frequency : 27.145MHz
Rating : 1 x 9V battery
No. of submitted sample : One (1) piece (s)
Sample registration No. : RW019274-001

Date Received : 19 Jun 2018

Test Period : 19 Jun 2018 to 10 Jul 2018

Test Requested : FCC 47CFR Part 15 Certification and RSS-310 Verification.

Test Method : 47 CFR Part 15 (10-1-17 Edition)

RSS-310 Issue 4, July 2015 ANSI C63.10 – 2013

Test Result : See attached sheet(s) from page 2 to 15.

Conclusion : The submitted sample was found to comply with requirement of FCC 47CFR Part

15 Subpart C and RSS-310 Issue 4.

For and on behalf of

CMA Industrial Development Foundation Limited

Authorized Signature : Page 1 of 15

Mr. WONG Lap-pong Andrew

Manager Electrical Division

FCC ID: OTM-8405218-27MTX

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website <a href="https://www.cmatesting.org">www.cmatesting.org</a>. This document shall not be reproduced except in full or with written approval by CMA Testing.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatesting.org Web Site: http://www.cmatesting.org



### **Table of Contents**

1	Gen	neral Information	3
	1.1	General Description	3
	1.2	Location of the test site	4
		List of measuring equipment	
	1.4	Measurement Uncertainty	6
	1.5	Test Summary	6
2	Des	cription of the radiated emission test	7
	2.1	Test Procedure	7
	2.2	Test Setup	8
	2.3	Test Result	. 10
	3.1	Test Procedure	. 12
		Test Result	
	3.3	Test Setup	. 12
	3.4	Graph and Table of Conducted Emission Measurement Data	. 12
4	Sup	plementary document	. 13
	4.1	Bandwidth	. 13
5	App	pendices	. 14

FCC ID: OTM-8405218-27MTX



### 1 General Information

## 1.1 General Description

The equipment under test (EUT) model 84052 is a remote controlled toys. It operates at frequency band 27.145MHz for transmitter. The oscillation of radio control is generated by a 27.145MHz crystal (TX1) and modulated by encoder IC1 977. The EUT is powered by one 9V battery. The EUT contains two control levers to control moving direction and a ON/OFF switch (K1).

The extendable antenna is used in EUT and the radio output power is unable to adjust.

The brief circuit description is listed as follows:

- SW1-SW4 and K1	and its associated circuit act as switch and control lever.
- IC1	and its associated circuit act as Encoder.
- TX1	and its associated circuit act as oscillation clock.
- Q1	and its associated circuit act as modulator.
- Q2	and its associated circuit act as RF amplifier.
- C6, C7, C8, T1, L3	and its associated circuit act as Filter and Antenna matching.
- ZD3	and its associated circuit act as Regulator circuit



#### 1.2 Location of the test site

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2014. A Semi-Anechoic Chamber Testing Site is set up for investigation and located at:

Ground Floor, Yan Hing Centre, 9 – 13 Wong Chuk Yeung Street, Fo Tan, Shatin, New Territories, Hong Kong.

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.4 - 2014. A shielded room is located at :

Ground Floor, Yan Hing Centre, 9 – 13 Wong Chuk Yeung Street, Fo Tan, Shatin, New Territories, Hong Kong.

FCC Accredited Lab (Designation Number: HK0004) ISED Wireless Test Site (ISED Assigned Code: 4093A)



## 1.3 List of measuring equipment

Equipment	Manufacturer	Model No.	Serial No.	Calibration Due Date	Calibration Period
EMI Test Receiver	Rohde & Schwarz	ESCS30	100001	01 Feb 2019	1Year
EMI Test Receiver	Rohde & Schwarz	ESCI	100152	07 Dec 2018	1Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	100964	08 Feb 2019	1Year
Broadband Antenna	Schaffner	CBL6112B	2692	28 Mar 2020	2Years
Loop Antenna	EMCO	6502	00056620	25 Jan 2020	2Years
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D- 531	21 Dec 2018	2Years
Broadband Pre-Amplifier	Schwarzbeck	BBV 9718	9718-119	21 Dec 2018	2Years
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA917 0442	02 Aug 2018	2Years
Broadband Pre-Amplifier	Schwarzbeck	BBV 9719	9719-010	02 Aug 2018	2Years
Coaxial Cable	Schaffner	RG 213/U	N/A	17 May 2019	1Year
Coaxial Cable	Suhner	RG 214/U	N/A	17 May 2019	1Year
Coaxial Cable	Suhner	Sucoflex_104	N/A	21 Dec 2018	1Year
LISN	Rohde & Schwarz	ENV216	101323	16 Jan 2019	1Year
Coaxial Cable	Tyco Electronics	RG 58C/U	N/A	24 Oct 2018	1Year



## 1.4 Measurement Uncertainty

The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor k=2, providing a level of confidence of approximately 95%.

## Radiated emissions

Frequency	Uncertainty (U <sub>lab</sub> )			
30MHz ~ 200MHz (Horizontal)	4.59dB			
30MHz ~ 200MHz (Vertical)	4.49dB			
200MHz ~1000MHz (Horizontal)	4.94dB			
200MHz ~1000MHz (Vertical)	4.97dB			
1GHz ~ 6GHz	4.52dB			

## 1.5 Test Summary

TEST ITEM	FCC REFERANCE	RSS REFERENCE	RESULT
Fundamental emission	15.227(a)	RSS-310, section 3.8	Comply
Out-band emission	15.227(d)	RSS-310, section 3.8	Comply
Bandwidth	15.215(c)	RSS-Gen	Comply



## 2 Description of the radiated emission test

### 2.1 Test Procedure

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.10 - 2013.

A non-conductive turntable with dimensions of  $1.5 \text{m} \times 0.4 \text{m} \times 0.8 \text{m}$  (L x W x H) placed above the reference ground plane. The equipment under test (EUT) was placed at 0.8 m height for below 1 GHz measurement and 1.5 m height for above 1 GHz measurement. The test distance is 3 m between EUT and receiving antenna. A broadband antenna mounting on the mast received the signal strength. The turntable was rotated to maximize the emission level. The antenna was moving along the mast from 1 m up to 4 m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated. Additional absorbing material will be placed between the EUT and receiving antenna for above 1 GHz measurement.


For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1 m above the ground.

The device was rotated through three orthogonal axes to determine which attitude and configuration produce the highest emission during measurement.



廠商會檢定中心

## 2.2 Test Setup

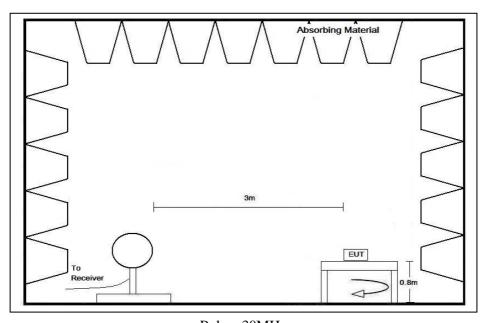

Below 30MHz

Absorbing Material

Antenna

To Receiver


30MHz - 1GHz

FCC ID: OTM-8405218-27MTX



廠商會檢定中心

## 2.2 Test Setup

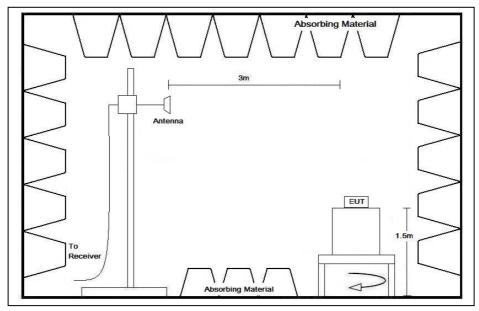

Above 1GHz



#### 2.3 Test Result

Peak Detector data was measured unless otherwise stated.

The radiated emissions are measured from 9kHz to 270MHz (the tenth harmonics)

The worst case configuration is shown on the worst case configuration of test setup photo.

The frequencies from fundamental up to tenth harmonics were investigated, and emissions more 20dB below limit were not reported. Thus, those highest emissions were presented in next pages.

The EUT has been tested in Transmission mode and antenna is fully extended.

It was found that the EUT meet the FCC requirement and RSS requirement.



## 2.4 Radiated Emission Measurement Data

### **Radiated emission**

Environmental conditions:

Parameter	Recorded value		
Ambient temperature:	25.3	° C	
Relative humidity:	59.8	%	

Polarization	Frequency (MHz)	Reading	Antenna	Field	Limit at	Margin	Detector
		at 3m	Factor and	Strength at	3m	(dB)	Type
		(dBµV)	Cable Loss	3m	$(dB\mu V/m)$		
			(dB/m)	$(dB\mu V/m)$			
V	27.145	60.1	16.0	76.1	80.0	-3.9	Peak
V	54.290	15.4	10.4	25.8	40.0	-14.2	Peak
V	81.435	13.7	9.8	23.5	40.0	-16.5	Peak
V	108.582	16.6	11.2	27.8	43.5	-15.7	Peak
V	135.725	21.9	12.6	34.5	43.5	-9.0	Peak
V	162.871	10.1	14.2	24.3	43.5	-19.2	Peak

Remark: All other emission below the limit more than 20dB are not reported in this report.




- 3 Description of the Line-conducted Test
- 3.1 Test Procedure

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.10 - 2013. The EUT was setup as described in the procedures, and both lines were measured.

3.2 Test Result

No measurement is required as the EUT is a battery-operated product.

## 3.3 Test Setup

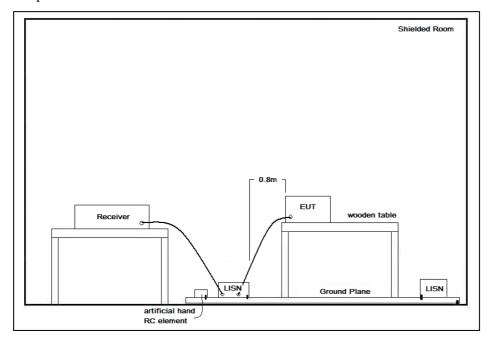

3.4 Graph and Table of Conducted Emission Measurement Data

Not Applicable



## 4 Supplementary document

The following document were submitted by applicant, and for electronic filing, the document are saved with the following filenames:

Document	Filename		
ID Label/Location	Label Artwork and Location.pdf		
Block Diagram	Block Diagram.pdf		
Schematic Diagram	Schematic.pdf		
Users Manual	User Manual.pdf		
Operational Description	Operation Description.pdf		

#### 4.1 Bandwidth

Appendices A1 is shown the fundamental emission is confined in the specified band. 20dB bandwidth and 99% bandwidth are 6.56kHz and 18.1kHz and both bandwidth are within the assigned band. It also shows that the EUT meets the FCC Part 15.215(c) and RSS-Gen requirement.



5 Appendices


A1. Bandwidth Plot 1 page(s)

FCC ID: OTM-8405218-27MTX




廠商會檢定中心

### A1. Bandwidth Plot

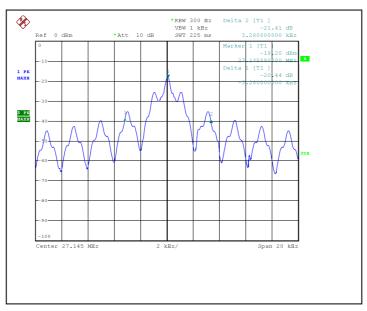

20dB Bandwidth

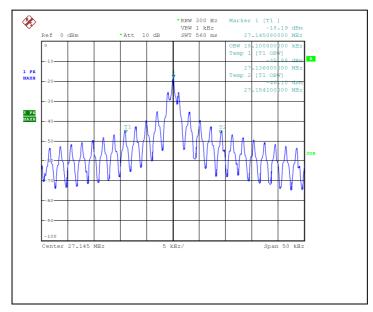

99% Bandwidth

\*\*\*\*\* End of Report \*\*\*\*\*

FCC ID: OTM-8405218-27MTX