



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0030163(2)-R1 Date : 8 Jul 2019

Application No. : LY014803(5)

Applicant : Kidztech Toys Manufacturing Ltd
Room 802, 8/F, Inter Continental Plaza,
94 Granville Road, TST East, Kowloon, HK

Sample Description : One(1) item of submitted sample stated to be:

Sample Description	Model No.
1/10 R/C Jet Panther	84083 / 84087

Radio Frequency : 2407MHz – 2475MHz Transmitter
Rating : 1 x 9V size battery (For Remote)
No. of submitted sample : One (1) piece (s)
Sample registration No. : RY008983-001

Date Received : 17 May 2019.

Test Period : 17 May 2019 – 31 May 2019.

Test Requested : FCC 47CFR Part 15 Certification

Test Method : 47 CFR Part 15 (10-1-17 Edition)
ANSI C63.10 – 2013
ANSI C63.4 – 2014

Test Result : See attached sheet(s) from page 2 to 19.

Conclusion : The submitted sample was found to comply with requirement of FCC 47CFR Part 15 Subpart C, section 15.249.

Remark : Manufacturer declare that all **Two** models are the same cosmetics, materials, PCB layout, electrical, mechanical, physical design, including software/firmware; therefore model **84083** was provided to be the representative of the test sample.

The difference between the tested sample and declared model(s) are non-conductive outer casing only.

This report supersedes the report no. AY0030163(2) issued on 10 Jun 2019

For and on behalf of
CMA Industrial Development Foundation Limited

Authorized Signature : _____


Mr. WONG Lap-pong, Andrew
Manager

Page 1 of 19

FCC ID: OTM-8408319-24GTX

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmateesting.org.
This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel : (852) 2698 8198 Fax : (852) 2695 4177 E-mail : info@cmateesting.org Web Site : <http://www.cmateesting.org>



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0030163(2)-R1

Date : 8 Jul 2019

Table of Contents

1	General Information	3
1.1	General Description	3
1.2	Location of the test site	4
1.3	List of measuring equipment.....	5
1.4	Measurement Uncertainty	6
1.5	Test Summary	6
2	Description of the radiated emission test	7
2.1	Test Procedure	7
2.2	Test Setup	8
2.3	Test Result	10
3.1	Test Procedure	13
3.2	Test Result	13
3.3	Test Setup	13
3.4	Graph and Table of Conducted Emission Measurement Data	13
4	Supplementary document.....	14
4.1	Bandwidth.....	14
5	Appendices.....	15



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0030163(2)-R1

Date : 8 Jul 2019

1 General Information

1.1 General Description

The equipment under test (EUT) is a controller of 2.4GHz wireless remote car 1/10 R/C Jet Panther.

It is powered by 1 x 9V size battery, and the radio transmission frequency band is 2407 - 2475MHz. An Accelerator Trigger and Steering wheel are responsible to given Forward, Backward, Turn Left and Turn Right control command to receiver.

The radio transmissions and digital modulation are controlled by IC SR080, and the oscillation frequency is 12MHz generated by crystal.

A non-replaceable intergraded antenna is used in EUT and the radio transmission power are un-adjustable.

The brief circuit description is listed as follows:

- U1 and its associated circuit act as radio transmissions and digital modulation controller.
- Y1 and its associated circuit act as 12MHz crystal for IC SR080.
- L1,C1,C2 and its associated circuit act as RF filter and matching network.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0030163(2)-R1

Date : 8 Jul 2019

1.2 Location of the test site

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2014. A Semi-Anechoic Chamber Testing Site is set up for investigation and located at:

Ground Floor, Yan Hing Centre,
9 – 13 Wong Chuk Yeung Street,
Fo Tan, Shatin,
New Territories,
Hong Kong.

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.4 – 2014. A shielded room is located at :

Ground Floor, Yan Hing Centre,
9 – 13 Wong Chuk Yeung Street,
Fo Tan, Shatin,
New Territories,
Hong Kong.

FCC Accredited Lab (Designation Number: HK0004)
Conformity Assessment Body Identifier (CABID: HK0002)



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0030163(2)-R1

Date : 8 Jul 2019

1.3 List of measuring equipment

Equipment	Manufacturer	Model No.	Serial No.	Calibration Due Date	Calibration Period
EMI Test Receiver	Rohde & Schwarz	ESCI	100152	31 May 2020	1Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	100964	11 Sep 2019	1Year
Loop Antenna	EMCO	6502	00056620	29 Oct 2020	2Years
Biconical Antenna	Rohde & Schwarz	HK116	837414/004	08 Oct 2020	2Years
Log Periodic Antenna	TESEQ	UPA6109	43666	08 Oct 2019	2Years
Horn Antenna	Schwarzbeck	BBHA9120D	9120D531	21 Dec 2019	1Year
Pre-amplifier	Schwarzbeck	BBV9718	9718-119	21 Dec 2019	1Year
High-pass Filter	Trilithic Inc	6HC3000/18000-3-KK	200720014	21 Dec 2019	1Year
Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170442	24 Aug 2019	2Years
Pre-amplifier	Schwarzbeck	BBHA9719	9719-010	23 Aug 2019	2Years
Coaxial Cable	Humber+Suhner	RG 213/U	N/A	08 May 2020	1Year
Coaxial Cable	Humber+Suhner	RG 214/U	N/A	08 May 2020	1Year
RF cable With 11 N-47 connector	HUBER+SUHNER	-	MY24201/4	22 Jan 2020	2Years
RF cable with PC2.4 connectors	HUBER+SUHNER	-	MY3432/2	22 Jan 2020	2Years



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0030163(2)-R1

Date : 8 Jul 2019

1.4 Measurement Uncertainty

The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor $k=2$, providing a level of confidence of approximately 95%.

Radiated emissions

Frequency	Uncertainty (U_{lab})
30MHz ~ 200MHz (Horizontal)	4.59dB
30MHz ~ 200MHz (Vertical)	4.49dB
200MHz ~1000MHz (Horizontal)	4.94dB
200MHz ~1000MHz (Vertical)	4.97dB
1GHz ~ 6GHz	4.52dB
6GHz ~ 18GHz	4.58dB
18GHz ~ 40GHz	4.80dB

1.5 Test Summary

TEST ITEM	FCC REFERANCE	RESULT
Fundamental and harmonic emission	15.249(a)	Comply
Out-band emission	15.249(d)	Comply
Peak Limit	15.249(e)	Comply
Bandwidth	15.215(c)	Comply



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0030163(2)-R1

Date : 8 Jul 2019

2 Description of the radiated emission test

2.1 Test Procedure

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.10 – 2013.

A non-conductive turntable with dimensions of 1.5m x 0.4m x 0.8m (L x W x H) placed above the reference ground plane. The equipment under test (EUT) was placed at 0.8m height for below 1GHz measurement and 1.5m height for above 1GHz measurement. The test distance is 3m between EUT and receiving antenna. A broadband antenna mounting on the mast received the signal strength. The turntable was rotated to maximize the emission level. The antenna was moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated. Additional absorbing material will be placed between the EUT and receiving antenna for above 1GHz measurement.

For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1 m above the ground.

The device was rotated through three orthogonal axes to determine which attitude and configuration produce the highest emission during measurement.



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AY0030163(2)-R1

Date : 8 Jul 2019

2.2 Test Setup

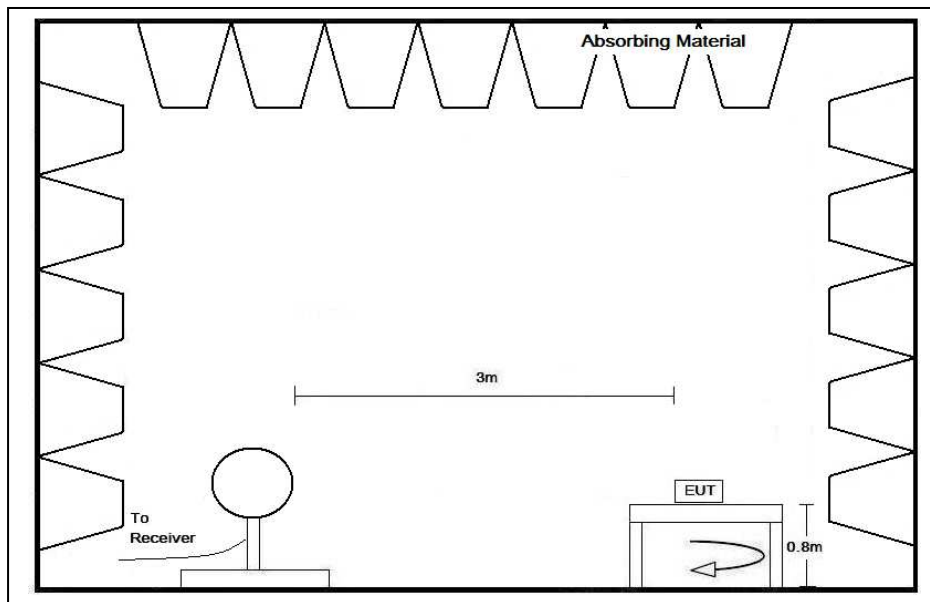

Below 30MHz

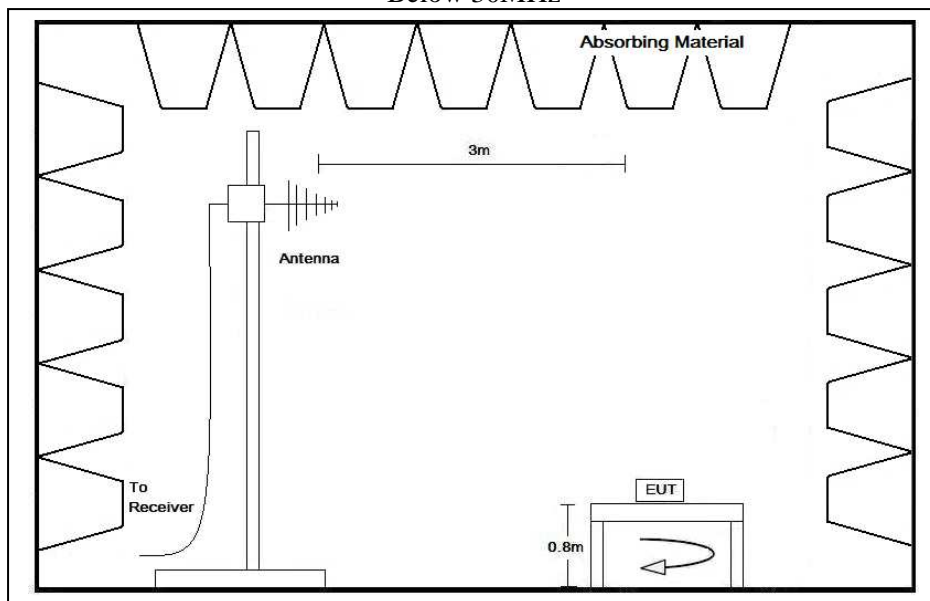

30MHz – 1GHz



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT

Report No. : AY0030163(2)-R1

Date : 8 Jul 2019

2.2 Test Setup

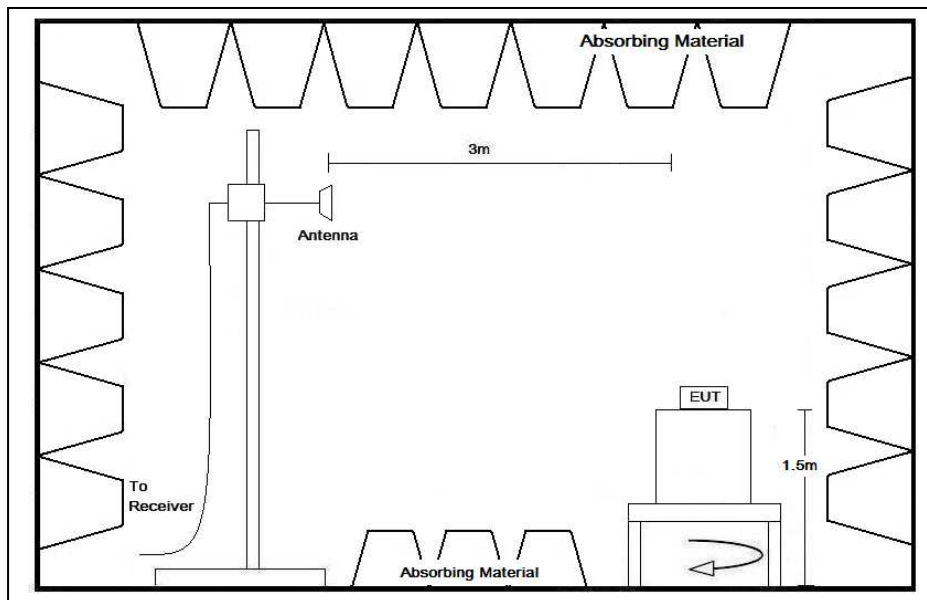

Above 1GHz



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0030163(2)-R1

Date : 8 Jul 2019

2.3 Test Result

Peak Detector data was measured unless otherwise stated.

The radiated emissions are measured from 9kHz to 26GHz (the tenth harmonics)

The worst case configuration is shown on the worst case configuration of test setup photo.

The frequencies from fundamental up to tenth harmonics were investigated, and emissions more 20dB below limit were not reported. Thus, those highest emissions were presented in next pages.

The EUT has been tested in Transmission mode.

It was found that the EUT meet the FCC requirement.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0030163(2)-R1

Date : 8 Jul 2019

2.4 Radiated Emission Measurement Data

Radiated emission

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	27.1	° C
Relative humidity:	52.1	%

Channel: 2407MHz

Polarization	Frequency (MHz)	Reading at 3m (dBμV)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)	Detector Type
H	2406.674	101.7	-4.6	97.1	114.0	-16.9	Peak
H	2407.293	80.0	-4.6	75.4	94.0	-18.6	Average
H	2310.805 ¹	55.7	-6.6	49.1	54.0	-4.9	Peak
H	2400.000 ¹	64.9	-4.6	60.3	74.0	-13.7	Peak
H	4813.525	51.6	3.2	54.8	74.0	-19.2	Peak
H	4813.595	30.7	3.2	33.9	54.0	-20.1	Average
H	7221.924 ¹	41.8	10.4	52.2	54.0	-1.8	Peak
H	9629.443 ¹	33.6	13.7	47.3	54.0	-6.7	Peak

Remark: 1) The peak value of emission 2310.805MHz, 2400.000MHz, 7221.924MHz and 9629.443MHz are below the average limit, so no average measurement is performed.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0030163(2)-R1

Date : 8 Jul 2019

Channel: 2440 MHz

Polarization	Frequency (MHz)	Reading at 3m (dBμV)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)	Detector Type
H	2439.680	103.3	-4.6	98.7	114.0	-15.3	Peak
H	2440.061	81.8	-4.6	77.2	94.0	-16.8	Average
H	2367.738 ¹	54.2	-6.6	47.6	54.0	-6.4	Peak
V	2488.229 ¹	52.5	-4.6	47.9	54.0	-6.1	Peak
H	4879.315 ¹	49.0	3.2	52.2	54.0	-1.8	Peak
H	7319.150	47.2	10.4	57.6	74.0	-16.4	Peak
H	7320.984	27.1	10.4	37.5	54.0	-16.5	Average
V	9758.786 ¹	37.0	13.7	50.7	54.0	-3.3	Peak

Remark: 1) The peak value of emission 2367.738MHz, 2488.229MHz, 4879.315MHz and 9758.786MHz are below the average limit, so no average measurement is performed.

Channel: 2475MHz

Polarization	Frequency (MHz)	Reading at 3m (dBμV)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)	Detector Type
H	2475.057	86.1	-4.6	81.5	94.0	-12.5	Average
V	2475.809	103.6	-4.6	99.0	114.0	-15.0	Peak
H	2483.500 ¹	55.7	-4.6	51.1	54.0	-2.9	Peak
H	2499.339 ¹	54.9	-4.6	50.3	54.0	-3.7	Peak
H	4949.270 ¹	48.4	3.8	52.2	54.0	-1.8	Peak
V	7426.213	43.6	10.4	54.0	74.0	-20.0	Peak
V	7425.869	27.8	10.4	38.2	54.0	-15.8	Average
V	9901.323 ¹	38.6	13.7	52.3	54.0	-1.7	Peak

Remark: 1) The peak value of emission 2483.500MHz, 2499.339MHz, 4949.270MHz and 9901.323MHz are below the average limit, so no average measurement is performed.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0030163(2)-R1

Date : 8 Jul 2019

3 Description of the Line-conducted Test


3.1 Test Procedure

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.10 – 2013. The EUT was setup as described in the procedures, and both lines were measured.

3.2 Test Result

No measurement is required as the EUT is a battery-operated product.

3.3 Test Setup

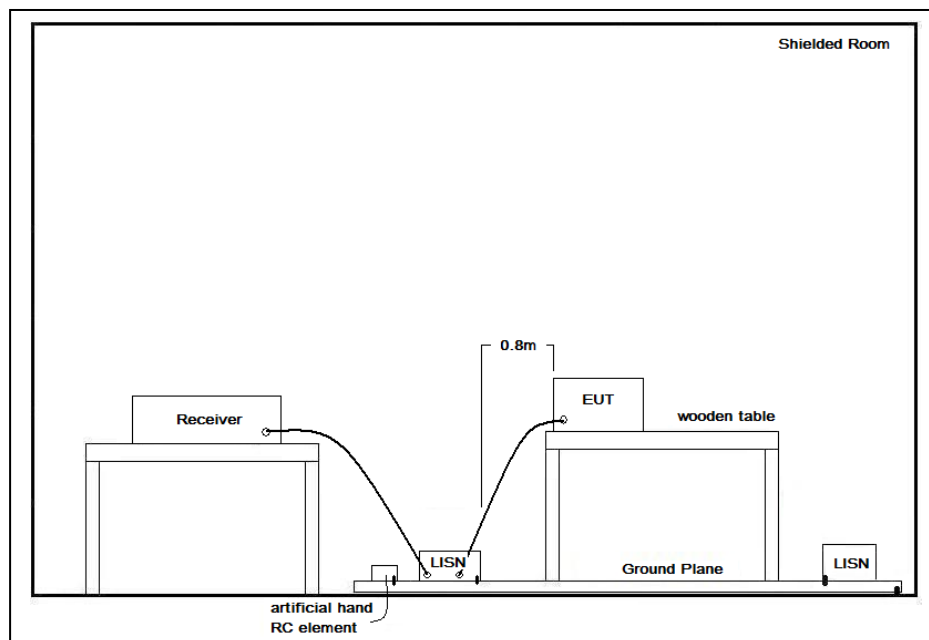

3.4 Graph and Table of Conducted Emission Measurement Data

Not Applicable



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0030163(2)-R1

Date : 8 Jul 2019

4 Supplementary document

The following document were submitted by applicant, and for electronic filing, the document are saved with the following filenames:

Document	Filename
ID Label/Location	Label Artwork and Location.pdf
Block Diagram	Block Diagram.pdf
Schematic Diagram	Schematic.pdf
Users Manual	User Manual.pdf
Operational Description	Operation Description.pdf

4.1 Bandwidth

Appendices A1 and A2 are shown the fundamental emission is confined in the specified band. A 20dB bandwidth is 6.368MHz and 99% bandwidth is 5.2971MHz. Both bandwidth fall in the band of 2400 – 2483.5MHz. It shows that the EUT met the requirement of FCC Part 15.215(c).



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0030163(2)-R1

Date : 8 Jul 2019

5 Appendices

A1.	20dB Bandwidth Plot	2	page(s)
A2.	99% Bandwidth	2	page(s)

FCC ID: OTM-8408319-24GTX

Page 15 of 19



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AY0030163(2)-R1

Date : 8 Jul 2019

A1. 20dB Bandwidth Plot

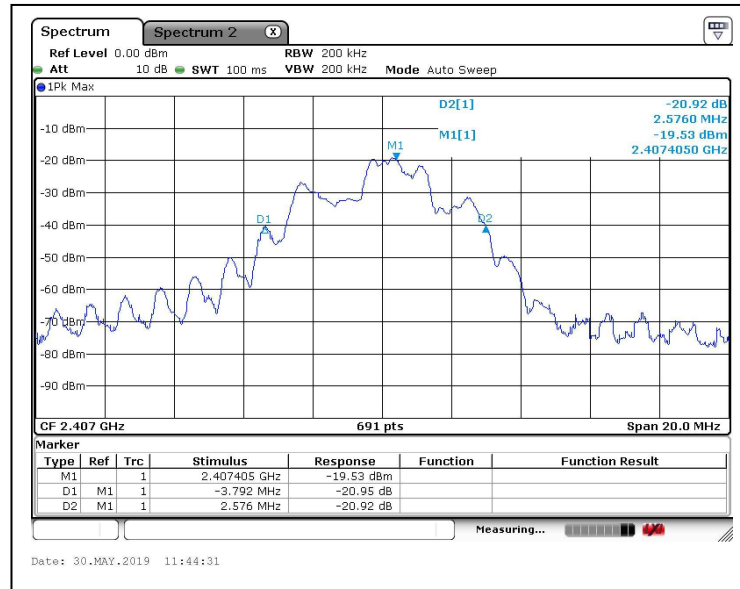

Channel: 2407MHz

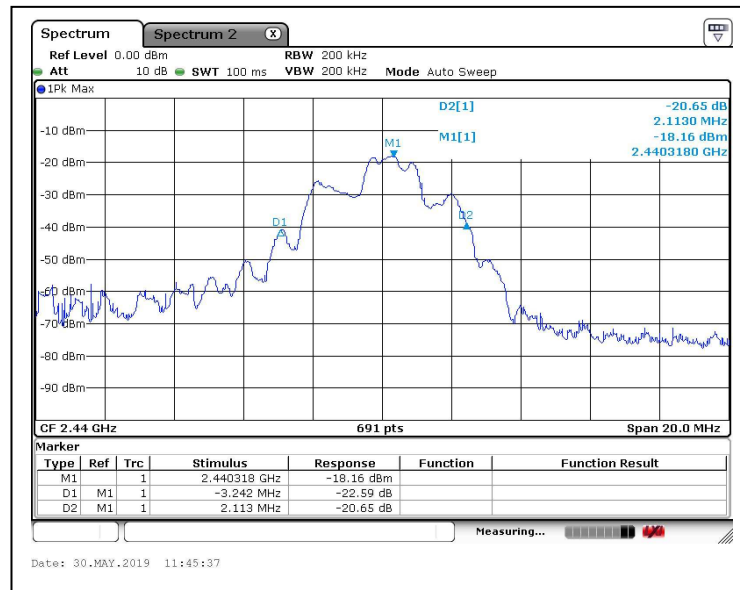

Channel: 2440MHz

FCC ID: OTM-8408319-24GTX

Page 16 of 19




CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0030163(2)-R1

Date : 8 Jul 2019

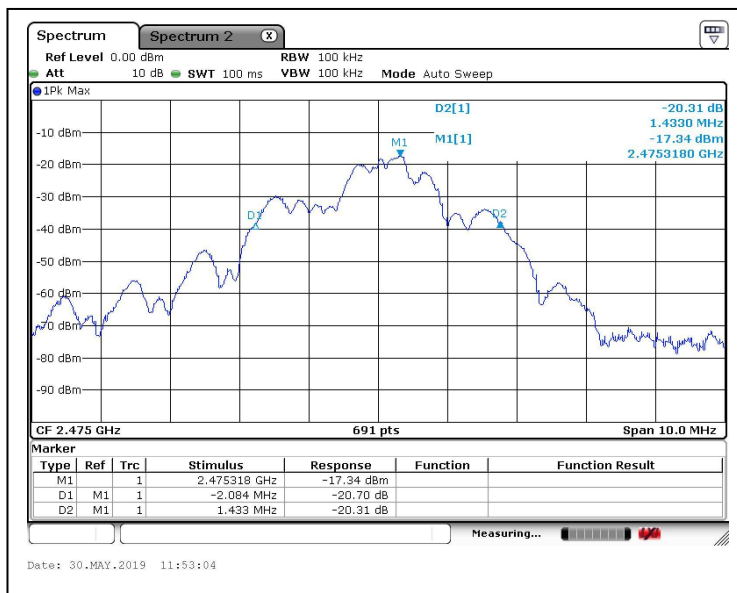

Channel: 2475MHz



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AY0030163(2)-R1

Date : 8 Jul 2019

A2. 99% Bandwidth Plot

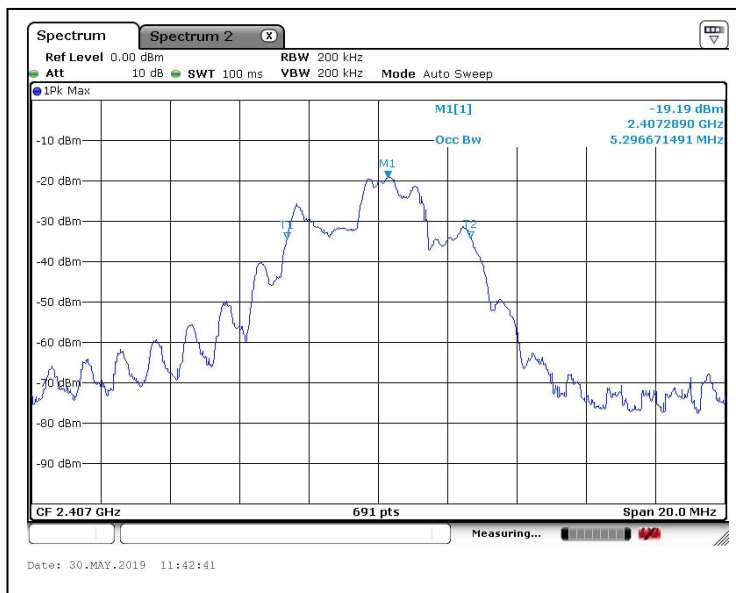

Channel: 2407MHz

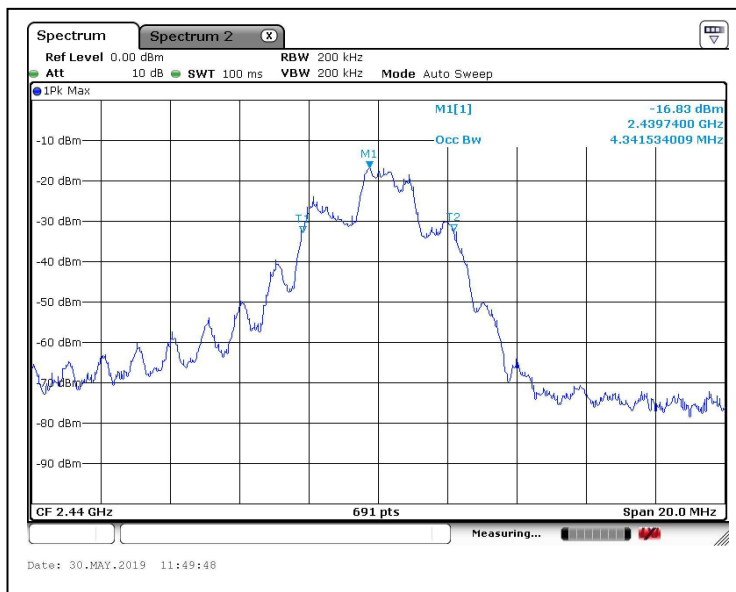

Channel: 2440MHz

FCC ID: OTM-8408319-24GTX

Page 18 of 19




CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0030163(2)-R1

Date : 8 Jul 2019

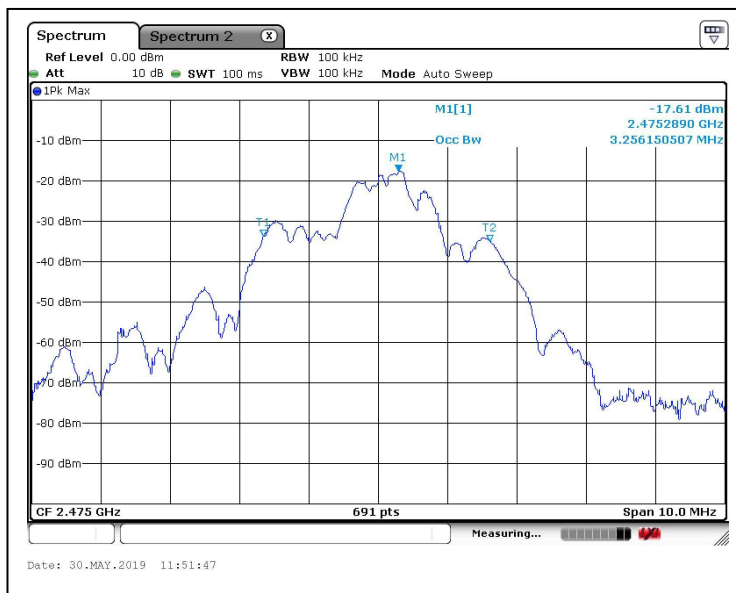

Channel: 2475MHz

***** End of Report *****

FCC ID: OTM-8408319-24GTX

Page 19 of 19