

Technical Description

The Equipment Under Test (EUT) is a portable 2.4GHz Pure Transmitter for a Pure Receiver RC Car operated at 2405-2475MHzMHz With 1MHz channel Spacing. The EUT is powered by 1 x 9.0V Alkaline battery. After switch on the EUT and paired with RC Car, the RC Car can be controlled to move forward, backward, turning left/right direction by the controller.

The brief circuit description is listed as below:

- 1) 2.4G-10 acts as 2.4GHz RF Module Circuit (2.4G-TX7).**
- 2) Y1 is 12MHz crystal oscillator providing clock for 2.4G-10.**
- 3) U1 acts as Voltage Regulator (6209).**

Antenna Type: Internal antenna

Antenna Gain: 0Bi

Nominal rated field strength: 93.9dB μ V/m at 3m

Maximum allowed field strength of production tolerance: +/- 3dB



深圳市尚瑞思电子有限公司
ShenZhen Sunrise Electronics CO.,Ltd
TEL: +86-755-23093179-802 FAX: +86-755-23093179-816
www.sunrisedigit.com/en/ sales@sunrisedigit.com

SR001
2.4 G transceiver
Datasheet
V100



1. Outline

SR001 is a low cost, high integrated 2.4GHZ SOC transceiver;
It use GFSK modulation and demodulation technology, It has a strong anti-interference ability;

Transmit power can be adjusted, and the max transmit power is up to 6DBM;

The receiver with low IF structure, the receive sensitivity can be -96dBm@62.5Kbps. Also, the RSSI can be detected ;

The MCU with a low power consumption, Wakeup enable, 2K flash coding room;

The sleep current can be less than 5UA, and the lowest working voltage is up to 2.2V;

SR001 has a very low cost application, single side board can ensure the function and performance, it support the 33MM wire antenna;

SOP16 footprint, compatible RoHS standard;

1.1 Performance

- 2.4G SOC transceiver
- SOP16 footprint
- Support single side board
- Communication distance up to 100 m
- Support 33 mm wire antenna
- 9 GPIO
- 16 bit instruction
- 2K x 14-bit FLASH Program Memory
- 256x8b data EEPROM
- 128x8b SRAM
- 7 CH 10 bit A/D
- Low voltage reset, low voltage detect

1.2 Typical application

- Remote
- Wireless key and mouse
- Wireless net
- Smart home
- Industrial and commerce short distance communication;
- IP telephone, Cordless phone



2 Pin assignment:

1	ANT	VCO_VDD	16
2	GND	XTALI	15
3	VDD_IO	XTALO	14
4	PA4	VDD	13
5	PC5	PA0	12
6	PC4	PA1	11
7	PC1	PA2	10
8	PC0	PA3	9

SOP16


2.1 pin function description

Pin No	Pin Name	Type	Description
1	ANT	Balanced RF	Rf input/output
2	GND	GND	GND
3	VDD_IO	Power	Power for mcu
4	PA4	I/O	GPIO
5	PC5	I/O	GPIO
6	PC4	I/O	GPIO
7	PC1	Power	GPIO
8	PC0	I/O	GPIO
9	PA3	I/O	GPIO
10	PA2	I/O	GPIO
11	PA1	I/O	GPIO
12	PA0	I/O	GPIO
13	VDD	I/O	VDD for RF
14	XTALO	XO	XTAL Output
15	XTALI	XI	XTAL input
16	VCO_VDD	Power	Power for VCO




3 IC Block diagram

3.1 IC internal interface

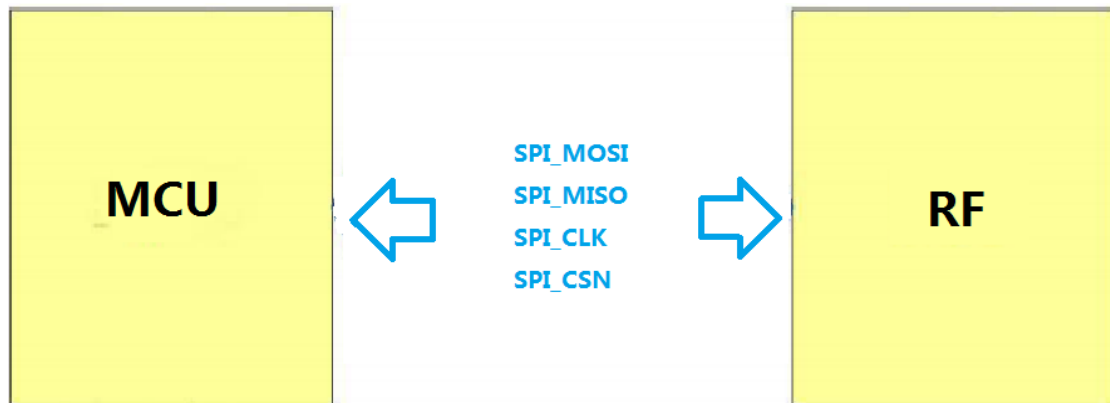


3.2 RF Block diagram

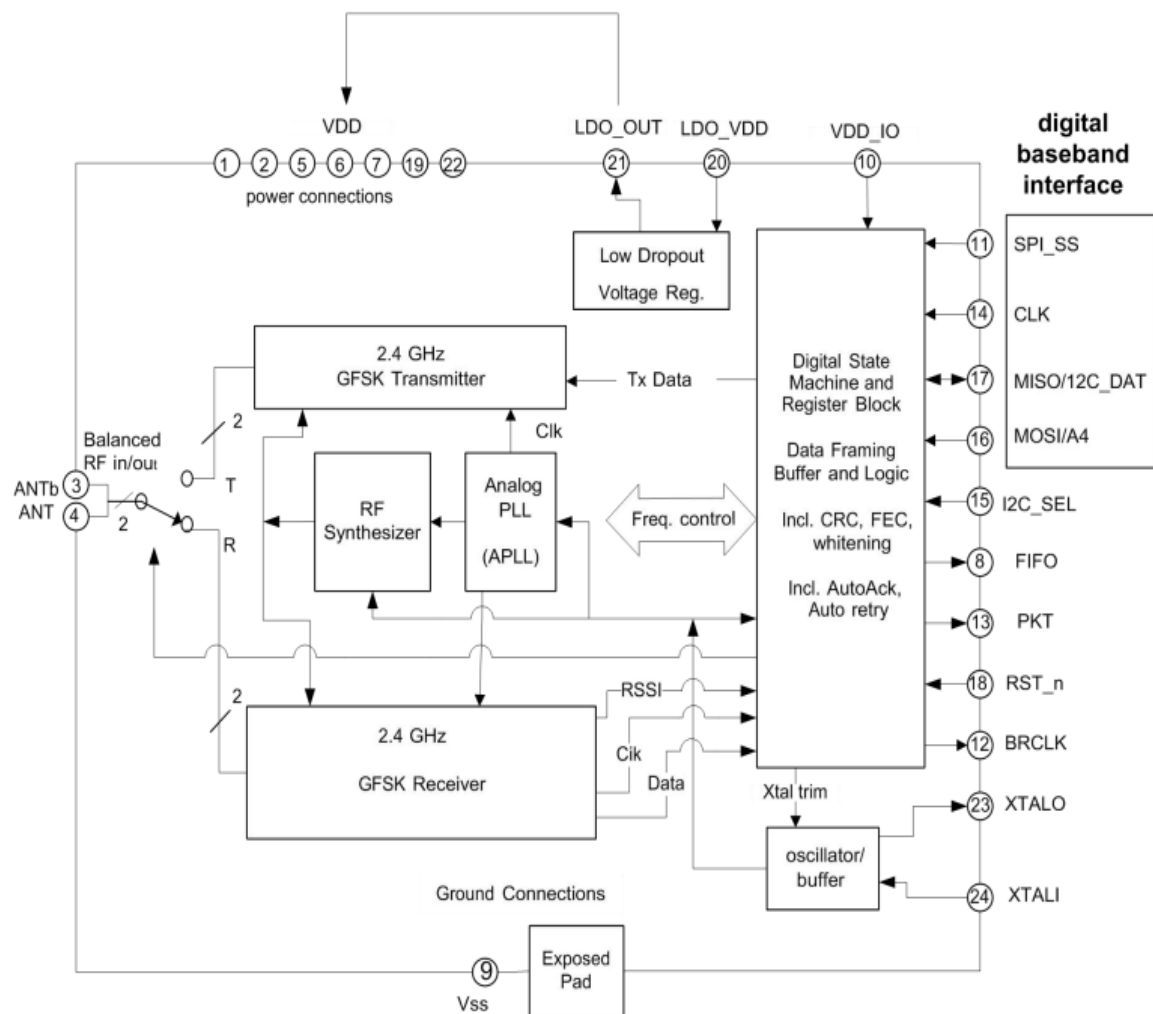




3.3 MCU block diagram

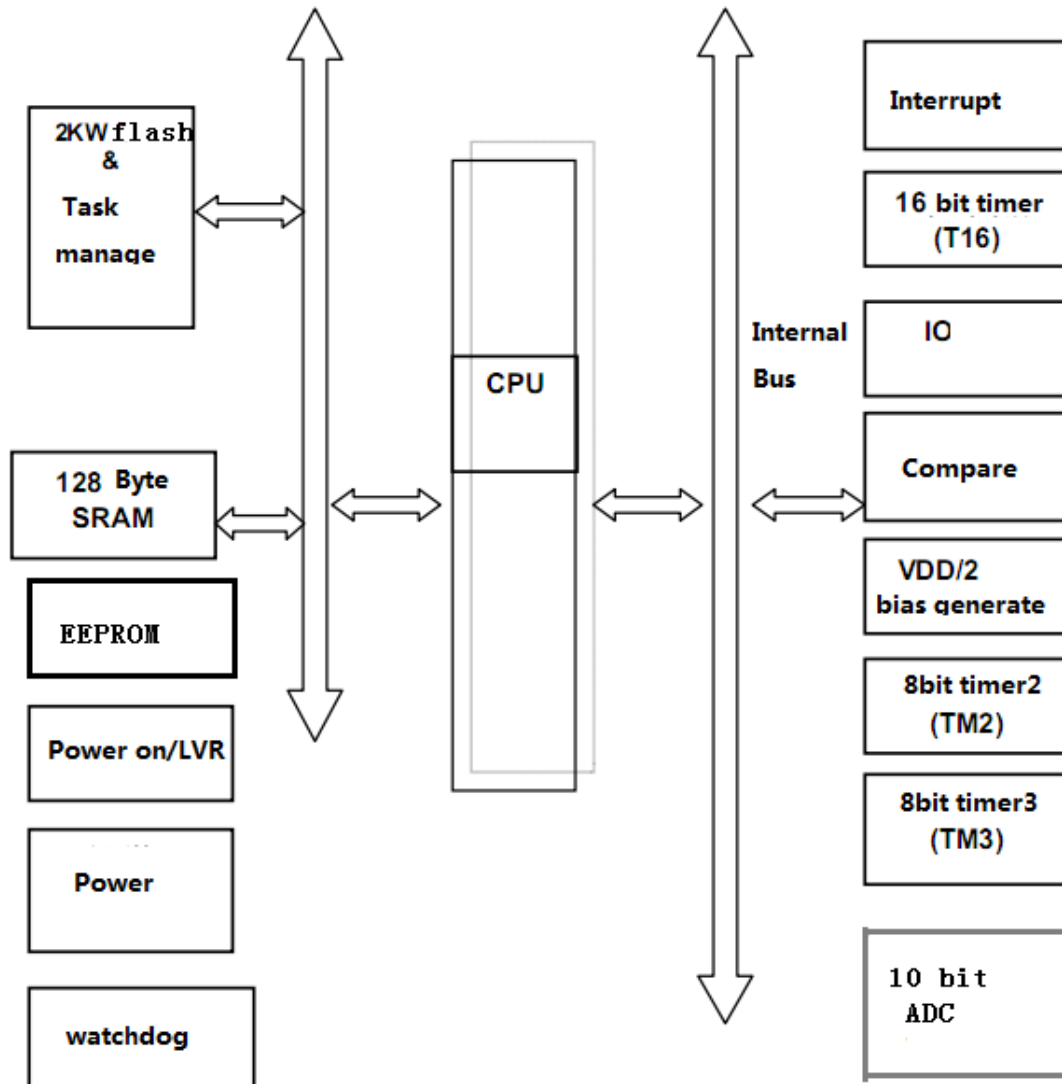



4 Typical application circuit

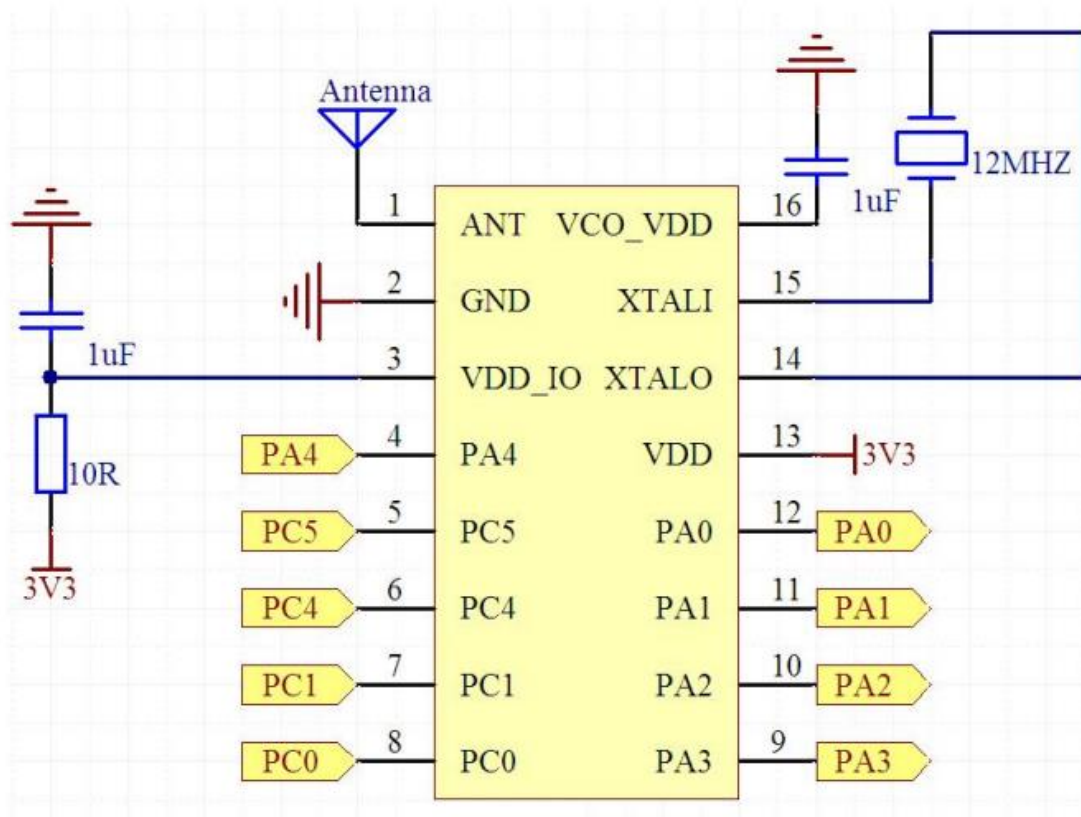



5. Transmit performance


Transmit Section						Measured using 50 Ohm balun3:
Transmit power	PAV		6		dBm	
Second harmonic			-50		dBm	Conducted to ANT pin
Third harmonic			-50		dBm	Conducted to ANT pin
modulating characteristic						
Modulation offset	00001111 pattern	Δf_{1avg}	280		kHz	
	01010101 pattern	Δf_{2max}	225		kHz	
In band radiation						
2MHz Modulation offset	IBS_2		-40		dBm	
>3MHz Modulation offset	IBS_3		-60		dBm	
Out of band radiation	OBS_O_1	< -60	-36		dBm	30 MHz ~ 1 GHz
	OBS_O_2	-45	-30		dBm	1 GHz ~ 12.75 GHz, excludes desired signal and harmonics
	OBS_O_3	< -60	-47		dBm	1.8 GHz ~ 1.9 GHz
	OBS_O_4	< -65	-47		dBm	5.15 GHz ~ 5.3 GHz

6. Receiver performance

Parameter	Symbol	MIN	TYP	MAX	Units	Test Condition and Notes	
Receive Section						Measured using 50 Ohm balun. For BER $\leq 0.1\%$	
receiver sensitivity			-87		dBm	1Mbps	
			-90		dBm	250Kbps	
			-93		dBm	125Kbps	
			-96		dBm	62.5Kbps	
max input power		-20	1		dBm		
data symbol	TS		1		us		
anti interference						For BER $\leq 0.1\%$	
Co channel interference	CI_cochannel		+9		dB	-60 dBm desired signal	
1MHz adjacent interference	CI_1		+6		dB	-60 dBm desired signal	
2MHz adjacent interference	CI_2		-12		dB	-60 dBm desired signal	
3MHz adjacent interference	CI_3		-24		dB	-67 dBm desired signal	
Out of band interference	OBB_1	-10			dBm	30 MHz to 2000 MHz	
	OBB_2	-27			dBm	2000 MHz to 2400 MHz	
	OBB_3	-27			dBm	2500 MHz to 3000 MHz	
	OBB_4	-10			dBm	3000 MHz to 12.75 GHz	



7. PACKAGE

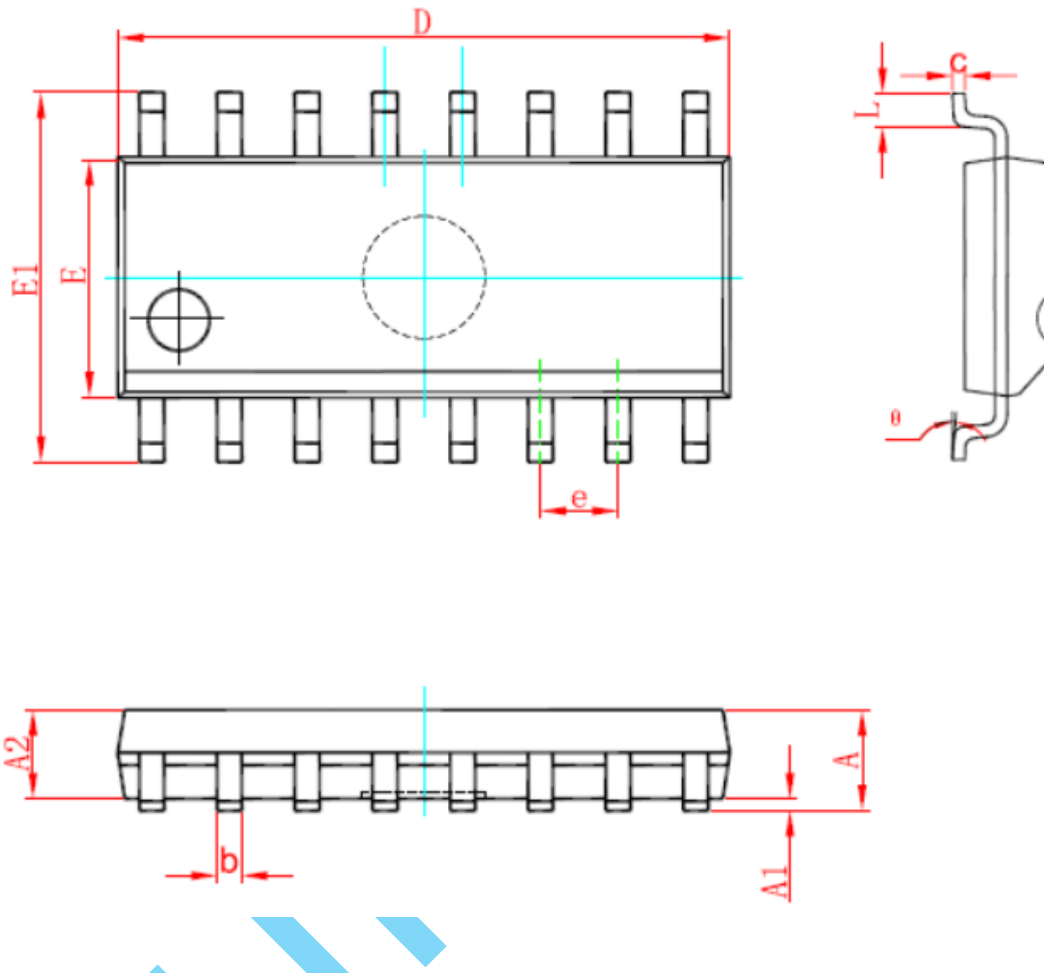

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	9.800	10.200	0.386	0.402
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.270 (BSC)		0.050 (BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°