



198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technological Development District, Guangzhou, China 510663
Telephone: +86 (0) 20 82155555
Fax: +86 (0) 20 82075059
Email: ee.guangzhou@sgs.com

Report No.: GZEM120800316202
Page: 1 of 11
FCC ID: OTM85021RX-49MHZ

TEST REPORT

Application No.:	GZEM1208003162RF
Applicant:	KIDZTECH TOYS MANUFACTURING LTD
FCC ID:	OTM85021RX-49MHZ
Product Name:	Remote control car series
Product Description:	Radio toys with 49.860 MHz as a carrier
Model No:	85021, 85022, 85031, 85032, 85041, 85042, 85051, 85052, 85061, 85062, 85071, 85072, 85081, 85082, 85091, 85092, 6618-852A, 6618-853A, 6618-854A, 6618-855A, 6618-856A, 6618-857A, 6618-858A, 6618-859A, 6618-852B, 6618-853B, 6618-854B, 6618-855B, 6618-856B, 6618-857B, 6618-858B, 6618-859B ♣
♣	Please refer to section 3 of this report which indicates which Model was actually tested and which were electrically identical.
Standards:	47 CFR Part 15, Subpart B:2011
Date of Receipt:	2012-08-06
Date of Test:	2012-08-10
Date of Issue:	2012-08-20
Test Result :	Pass*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature

Strong Yao
Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2012-08-20		Original

Authorized for issue by:			
Tested By		<u>2012-08-10</u>	Date
	(Storm Shu) /Project Engineer		
Prepared By		<u>2012-08-18</u>	Date
	(Millie Li) /Clerk		
Checked By		<u>2012-08-20</u>	Date
	(Strong Yao) /Reviewer		

3 Test Summary

Electromagnetic Interference (EMI)				
Test	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission Below 1 GHz	FCC PART 15 SUBPART B	ANSI C63.4	Class B	PASS
Radiated Emission above 1 GHz	FCC PART 15 SUBPART B	ANSI C63.4	Class B	N/A
<p>Remark : N/A: Not applicable. Please refer to clause 7.2 for details. EUT: In this whole report EUT means Equipment Under Test. Tx: In this whole report Tx (or tx) means Transmitter. Rx: In this whole report Rx (or rx) means Receiver. RF: In this whole report RF means Radio Frequency. ANSI C63.4: the detail version is ANSI C63.4:2009 in the whole report.</p> <p>♣ Model No.: 85021, 85022, 85031, 85032, 85041, 85042, 85051, 85052, 85061, 85062, 85071, 85072, 85081, 85082, 85091, 85092, 6618-852A, 6618-853A, 6618-854A, 6618-855A, 6618-856A, 6618-857A, 6618-858A, 6618-859A, 6618-852B, 6618-853B, 6618-854B, 6618-855B, 6618-856B, 6618-857B, 6618-858B, 6618-859B</p> <p>According to the confirmation from the applicant, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, only difference is the Model No. and appearance</p> <p>Therefore only one item 85031 was tested in this report.</p>				



4 Contents

1	COVER PAGE	1
2	VERSION.....	2
3	TEST SUMMARY	3
4	CONTENTS.....	4
5	GENERAL INFORMATION	5
5.1	Client Information	5
5.2	General Description of E.U.T.	5
5.3	Details of E.U.T.	5
5.4	Description of Support Units	5
5.5	Deviation from Standards	5
5.6	Abnormalities from Standard Conditions	5
5.7	General Test Climate During Testing.....	5
5.8	Other Information Requested by the Customer	5
5.9	Test Location	5
5.10	Test Facility	6
6	EQUIPMENT USED DURING TEST	7
7	EMISSION TEST RESULTS.....	8
7.1	Radiated Emissions, 30 MHz to 1 GHz.....	8
7.2	Radiated Emissions above 1 GHz.....	11

5 General Information

5.1 Client Information

Applicant: KIDZTECH TOYS MANUFACTURING LTD
Address of Applicant: Room 1201, inter-Continental Plaza, 94 Granville Road, Tsim Sha Tsui East, Kowloon, Hong Kong

5.2 General Description of E.U.T.

Product Name: Remote control car series
Model No: 85031

5.3 Details of E.U.T.

Power Supply: DC 7.5V (5 x 1.5V size "AA" battery)
Power cord: N/A

5.4 Description of Support Units

The EUT has been tested as an independent unit.

5.5 Deviation from Standards

None.

5.6 Abnormalities from Standard Conditions

None.

5.7 General Test Climate During Testing

Temperature: 15-30 °C Humidity: 30~70 %RH Atmospheric Pressure: 886~1086 mbar

5.8 Other Information Requested by the Customer

None.

5.9 Test Location

All tests were performed at:
SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory,
198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

5.10 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

- **FCC (Registration No.: 282399)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

- **Industry Canada (Registration No.: 4620B-1)**

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

- **VCCI (Registration No.: R-2460, C-2584, G-449 and T-1179)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460, C-2584, G-449 and T-1179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IEC 61010-1:2006-10 and Rules of procedure IEC 61010-2:2006-10, and the relevant IEC CB-Scheme Operational documents.

6 Equipment Used during Test

RE in Chamber						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date	Calibration
					(YYYY-MM-DD)	
EMC0525	Compact Semi-Anechoic Chamber	ChangZhou ZhongYu	N/A	N/A	2012-09-06	2Y
EMC0522	EMI Test Receiver	Rohde & Schwarz	ESIB26	100283	2012-11-11	1Y
EMC0056	EMI Test Receiver	Rohde & Schwarz	ESCI	10036	2013-03-12	1Y
EMC0528	RI High frequency Cable	SGS	20 m	N/A	2013-06-01	1Y
EMC2025	Trilog Broadband Antenna 30-3000MHz	SCHWARZBECK MESS-ELEKTRONIK	VULB 9163	9163-450	2012-10-20	1Y
EMC0524	Bi-log Type Antenna	Schaffner -Chase	CBL6112B	2966	2012-11-28	1Y
EMC0519	Bilog Type Antenna	Schaffner -Chase	CBL6143	5070	2012-11-28	1Y
EMC2026	Horn Antenna 1-18GHz	R&S	BBHA 9120D	9120D-841	2012-10-20	1Y
EMC0518	Horn Antenna	Rohde & Schwarz	HF906	100096	2014-07-01	2Y
EMC0521	1-26.5 GHz Pre-Amplifier	Agilent	8449B	3008A01649	2013-03-12	1Y
EMC0049	Amplifier	Agilent	8447D	2944A10862	2013-03-12	1Y
EMC0075	310N Amplifier	Sonama	310N	272683	2013-03-12	1Y
EMC0523	Active Loop Antenna	EMCO	6502	42963	2012-11-17	1Y
EMC2041	Broad-Band Horn Antenna (14)15-26.5(40)GHz	SCHWARZBECK MESS-ELEKTRONI	BBHA 9170	9170-375	2014-06-01	3Y
EMC0530	10m Semi-Anechoic Chamber	ETS	N/A	N/A	2014-04-27	2Y

General used equipment						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date	Calibration Interval
					(YYYY-MM-DD)	
EMC0006	DMM	Fluke	73	70681569	2012-11-14	1Y
EMC0007	DMM	Fluke	73	70671122	2012-11-14	1Y

7 Emission Test Results

Frequency range of radiated emission measurements for unintentional radiators:

Except as otherwise indicated in FCC part 15 Section 15.33 paragraphs (b)(2) or (b)(3), for an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency range of measurement
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

7.1 Radiated Emissions, 30 MHz to 1 GHz


Test Requirement: FCC Part15 B
 Test Method: ANSI C63.4
 Test Voltage: DC 7.5V
 Frequency Range: 30MHz to 1GHz
 Measurement Distance: 3 m
 Detector: Peak for pre-scan
 Quasi-Peak if maximised peak within 6dB of limit
 (120 kHz resolution bandwidth)
 Class / Limit: Class B

Frequency range MHz	Quasi-peak limits dB (µV/m)
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960	54
At transitional frequencies the lower limit applies.	

7.1.1 E.U.T. Operation

EUT Operation: Pre-test the EUT in motor running mode and cohere mode (with an unmodulated CW signal to the receiver), compliance test in motor running mode as worse case was found.

7.1.2 Test Setup and Procedure

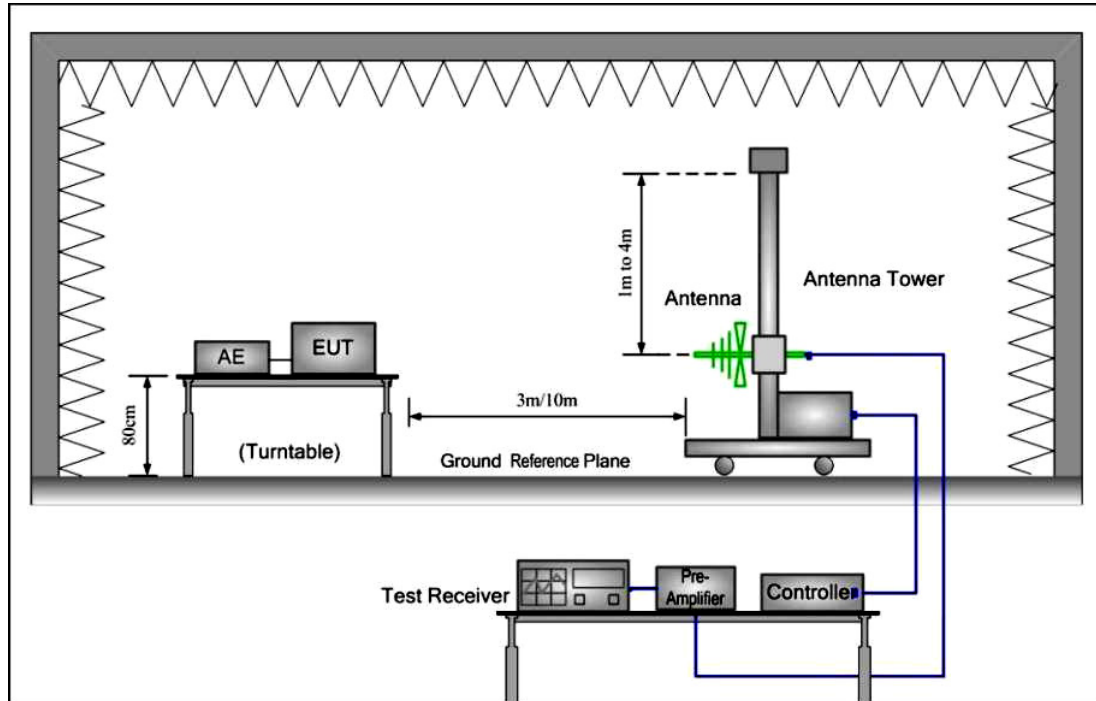

1. The radiated emissions test was conducted in a semi-anechoic chamber.
2. Biconical and log periodic antenna was used for the frequency range from 30MHz to 1GHz
3. The EUT was connected to nominal power supply through a mains power outlet which was bonded to the ground reference plane; The mains cables were draped to the ground reference plane. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. For super-regenerative receiver, A signal generator was used to radiate an unmodulated CW signa at its operating frequency in order to “cohere” or to resolve the individual components of the characteristic broadband emissions from the receiver.
5. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT.
6. The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.




7.1.3 Measurement Data

Vertical:

Peak scan

Level (dBμV/m)

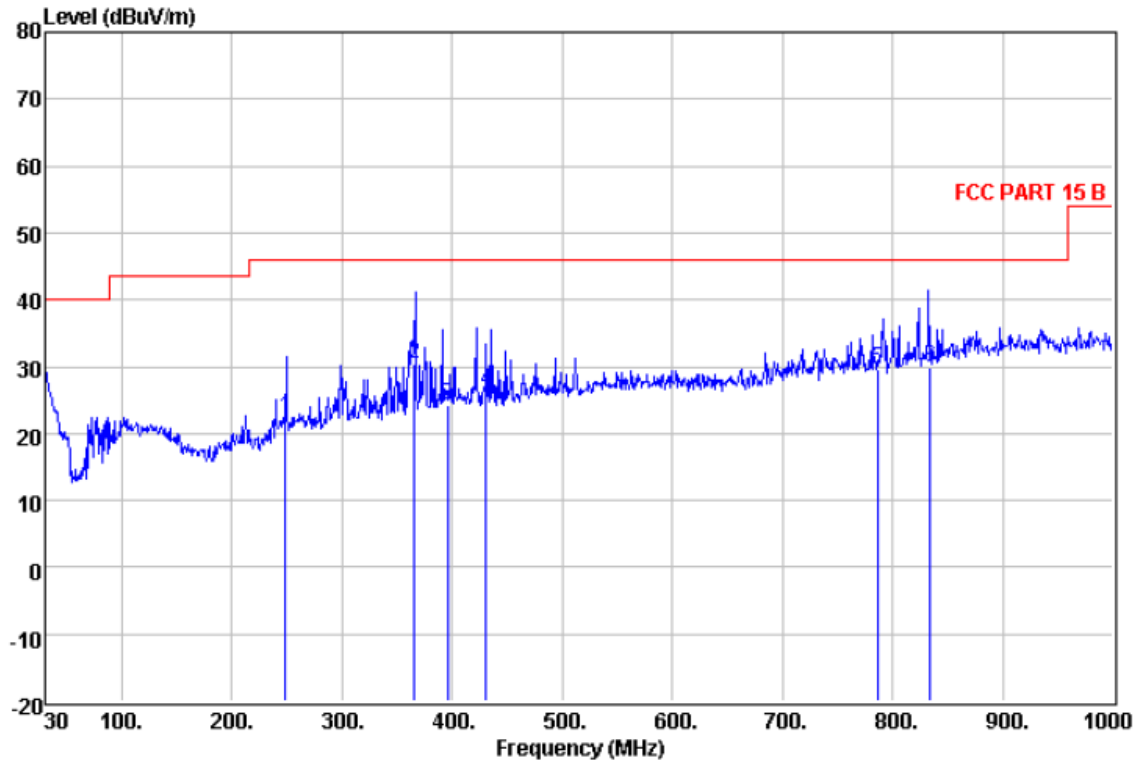

Quasi-peak measurement

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Over Limit	Limit Line	Remark
MHz	dBμV	dB/m	dB	dB	dBμV/m	dB	dBμV/m	
248.250	36.41	11.50	1.59	27.15	22.35	-23.65	46.00	QP
365.620	41.03	14.99	2.00	27.55	30.47	-15.53	46.00	QP
395.690	34.07	15.85	2.08	27.74	24.26	-21.74	46.00	QP
430.610	36.04	16.00	2.15	27.86	26.33	-19.67	46.00	QP
786.600	34.21	19.88	3.05	27.66	29.48	-16.52	46.00	QP
834.130	33.37	20.53	3.22	27.30	29.82	-16.18	46.00	QP


Level = Read Level + Antenna Factor + Cable Loss – Preamp Factor.



Horizontal:

Peak scan

Level (dBµV/m)

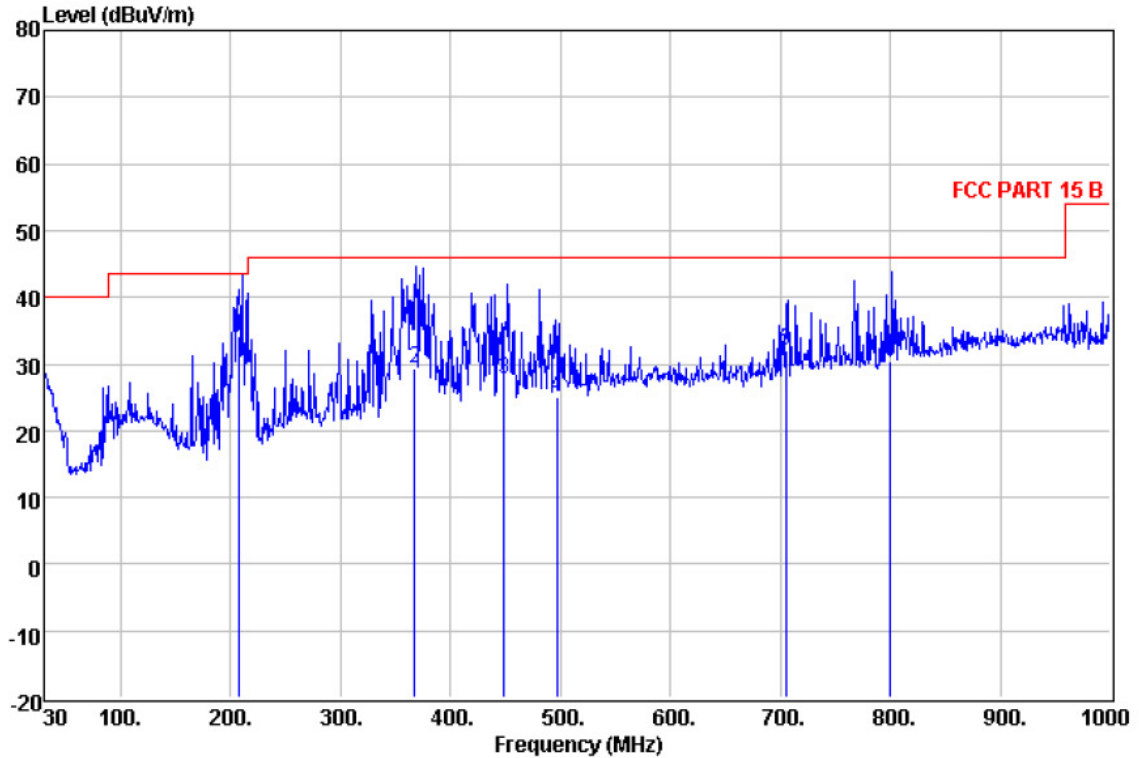

Quasi-peak measurement

Freq MHz	Read Level dBµV	Antenna Factor dB/m	Cable Loss dB	Preamp Factor dB	Level dBµV/m	Over Limit dB	Limit Line dBµV/m	Remark
207.510	50.86	9.06	1.35	27.23	34.04	-9.46	43.50	QP
367.560	39.69	15.13	2.00	27.56	29.26	-16.74	46.00	QP
449.040	37.26	16.20	2.20	27.91	27.75	-18.25	46.00	QP
496.570	33.36	17.34	2.38	28.03	25.05	-20.95	46.00	QP
705.120	37.98	19.05	2.81	27.87	31.97	-14.03	46.00	QP
800.180	34.87	20.10	3.10	27.63	30.44	-15.56	46.00	QP

Level = Read Level + Antenna Factor + Cable Loss – Preamp Factor.

7.2 Radiated Emissions above 1 GHz

N/A: Not applicable. Since Highest frequency generated or used in the device or on which the device operates or tunes (MHz) is less than 108 MHz. The spectrum was investigated up to 1 GHz.

--End of Report--