



**EMC Compliance  
Management Group**  
670 National Avenue  
Mountain View, CA 94043  
Tel. (650) 988-0900  
Fax (650) 988-6647

Competent Body Approval #: 14082  
NVLAP Lab code: 200068-0

## EMI TEST REPORT

### On Models: 2U

1. Twin (circle style, E14 screw tube) 7W, 9W, 11W
  - Twin (circle style, E27 screw tube) 7W, 9W, 11W
  - Twin (square style, E27 screw tube) 7W, 9W, 11W
2. Candex (E14 screw tube) 3W, 5W, 7W, 9W
  - Candex (E27 screw tube) 3W, 5W, 7W, 9W, 11W
3. Classic (E14 screw tube) 7W, 9W, 11W
  - Classic (E27 screw tube) 5W, 7W, 9W, 11W
4. Reflector (E14 screw tube) 3W
  - Reflector (E27 screw tube) 5W, 7W, 9W

Prepared for Primex Industries Limited

According to  
FCC Part 18 Consumer ISM Device

FCC ID #: OTZ-90311

Prepared by: Arcelia Maldonado

QC Manager: William F. Scherer

# ***Table of Contents***

---

<b>GOVERNMENT DISCLAIMER NOTICE</b>	<b>1</b>
<b>REPRODUCTION CLAUSE</b>	<b>1</b>
<b>ADMINISTRATIVE DATA</b>	<b>2</b>
<b>EUT DESCRIPTION</b>	<b>2</b>
<b>TEST SUMMARY</b>	<b>3</b>
<b>TEST LOCATION</b>	<b>4</b>
<b>ACCREDITATION BODIES</b>	<b>4</b>
<b>PRODUCT LABELING</b>	<b>5</b>
<b>SYSTEM TEST JUSTIFICATION</b>	<b>6</b>
<b>EQUIPMENT MODIFICATION</b>	<b>7</b>
<b>TEST SYSTEM DETAILS</b>	<b>8</b>
<b>CONFIGURATION OF TESTED SYSTEM</b>	<b>9</b>
<b>ATTACHMENT 1 - CONDUCTED EMISSION TEST RESULTS (202-C-01)</b>	<b>10</b>
<b>ATTACHMENT 2 - RADIATED EMISSION TEST RESULTS (204-R-01)</b>	<b>13-14</b>

### **Government Disclaimer Notice**

*When government drawing, specification, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawing, specifications, or other data, is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell patented invention that may in any way be related thereto. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.*

### **Reproduction Clause**

*Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from EMC Compliance Management Group, 670 National Ave., Mountain View, CA 94043.*

## ADMINISTRATIVE DATA

Test Sample : Compact Fluorescent Lamp

Model Numbers : 2U

1. Twin (circle style, E14 screw tube) 7W, 9W, 11W  
Twin (circle style, E27 screw tube) 7W, 9W, 11W  
Twin (square style, E27 screw tube) 7W, 9W, 11W
2. Candlex (E14 screw tube) 3W, 5W, 7W, 9W  
Candlex (E27 screw tube) 3W, 5W, 7W, 9W, 11W
3. Classic (E14 screw tube) 7W, 9W, 11W  
Classic (E27 screw tube) 5W, 7W, 9W, 11W
4. Reflector (E14 screw tube) 3W  
Reflector (E27 screw tube) 5W, 7W, 9W

Part Number : N/A

Applicant : Primex Industries Limited  
31 Lok Yip Road, Level 606  
Fanling, NT Hong Kong

Manufacturer : Primex Lighting (SZ) Co., Ltd.

Telephone : (852) 2311-2266

Fax : (852) 2311-0879

## EUT Description

Primex Industries Limited models 2U 1. Twin (circle style, E14 screw tube) 7W, 9W, 11W Twin (circle style, E27 screw tube) 7W, 9W, 11W Twin (square style, E27 screw tube) 7W, 9W, 11W 2. Candlex (E14 screw tube) 3W, 5W, 7W, 9W Candlex (E27 screw tube) 3W, 5W, 7W, 9W, 11W 3. Classic (E14 screw tube) 7W, 9W, 11W Classic (E27 screw tube) 5W, 7W, 9W, 11W 4. Reflector (E14 screw tube) 3W Reflector (E27 screw tube) 5W, 7W, 9W (referred to as the EUT in this report) are compact fluorescent lamps. Testing was conducted on the 11W, since it consummates the most power and all the circuitry are the same. The only difference on all the other models is the size and the shapes.

FCC ID #: OTZ-90311

Prepared for Primex Industries Limited

Prepared by EMC Compliance Management Group

Page 2 of 14

## Test Summary

The Electromagnetic Compatibility requirements on Models 2U 1. Twin (circle style, E14 screw tube) 7W, 9W, 11W Twin (circle style, E27 screw tube) 7W, 9W, 11W Twin (square style, E27 screw tube) 7W, 9W, 11W 2. Candex (E14 screw tube) 3W, 5W, 7W, 9W Candex (E27 screw tube) 3W, 5W, 7W, 9W, 11W 3. Classic (E14 screw tube) 7W, 9W, 11W Classic (E27 screw tube) 5W, 7W, 9W, 11W 4. Reflector (E14 screw tube) 3W Reflector (E27 screw tube) 5W, 7W, 9W for this test are stated below. All results listed in this report relate exclusively to this above-mentioned model as the Equipment Under Test. This report confers no approval or endorsement upon any other component, host or subsystem used in the test set-up.

<b>Emission Tests</b>			
<b>Specifications</b>	<b>Description &amp; Test Results</b>	<b>Test Point</b>	<b>Remark</b>
CFR 47 Part 18.307(c)	Conducted Emissions Test - Passed by 18.25 dB of QP.	Enclosure	Attachment 1
CFR 47 Part 18.305(c)	Radiated Emissions Test - No significant emissions found.	Enclosure	Attachment 2

### **Test Location**

*EMC Compliance Management Group is located at 670 National Ave., Mountain View, CA 94043, USA.*

### **Accreditation Bodies**

*EMC Compliance Management Group is a fully accredited Test Laboratory for ITE, ISM and Telecommunications Products.*



*Laboratory Assessment #: 14082, Approved by Assessment Services, A U. K. Competent Body, as meeting the requirements of EN45001 and ISO Guide 25.*



*In compliance with the site registration requirements of Section 2.948 of the FCC Rules to perform EMI measurements for the general public.*



*Accredited by the National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code # 200068-0.*



*Registered in accordance with Japanese VCCI Regulations.*

## Product Labeling

**LUXLITE®**

Ref: LUXLITE-91221-21

21 December 1999

**Federal Communications Commission**  
Authorization and Evaluation Division  
7435 Oakland Mills Road  
Columbia, MD 21046  
USA

Gentlemen

This is to certify that the label shown above will be the production label to be used on production units of model

(1) 2U, Classic, Candelix - 3W, 5W, 7W, 9W, 11W. FCC ID number: OTZ-90311



Thank you for your attention.

Sincerely yours  
PRIMEX INDUSTRIES LTD



FION CHIU  
Manager



**PRIMEX INDUSTRIES LIMITED**  
ISO 9001 Certified Co. of Prime Group 1  
31 Lok Yip Road, Level 606  
Fanling, Hong Kong  
Tel: (852) 2311-2266  
Fax: (852) 2311-0879  
E-mail: luxlite@luxlite.com

**FCC ID #: OTZ-90311**

**Prepared for Primex Industries Limited**

**Prepared by EMC Compliance Management Group**

**Page 5 of 14**

### ***System Test Justification***

*Testing was conducted on the 11W, since it consumes the most power and all the circuitry are the same. The only difference on all the other models is the size and the shapes.*

### ***Equipment Modification***


*Any modifications installed previous to testing by Primex Industries Limited will be incorporated in each production model sold or leased in United States.*

*No modifications were installed by EMC Compliance Management Group.*

## Test System Details

<b>EUT</b>				
<b>Model Numbers:</b>	<b>2U</b> 1. Twin (circle style, E14 screw tube) 7W, 9W, 11W Twin (circle style, E27 screw tube) 7W, 9W, 11W 2. Candlex (E14 screw tube) 3W, 5W, 7W, 9W Candlex (E27 screw tube) 3W, 5W, 7W, 9W, 11W 3. Classic (E14 screw tube) 7W, 9W, 11W Classic (E27 screw tube) 5W, 7W, 9W, 11W 4. Reflector (E14 screw tube) 3W Reflector (E27 screw tube) 5W, 7W, 9W			
<b>Description:</b>	<b>Compact Fluorescent Lamps</b>			
<b>Manufacturer:</b>	<b>Primex Industries Limited</b>			
<b>Support Equipment</b>				
<b>Description</b>	<b>Model Number</b>	<b>Serial Number</b>	<b>Manufacturer</b>	<b>Cable Description</b>
Lamp	2030	993927	N/A	Power Cord
<b>Cable Description</b>				
<b>From</b>	<b>To</b>	<b>Length (Meters)</b>	<b>Shielded (Y/N)</b>	<b>Ferrite Loaded (Y/N)</b>
Lamp	AC	0.5	N	N

## *Configuration of Tested System*

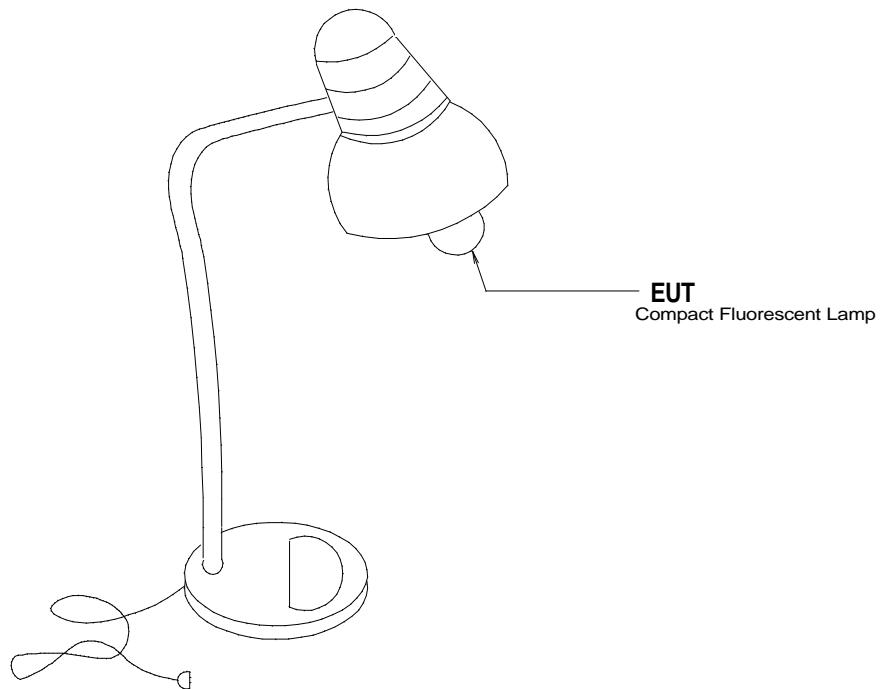

**ATTACHMENT 1 - CONDUCTED EMISSION TEST RESULTS (202-C-01)**



<b>CLIENT:</b>	Primex Industries Limited	<b>TEST REFERENCE:</b>	FCC Part 18.307(c) Consumer ISM Device
<b>EUT MODEL:</b>	2U	<b>PRODUCT:</b>	Compact Fluorescent Lamps
<b>SERIAL NO.:</b>	N/A	<b>EUT DESIGNATION:</b>	Residential
<b>TEMPERATURE:</b>	20°C	<b>HUMIDITY:</b>	45%
<b>ATM PRESSURE:</b>	1017 Mbar	<b>GROUNDING:</b>	Through AC Power Cord
<b>TESTED BY:</b>	Charles Taylor	<b>DATE OF TEST:</b>	1999 Dec 30
<b>SETUP METHOD:</b>	ANSI C63.4 - 1992, CISPR 16-1:1993		
<b>TEST PROCEDURE:</b>	The EUT was set up according to the guideline of ANSI C63.4 for conducted emissions. The measurement was using a LISN probe on each line and an EMI receiver peak scan was made at the frequency measurement range. The six highest significant peaks were then marked, and these signals were then quasi-peaked and averaged. The frequency range investigated was from 450KHz to 30MHz.		
<b>TESTED RANGE:</b>	450kHz to 30MHz		
<b>TEST VOLTAGE:</b>	120VAC / 60Hz		
<b>RESULTS:</b>	The EUT meet the requirements of test reference for Conducted Emissions on line 1 by 18.25 dB of Quasi-Peak detector. The test results relate only to the equipment under test provided by client.		
<b>CHANGES OR MODIFICATIONS:</b>	There were no modifications installed by EMC Compliance Management Group test personnel.		
<b>M. UNCERTAINTY:</b>	Freq. $\pm 2 \times 10^{-7} \times$ Center Freq., Amp $\pm 2.6$ dB		

FCC ID #: OTZ-90311

Prepared for Primex Industries Limited

Prepared by EMC Compliance Management Group

Page 10 of 14

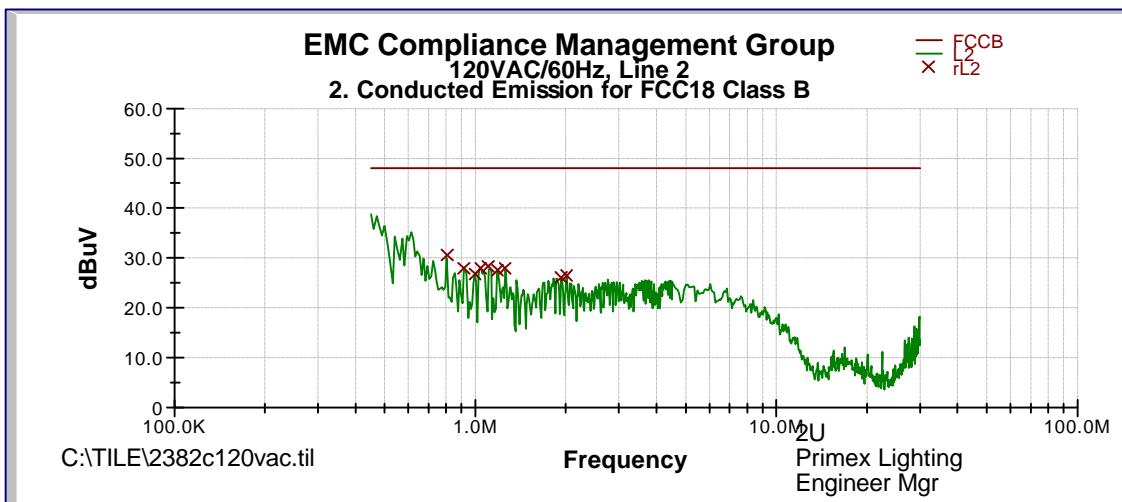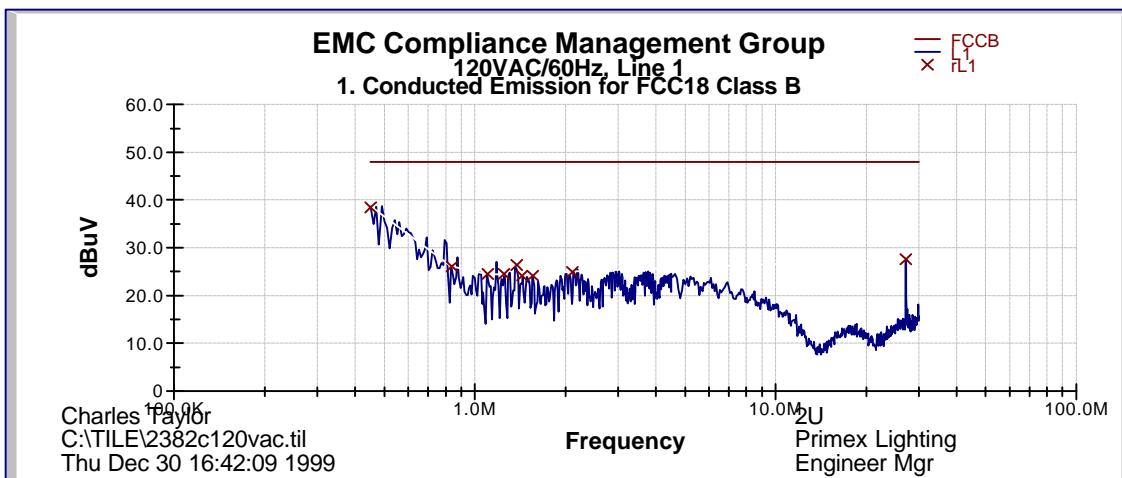

Line	Frequency [MHz]	Corrected QP Reading [dB(μV)]	Delta QP [dB]	Limit [dB(μV)/m]
L1	0.452	30.14	-18.25	48.0
L1	1.366	23.42	-22.83	48.0
L1	2.116	22.22	-24.79	48.0
L2	1.107	27.35	-20.65	48.0
L2	1.181	26.30	-21.70	48.0
L2	0.997	25.91	-22.09	48.0

Note: All reading are using a bandwidth of 9 kHz, with a 30 ms sweep time. A video filter was not used.

FCC ID #: OTZ-90311

Prepared for Primex Industries Limited

Prepared by EMC Compliance Management Group

Test Equipment	Manufacturer/ Model	Serial No.	Last Cal.	Cal. Due Date
EMI Receiver	HP 85462A	3650A00363	05/21/99	05/21/00
RF Filter	HP 85460A	3704A00349	05/21/99	05/21/00
LISN	EMCO	109804	10/14/99	10/14/00
Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).				

SIGNED: Charles Taylor Jr.

REVIEWED: William J. Scheuer

**ATTACHMENT 2 - RADIATED EMISSION TEST RESULTS** (204R-01)

<b>CLIENT:</b>	Primex Industries Limited	<b>TEST REFERENCE:</b>	FCC Part 18.305(c) Consumer ISM Device
<b>EUT MODEL:</b>	2U	<b>PRODUCT:</b>	Compact Fluorescent Lamps
<b>SERIAL NO.:</b>	N/A	<b>EUT DESIGNATION:</b>	Residential
<b>TEMPERATURE:</b>	22°C	<b>HUMIDITY:</b>	45%
<b>ATM PRESSURE:</b>	1017 Mbar	<b>GROUNDING:</b>	Through AC Power Cord
<b>TESTED BY:</b>	Charles Taylor	<b>DATE OF TEST:</b>	1999 Dec 30
<b>SETUP METHOD:</b>	ANSI C63.4:1992, CISPR 16-1:1993		
<b>TEST PROCEDURE:</b>	<p>The EUT was set up according to the guidelines of ANSI C63.4:1992 for radiated emissions. An EMI receiver peak scan was made at the frequency measurement range (pre-scan) in an Anechoic chamber. Signal discrimination was then performed and the significant peaks marked. These peaks were then quasi-peaked from 30 MHz to 1GHz at OATs.</p> <p>The following data lists the significant emission frequencies, measured levels, correction factors (including cable and antenna correction factors), and the corrected readings against the limits. Explanation of the Correction Factor is given as follows:</p> <p>FS= RA + AF + CF - AG</p> <p>Where: FS = Field Strength</p> <p>RA = Receiver Amplitude</p> <p>AF = Antenna Factor</p> <p>CF = Cable Attenuation Factor</p> <p>AG = Amplifier Gain</p>		
<b>TESTED RANGE:</b>	30MHz to 1,000MHz on Quasi-peak		
<b>TEST VOLTAGE:</b>	120VAC / 60Hz		
<b>RESULTS:</b>	The EUT meet the requirements of test reference for Radiated Emissions on vertical and horizontal polarization. The test results relate only to the equipment under test provided by client.		
<b>CHANGES OR MODIFICATIONS:</b>	There were no modification installed by EMC Compliance Management Group test personnel.		
<b>M. UNCERTAINTY:</b>	Freq. $\pm 2 \times 10^{-7} \times$ Center Freq., Amp $\pm 2.6$ dB		

FCC ID #: OTZ-90311

Prepared for Primex Industries Limited

Prepared by EMC Compliance Management Group

Page 13 of 14

<b>30 MHz – 1GHz</b>					
Frequency [MHz]	Antenna Polarization [V/H]	Corrected Reading [dB $\mu$ V/m]	Delta, QP [dB]	3 Meters Limits [dB $\mu$ V/m]	Correction Factors [dB/m]
Set-up/Configuration: ANSI C63.4:1992					
<b>Comments: NO EMISSION FOUND BETWEEN 30MHz – 1GHz</b>					
Note: All readings are quasi-peak unless stated otherwise, using a QPA bandwidth of 120kHz, with a 30 ms sweep time. A video filter was not used.					

Test Equipment	Manufacturer/ Model	Serial No.	Last Cal.	Cal. Due Date
EMI Receiver	HP 85462A	3650A00363	05/21/99	05/21/00
RF Filter	HP 85460A	3704A00349	05/21/99	05/21/00
Antenna	CHASE CBL6112A	2274	11/15/99	11/15/00
Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).				

SIGNED: Charles Taylor Jr.

REVIEWED: William J. Scherer

FCC ID #: OTZ-90311

Prepared for Primex Industries Limited

Prepared by EMC Compliance Management Group

Page 14 of 14