

FCC Part 15.249 Test Report  
For  
Sonus Telecom, Inc.  
on the  
Cordless Telephone  
Model: IBM3415  
FCC ID: OU3IBM3415

Test Report # J20006239A

Date of Report: April 10, 2000



NVLAP Laboratory Code 200201-0  
Accredited for testing to FCC Parts 15

Tested by:	<i>Xi-Ming Yang</i>	Xi-Ming Yang
Reviewer:	<i>David Chernomordik</i>	David Chernomordik

All services undertaken are subject to the following general policy: Reports are submitted for exclusive use of the client to whom they are addressed. Their significance is subject to the adequacy and representative character of the samples and to the comprehensiveness of the tests, examinations or surveys made. This report shall not be reproduced except in full, without written consent of Intertek Testing Services, NA Inc. This report must not be used to claim product endorsement by NVLAP, NIST nor any other agency of the U.S. Government.

Table of Contents

**1 JOB DESCRIPTION.....1**

1.1 Client Information .....1

1.2 Equipment under test (EUT) .....1

1.3 Test plan reference.....2

1.4 System test configuration.....2

1.4.1 System block diagram & Support equipment.....2

1.4.2 Justification .....3

1.4.3 Mode(s) of operation.....3

1.5 Modifications required for compliance.....3

**2 TEST SUMMARY.....4**

**3 FIELD STRENGTH OF EMISSIONS.....5**

3.1 Test Description.....5

3.2 Test Procedure.....5

3.3 Test Results.....5

3.4 Modifications made during testing.....5

3.5 Test Instrumentation.....5

**4 SPURIOUS EMISSIONS (EXCEPT HARMONICS).....6**

4.1 Test Description.....6

4.2 Test Procedure.....6

4.3 Test Results.....6

4.4 Modifications made during testing.....6

4.5 Test Instrumentation.....6

**5 ANTENNA REQUIREMENTS.....8**

5.1 Test description .....8

5.2 Test Procedure.....8

5.3 Test Results.....8

5.4 Modifications made during testing.....8

5.5 Test instrumentation.....8

**6 AC LINE CONDUCTED EMISSIONS.....9**

6.1 Test description .....9

6.2 Test Procedure.....9

6.3 Test Results.....9

6.4 Modifications made during testing.....9

6.5 Test instrumentation.....9

## 1 JOB DESCRIPTION

### 1.1 Client Information

The EUT has been tested at the request of

**Company:** Sonus Telecom, Inc.  
123 Bldg., 2-Dong, Suite 714, 75-1 Gochuck-Dong  
Youngdungpo-Gu, Seoul  
Korea

**Name of contact:** Bryan Lee  
**Telephone:** (822) 6090-3000  
**Fax:** (822) 6090-3002

### 1.2 Equipment under test (EUT)

**Equipment type:** Cordless Telephone system

**Equipment class:** Low Power transmitter

**Model number(s):** IBM3415

**FCC ID:** OU3IBM3415

**Manufacturer:** SAME as above.

**Use of Product :** Voice communications

**Production is planned:**  Yes,  No

**Technical Specifications:**

Type of Emission	
Modulation	Analog
Range of RF Output	0.5 W (Peak EIRP)
Means for variation of operating power	None
Frequency Range	to MHz
Max. number of Channels	
Antenna	Handset: Base Unit:
Detachable antenna ?	No
External input	<ul style="list-style-type: none"> <li>• Audio Voice</li> <li>• PSTN</li> </ul>

**EUT receive date:** March 30, 2000  
**EUT received condition:** Good condition prototype  
**Test start date:** March 30, 2000  
**Test end date:** April 6, 2000


### 1.3 Test plan reference

FCC Part 2.1033, FCC Part 15.249

### 1.4 System test configuration

#### 1.4.1 System block diagram & Support equipment

The diagrams shown below details the placement of the equipment under test on the turntable.

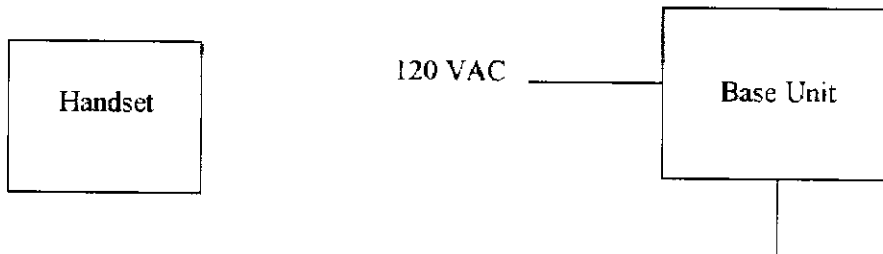

<b>S:</b> Shielded	<b>U:</b> Unshield	<b>F:</b> With Ferrite Core
--------------------	--------------------	-----------------------------

Support equipment					
Equip. #	Equipment	Manufacturer	Model #	S/N #	FCC ID
1	Telephone Simulator				NA

**1.4.2 Justification**

The system was **configured** for testing in a **typical** manner in accordance with ANSI C63.4 standard.

For emission testing, the equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). During testing, all cables were manipulated to produce worst case emissions.

**1.4.3 Mode(s) of operation**

The handset and Base unit was powered from **fully charged batteries and AC adapter**. During tests, EUT was operating at continuous transmitting mode.

**1.5 Modifications required for compliance**

No modifications were implemented by Intertek Testing Services.

**2 TEST SUMMARY**

FCC RULE	DESCRIPTION OF TEST	RESULT	PAGE
<b>Handset</b>			
15.249a	Field Strength of Emissions	90.4 dB(μV/m)	5
15.249c	Field Strength of Spurious Radiation	Worst case Freq.: MHz Margin: dB	6
15.203	Antenna requirement	Complies	8
15.205	Restricted bands of operation	Worst case Freq.: MHz Margin: dB	
15.207	Line Conducted Emissions	N/A	N/A
<b>Base Unit</b>			
15.249a	Field Strength of Emissions	DB(μV/m)	5
15.249c	Field Strength of Spurious Radiation	Worst case Freq.: MHz Margin: dB	6
15.203	Antenna requirement	Complies	8
15.205	Restricted bands of operation	Worst case Freq.: MHz Margin: dB	
15.207	Line Conducted Emissions	Worst case Freq.: MHz Margin: dB	9

### 3 FIELD STRENGTH OF EMISSIONS

#### 3.1 Test Description

Parameter:	FCC § 15.249a
Requirement:	FCC § 15.249a
Fundamental: Harmonics	

#### 3.2 Test Procedure

For the measurements, the EUT is attached to a cardboard box (if necessary) and placed on the wooden turntable which is 0.8m above the ground plane on an open site. If the EUT attaches to peripherals, they are connected and operational (as typical as possible). The EUT is wired to transmit full power.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance.

Radiated emission measurements were performed from 30 MHz to the 10th harmonic of transmitter frequency. Analyzer resolution is 100 kHz or greater for 30 MHz to 1000 MHz, 1 MHz for >1000 MHz.

Measurements were performed for lowest and highest channels.

#### 3.3 Test Results

See attached.

#### 3.4 Modifications made during testing

None

#### 3.5 Test Instrumentation

Hewlett Packard HP8566B Spectrum Analyzer (S.A.)

EMCO 3115 Horn Antenna

HP Pre-amp

## Radiated Emissions Test Data

<b>Company:</b>	Sonus	<b>Model #:</b>	GH 2400N	<b>Standard:</b>	FCC § 15.249
<b>EUT:</b>	2.4 GHz Cordless Phone	<b>S/N #:</b>		<b>Limits:</b>	12
<b>Project #:</b>	J20009276	<b>Test Date:</b>	Mar 30, 2000	<b>Test Distance:</b>	3 meters
<b>Test Mode:</b>	Base low channel	<b>Engineer:</b>	Barry S.	<b>Duty Relaxation:</b>	0 dB

Number:	Antenna Used			Pre-Amp Used			Cable Used			Transducer Used
	8	3	19	8	10	13	12			
<b>Model:</b>	BMC03115	CDI8100	6	CDI_P100	AFT15855	ACO400	Gm_M+L	None	None	None

Frequency	Reading	Detector	Ant #	Amp #	Ant. Pol.	Ant. Factor	Pre-Amp	Insert Loss	D. C. F.	Net	Limit @3m	Margin
MHz	dB(µV)	P/A/Q	#	#	H/V	dB(1/m)	dB	dB	dB	dB(µV/m)	dB(µV/m)	dB
2402.55	58.5	Peak	8		V	29.6	0.0	2.3	0.0	90.4	94.0	-3.6
4805.10	28.4	Peak	8	8	V	33.5	28.1	3.2	0.0	37.0	74.0	-37.0
4805.10	22.0	Ave.	8	8	V	33.5	28.1	3.2	0.0	30.6	54.0	-23.4
7207.65	31.0	Peak	8	8	V	38.0	28.0	4.3	0.0	45.3	74.0	-28.7
7207.65	25.6	Ave.	8	8	V	38.0	28.0	4.3	0.0	39.9	54.0	-14.1
9610.20	32.0	Peak	8	8	V	39.3	27.3	5.0	0.0	49.0	74.0	-25.0
9610.20	26.0	Ave.	8	8	V	39.3	27.3	5.0	0.0	43.0	54.0	-11.0
12012.75	38.0	Peak	8	10	V	42.5	39.1	5.9	0.0	47.3	74.0	-26.8
12012.75	33.3	Ave.	8	10	V	42.5	39.1	5.9	0.0	42.6	54.0	-11.5
14415.3	39.3	Peak	8	10	V	41.5	37.8	6.5	0.0	49.5	74.0	-24.5
14415.3	32.9	Ave.	8	10	V	41.5	37.8	6.5	0.0	43.1	54.0	-10.9
16817.85	40.9	Peak	8	10	V	41.5	39.4	7.2	0.0	50.2	74.0	-23.9
16817.85	34.9	Ave.	8	10	V	41.5	39.4	7.2	0.0	44.2	54.0	-9.8
19220.4	37.3	Peak	21	13	V	40.2	23.3	0.0	-9.5	44.7	74.0	-29.3
19220.4	30.3	Ave.	21	13	V	40.2	23.3	0.0	-9.5	37.7	54.0	-16.3
21622.95	42.3	Peak	21	13	V	40.3	23.3	0.0	-9.5	49.8	74.0	-24.2
21622.95	33.2	Ave.	21	13	V	40.3	23.3	0.0	-9.5	40.7	54.0	-13.3
24025.5	42.3	Peak	21	13	V	40.4	24.2	0.0	-9.5	49.0	108.0	-59.0
24025.5	35.1	Ave.	21	13	V	40.4	24.2	0.0	-9.5	41.8	108.0	-66.2

<b>Notes:</b>	a) D.C.F.:Distance Correction Factor
	b) Insert. Loss (dB) = Cable A + Cable B + Cable C.
	c) Net (dB) = Reading + Antenna Factor - Pre-amp + Insert. Loss. - Transducer Loss - Duty Relaxation (transmitter only).
	d) Negative signs (-) in Margin column signify levels below the limits.
	e) All other emissions not reported are below the equipment noise floor which is at least 20 dB below the limits.







## Radiated Emissions Test Data

Company:	Sonus	Model #:	GH 2400N	Standard:	FCC § 15.249
EUT:	2.4 GHz Cordless Phone	S/N #:		Limits:	12
Project #:	J20009278	Test Date:	Mar 30, 2000	Test Distance:	3 meters
Test Mode:	Hand hi channel	Engineer:	Barry S.	Duty Relaxation:	0 dB

	Antenna Used			Pre-Amp Used			Cable Used			Transducer Used
Number:	8	3	19	8	10	13	12			0
Model:	EMCO 3115	CDI B100	0	CDI P100 0	AFT16355	ACO400	Gm_M+L	None	None	None

Frequency	Reading	Detector	Ant	Amp	Ant. Pol.	Ant. Factor	Pre-Amp	Insert. Loss	D. C. F.	Net	Limit @3m	Margin
MHz	dB(µV)	P/A/Q	#	#	H/V	dB(1/m)	dB	dB	dB	dB(µV/m)	dB(µV/m)	dB
2476.45	55.3	Peak	8		V	29.6	0.0	2.3	0.0	87.2	94.0	-6.8
4952.90	30.7	Peak	8	8	V	33.5	28.1	3.2	0.0	39.3	74.0	-34.7
4952.90	22.8	Ave.	8	8	V	33.5	28.1	3.2	0.0	31.4	54.0	-22.6
7429.35	32.2	Peak	8	8	V	38.0	28.0	4.3	0.0	46.5	74.0	-27.5
7429.35	25.7	Ave.	8	8	V	38.0	28.0	4.3	0.0	40.0	54.0	-14.0
9905.80	32.5	Peak	8	8	V	39.3	27.6	5.0	0.0	49.2	74.0	-24.8
9905.80	26.2	Ave.	8	8	V	39.3	27.6	5.0	0.0	42.9	54.0	-11.1
12382.25	41.2	Peak	8	10	V	42.5	39.1	5.9	0.0	50.5	74.0	-23.6
12382.25	33.5	Ave.	8	10	V	42.5	39.1	5.9	0.0	42.8	54.0	-11.3
14858.7	39.0	Peak	8	10	V	42.1	37.4	6.8	0.0	50.5	74.0	-23.6
14858.7	33.6	Ave.	8	10	V	42.1	37.4	6.8	0.0	45.1	54.0	-9.0
17335.15	39.2	Peak	8	10	V	43.8	38.8	7.5	0.0	51.7	74.0	-22.3
17335.15	34.2	Ave.	8	10	V	43.8	38.8	7.5	0.0	46.7	54.0	-7.3
19811.6	39.4	Peak	21	13	V	40.3	23.3	0.0	-9.5	46.9	74.0	-27.1
19811.6	31.2	Ave.	21	13	V	40.3	23.3	0.0	-9.5	38.7	54.0	-15.3
22288.05	41.4	Peak	21	13	V	40.3	23.3	0.0	-9.5	48.9	74.0	-25.1
22288.05	34.6	Ave.	21	13	V	40.3	23.3	0.0	-9.5	42.1	54.0	-11.9

<b>Notes:</b>	a) D.C.F.: Distance Correction Factor
	b) Insert. Loss (dB) = Cable A + Cable B + Cable C.
	c) Net (dB) = Reading + Antenna Factor - Pre-amp + Insert. Loss. - Transducer Loss - Duty Relaxation (transmitter only).
	d) Negative signs (-) in Margin column signify levels below the limits.
	e) All other emissions not reported are below the equipment noise floor which is at least 20 dB below the limits.

### Radiated Emissions Test Data

<b>Company:</b>	Sonus	<b>Model #:</b>	GH 2400N	<b>Standard</b>	<b>FCC § 15B</b>
<b>EUT:</b>	Cordless 2.4 GHz Phone	<b>S/N #:</b>		<b>Limits</b>	2
<b>Project #:</b>	J20009278	<b>Test Date:</b>	March 31, 2000	<b>Test Distance</b>	3 meters
<b>Test Mode:</b>	On in Standby mode	<b>Engineer:</b>	Barry S.	<b>Duty Relaxation</b>	0 dB

Antenna Used			Pre-Amp Used			Cable Used			Transducer Used	
Number:	2	7	19	2	3	13	5			0
Model:	EMCO 3143	EM LPA- 25	6	HP 8447D	MC 15542	ACO/400	Sita 3 10m	None	None	None

Frequency	Reading	Detector	Ant	Amp	Ant. Pol.	Ant. Factor	Pre-Amp	Insert. Loss	D. C. F.	Net	Limit @3m	Margin
MHz	dB(µV)	P/A/G	#	#	H/V	dB(f/m)	dB	dB	dB	dB(µV/m)	dB(µV/m)	dB
41.50	28.8	Peak	2		V	7.1	0.0	1.1	0.0	37.0	40.0	-3.0
46.60	21.7	Peak	2		V	8.3	0.0	1.1	0.0	31.1	40.0	-8.9
51.16	23.1	Peak	2		V	6.3	0.0	1.1	0.0	30.5	40.0	-9.5
55.80	16.7	Peak	2		V	5.5	0.0	1.1	0.0	23.3	40.0	-16.7
62.20	15.5	Peak	2		V	5.4	0.0	1.4	0.0	22.3	40.0	-17.7
113.40	22.6	Peak	2		V	7.0	0.0	1.5	0.0	31.1	43.5	-12.4
117.50	19.7	Peak	2		H	6.7	0.0	1.5	0.0	27.9	43.5	-15.6
118.90	19.6	Peak	2		H	6.7	0.0	1.5	0.0	27.8	43.5	-15.7
138.20	25.5	Peak	2		H	8.3	0.0	1.7	0.0	35.5	43.5	-8.0
141.00	17.0	Peak	2		H	9.2	0.0	1.7	0.0	27.9	43.5	-15.6
154.80	24.6	Peak	2		V	11.7	0.0	1.8	0.0	38.1	43.5	-5.4

**Notes:**

- a) D.C.F.: Distance Correction Factor
- b) Insert. Loss (dB) = Cable A + Cable B + Cable C.
- c) Net (dB) = Reading + Antenna Factor - Pre-amp + Insert. Loss. - Transducer Loss - Duty Relaxation (transmitter only).
- d) Negative signs (-) in Margin column signify levels below the limits.
- e) All other emissions not reported are below the equipment noise floor which is at least 20 dB below the limits.

**4 SPURIOUS EMISSIONS (EXCEPT HARMONICS)**

**4.1 Test Description**

Parameter:	FCC § 15.249c
Requirement:	FCC § 15.249c
Attenuation limits:	≤ 50 dB or FCC § 15.209

**4.2 Test Procedure**

For measurement below 1 GHz, the EUT was placed inside a TEM cell (stripline) connected to a spectrum analyzer from one side and to 50 ohm termination from one side and to 50 ohm termination from another. For measurement above 1 GHz, a horn antenna was placed at a distance of 10-15 cm from EUT and connect4d to a spectrum analyzer. Several plots were made to show emissions from 1 MHz up to 10<sup>th</sup> harmonic.

**4.3 Test Results**

See attached plots.

**4.4 Modifications made during testing**

None

**4.5 Test Instrumentation**

Hewlett Packard HP8566B Spectrum Analyzer (S.A.)


EMCO 3115 Horn Antenna

Pre-amplifiers


**OUT OF BAND EMISSION PLOTS**

<b>Plot #</b>	<b>Description</b>
4.1.a – 4.1.f	Base unit, Low channel
4.2.a – 4.2.f	Base unit, High channel
4.3.a – 4.3.f	Handset, Low channel
4.4.a – 4.4.f	Handset, High channel

Plot 4.1.2

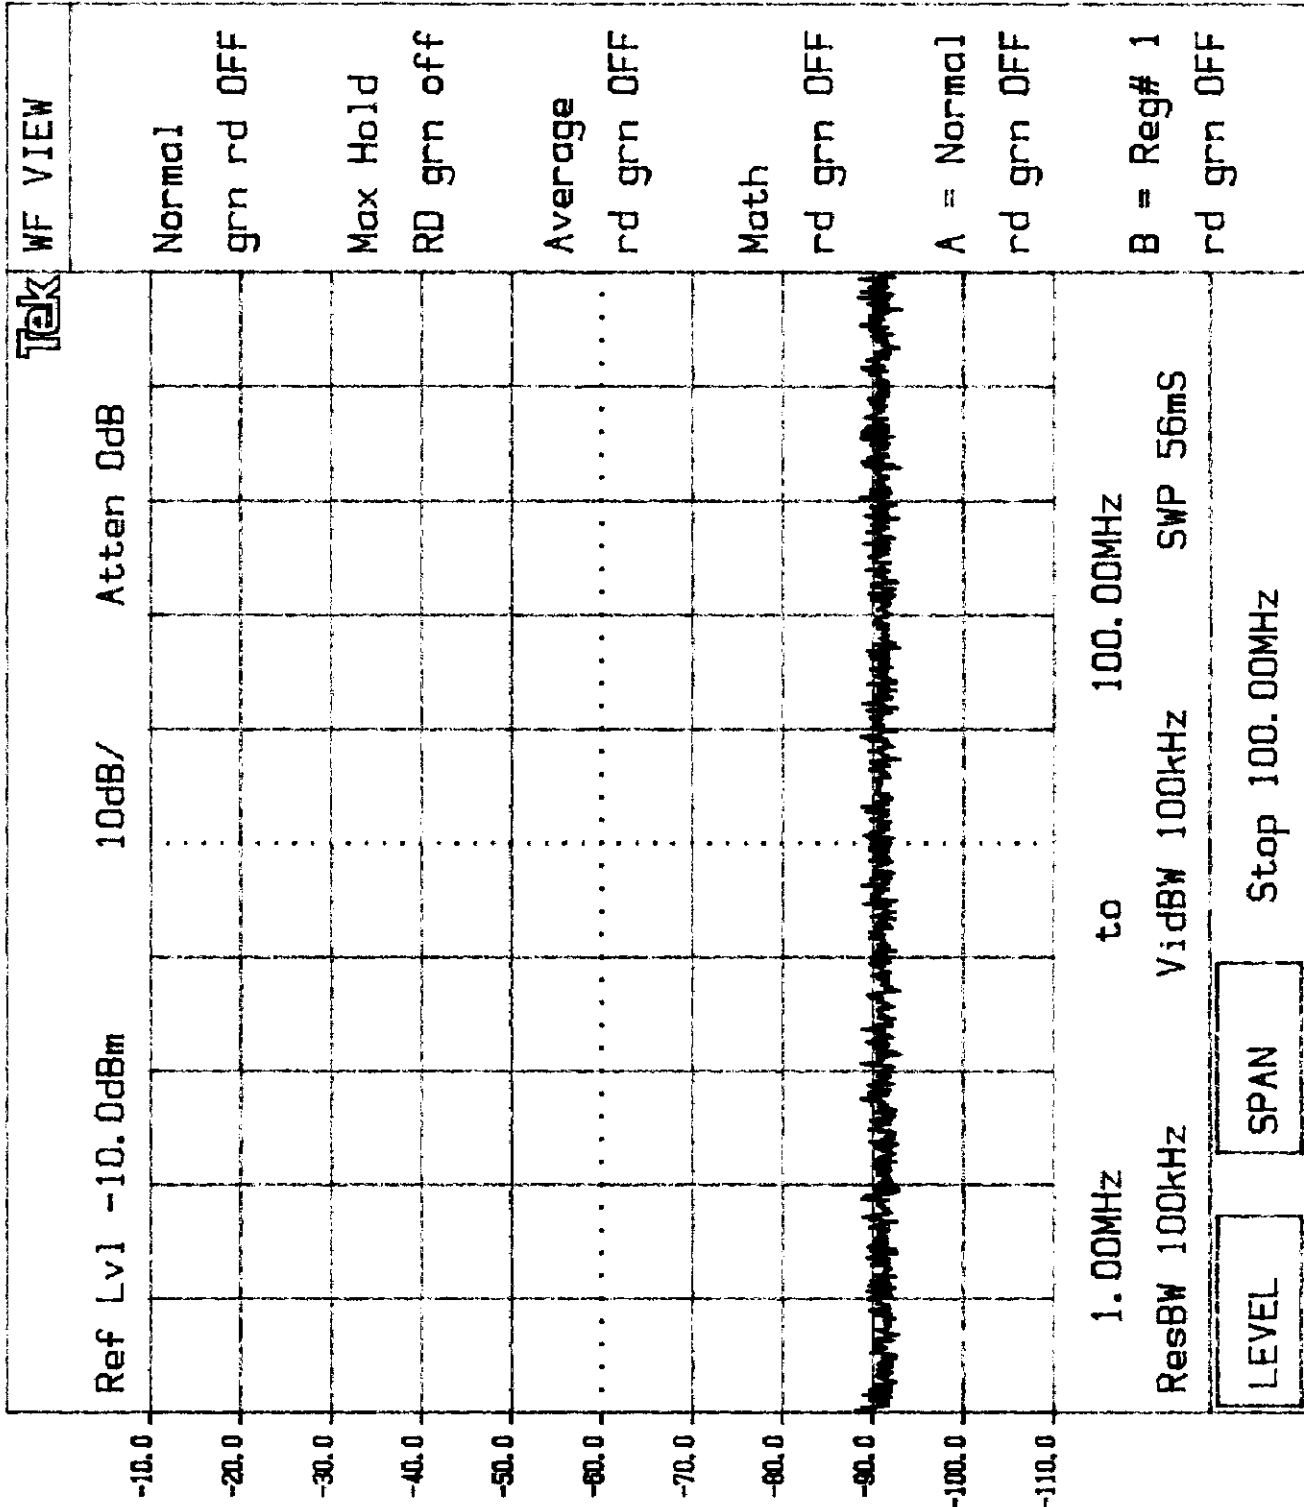


Plot 4.1.6

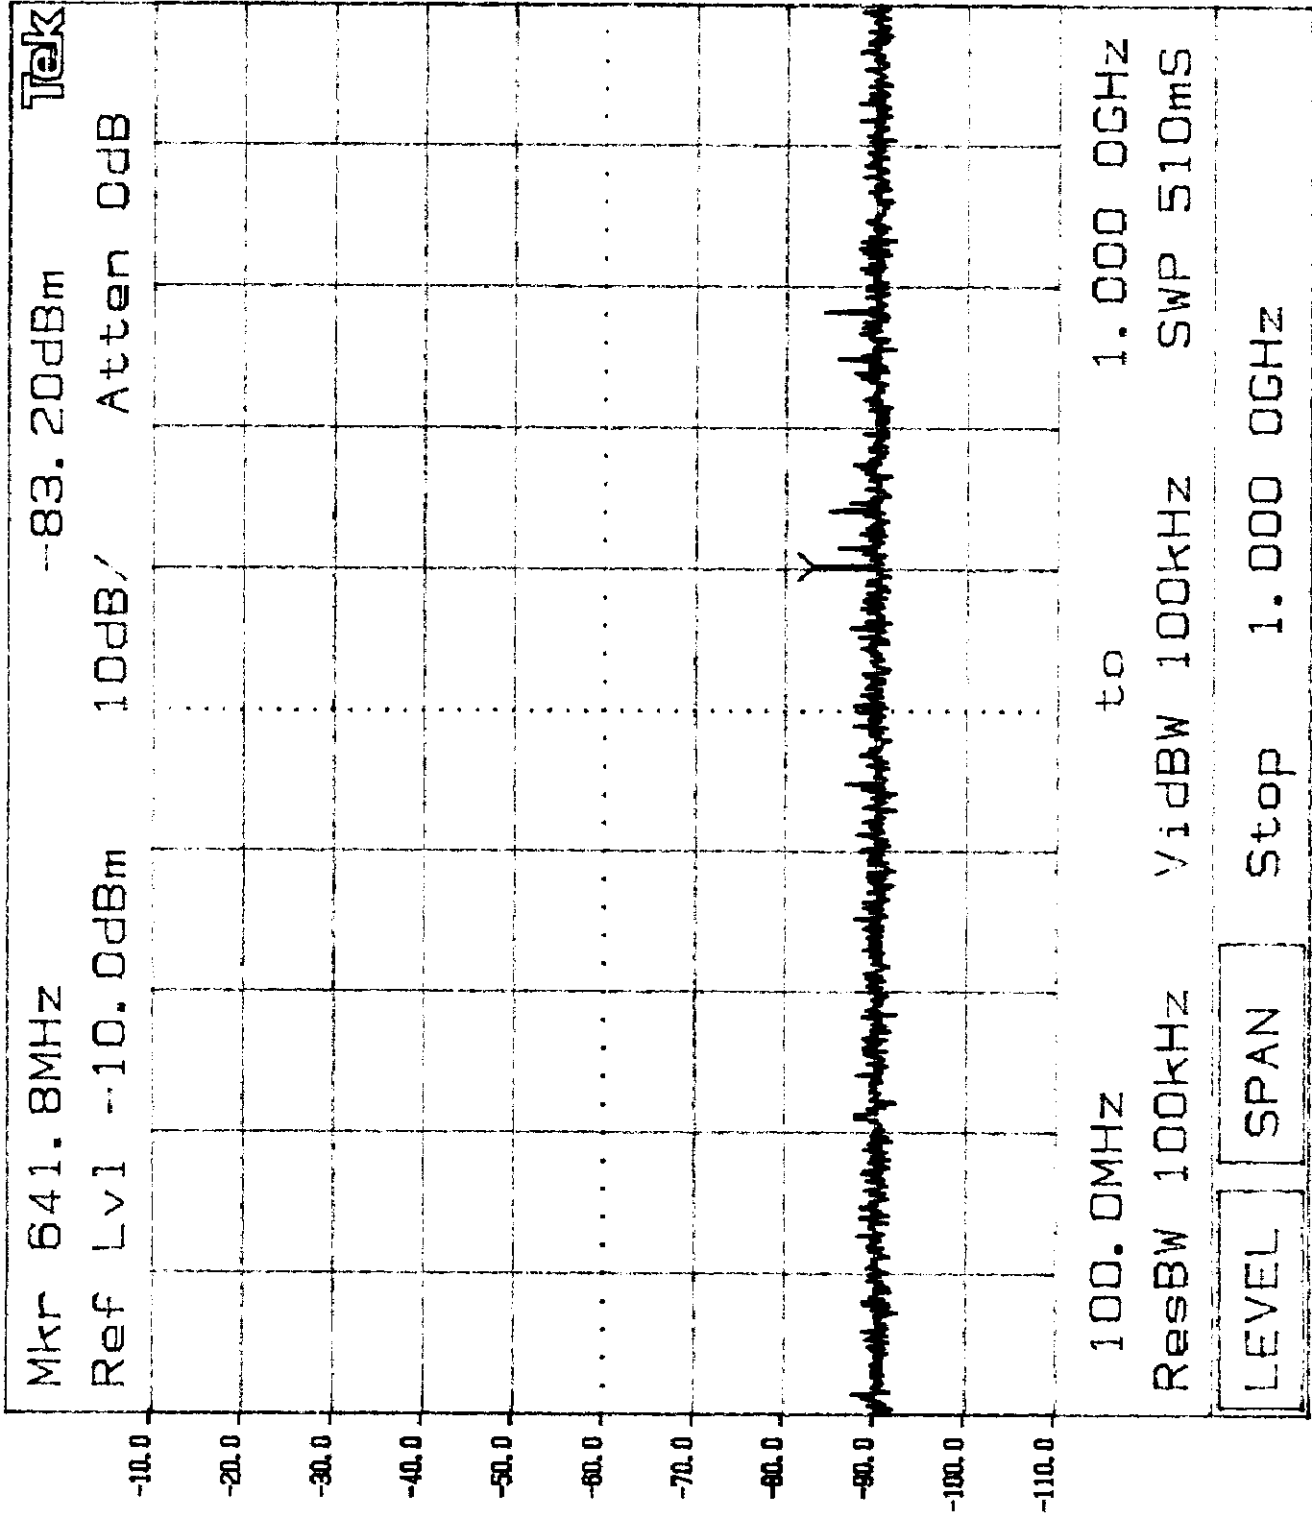





Plot 4.1.c

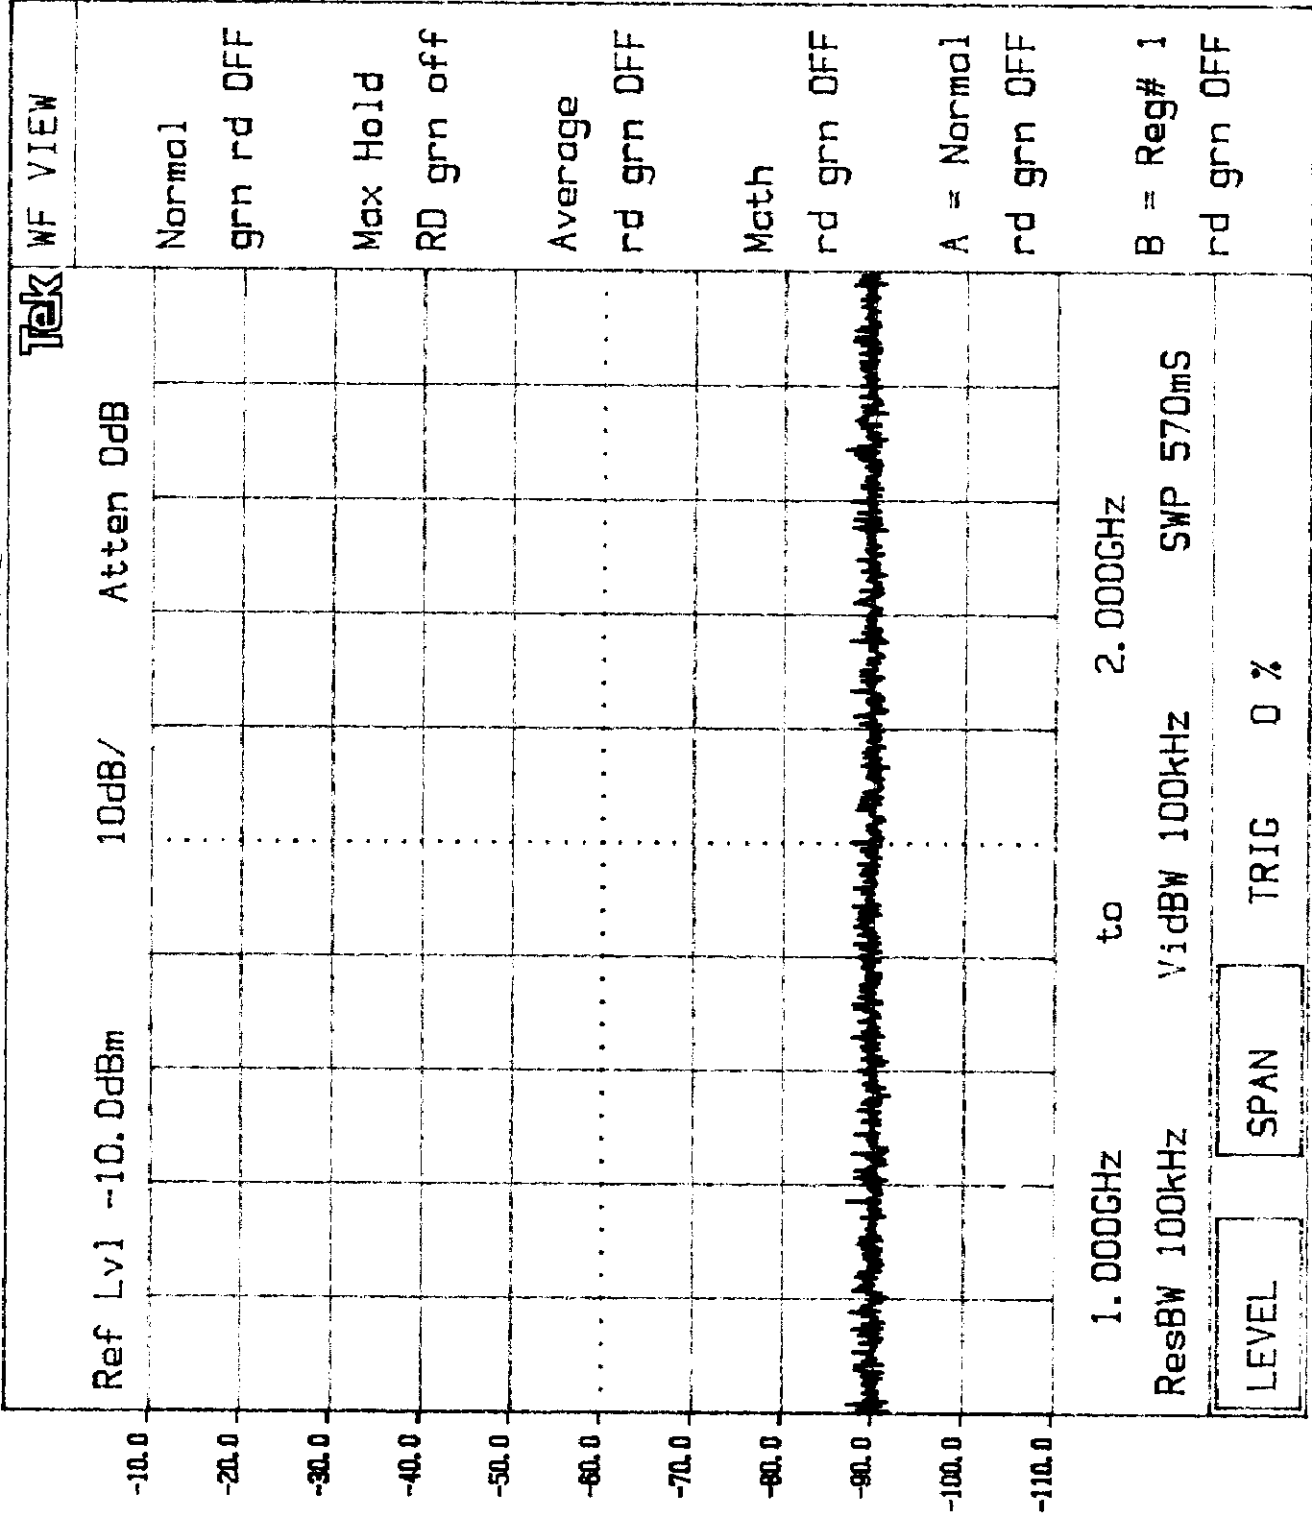


Plot 4, 1.d

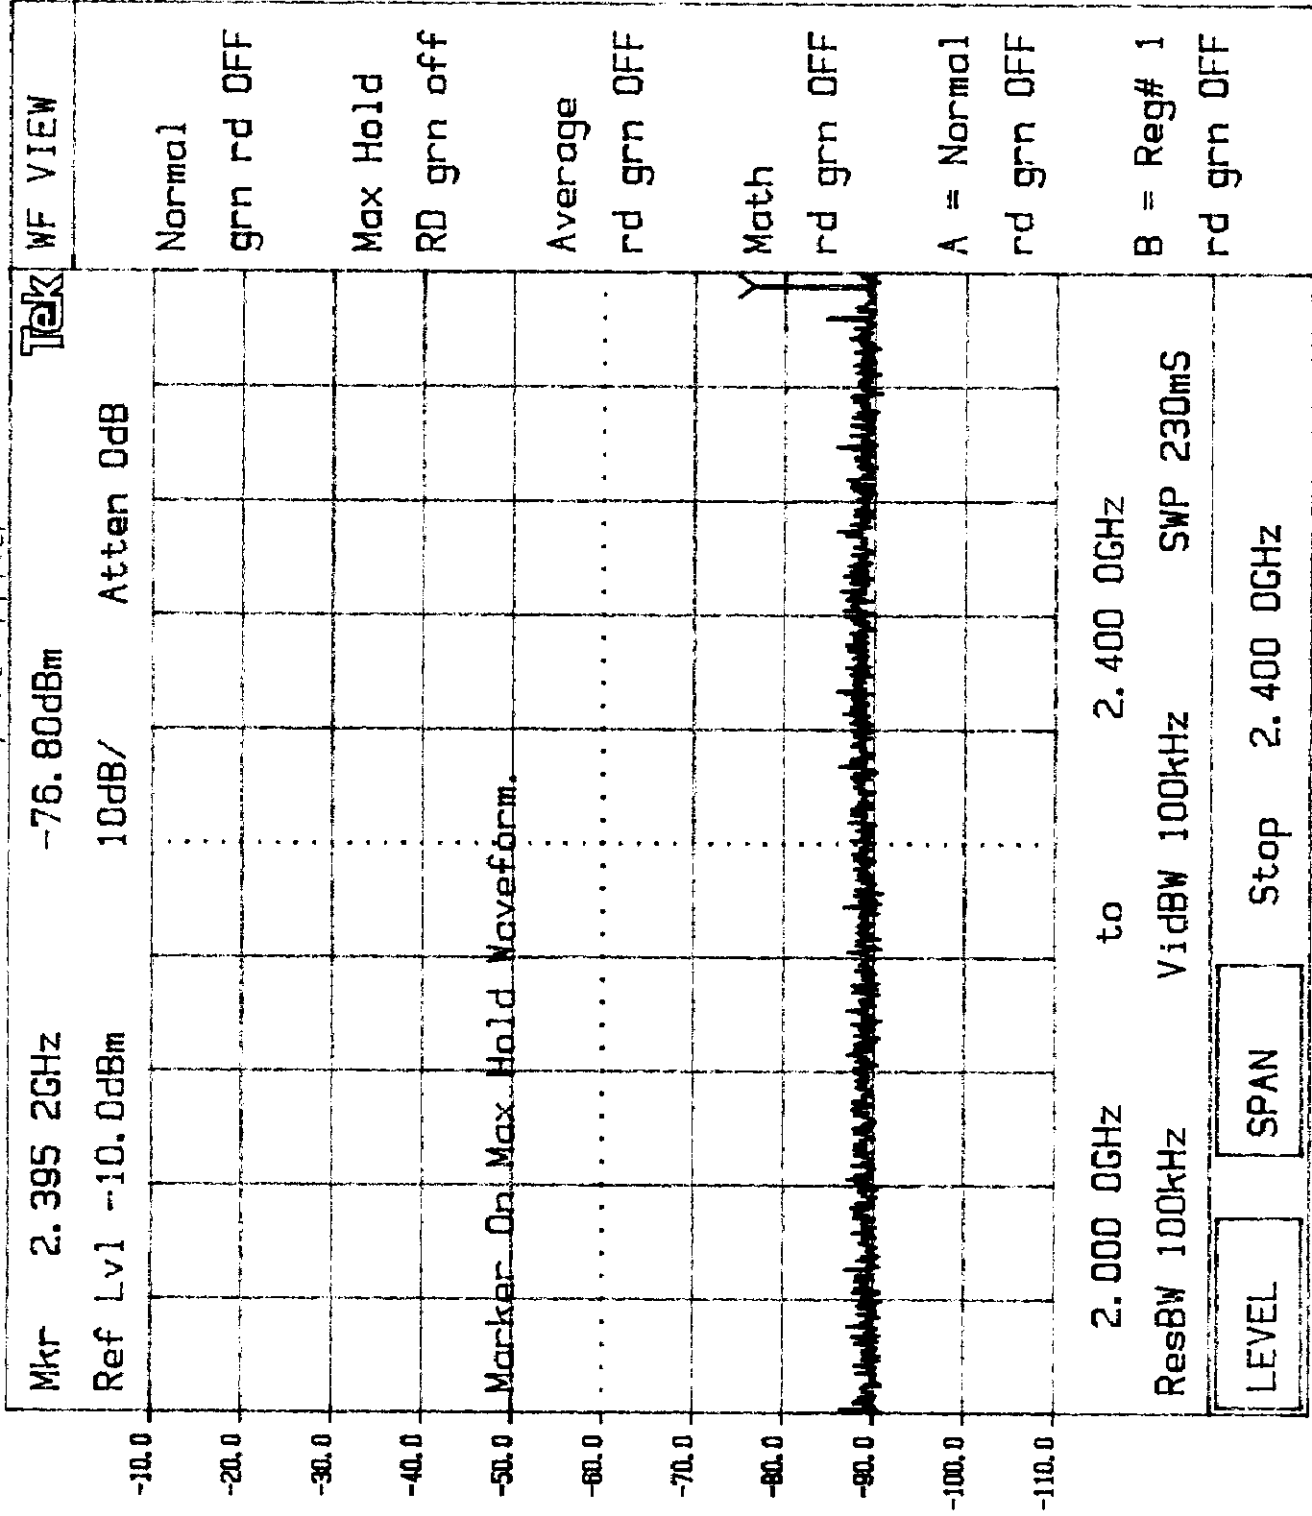


Plot 4, 1, e

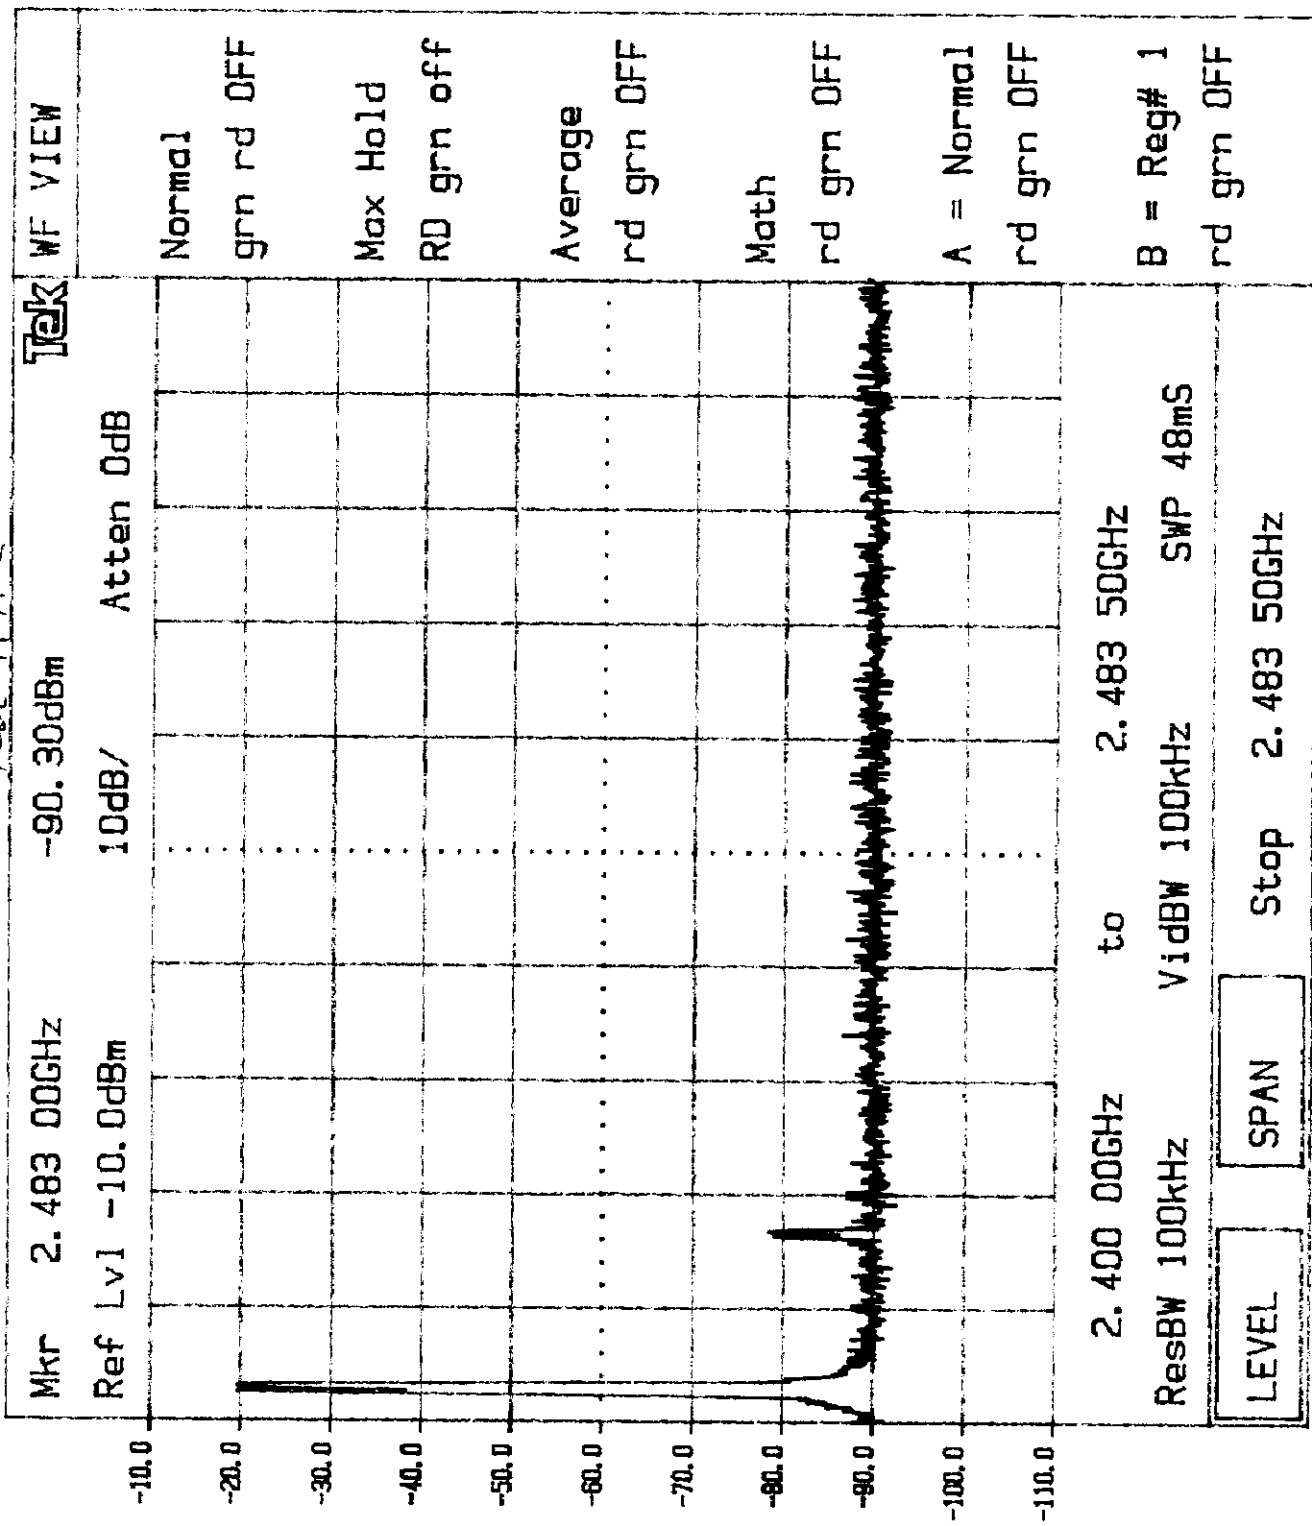


Plot 4.1.f

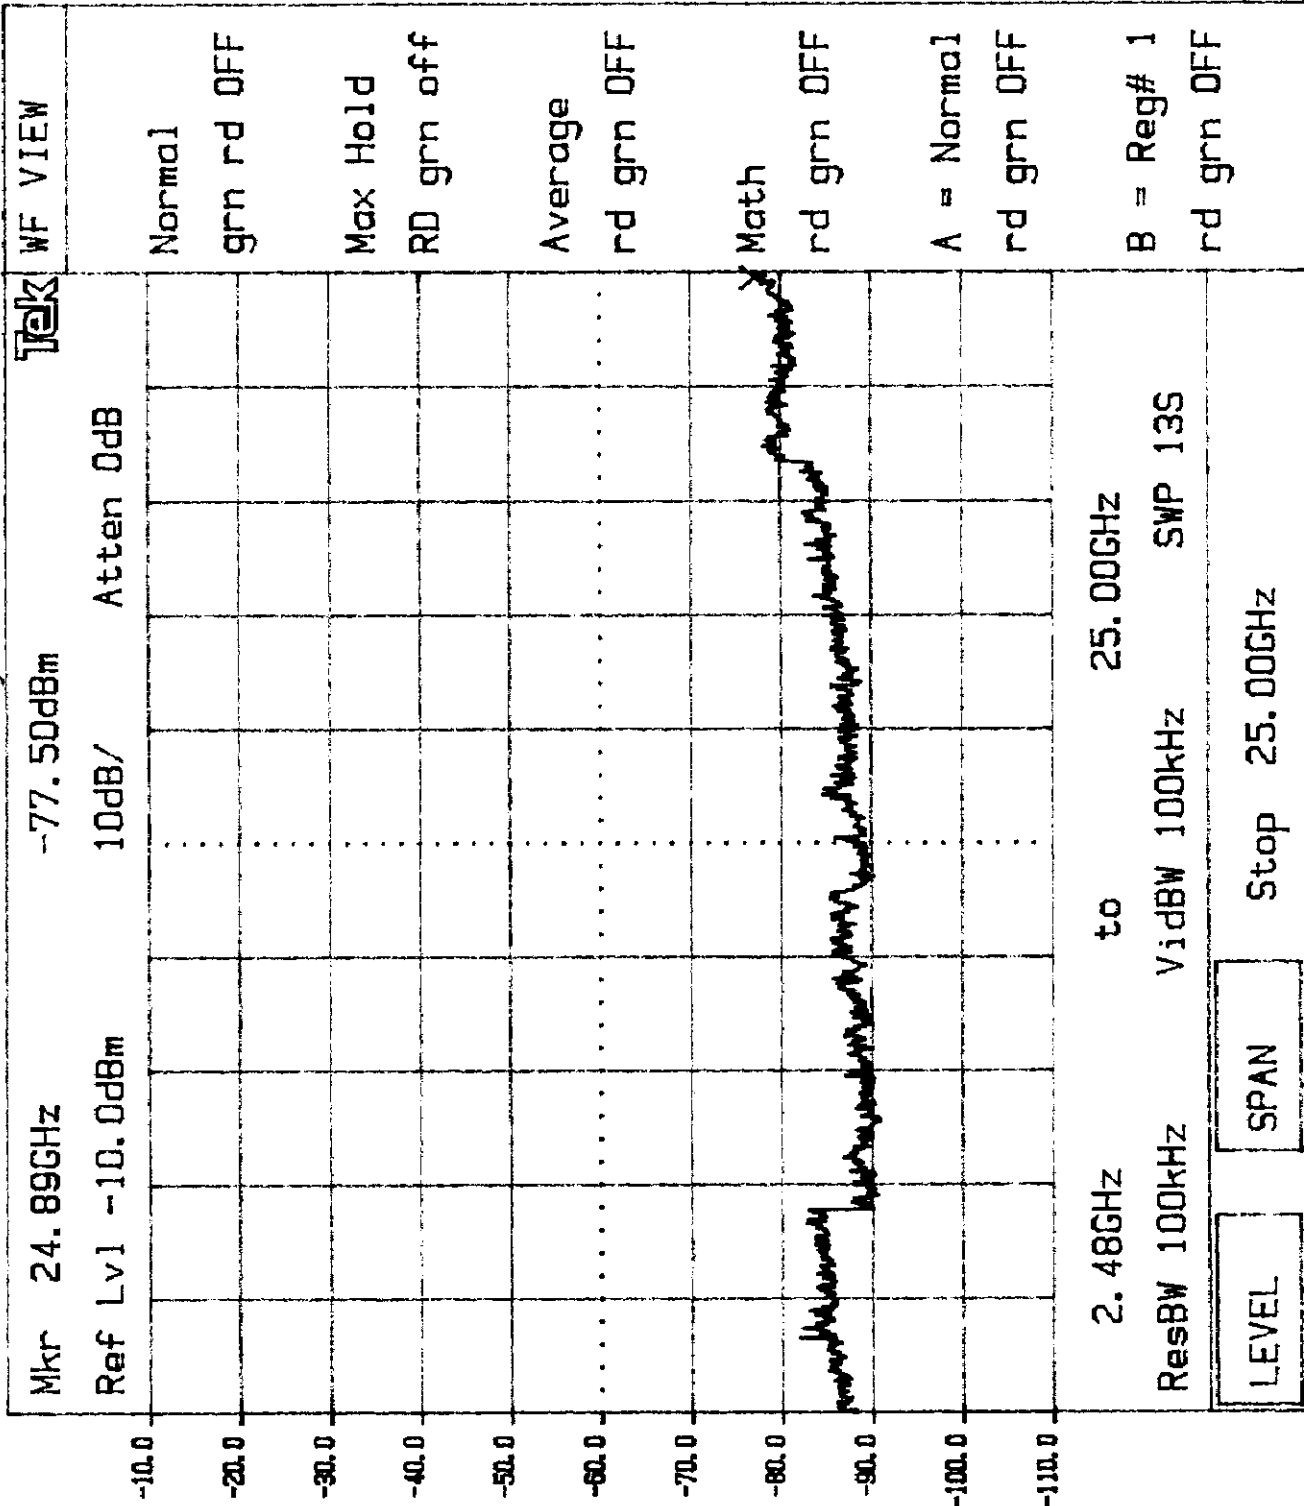


Plot 4.2.e

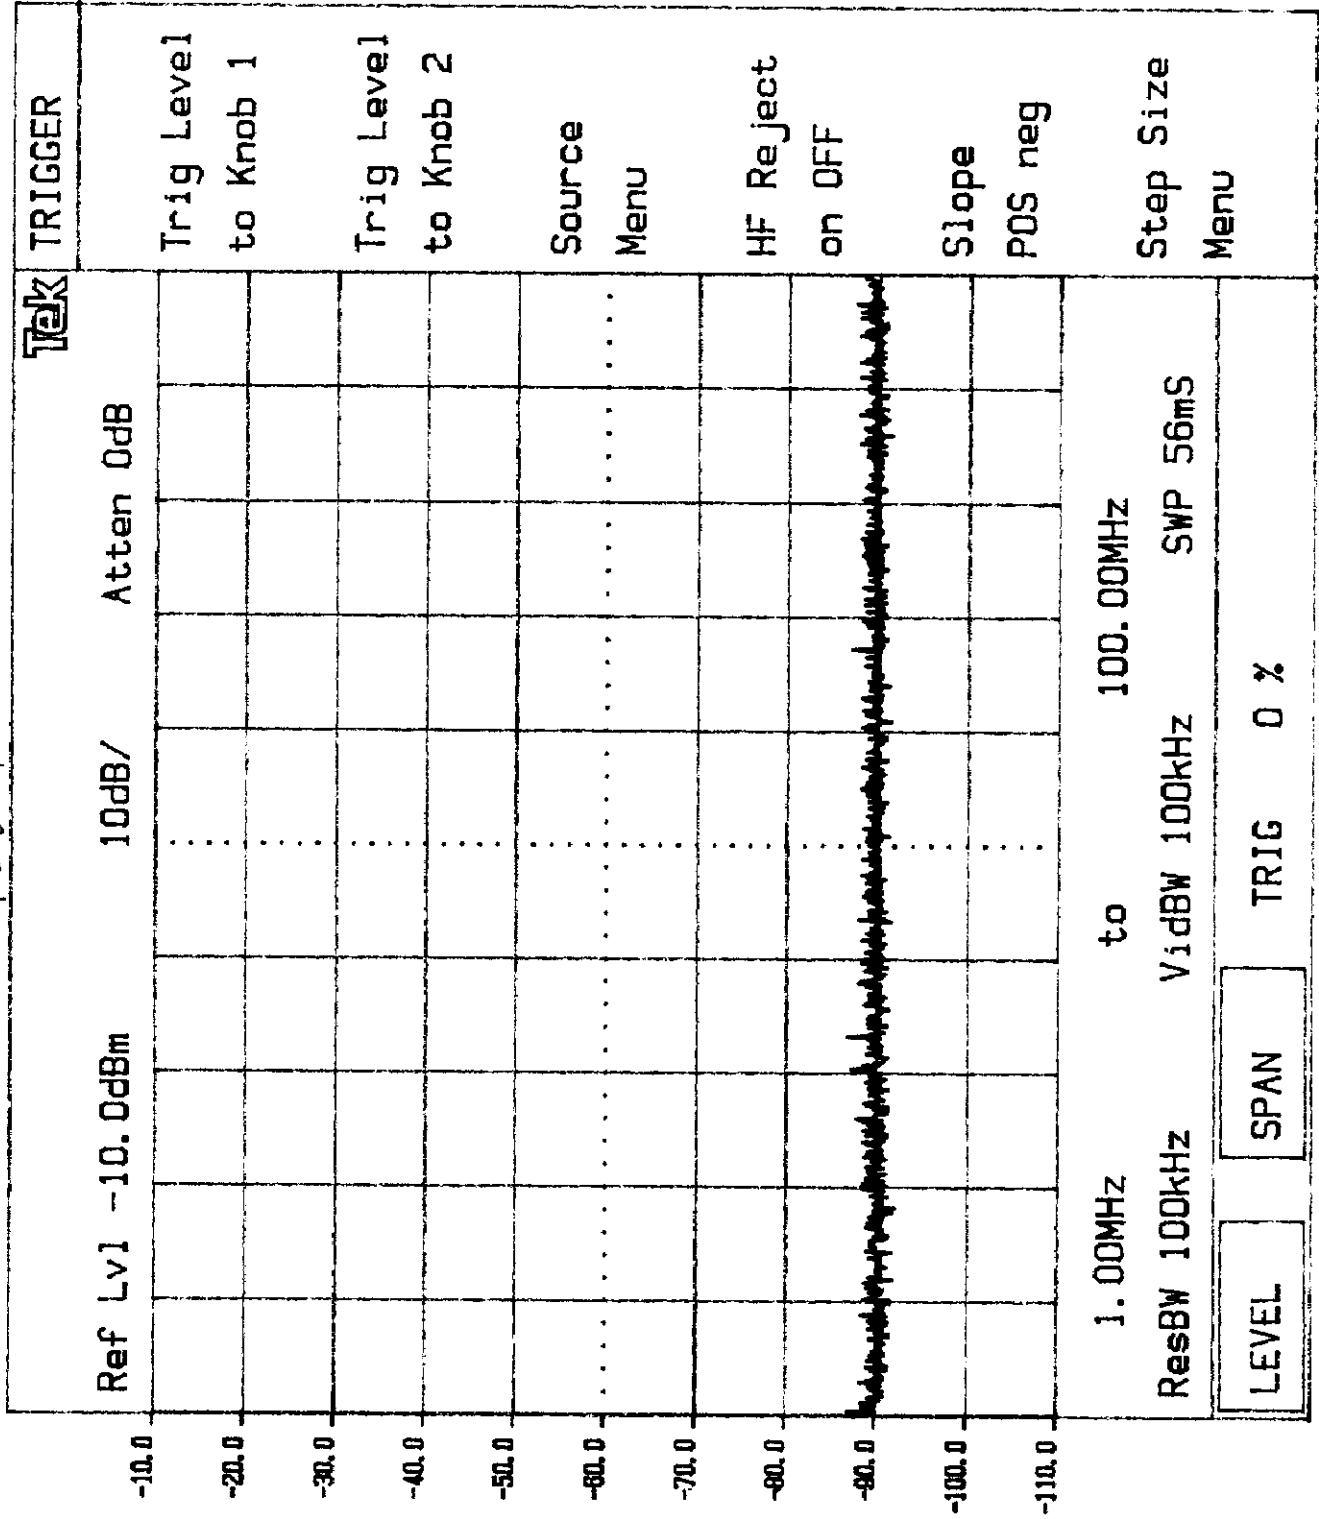


Plot 4.2.b

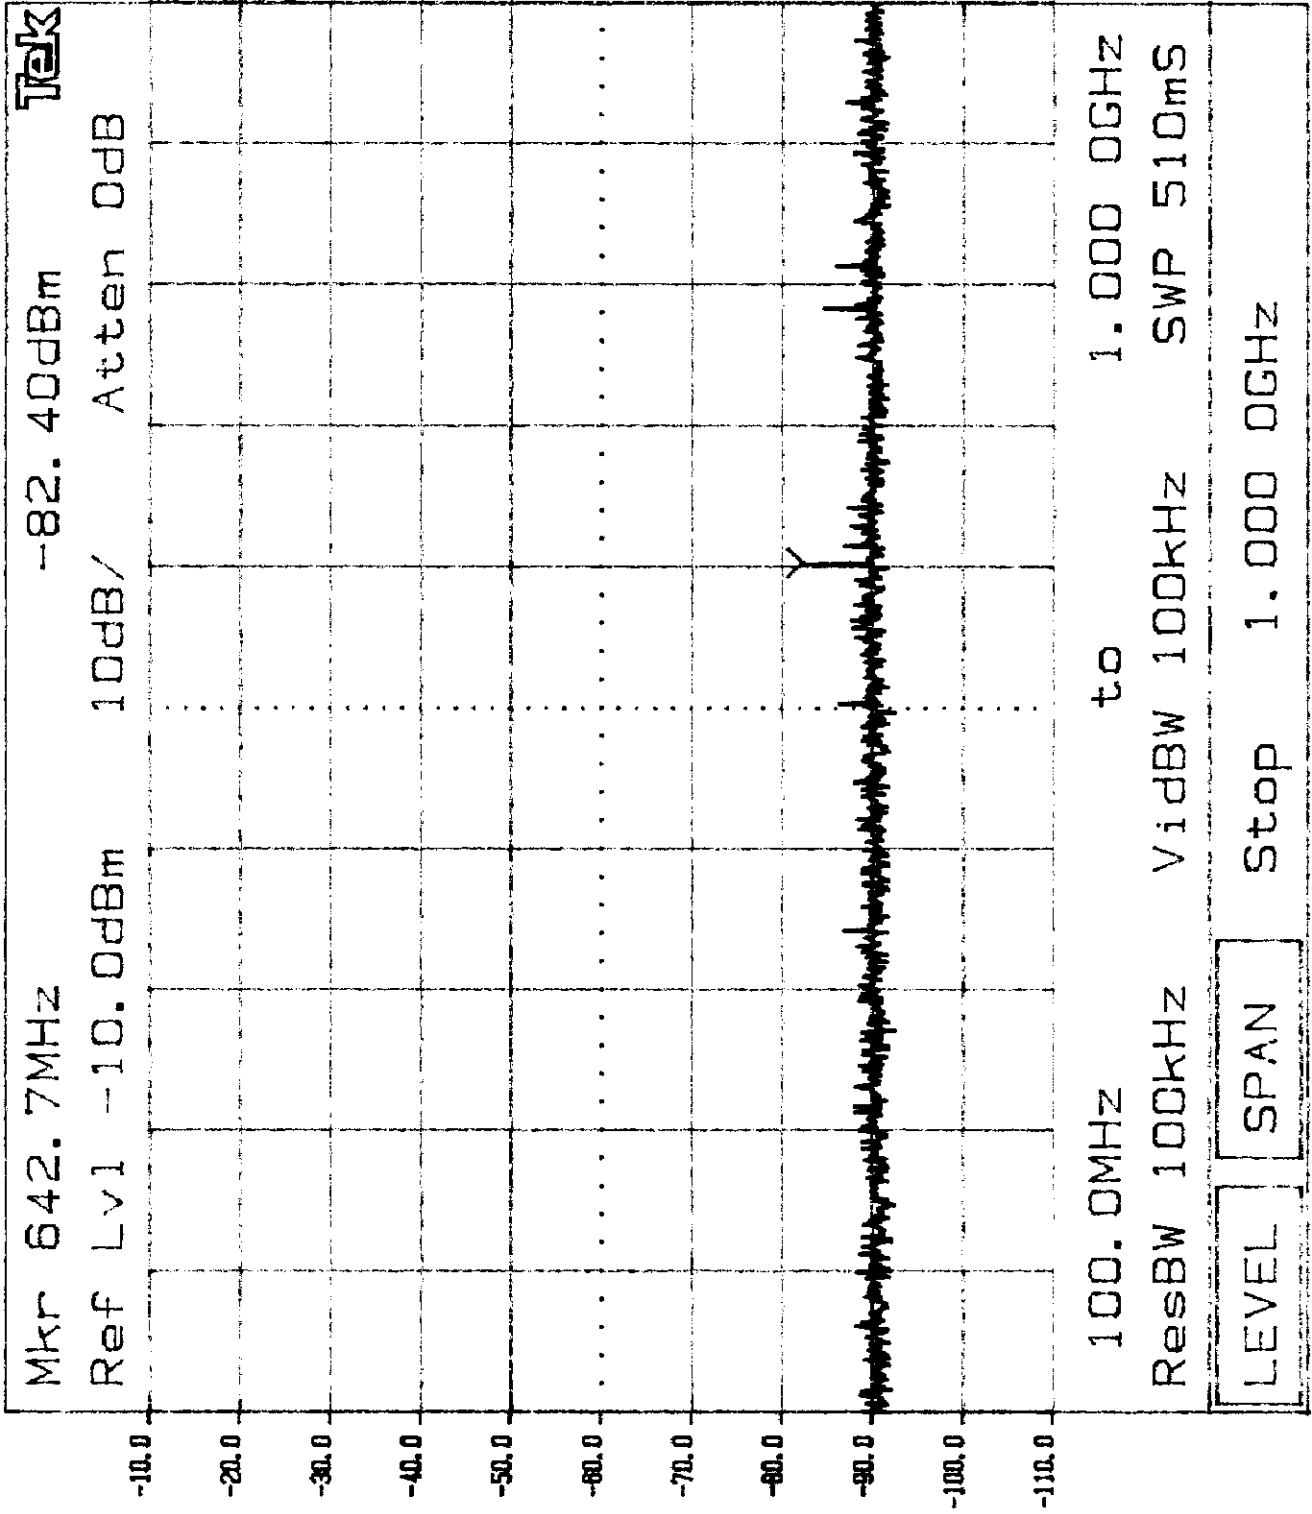

Plot 4.2.c

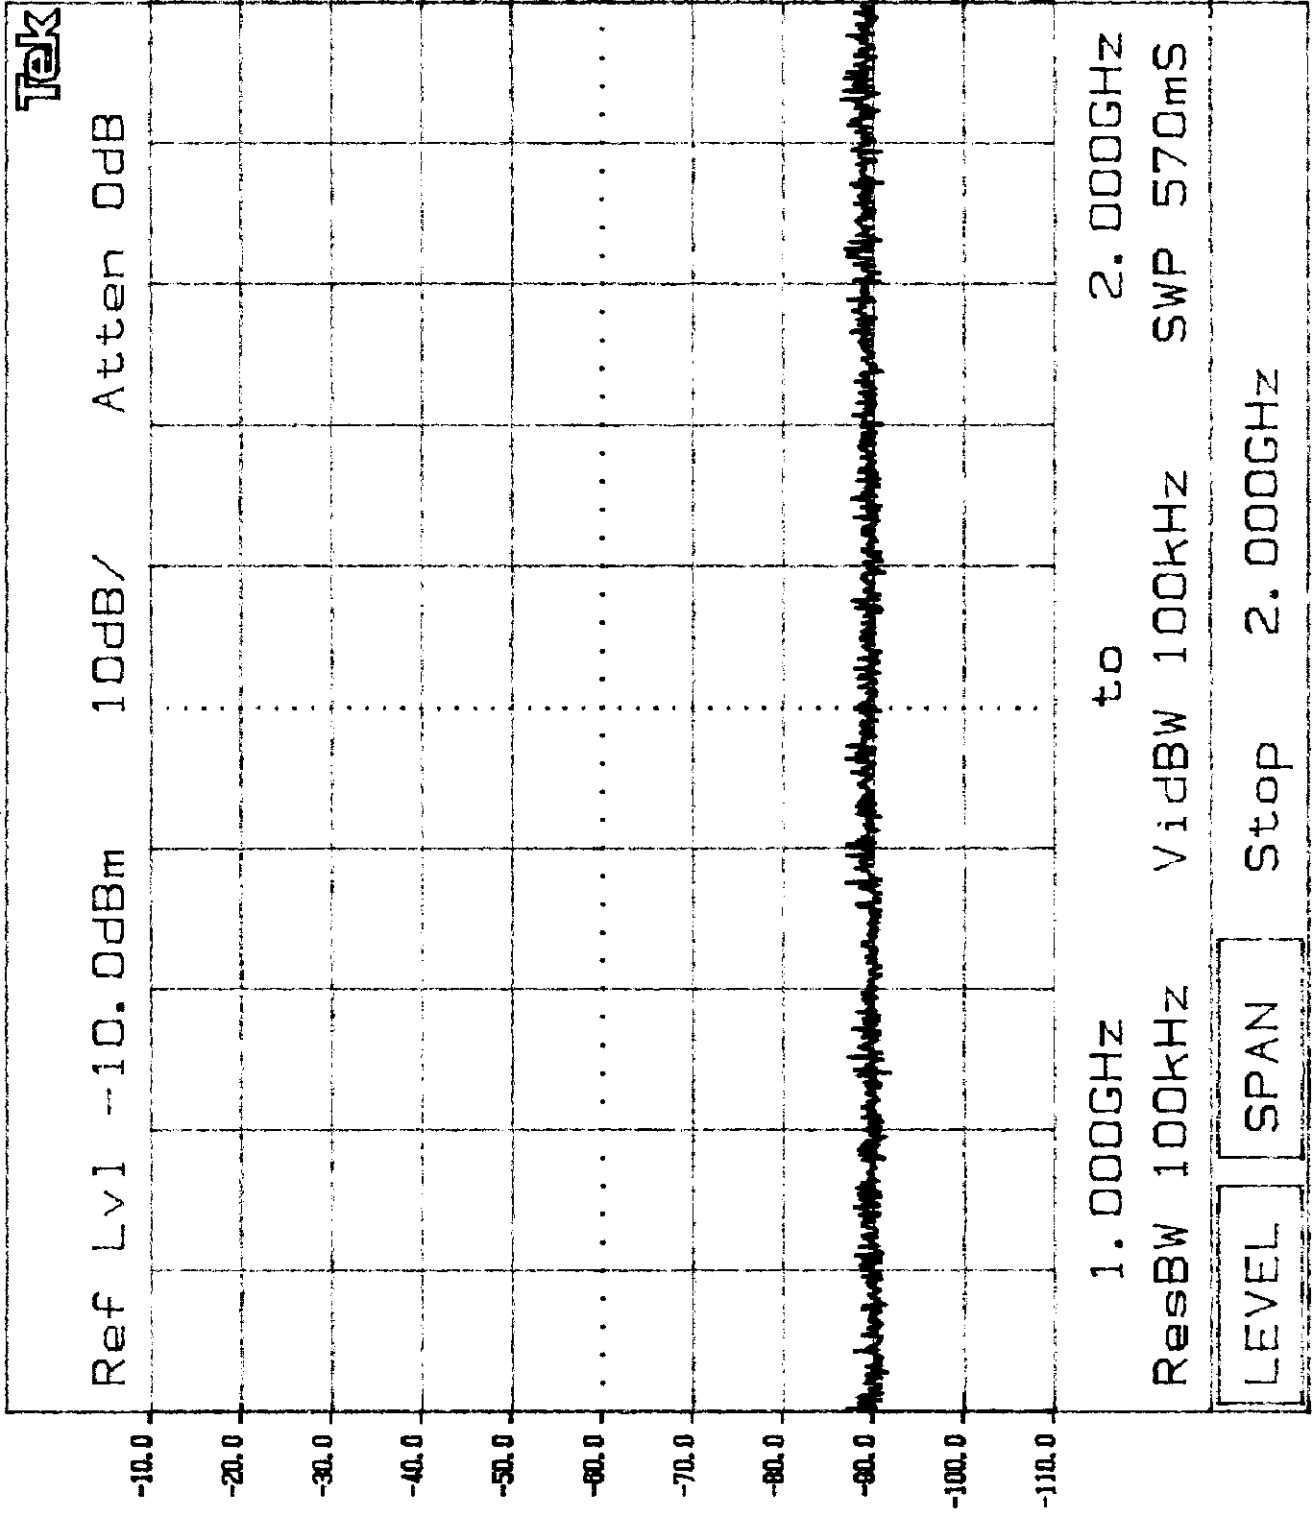


Plot 4.2.d

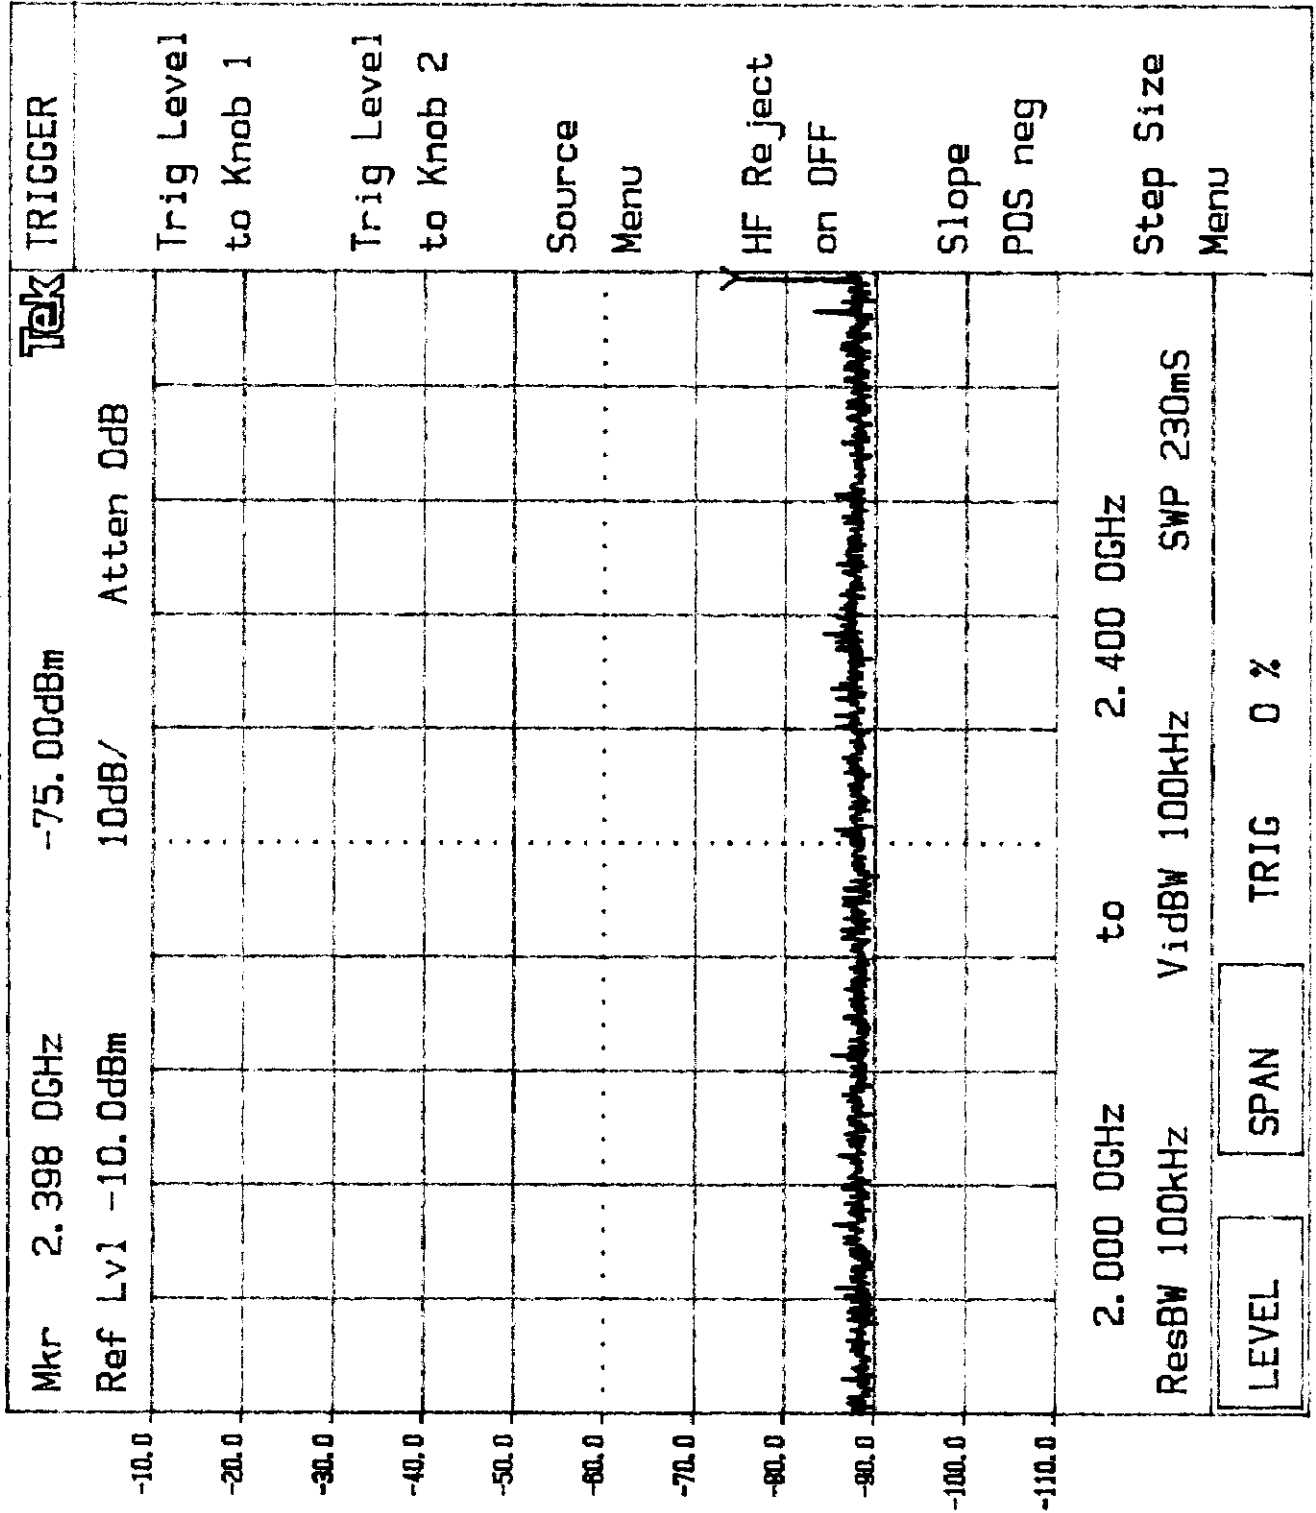





Plot 4.2.e

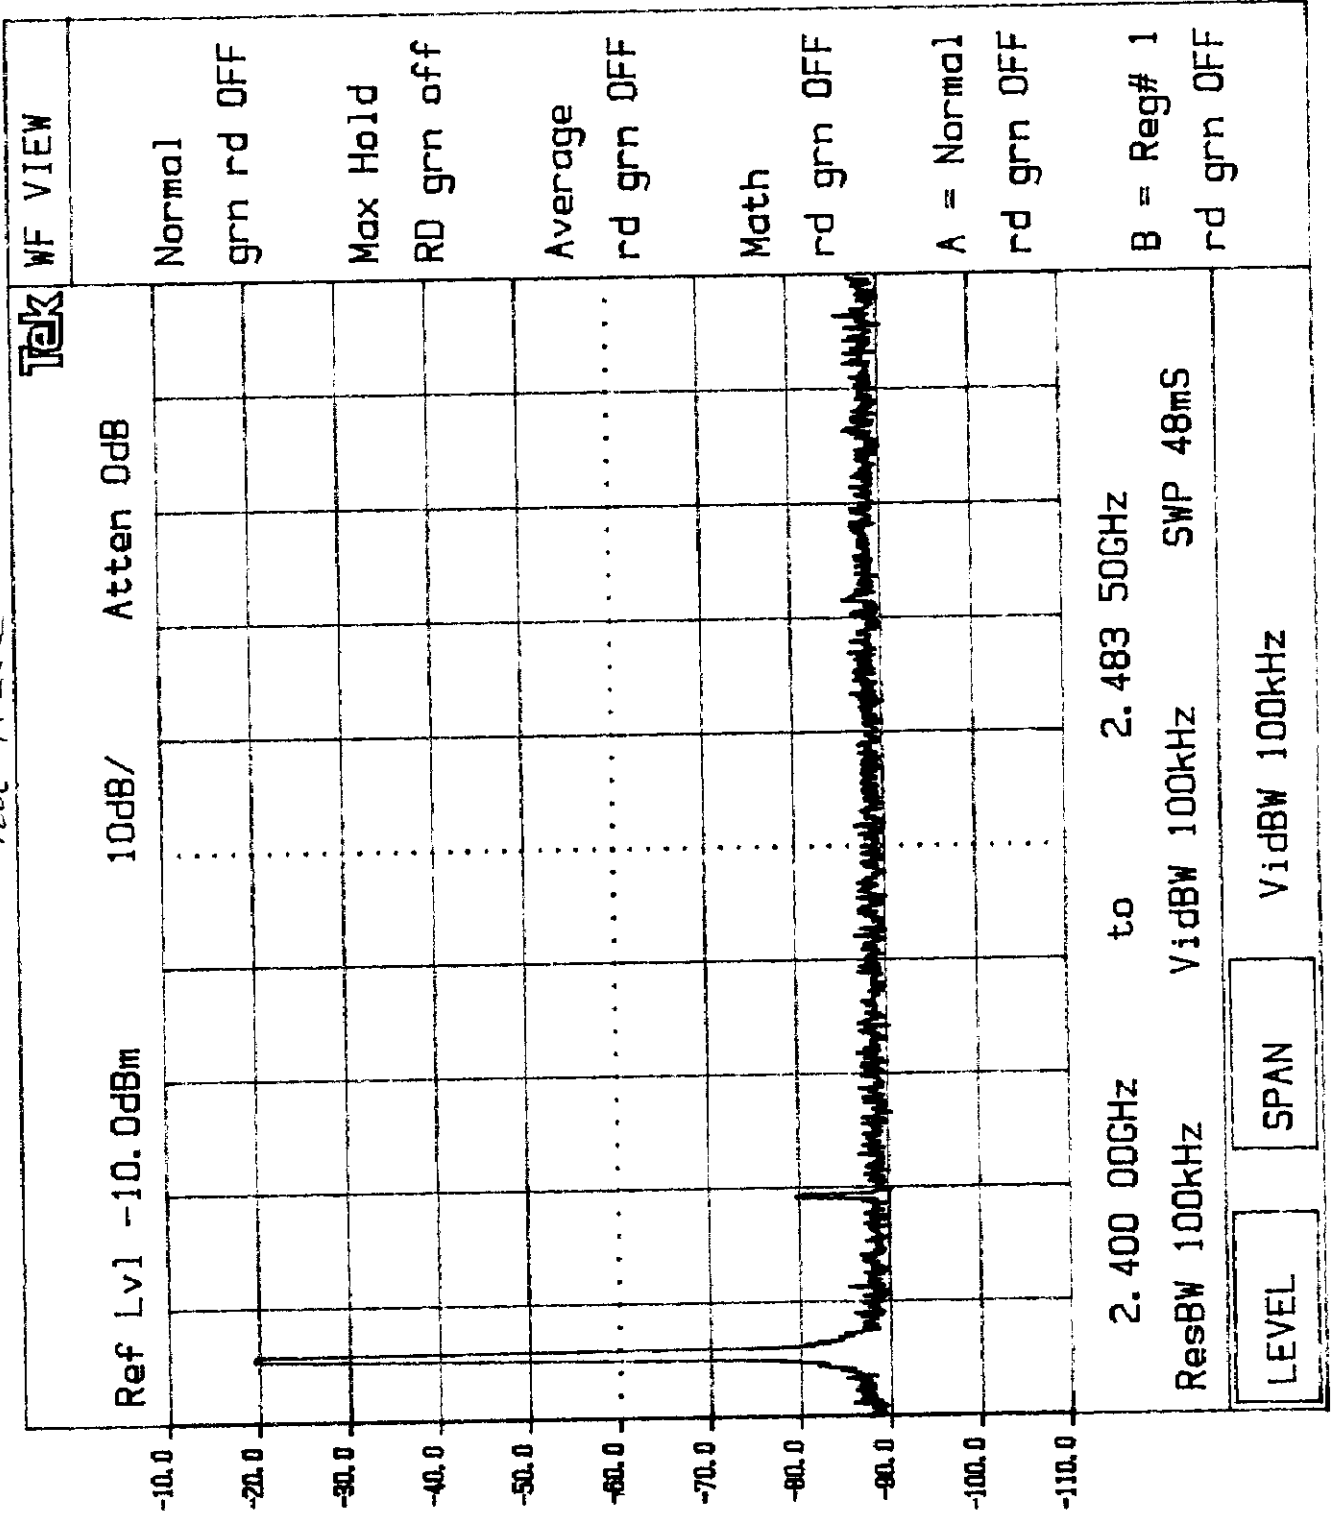


Plot 4.2.f

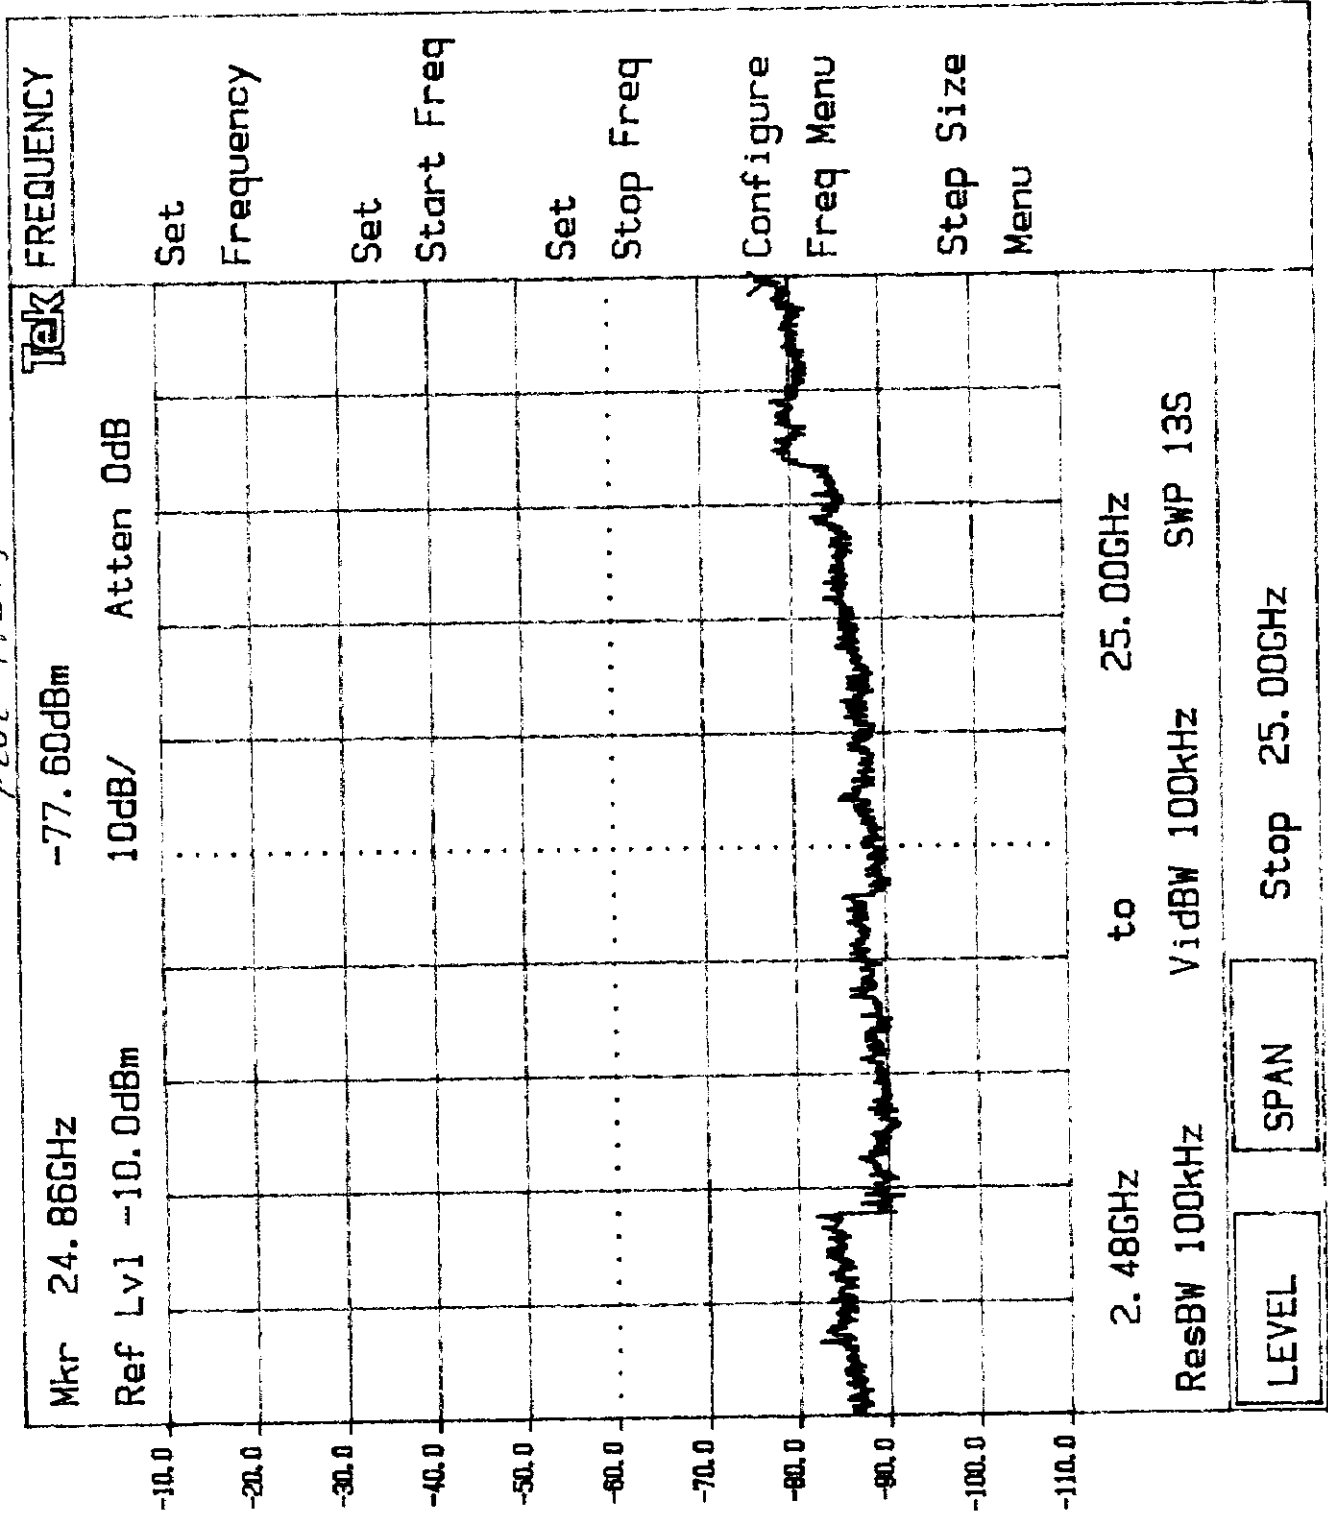


Plot 4.3.2

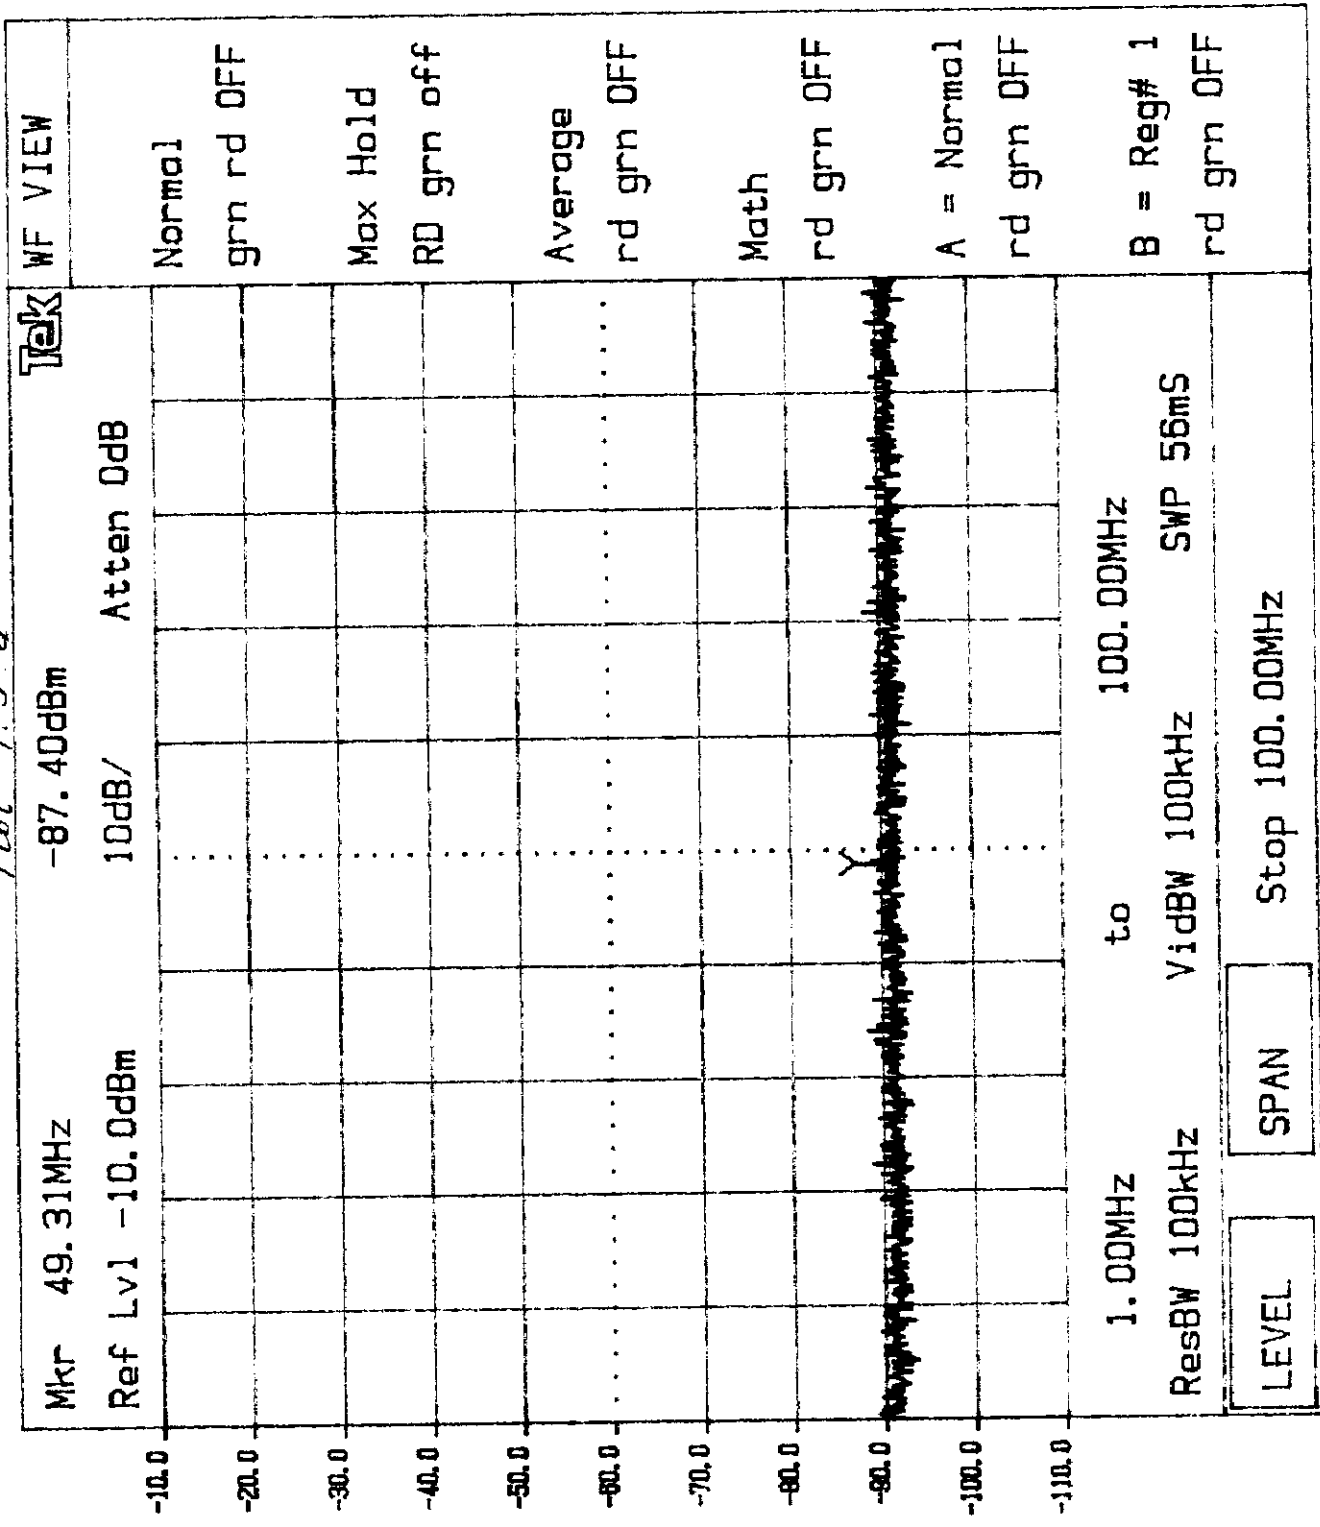

Plot 4.3.6

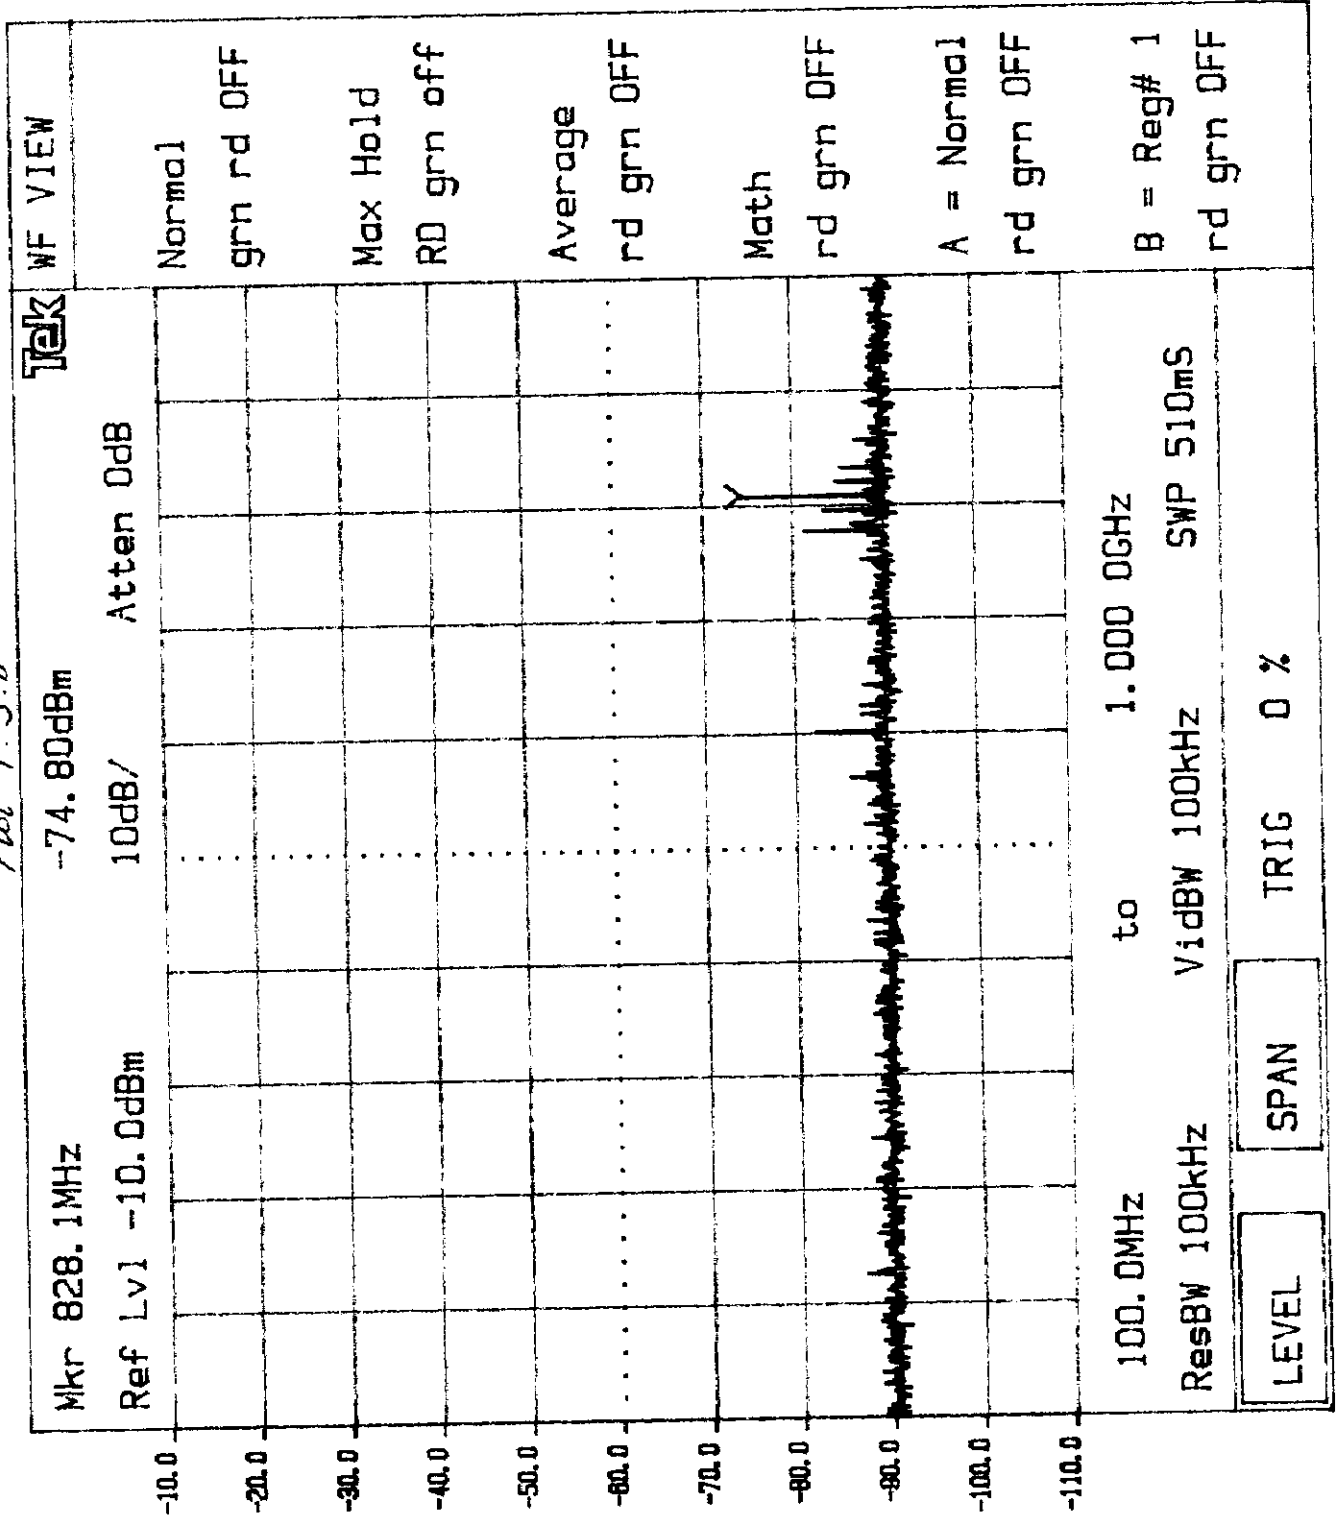


Plot 4.3 c

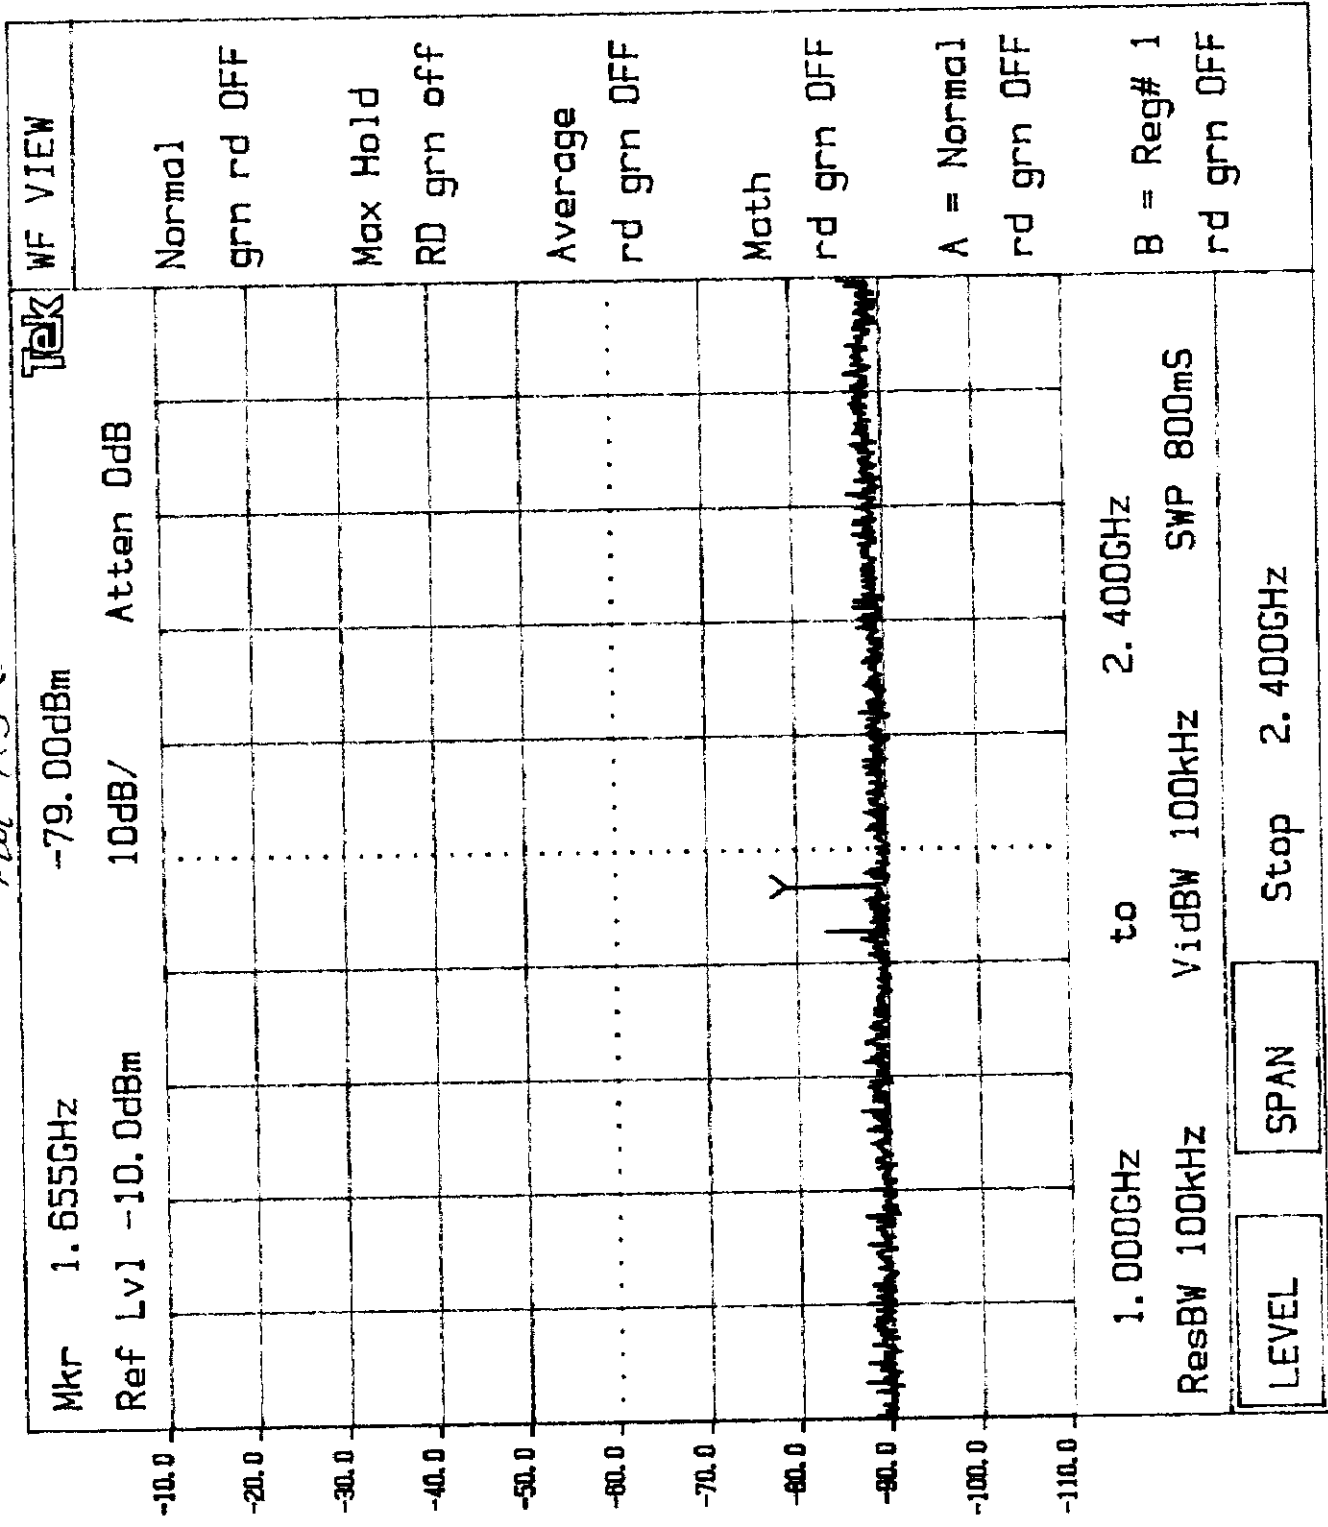


Knob 2 Knob 1 Keypad Tektronix 2784


Plot 4.3 d

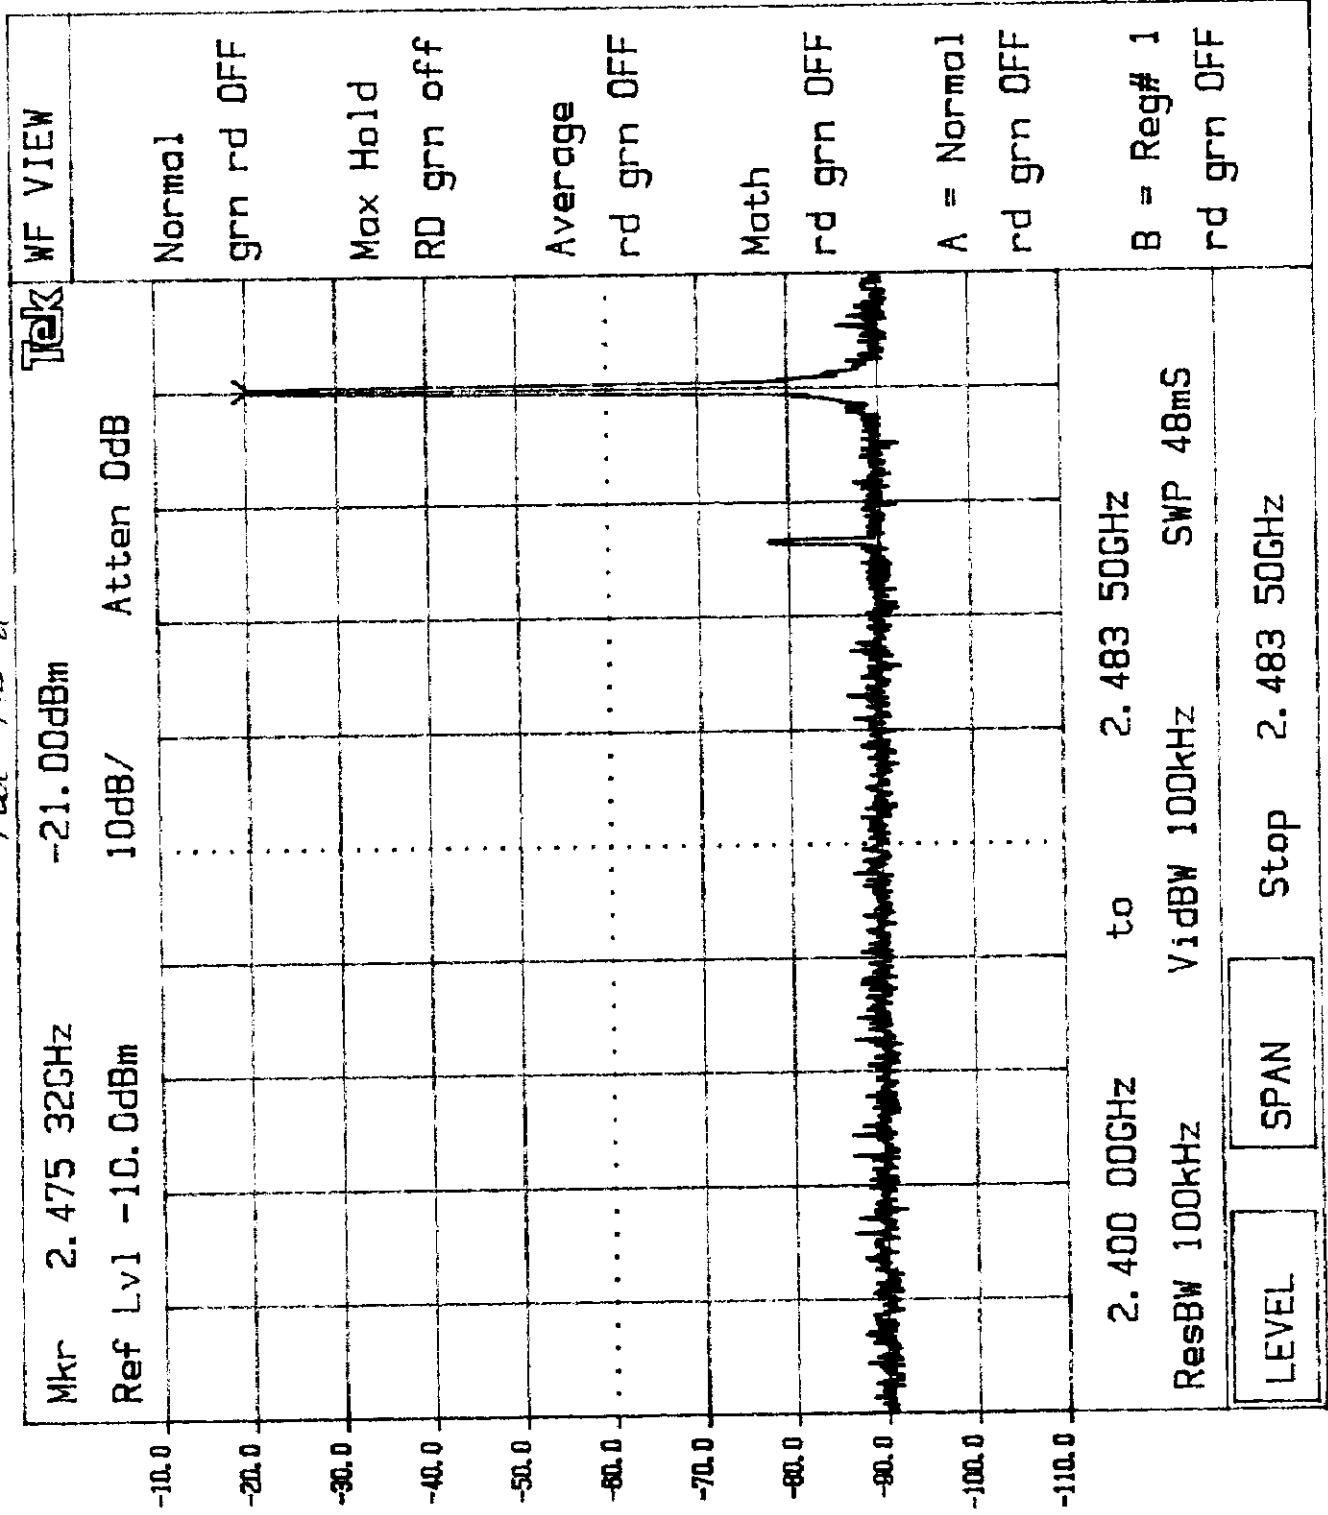

Plot 4.3.e

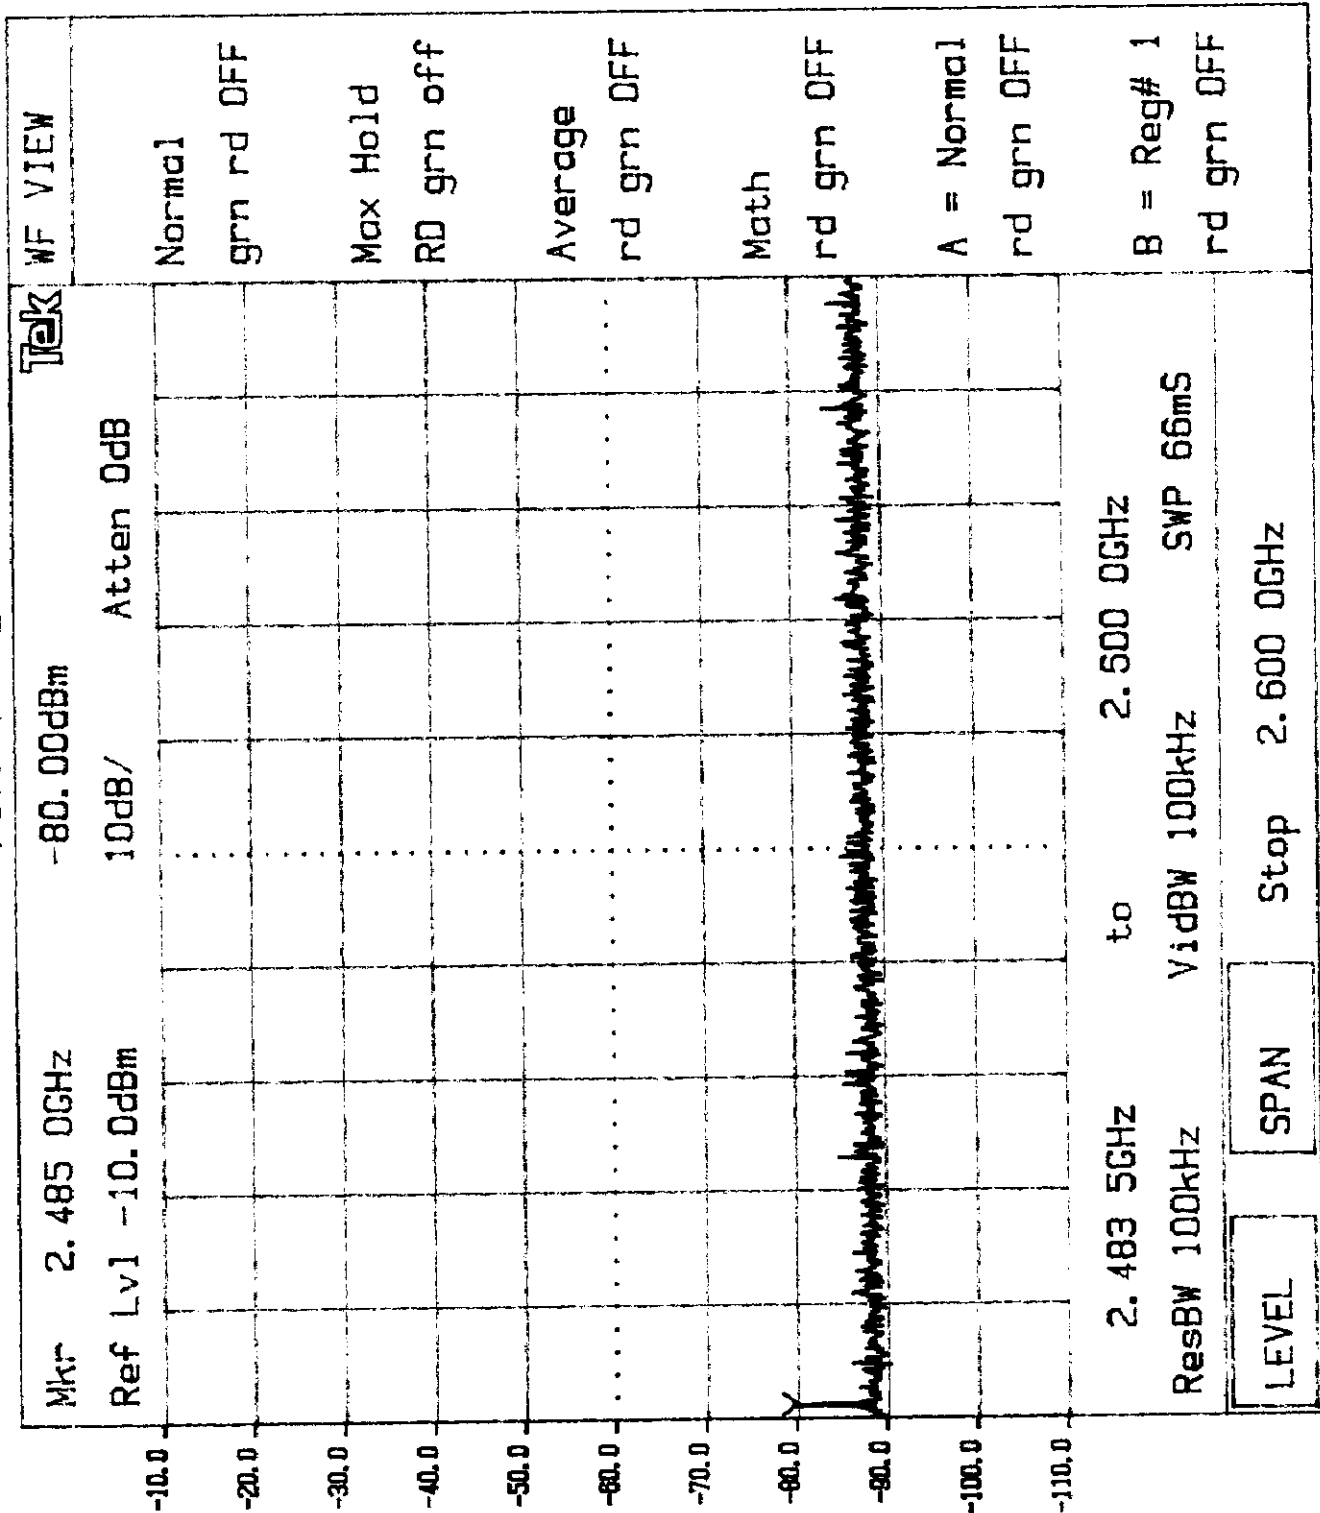


Plot 4.3.f

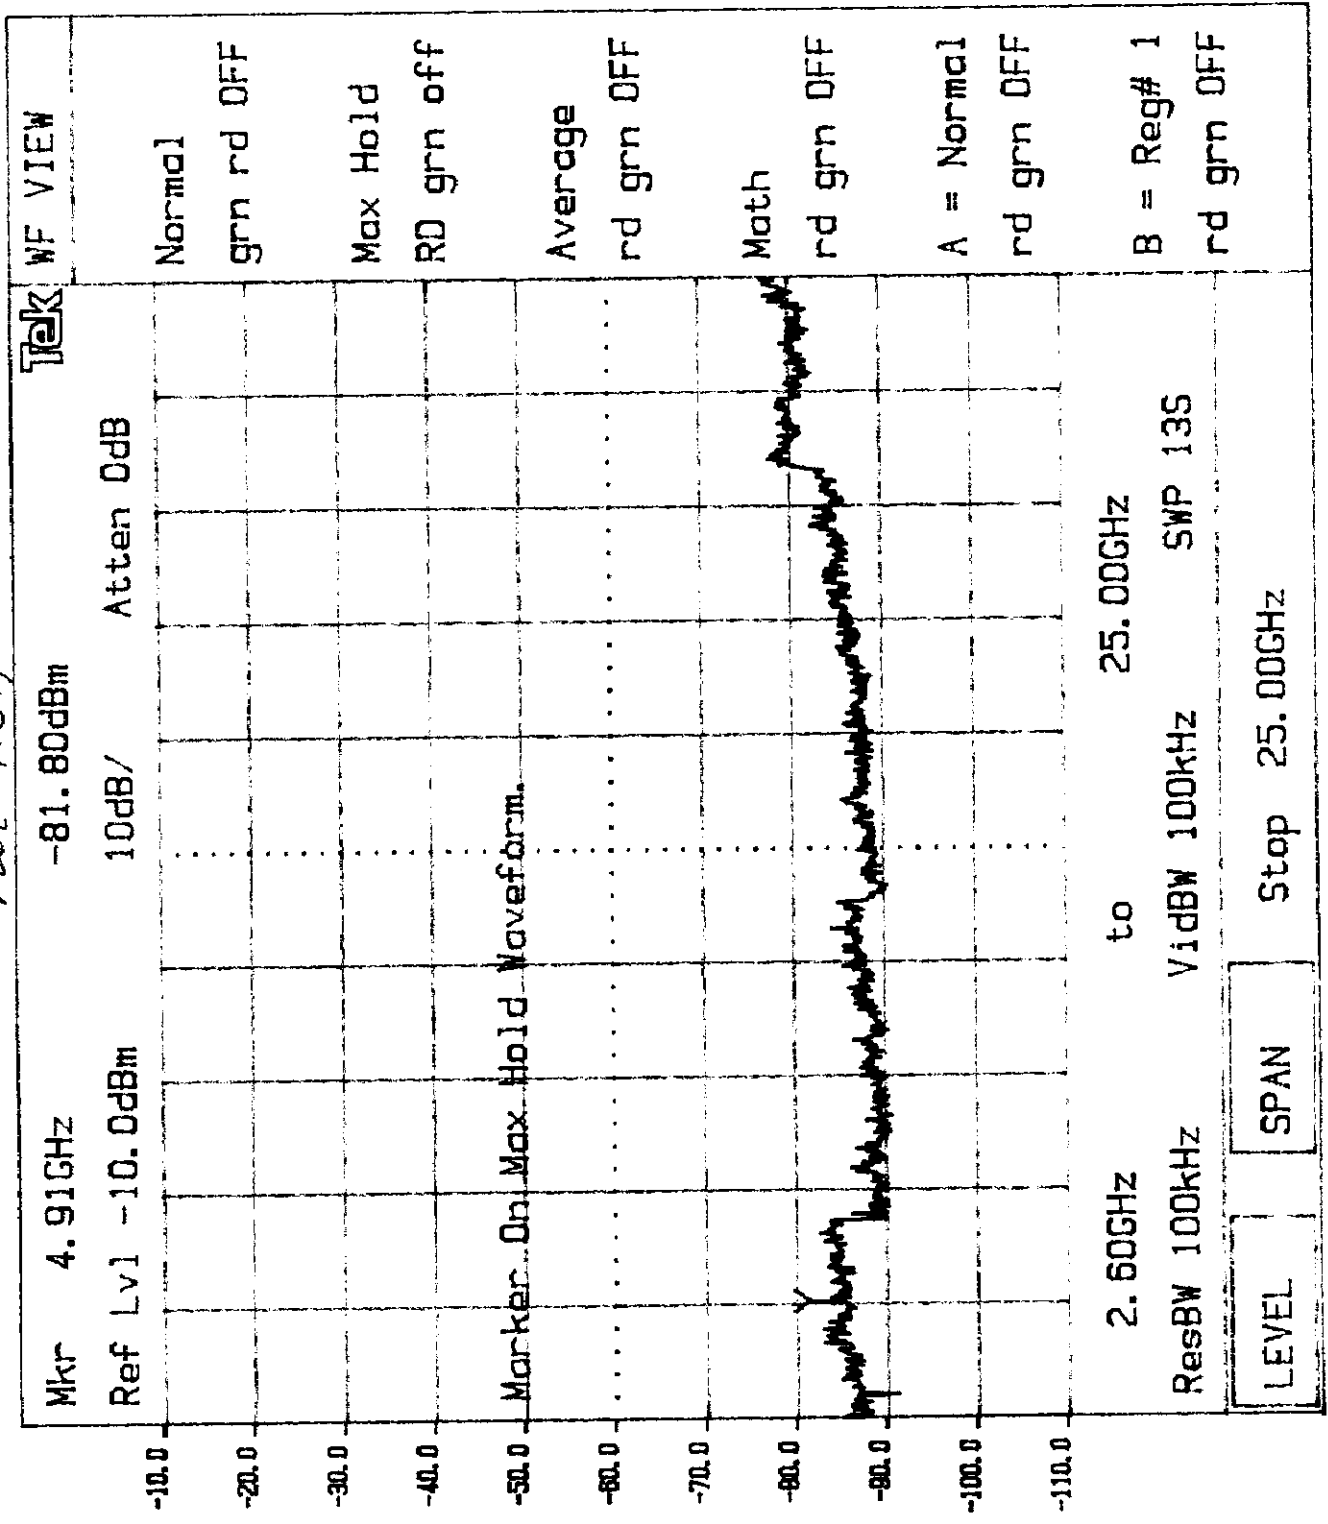





Plot 4.4.12

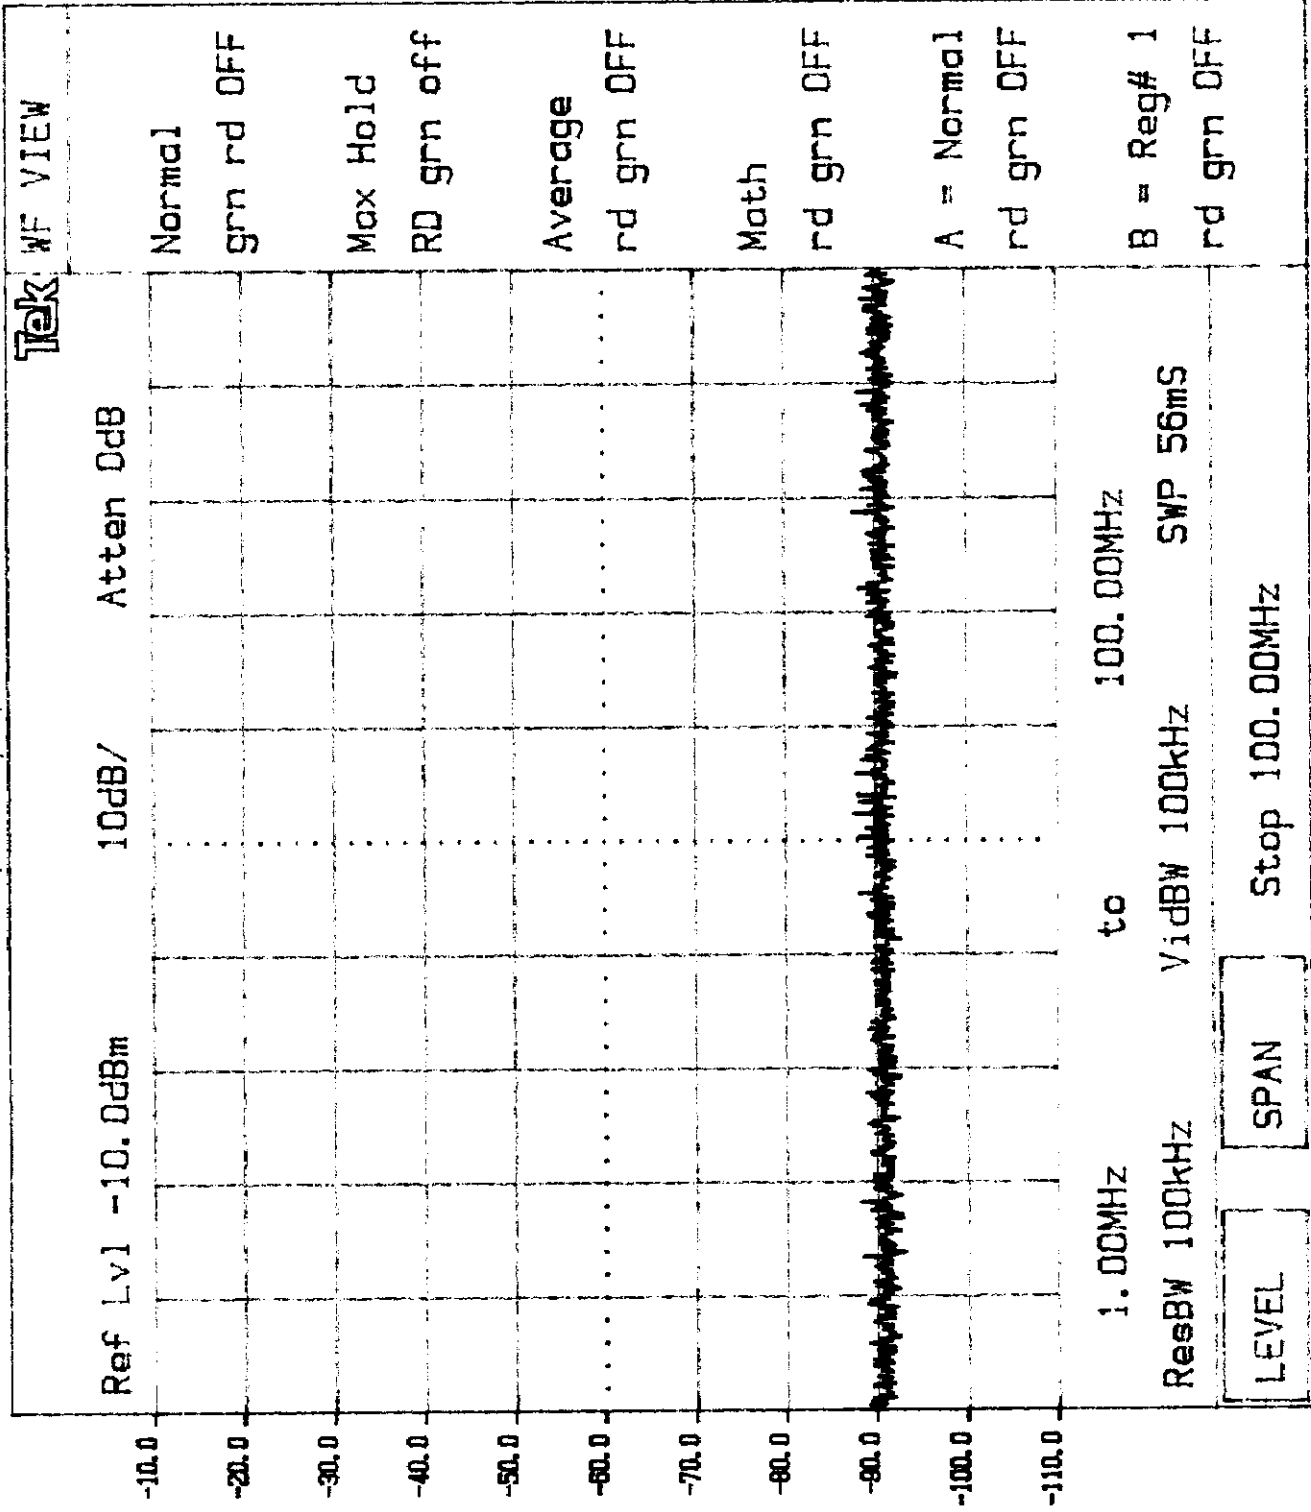


Plot 4.4.b

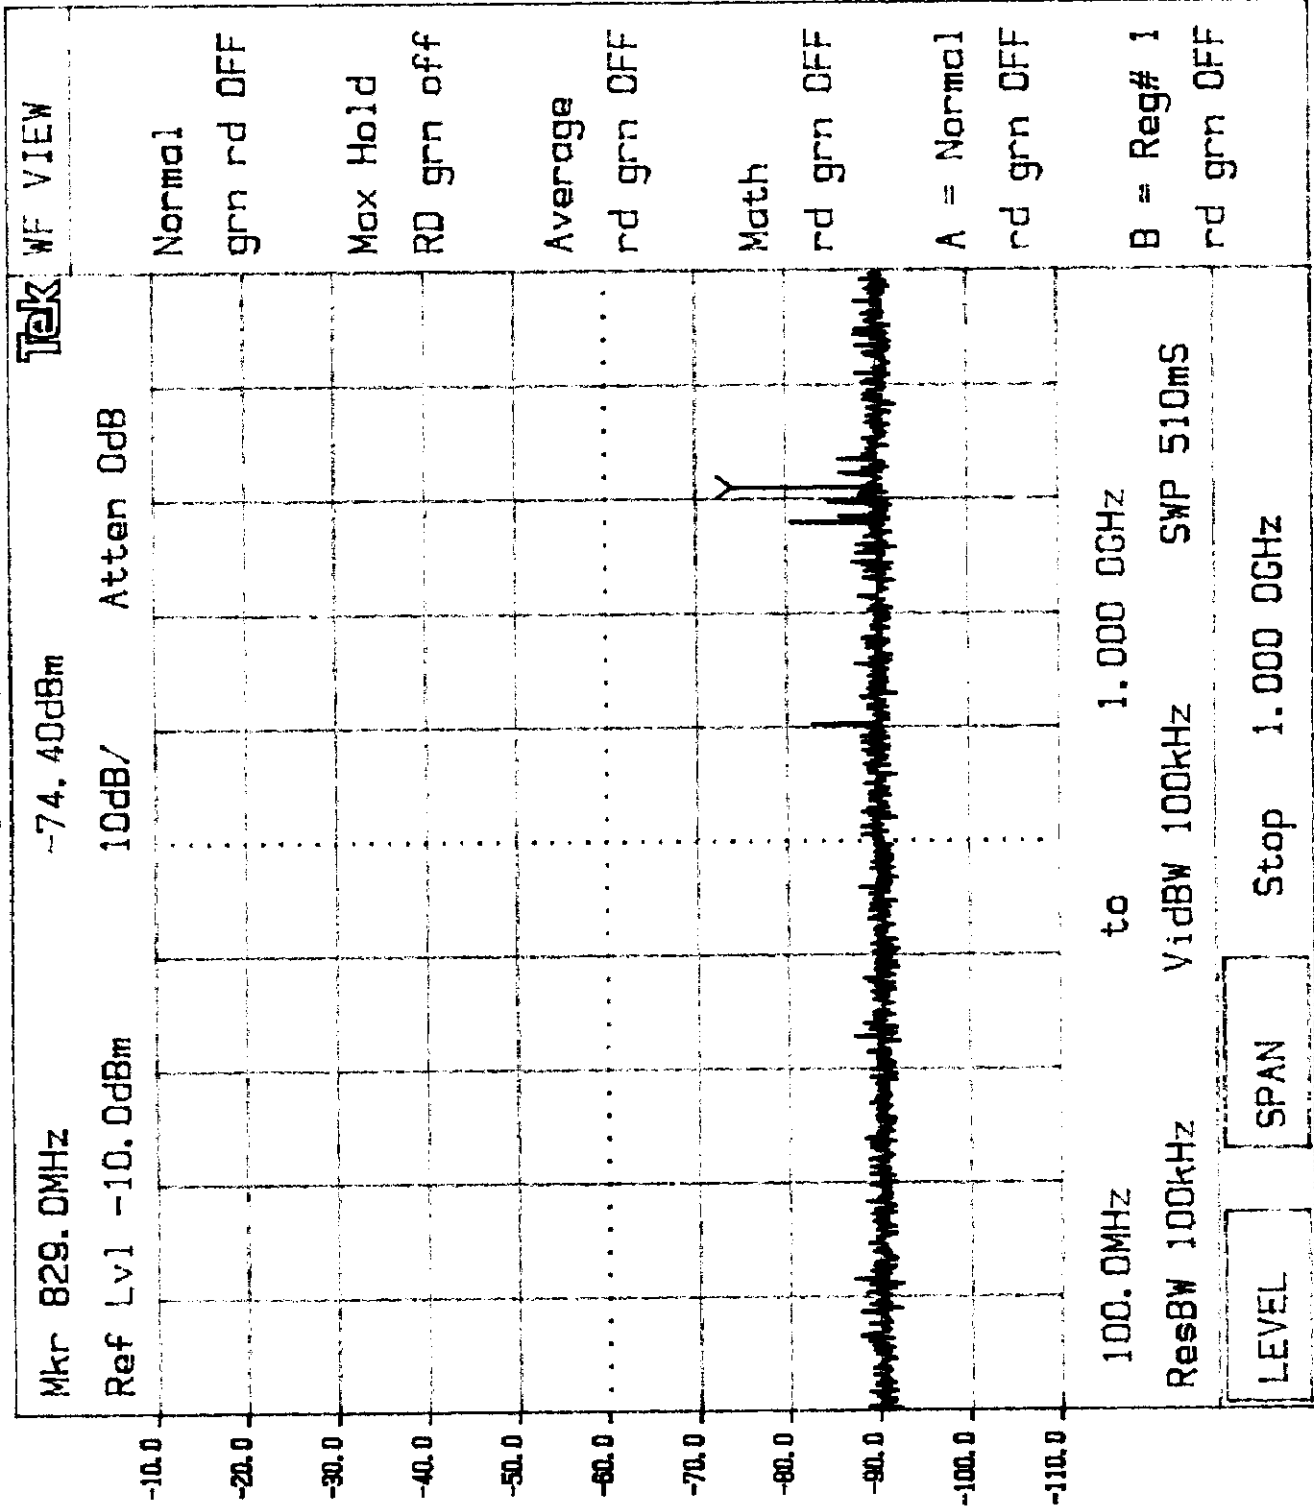


Plot 4.Y.C

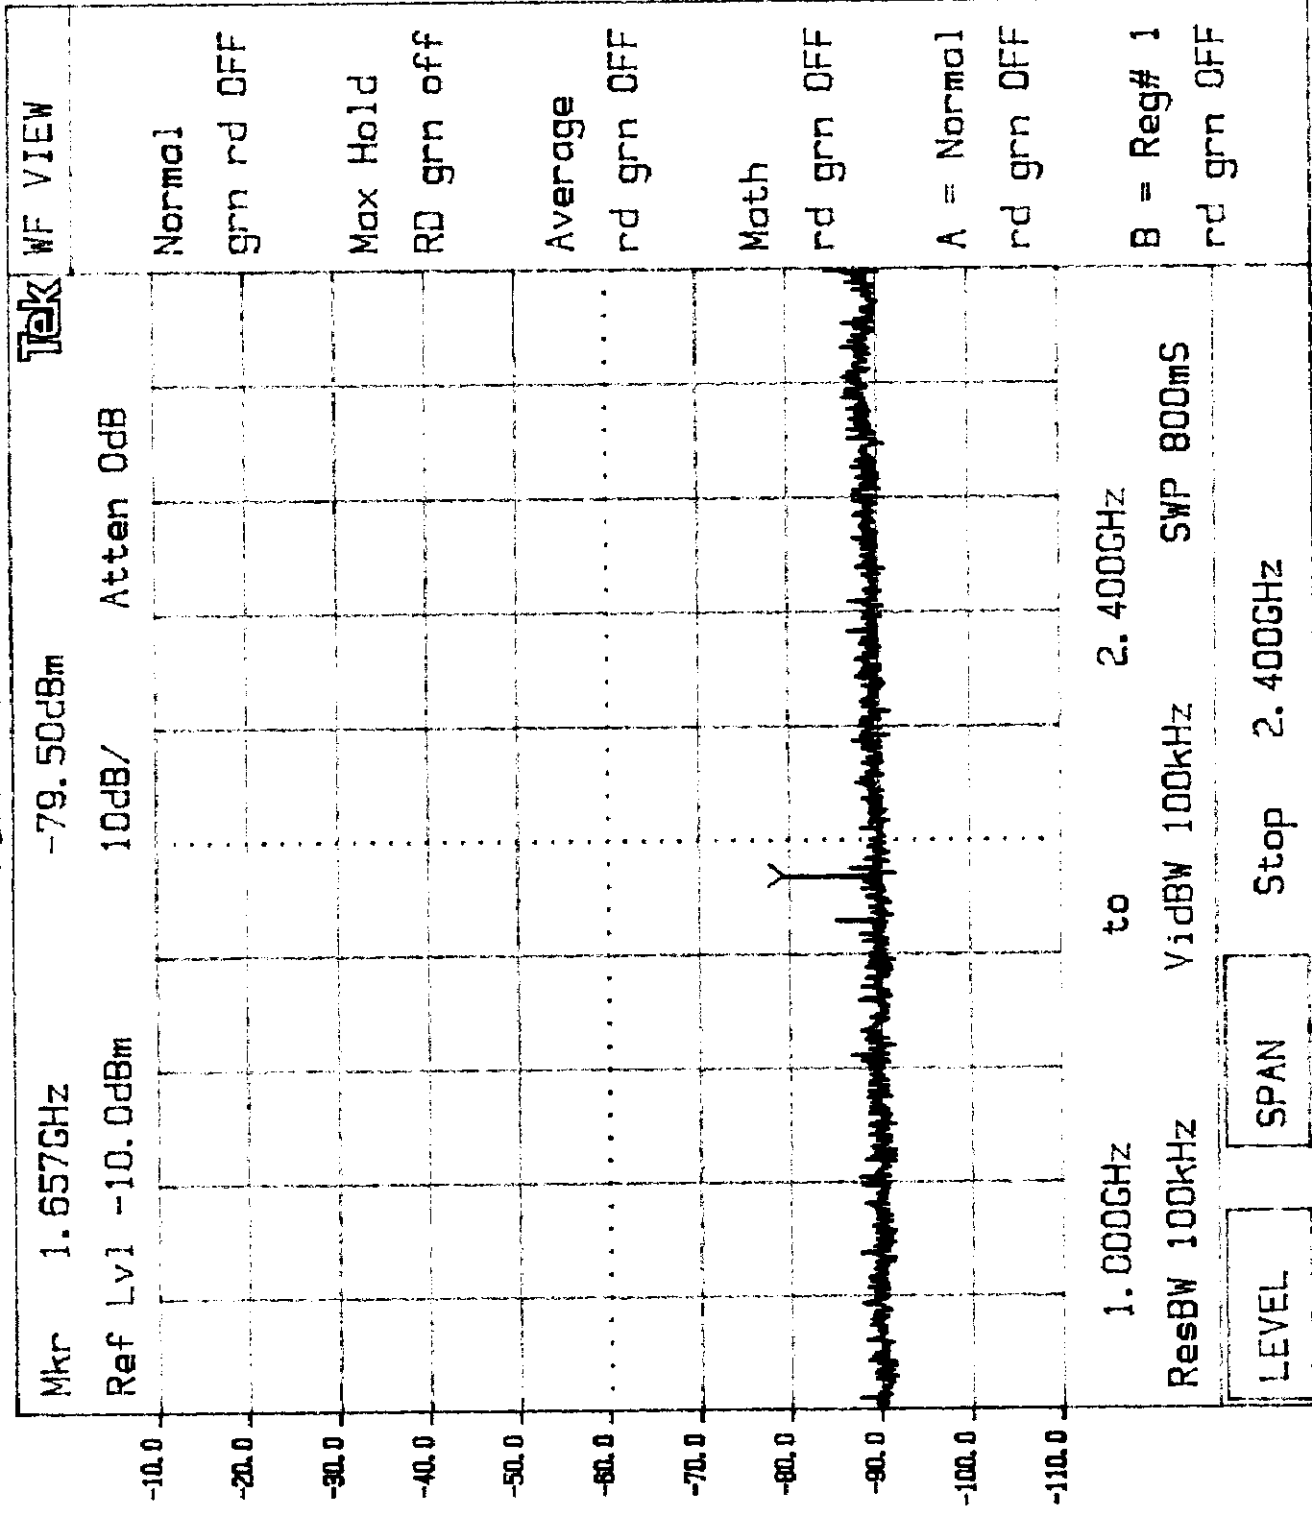


Plot 4.4. d

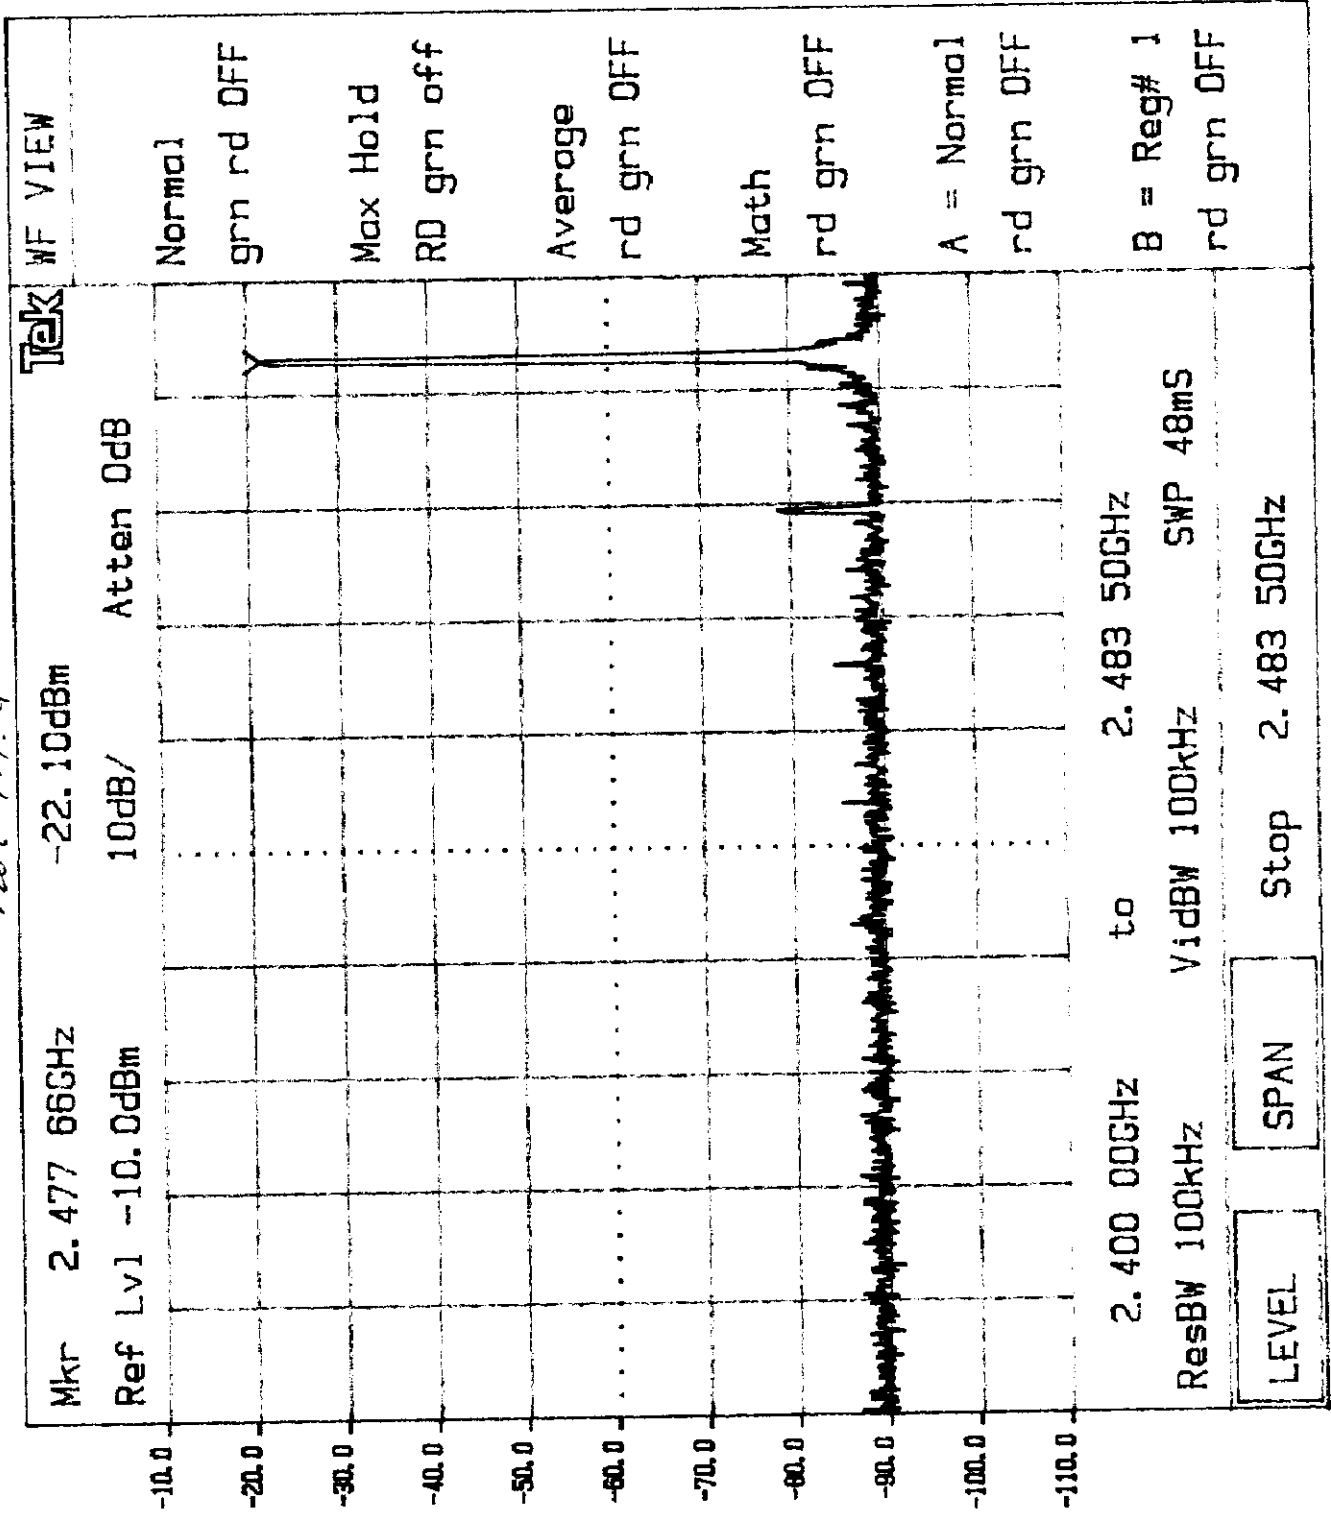

Plot 4.4.e

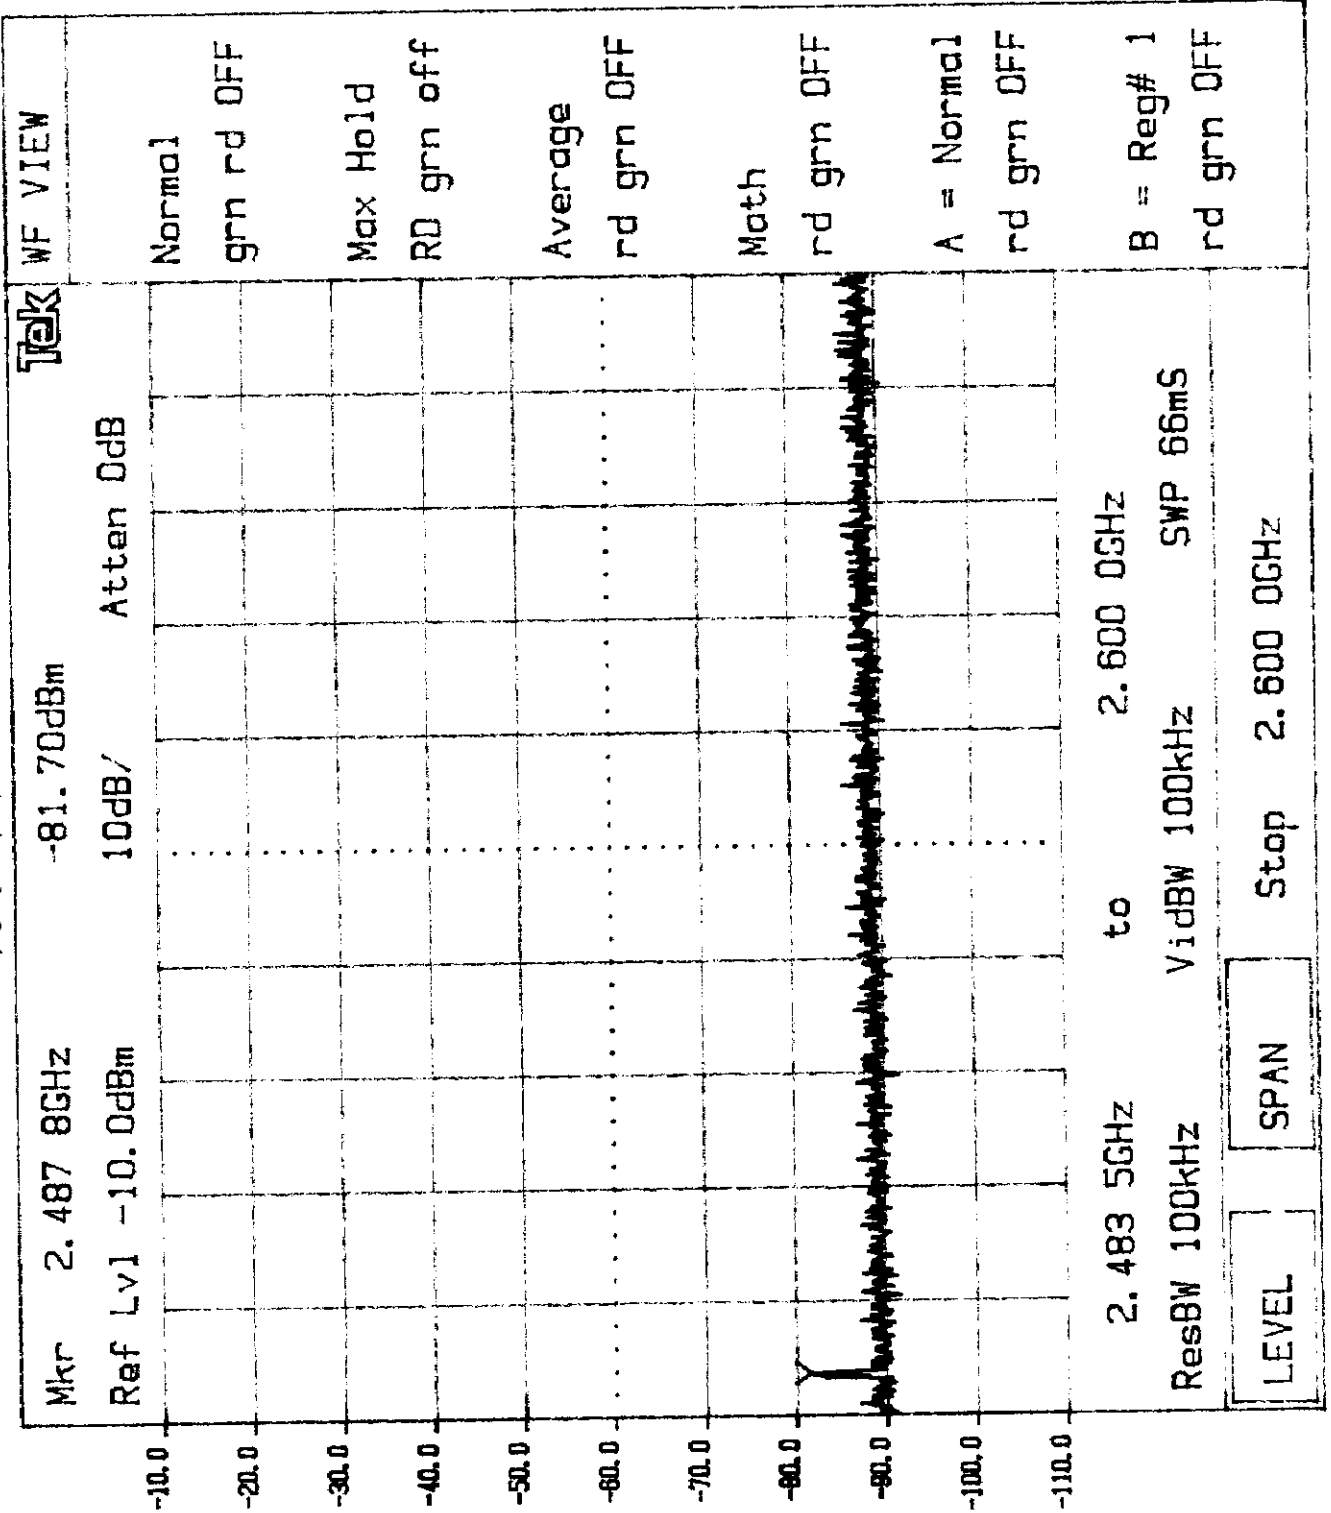

Plot 4.4.f

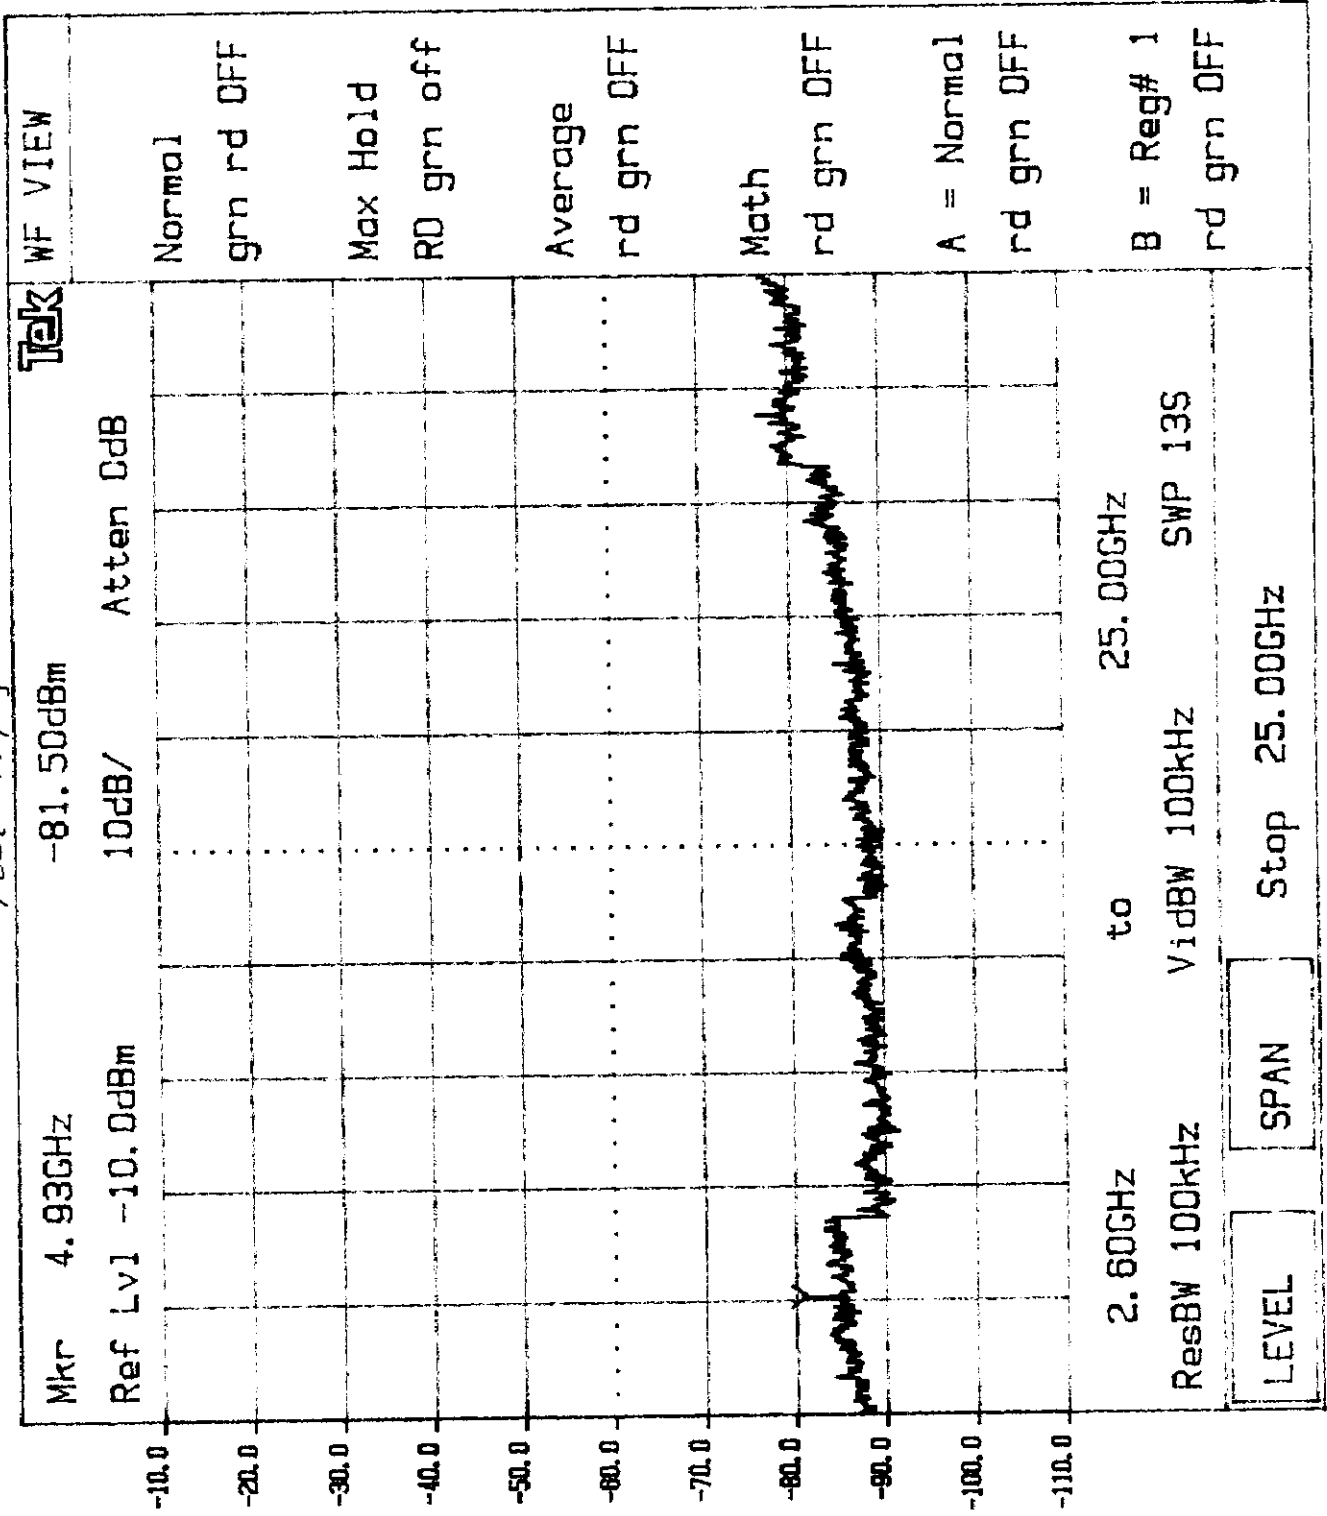

**5 ANTENNA REQUIREMENTS**

**5.1 Test description**

Parameter:	FCC § 15.203
Requirement:	FCC § 15.203
Descriptions:	No antenna other than furnished by the responsible party shall be used with the device.

**5.2 Test Procedure**

None

**5.3 Test Results**

The device is considered to comply with the requirements by

	Description
X	Permanently attached antenna
	Using an antenna with a unique coupling connector

**5.4 Modifications made during testing**

None

**5.5 Test instrumentation**

None

**6 AC LINE CONDUCTED EMISSIONS**

**6.1 Test description**

<b>Parameter:</b>	ANSI C63.4
<b>Requirement:</b>	FCC § 15.207
<b>Limits:</b>	≤ 250 μV within the band 450 kHz to 30 MHz

**6.2 Test Procedure**

The EUT was connected to the DC power supply, that was connected to the AC line through the LISNs. Both HOT and NEUTRAL leads were tested.

AC line conducted emission measurements were performed from 0.45 MH to 30 MHz. Analyzer resolution is 10 kHz or greater.

**6.3 Test Results**

<b>Handset</b>	<b>Base Unit</b>
Not applicable, EUT is battery powered only	See attached. Passed by 4.7 dB



**6.4 Modifications made during testing**

None

**6.5 Test instrumentation**

- HP 8566B Spectrum Analyzer
- LISN



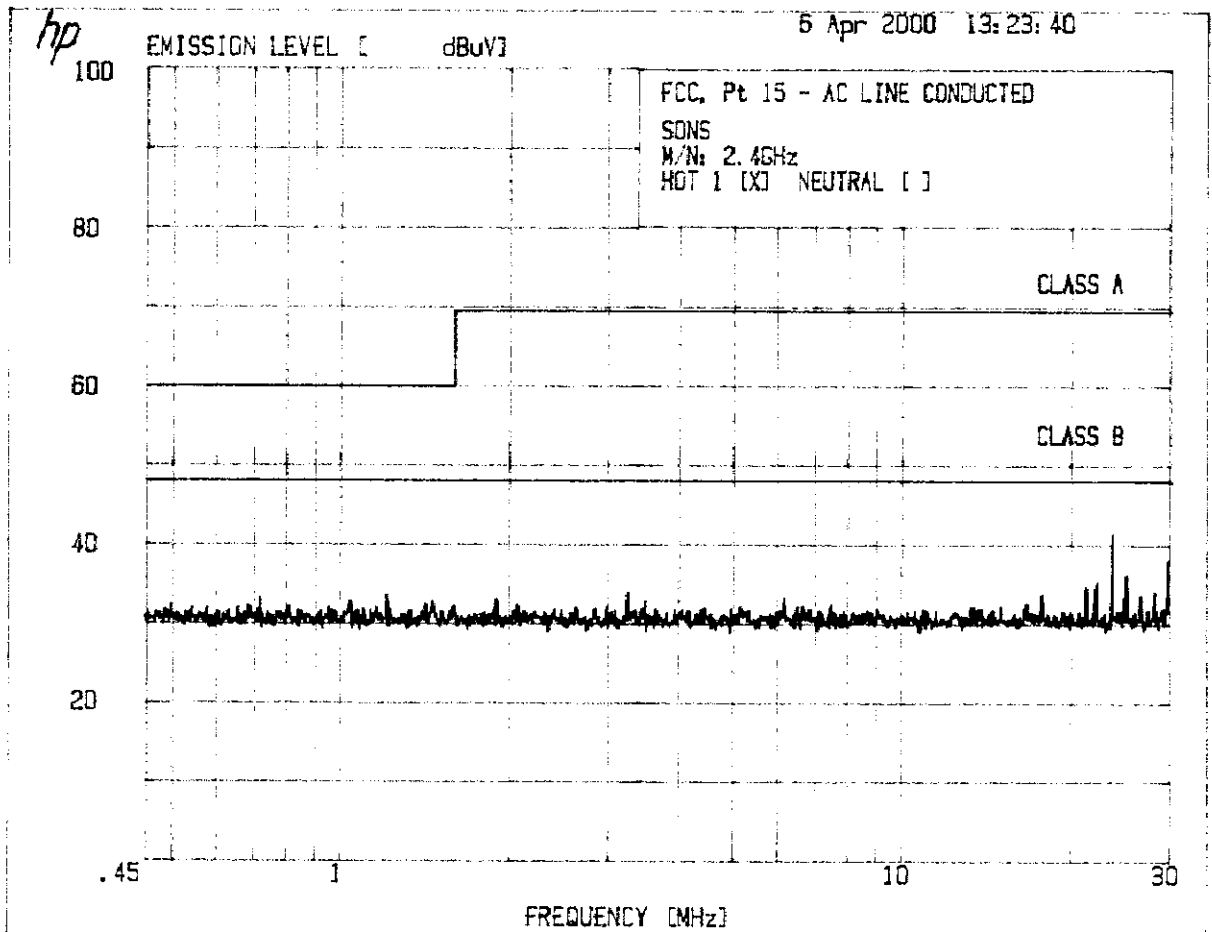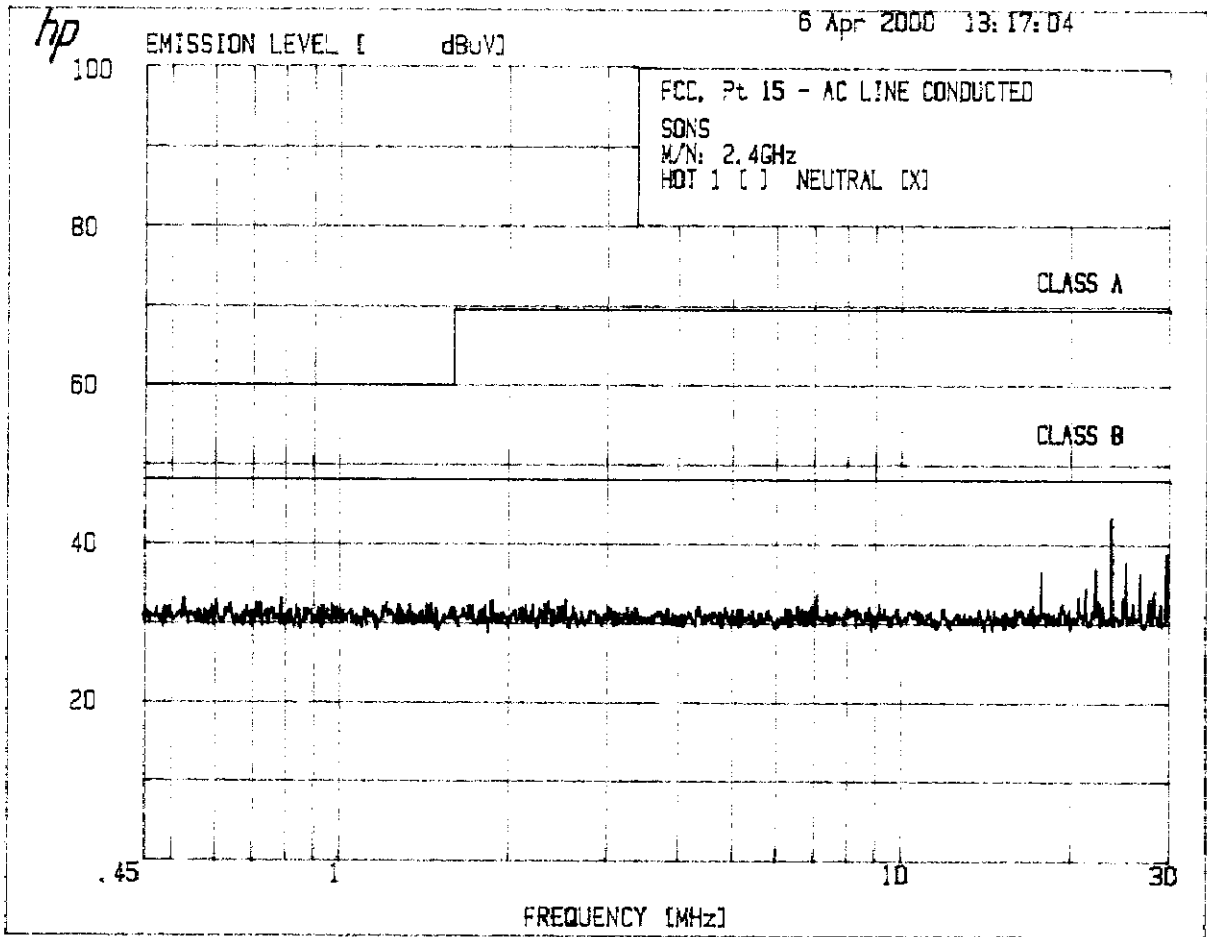

=====

6 Apr 2000 13:17:04

=====

3. FCC CFR 47, Pt 15

3.1 FCC, Pt 15 - AC LINE CONDUCTED

=====

SONS

M/N: 2.4GHz

HOT 1 I 1 NEUTRAL (X)

PEAKS FOUND ABOVE 35 dBuV

PEAK#	FREQ (MHz)	AMPL (dBuV)
1	17.91	36.6
2	22.37	37.1
3	23.82	43.3
4	25.26	37.6
5	26.79	36.4
6	29.87	38.9

=====

6 Apr 2008 13:23:40

=====

3. FCC CFR 47, Pt 15  
2.1 FCC, Pt 15 - 40 LINE CONDUCTED

=====

SONE

M/N: 2.4GHz

HOT 1 (X) NEUTRAL ( )

PEAKS FOUND ABOVE 35 dBuV

PEAK#	FREQ (MHz)	AMPL (dBuV)
1	22.37	38.3
2	23.62	41.4
3	25.26	38.3
4	23.67	36.2