

FCC TEST REPORT

FCC ID : OU4XWS350

Applicant : **Xanboo Inc**
115 WEST 30TH STREET, 6TH FLOOR NEW YORK, NY10001

Equipment Under Test (EUT) :


Product description : Wireless Siren

Model No. : XWS350

Standards : FCC 15 Paragraph 15.205, Paragraph 15.209, Paragraph 15.231,
Paragraph 15.31, Paragraph 15.33, Paragraph 15.35.

Date of Test : March 28, 2005

Test Engineer : **Peter Lin**

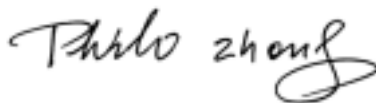Reviewed By : 

PERPARED BY:

Shenzhen Academy Of Metrology and Quality Inspection EMC Laboratory

Bldg, of Metrology and Quality Inspection ,Longzhu Road ,Nanshan
District ,Shenzhen ,Guangdong ,China

FCC Registration Number: 97379

Industry Canada Registration Number: IC4174

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS.....	2
3 TEST SUMMARY.....	5
4 GENERAL INFORMATION.....	6
4.1 CLIENT INFORMATION	6
4.2 GENERAL DESCRIPTION OF E.U.T.....	6
4.3 DETAILS OF E.U.T.	6
4.4 DESCRIPTION OF SUPPORT UNITS	6
4.5 STANDARDS APPLICABLE FOR TESTING.....	6
4.6 TEST FACILITY.....	7
4.7 TEST LOCATION.....	7
5 EQUIPMENT USED DURING TEST	8
6 CONDUCTED EMISSION TEST	9
6.1 TEST EQUIPMENT.....	9
6.2 TEST PROCEDURE	9
6.3 CONDUCTED TEST SETUP	10
6.4 EUT OPERATING CONDITION	10
6.5 CONDUCTED EMISSION LIMITS	11
6.6 CONDUCTED EMISSION TEST DATA.....	12
6.7 CONDUCTED EMISSIONS TEST DATA	14
7 RADIATION EMISSION TEST.....	15
7.1 TEST EQUIPMENT.....	15
7.2 MEASUREMENT UNCERTAINTY.....	15
7.3 TEST PROCEDURE	15
7.4 RADIATED TEST SETUP.....	16
7.5 SPECTRUM ANALYZER SETUP.....	16
7.6 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	17
7.7 SUMMARY OF TEST RESULTS.....	17
7.8 EUT OPERATING CONDITION	18
7.9 RADIATED EMISSIONS LIMIT.....	18
7.10 RADIATED EMISSIONS TEST RESULT.....	20
8 PERIODIC OPERATION.....	22
9 BAND EDGE	23
9.1 TEST PROCEDURE	23
9.2 BAND EDGE	23
9.3 BAND EDGE TEST RESULT	24
10 PHOTOGRAPHS OF TESTING.....	25
10.1 CONDUCTION EMISSION TEST VIEW	25
10.2 RADIATION EMISSION TEST VIEW FOR 30MHZ-1000MHZ.....	26

10.3 RADIATION EMISSION TEST VIEW FOR 1GHZ-5GHZ.....26

11 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS27

11.1 EUT - FRONT VIEW27

11.2 EUT - BACK VIEW27

11.3 PCB - COMPONENT VIEW(1)28

11.4 PCB - SOLDER VIEW (1).....28

11.5 PCB - COMPONENT VIEW(2)29

11.6 PCB - SOLDER VIEW(2).....29

12 FCC ID LABEL30

3 Test Summary

Test	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission (30MHz to 25GHz)	FCC PART 15: 2003	ANSI C63.4: 1992	Class B	PASS
Conducted Emission (150KHz to 30MHz)	FCC PART 15: 2003	ANSI C63.4: 1992	Class B	PASS

4 General Information

4.1 Client Information

Applicant: **Xanboo Inc**
Address of Applicant: 115 WEST 30TH STREET, 6TH FLOOR NEW YORK, NY10001

4.2 General Description of E.U.T.

Product description: Wireless Siren
Model No.: XWS350

4.3 Details of E.U.T.

Power Supply: 120V AC/60Hz

4.4 Description of Support Units

The EUT has been tested as an independent unit.

4.5 Standards Applicable for Testing

The customer requested FCC tests for a Wireless Siren. The standards used were FCC 15 Paragraph 15.205, Paragraph 15.209, Paragraph 15.231, Paragraph 15.31, Paragraph 15.33, Paragraph 15.35.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC – Registration No.: 97379**

Shenzhen Academy Of Metrology and Quality Inspection EMC Laboratory, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 97379.

4.7 Test Location

Bldg, of Metrology and Quality Inspection ,Longzhu Road ,Nanshan District ,Shenzhen ,Guangdong ,China.

5 Equipment Used during Test

Conducted Emission Test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due date
1	Shielding Room	ETS	8 x 4 x 4 m ³	N0.2	N/A	N/A
2	LISN	Rohde & Schwarz	ESH2-Z5	100028	06-11-2004	05-11-2005
3	EMI Test Receiver	Rohde & Schwarz	ESCS30	100038	18-11-2004	17-11-2005
Radiated Emission Test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due date
1	3m Semi- Anechoic Chamber	ETS	N/A	N/A	05-11-2004	04-11-2005
2	EMI Test Receiver	ROHDE & SCHWARZ	ESI 26	100009	05-11.2004	04-11-2005
3	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100038	05-11.2004	04-11-2005
4	EMI Test Software	ROHDE & SCHWARZ	ES-K1	N/A	N/A	N/A
5	Bilog Type Antenna	ETS	2075	2346	02-12-2004	01-12-2005
6	Horn Antenna	ROHDE & SCHWARZ	HF906	1000029	05-11.2004	04-11-2005
7	Ultra-Broadband Antenna	ROHDE & SCHWARZ	HL562	100015	02-12-2004	01-12-2005
Common Used Equipment						
Item	Test Equipment	Manufacturer	Model No.	Series No.	Cal. Date	Due date
1	Temperature, Humidity & Barometer	OREGON SCIENTIFIC	BA-888	EMC0001 to EMC0004	25-07-2004	25-07-2005
2	DMM	FLUKE	73	70681569 or 70671122	23-07-2004	23-07-2005

6 Conducted Emission Test

Product:	Wireless Siren M/N: XWS350
Test Requirement:	FCC Part15 Paragraph 15.207
Test Method:	Based on FCC Part15 Paragraph 15.207
Test Date:	March 28, 2005
Frequency Range:	150kHz to 30MHz
Class:	Class B
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

6.1 Test Equipment


Please refer to Section 5 this report.

6.2 Test Procedure

1. The EUT was tested according to ANSI C63.4. The frequency spectrum from 150kHz to 30MHz was investigated.
2. The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.3 Conducted Test Setup


The conducted emission tests were performed using the setup accordance with the ANSI C63.4, The specification used in this report was the FCC Part15 Paragraph 15.207 limits.

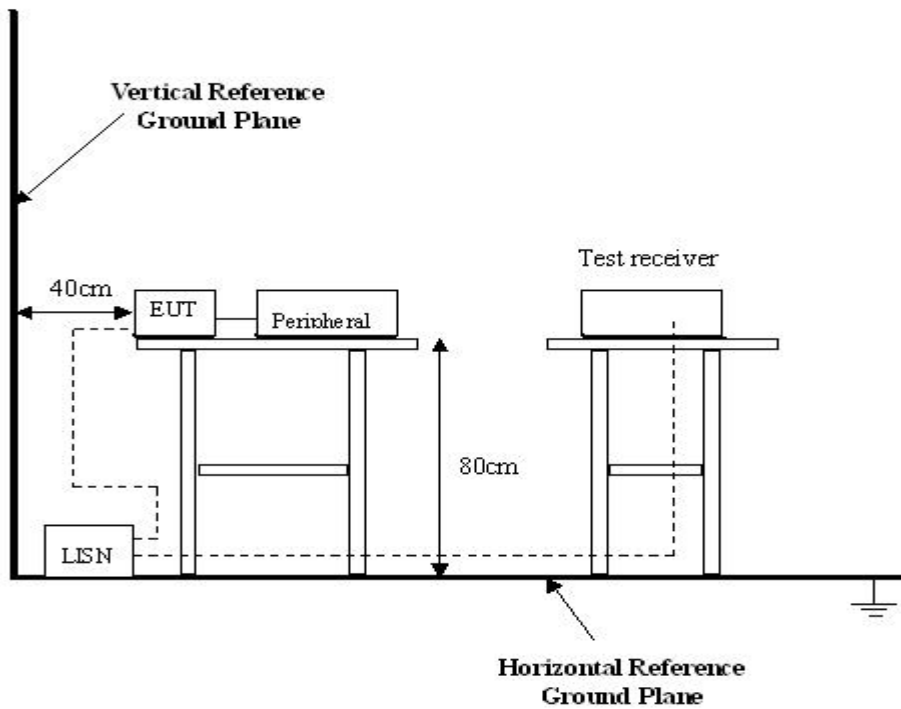

6.4 EUT Operating Condition

Operating condition is according to ANSI C63.4.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

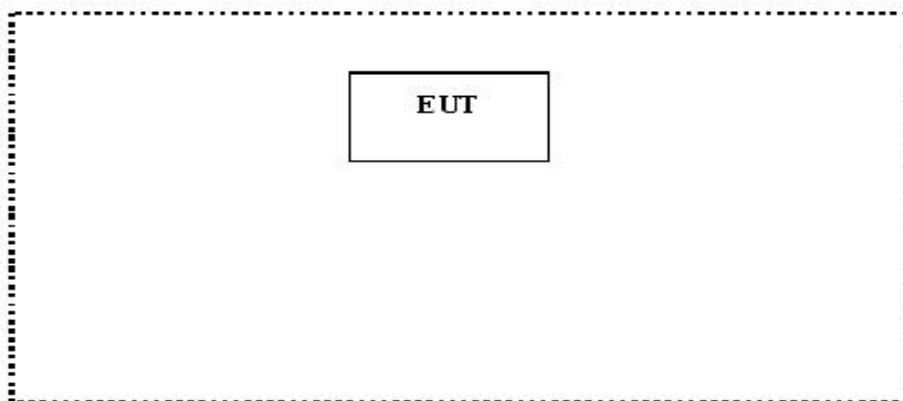

6.5 Conducted Emission Limits

66-56 dB μ V/m between 0.15MHz & 0.5MHz

56 dB μ V/m between 0.5MHz & 5MHz

60 dB μ V/m between 5MHz & 30MHz


Note: In the above limits, the tighter limit applies at the band edges.

6.6 Conducted Emission Test Data

Live Line:

Conducted Disturbance


EUT: M/N:XWS350
Op Cond: ON
Test Spec: L
Comment: AC 120V/60Hz

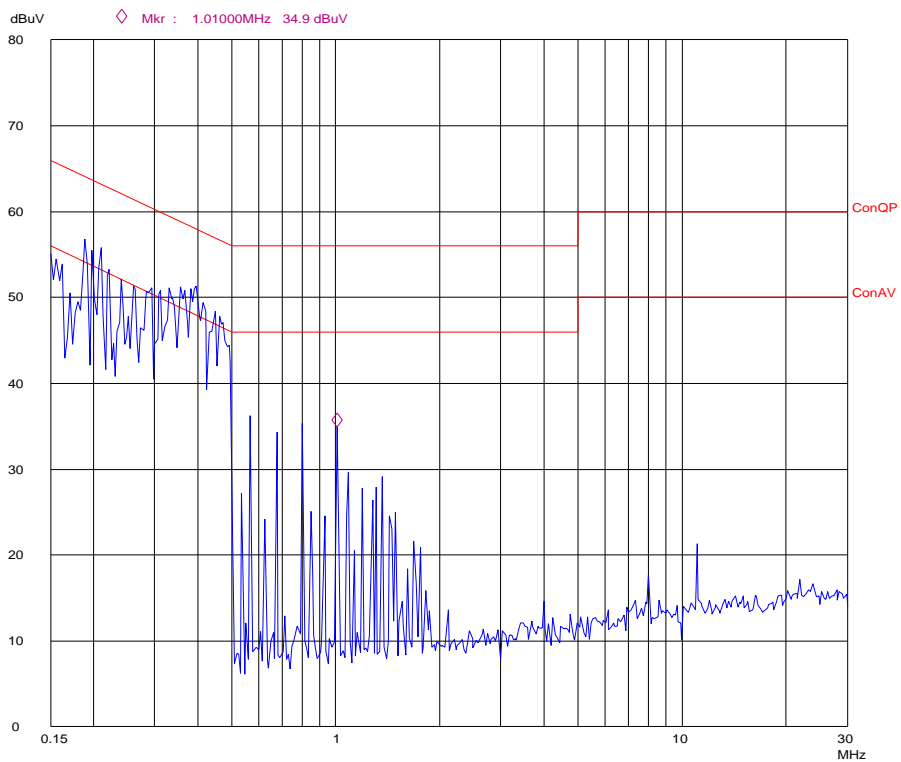

Neutral Line:

Conducted Disturbance

EUT: M/N:XWS350
Op Cond: ON
Test Spec: N
Comment: AC 120V/60Hz

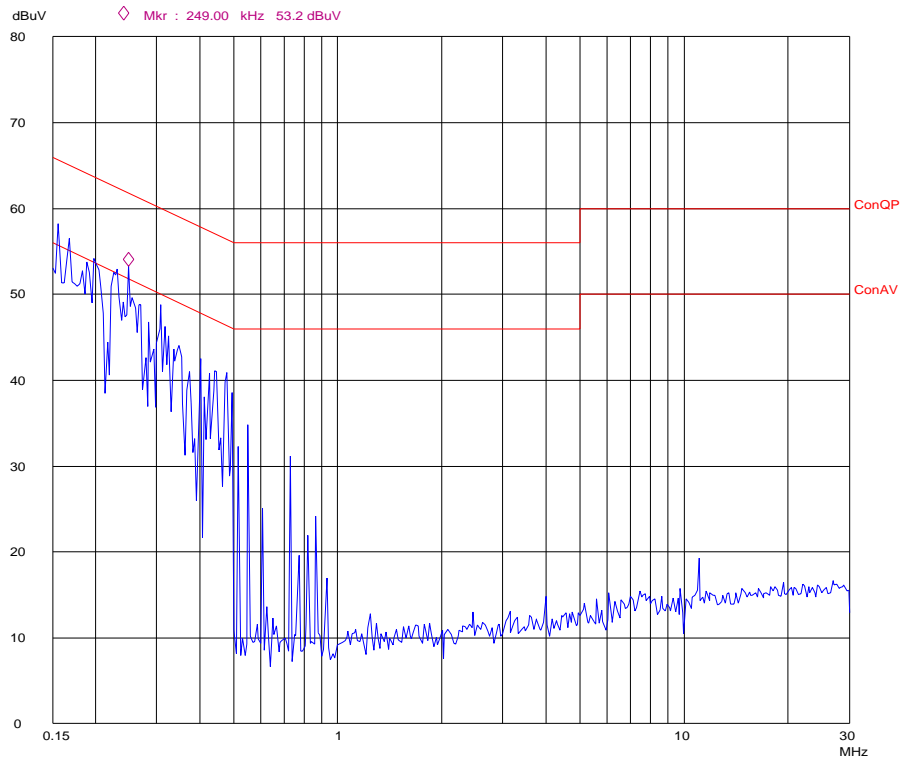

6.7 Conducted Emissions Test Data

Freq. MHz	Line	QP Reading dBuV	Limit dBuV	Margin dB	AV Reading dBuV	Limit dBuV	Margin dB
0.194000	Live	48.8	63.8	15.0	17.6	53.8	36.2
0.405000	Live	41.1	57.7	16.6	11.9	47.7	35.8
0.156000	Neutral	48.5	65.6	17.1	17.6	55.6	38.0
0.249000	Neutral	39.9	61.8	21.9	11.2	51.8	40.6

7 Radiation Emission Test

Product:	Wireless Siren M/N: XWS350
Test Requirement:	FCC Part15 Paragraph 15.209 and Paragraph 15.231
Test Method:	Based on FCC Part15 Paragraph 15.33
Test Date:	March 28, 2005
Frequency Range:	30MHz to 5GHz
Measurement Distance:	3m
Detector:	Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit

7.1 Test Equipment

Please refer to Section 5 this report.

7.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on ANSI C63.4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at SMQ is +4.0 dB.

7.3 Test Procedure

1. For the radiated emissions test, since the EUT does not have a power source, there was no connection to AC outlets.
2. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.
3. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB μ V of specification limits), and are distinguished with a "Qp" in the data table.
4. The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.

7.4 Radiated Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4, The specification used in this report was the FCC Part15 Paragraph 15.209, Paragraph 15.231 limits.

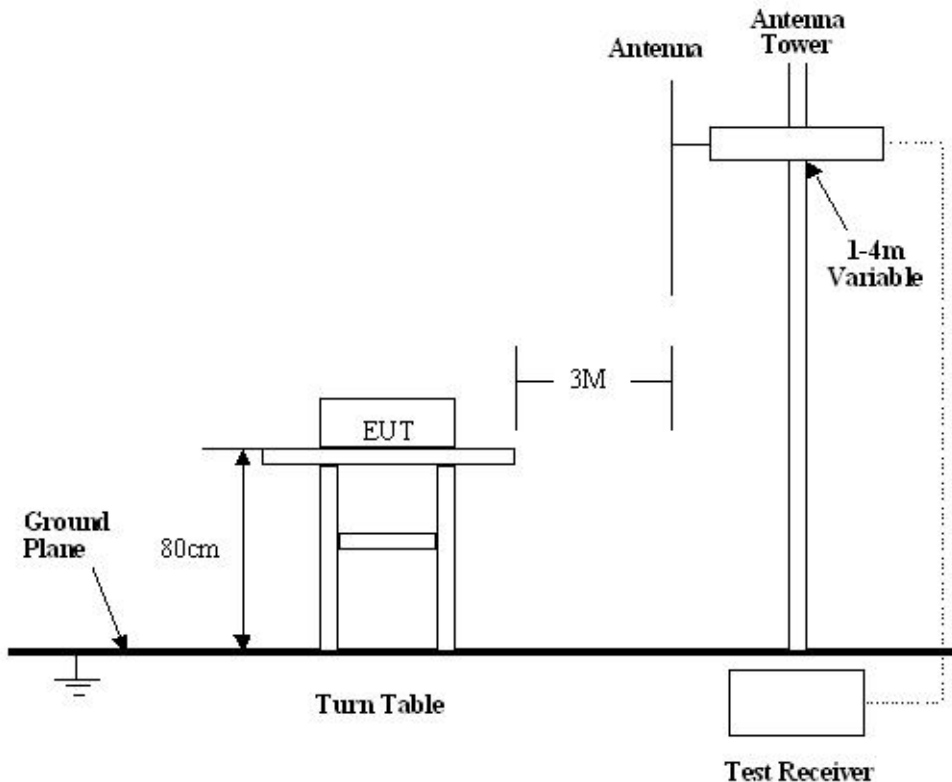

7.5 Spectrum Analyzer Setup

According to FCC Part15 Paragraph 15.209 and Paragraph 15.231 Rules, the system was tested to 5000 MHz.

- Start Frequency30 MHz
- Stop Frequency5000 MHz
- Sweep Speed Auto
- IF Bandwidth100 kHz
- Video Bandwidth1 MHz
- Quasi-Peak Adapter Bandwidth120 kHz
- Quasi-Peak Adapter Mode.....Normal
- Resolution Bandwidth1MHz

7.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

7.7 Summary of Test Results

According to the data in section 7.10, the EUT complied with the FCC Part15 Paragraph 15.209 and Paragraph 15.231 standards.

7.8 EUT Operating Condition

Same as section 6.4 of this report.

7.9 Radiated Emissions Limit

A. FCC Part 15 subpart C Paragraph 15.231 Limit

Fundamental Frequency(MHZ)	Field Strength of Fundamental	
	uV/m	dBuV/m
418	10351	80.3
Harmonics	1035	60.3

Note: (1) $RF\ Voltage(dBuV) = 20 \log RF\ Voltage(uV)$

(2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

(3) The emission limit in this paragraph is based on measurement instrumentation employing an average detector. Measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

(4) Above 1GHz, do a Peak and average measurements for all emissions, Limit for peak is 74dBuV/m, According to Part 15.35(b) and average is 54BuV/m.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency(MHZ)	Distance(m)	Field strength(dBuV/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- Note:** (1) $RF\ Voltage(dBuV) = 20 \log RF\ Voltage(uV)$
(2) In the Above Table, the tighter limit applies at the band edges.
(3) Distance refers to the distance in meters between the measuring instrument antenna.

7.10 Radiated Emissions Test Result

Formula of conversion factors:the field strength at 3m was established by adding
 The meter reading of the spectrum analyzer (which is set to read in units of dBuV)
 To the antenna correction factor supplied by the antenna manufacturer. The antenna
 Correction factors are stated in terms of dB.The gain of the presselector was accounted
 For in the spectrum analyzer meter reading.

Example:

$$\text{Freq(MHz) Meter Reading +ACF=FS}$$

$$33 \quad 20\text{dBuV}+10.36\text{dB}=30.36\text{dBuV/m @3m}$$

A. Fundamental Radiated Emission Data for 418MHz

Test Item: Fundamental Radiated Emission Data
 Test Voltage: 120VAC/60Hz
 Test Mode: On
 Temperature: 24 °C
 Humidity: 52%RH
 Test Result: PASS

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)	FCC 15 Subpart C Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°)
418.177555	Vertical	75.31	80.3	4.99	1.5	60
836.461323	Vertical	36.48	60.3	23.82	1.8	180
418.177555	Horizontal	74.67	80.3	5.63	1.5	60
836.409303	Horizontal	31.93	60.3	28.37	1.8	90

B. General Radiated Emission Data


Test Item: General Radiated Emission Data
 Test Voltage: 120VAC/60Hz
 Test Mode: On
 Temperature: 24 °C
 Humidity: 52%RH
 Test Result: PASS

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)	FCC 15 Subpart C Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°)
455.711424	Vertical	38.80	46.0	7.20	1.2	90
624.829659	Vertical	40.65	46.0	5.35	2.0	180
671.237563	Vertical	37.10	46.0	8.9	1.8	60
1969.938770	Vertical	41.33	54.0	12.67	2.0	45
143.241483	Horizontal	28.60	43.5	14.9	1.5	45
198.282563	Horizontal	27.35	43.5	16.15	1.6	60
455.711424	Horizontal	39.60	46.0	6.4	2.0	180
1593.186373	Horizontal	42.8	54.0	11.2	2.0	90

8 Periodic Operation

* linear interpolations

In addition, devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

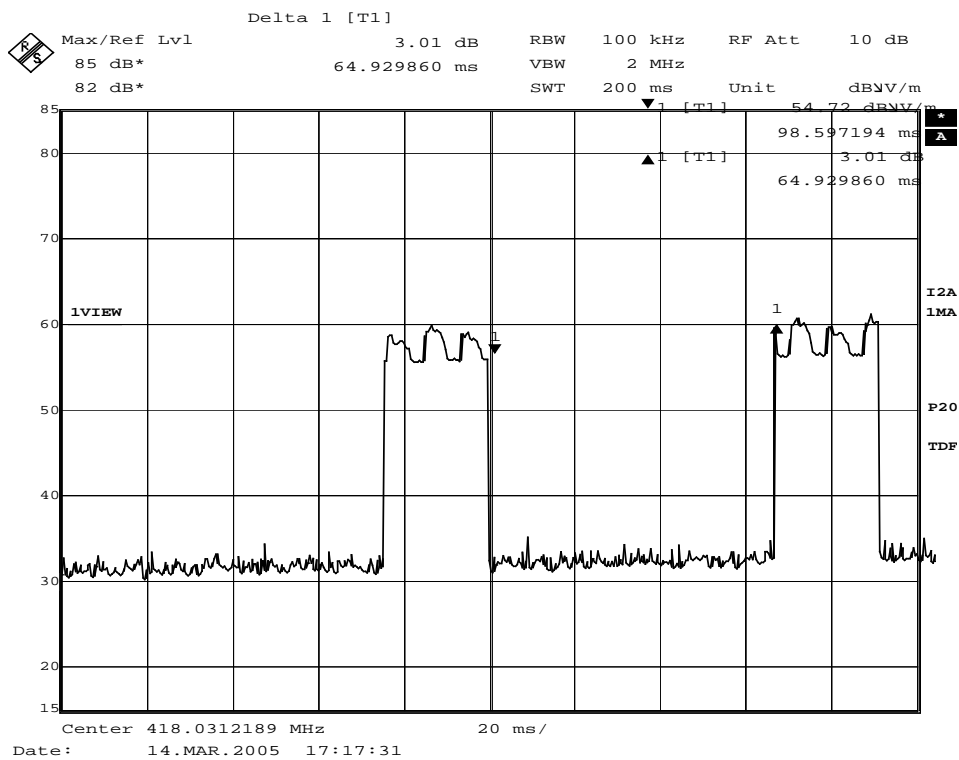

9 Band Edge

Test Requirement:	FCC Part15 C
Test Method:	Based on FCC Part15 Paragraph 15.231
Test Date:	March 14, 2005
Test mode:	On
Temperature:	24 °C
Humidity:	52%RH

9.1 Test Procedure


1. The EUT, peripherals were put on the turntable which table size is 1mX1.5m, table high 0.8m. All set up is according to ANSI C63.4.
2. With the EUT's antenna attached,The EUT's radiated emission power was received by the test antenna which was connected to the spectrum analyser with the START and STOP frequencies set to the EUT's operation band. Measurements were made at 3 meters.
3. The antenna high were varied from 1m to 4m high to find the maximum emission for each frequency.
4. The bandwidth of the fundamental frequency was measure by spectrum analyser with 20KHz RBW and 200KHz VBW.The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power 20dB.


9.2 Band Edge

Requirements: Paragraph 15.231,The emission power at the START and STOP frequencies shall be at least 50dB below the level of the fundamental or to the general radiated emission limits in FCC 15.209.

9.3 Band Edge Test Result

418MHz TX

	Max/Ref Lvl	Delta 2 [T1]	RBW	100 kHz	RF Att	10 dB
	85 dB*	-20.13 dB	VBW	30 kHz		
	82 dB*	114.22845691 kHz	SWT	200 ms	Unit	dBµV/m

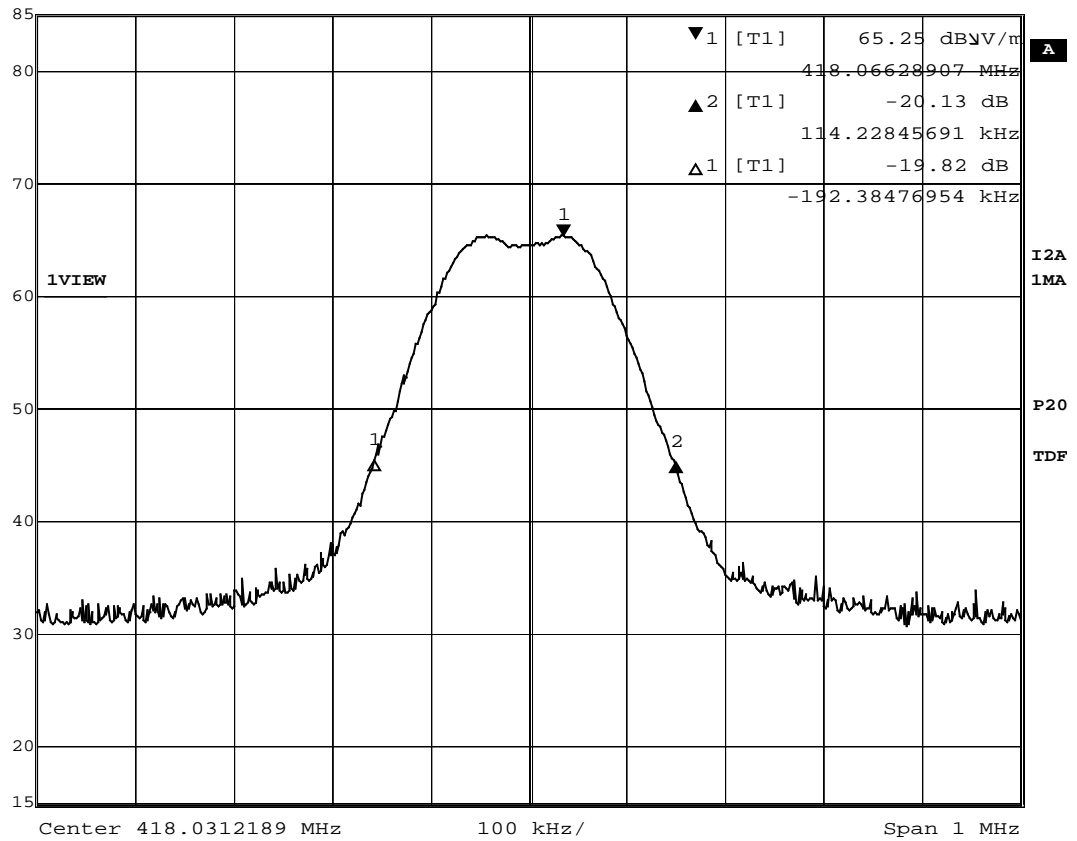

Date: 14.MAR.2005 17:05:41

10 Photographs of Testing


10.1 Conduction Emission Test View



10.2 Radiation Emission Test View For 30MHz-1000MHz



10.3 Radiation Emission Test View For 1GHz-5GHz

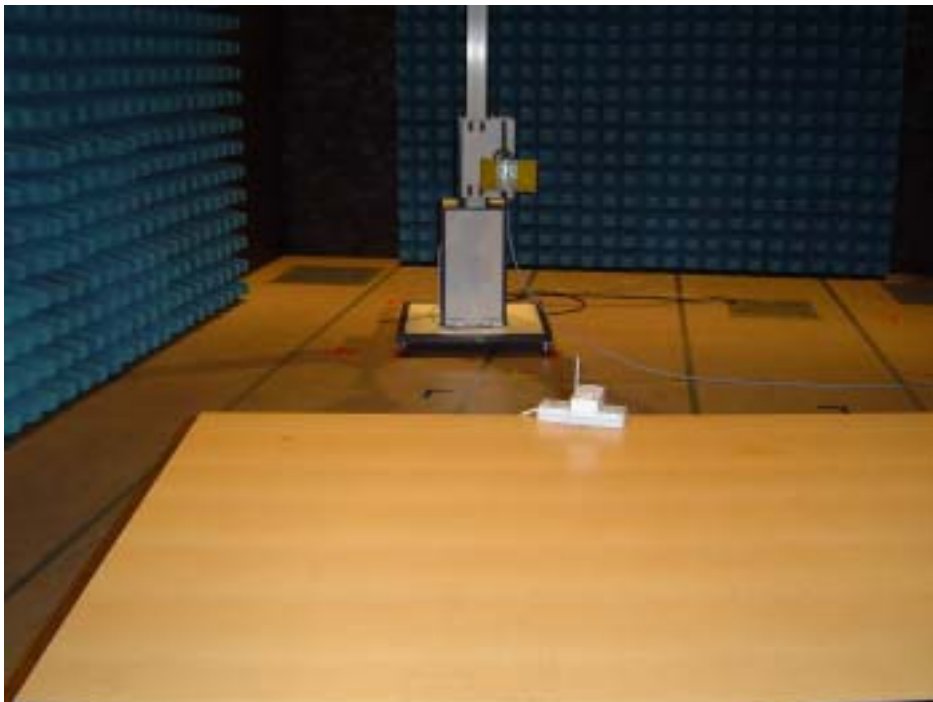

11 Photographs - Constructional Details


11.1 EUT - Front View



11.2 EUT - Back View




11.3 PCB - Component View(1)

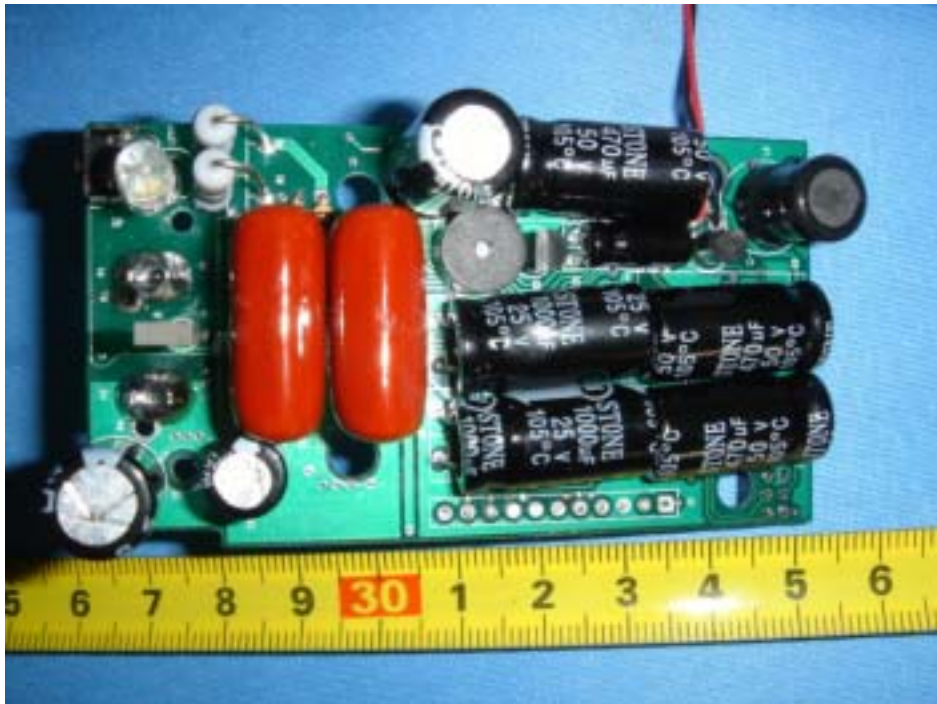


11.4 PCB - Solder View (1)



11.5 PCB - Component View(2)

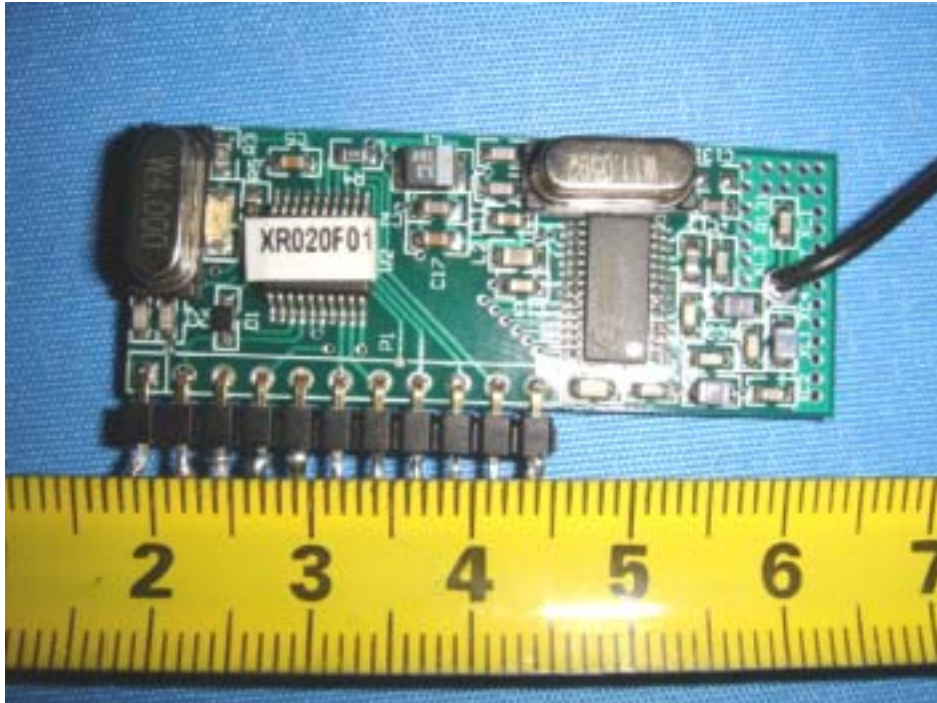

11.6 PCB - Solder View(2)

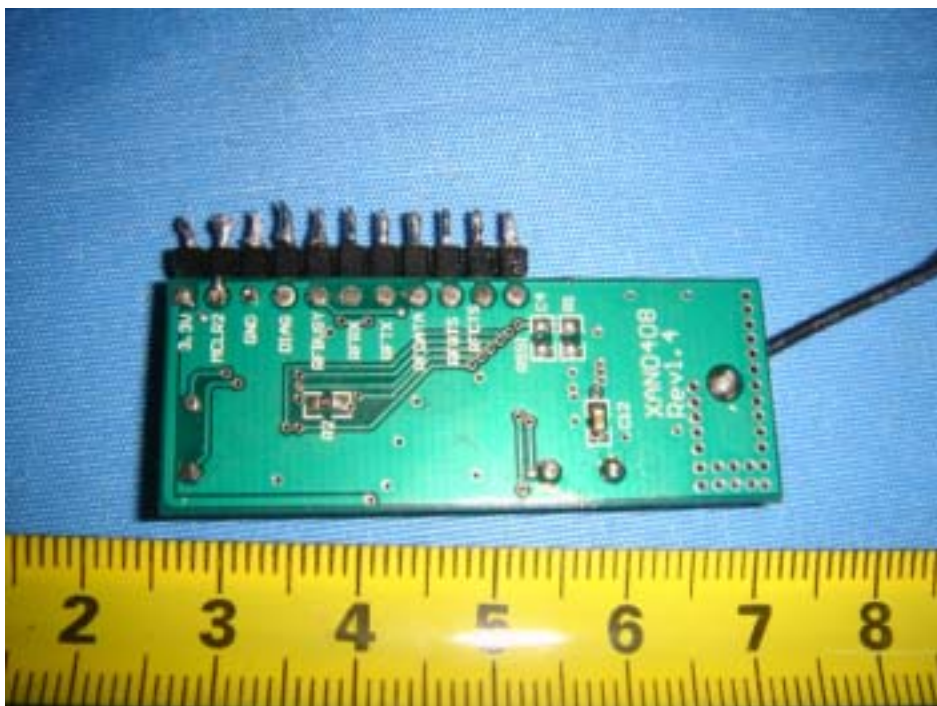

12 FCC ID Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference,and (2) this device must accept any interference received, including interference that may cause undesired operation

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT
EUT Bottom View/proposed FCC Mark Location

