



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 1 of 112

TEST REPORT

Application No.: KSCR2410002068HS
FCC ID: OU5MULW01
IC: 4048B-MULW01
Applicant: GE Medical Systems Information Technologies, Inc.
Address of Applicant: 8200 West Tower Avenue, Milwaukee, Wisconsin, 53223, United States
Manufacturer: GE Medical Systems Information Technologies, Inc.
Address of Manufacturer: 8200 West Tower Avenue, Milwaukee, Wisconsin, 53223, United States
Equipment Under Test (EUT):
EUT Name: WLAN Module
Model No.: WLANCSMOD
Trade Mark: GE HealthCare
Standard(s) : 47 CFR Part 15, Subpart C 15.247
RSS-247 Issue 3, August 2023
RSS-Gen Issue 5 Amendment 2 (February 2021)
Date of Receipt: 2024-06-06
Date of Test: 2024-06-07 to 2024-07-10
Date of Issue: 2024-07-12

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 2 of 112

Revision Record			
Version	Description	Date	Remark
00	Original	2024-07-12	/

Authorized for issue by:			
Tested By		<i>Damon Zhou</i>	
		<u>Damon_Zhou/Project Engineer</u>	
Approved By		<i>Terry Hou</i>	
		<u>Terry Hou /Reviewer</u>	

2 Test Summary

Radio Spectrum Technical Requirement				
Item	FCC Requirement	IC Requirement	Method	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	RSS-Gen Clause 6.8	N/A	Customer Declaration
Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence	47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)	RSS-247 Section 5.1(a)	N/A	Pass

N/A: Not applicable

Radio Spectrum Matter Part				
Item	FCC Requirement	IC Requirement	Method	Result
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247(b)(1)	RSS-247 Section 5.4(b)	ANSI C63.10 (2013) Section 7.8.5	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247(a)(1)	RSS-247 Section 5.1(a)	ANSI C63.10 (2013) Section 7.8.7	Pass
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247a(1)	RSS-247 Section 5.1(b)	ANSI C63.10 (2013) Section 7.8.2	Pass
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247a(1)(iii)	RSS-247 Section 5.1(d)	ANSI C63.10 (2013) Section 7.8.3	Pass
Dwell Time	47 CFR Part 15, Subpart C 15.247a(1)(iii)	RSS-247 Section 5.1(d)	ANSI C63.10 (2013) Section 7.8.4	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247(d)	RSS-247 Section 5.5	ANSI C63.10 (2013) Section 7.8.6	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247(d)	RSS-247 Section 5.5	ANSI C63.10 (2013) Section 7.8.8	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.205 & 15.209	RSS-247 Section 3.3 & RSS-Gen Section 8.9	ANSI C63.10 (2013) Section 6.10.5	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.205 & 15.209	RSS-247 Section 3.3 & RSS-Gen Section 8.9	ANSI C63.10 (2013) Section 6.4,6.5,6.6	Pass
99% Bandwidth	-	RSS-Gen Section 6.7	ANSI C63.10 Section 6.9.3	Pass

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents	4
4 General Information	7
4.1 Details of E.U.T.	7
4.2 Description of Support Units	7
4.3 Power level setting using in test.....	7
4.4 Measurement Uncertainty	8
4.5 Test Location.....	9
4.6 Test Facility	9
4.7 Deviation from Standards.....	9
4.8 Abnormalities from Standard Conditions	9
5 Equipment List	10
6 Radio Spectrum Technical Requirement	11
6.1 Antenna Requirement	11
6.1.1 <i>Test Requirement:</i>	11
6.1.2 <i>Conclusion</i>	11
6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence	12
6.2.1 <i>Test Requirement:</i>	12
6.2.2 <i>Conclusion</i>	12
7 Radio Spectrum Matter Test Results	13
7.1 Conducted Peak Output Power.....	13
7.1.1 <i>E.U.T. Operation</i>	13
7.1.2 <i>Test Mode Description</i>	13
7.1.3 <i>Test Setup Diagram</i>	13
7.1.4 <i>Measurement Procedure and Data</i>	13
7.2 20dB Bandwidth	14
7.2.1 <i>E.U.T. Operation</i>	14
7.2.2 <i>Test Mode Description</i>	14
7.2.3 <i>Test Setup Diagram</i>	14
7.2.4 <i>Measurement Procedure and Data</i>	14
7.3 Carrier Frequencies Separation	15
7.3.1 <i>E.U.T. Operation</i>	15
7.3.2 <i>Test Mode Description</i>	15
7.3.3 <i>Test Setup Diagram</i>	15
7.3.4 <i>Measurement Procedure and Data</i>	15
7.4 Hopping Channel Number.....	16
7.4.1 <i>E.U.T. Operation</i>	16
7.4.2 <i>Test Mode Description</i>	16
7.4.3 <i>Test Setup Diagram</i>	16
7.4.4 <i>Measurement Procedure and Data</i>	16
7.5 Dwell Time.....	17
7.5.1 <i>E.U.T. Operation</i>	17
7.5.2 <i>Test Mode Description</i>	17
7.5.3 <i>Test Setup Diagram</i>	17

Compliance Certification Services (Kunshan) Inc.

- 7.5.4 *Measurement Procedure and Data*..... 17
- 7.6 Conducted Band Edges Measurement 18
 - 7.6.1 *E.U.T. Operation*..... 18
 - 7.6.2 *Test Mode Description*..... 18
 - 7.6.3 *Test Setup Diagram*..... 18
 - 7.6.4 *Measurement Procedure and Data*..... 18
- 7.7 Conducted Spurious Emissions 19
 - 7.7.1 *E.U.T. Operation*..... 19
 - 7.7.2 *Test Mode Description*..... 19
 - 7.7.3 *Test Setup Diagram*..... 19
 - 7.7.4 *Measurement Procedure and Data*..... 19
- 7.8 Radiated Emissions which fall in the restricted bands 20
 - 7.8.1 *E.U.T. Operation*..... 20
 - 7.8.2 *Test Mode Description*..... 20
 - 7.8.3 *Test Setup Diagram*..... 20
 - 7.8.4 *Measurement Procedure and Data*..... 21
- 7.9 Radiated Spurious Emissions Below 1GHz 34
 - 7.9.1 *E.U.T. Operation*..... 34
 - 7.9.2 *Test Mode Description*..... 34
 - 7.9.3 *Test Setup Diagram*..... 34
 - 7.9.4 *Measurement Procedure and Data*..... 35
- 7.10 Radiated Spurious Emissions Above 1GHz..... 38
 - 7.10.1 *E.U.T. Operation*..... 38
 - 7.10.2 *Test Mode Description*..... 38
 - 7.10.3 *Test Setup Diagram*..... 38
 - 7.10.4 *Measurement Procedure and Data* 39
- 7.11 99% Bandwidth 58
 - 7.11.1 *E.U.T. Operation*..... 58
 - 7.11.2 *Test Mode Description*..... 58
 - 7.11.3 *Test Setup Diagram*..... 58
 - 7.11.4 *Measurement Procedure and Data* 58
- 8 Test Setup Photo 59**
- 9 EUT Constructional Details (EUT Photos) 59**
- 10 Appendix..... 59**
 - 10.1 Appendix A: 20dB Emission Bandwidth 59
 - 10.1.1 *Test Result* 59
 - 10.1.2 *Test Graphs*..... 60
 - 10.2 Appendix B: Occupied Channel Bandwidth 65
 - 10.2.1 *Test Result* 65
 - 10.2.2 *Test Graphs*..... 66
 - 10.3 Appendix C: Maximum conducted output power 71
 - 10.3.1 *Test Result* 71
 - 10.3.2 *Test Graphs*..... 72
 - 10.4 Appendix D: Carrier frequency separation 77
 - 10.4.1 *Test Result* 77
 - 10.4.2 *Test Graphs*..... 78
 - 10.5 Appendix E: Time of occupancy..... 80
 - 10.5.1 *Test Result* 80
 - 10.5.2 *Test Graphs*..... 81
 - 10.6 Appendix F: Number of hopping channels 88
 - 10.6.1 *Test Result* 88
 - 10.6.2 *Test Graphs*..... 89
 - 10.7 Appendix G: Band edge measurements 91



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 6 of 112

10.7.1 Test Result91
10.7.2 Test Graphs.....92
10.8 Appendix H: Conducted Spurious Emission98
10.8.1 Test Result98
10.8.2 Test Graphs.....99

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 3.3V
Test voltage:	DC 3.3V
Operation Frequency:	2402MHz to 2480MHz
Bluetooth Version:	V4.1 Dual mode
Modulation Type:	GFSK, pi/4DQPSK, 8DPSK
Number of Channels:	79
Channel Spacing:	1MHz
Spectrum Spread Technology:	Frequency Hopping Spread Spectrum(FHSS)
Antenna Type:	FPC Antenna
Antenna Gain:	2.71 dBi (Provided by manufacturer)
Antenna Number:	1
S/N:	9180169-003
Firmware Version:	(FRev) Rev 8.9.0.0.90

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
PC	GE	-	-

4.3 Power level setting using in test

Channel	Power setting		
	DH5	2DH5	3DH5
Low	6	6	6
Middle	6	6	6
High	6	6	6

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4 x 10 ⁻⁸
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
8	RF Radiated Power	5.2dB (Below 1GHz)
		5.9dB (Above 1GHz)
9	Radiated Spurious Emission Test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		5.1dB (1GHz-18GHz)
		5.4dB (Above 18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%
<p>Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.</p>		

4.5 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g. max. clock frequency, highest internal frequency, antenna gain, cable loss, etc) is provided by the applicant. (if applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (if applicable).
3. Sample source: sent by customer.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

• **FCC**

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory. Designation Number: CN1172.

• **ISED**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 2324E

• **VCCI**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 10 of 112

5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
RF Conducted Test						
1	Spectrum Analyzer	Keysight	N9020A	KUS1911E004-2	08/01/2024	07/31/2025
2	Spectrum Analyzer	Keysight	N9020A	KUS2001M001-2	08/01/2024	07/31/2025
3	Spectrum Analyzer	Keysight	N9030B	KSEM021-1	01/15/2024	01/14/2025
4	Signal Generator	R&S	SMBV100B	KSEM032	03/19/2024	03/18/2025
5	Signal Generator	R&S	SMW200A	KSEM020-1	08/02/2024	08/01/2025
6	Signal Generator	Agilent	N5182A	KUS2001M001-1	08/01/2024	07/31/2025
7	Signal Generator	Agilent	E8257C	KS301066	08/06/2024	08/05/2025
8	Radio Communication Test Station	Anritsu	MT8000A	KSEM001-1	08/01/2024	07/31/2025
9	Radio Communication Analyzer	Anritsu	MT8821C	KSEM002-1	03/19/2024	03/18/2025
10	Universal Radio Communication Tester	R&S	CMW500	KUS1911E004-1	08/12/2024	08/11/2025
11	Switcher	TST	FY562	KUS2001M001-4	01/15/2024	01/14/2025
12	Conducted Test Cable	Thermax	RF01-RF04	CZ301111- CZ301120	01/15/2024	01/14/2025
13	Temp. / Humidity Chamber	TERCHY	MHK-120AK	KS301190	08/26/2024	08/25/2025
14	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-5	03/19/2024	03/18/2025
15	Test software	Tonscend	JS Tonscend BT/WIFI System	Version: 2.6	NCR	NCR
RF Radiated Test						
1	Spectrum Analyzer	R&S	FSV40	KUS1806E003	08/06/2024	08/05/2025
2	Universal Radio Communication Tester	R&S	CMW500	KSEM009-1	03/19/2024	03/18/2025
4	Loop Antenna	COM-POWER	AL-130R	KUS1806E001	03/18/2023	03/17/2025
5	Bilog Antenna	TESEQ	CBL 6112D	KUS1806E005	06/29/2023	06/28/2025
6	Bilog Antenna	TESEQ	CBL 6112D	KUS1806E006	03/19/2024	03/18/2025
7	Horn-antenna(1-18GHz)	Schwarzbeck	BBHA9120D	KS301079	03/23/2024	08/22/2026
8	Horn-antenna(1-18GHz)	ETS-LINDGREN	3117	KS301186	04/07/2023	04/06/2025
9	Horn Antenna(18-40GHz)	Schwarzbeck	BBHA9170	CZ301058	01/07/2024	01/06/2026
10	Amplifier(30MHz~18GHz)	PANSHAN TECHNOLOGY	LNA:1~18G	KSEM010-1	01/15/2024	01/14/2025
11	Amplifier(18~40GHz)	PANSHAN TECHNOLOGY	LNA180400G40	KSEM038	08/12/2024	08/11/2025
12	RE Test Cable	REBES MICROWAVE	/	CZ301097	08/12/2024	08/11/2025
13	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-4	03/21/2024	03/20/2025
14	Software	Faratronic	EZ_EMV-v 3A1	/	NCR	NCR
15	Software	ESE	E3_V 6.111221a	/	NCR	NCR

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is FPC antenna and no consideration of replacement. The best case gain of the antenna is 2.71 dBi.

Antenna location: Refer to internal photo.

6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence

6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)

6.2.2 Conclusion

Standard Requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1):

According to Technical Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

> Number of shift register stages: 9

> Length of pseudo-random sequence: $2^9 - 1 = 511$ bits

> Longest sequence of zeros: 8 (non-inverted signal)

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

Each frequency used equally on the average by each transmitter.

According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g):

According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h):

According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

The system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

7 Radio Spectrum Matter Test Results

7.1 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(1)

Test Method: ANSI C63.10 (2013) Section 7.8.5

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25.9 °C


Humidity: 70.4 % RH

Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.1.3 Test Setup Diagram

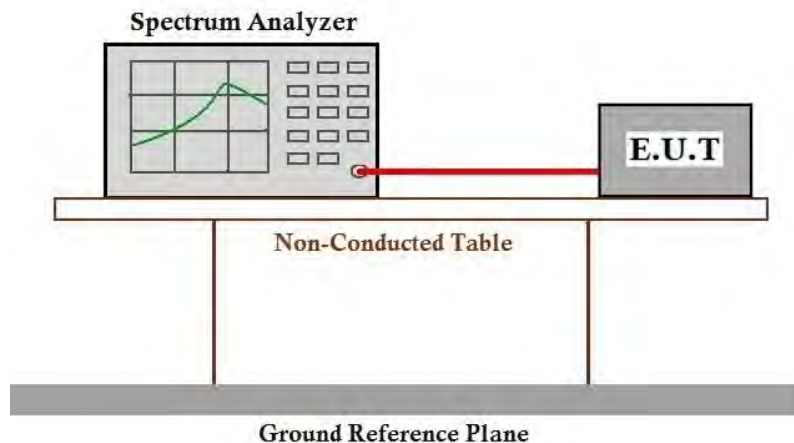

7.1.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 14 of 112

7.2 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247(a)(1)

Test Method: ANSI C63.10 (2013) Section 7.8.7

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 25.9 °C


Humidity: 70.4 % RH

Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

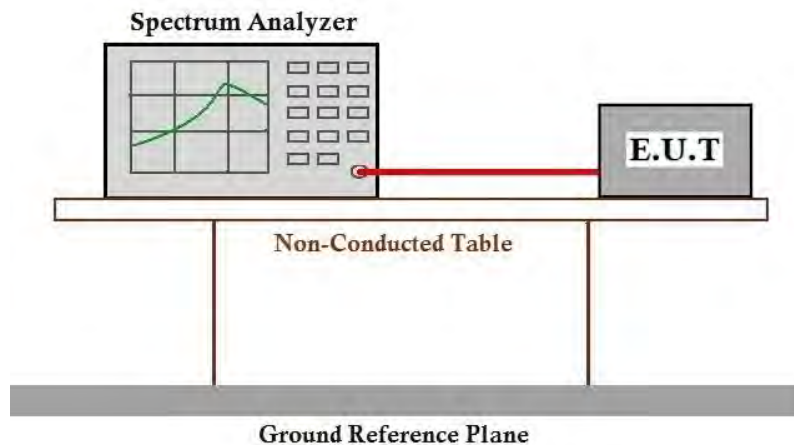

7.2.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.3 Carrier Frequencies Separation

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)

Test Method: ANSI C63.10 (2013) Section 7.8.2

Limit:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.3.1 E.U.T. Operation


Operating Environment:

Temperature: 25.9 °C Humidity: 70.4 % RH Atmospheric Pressure: 1010 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

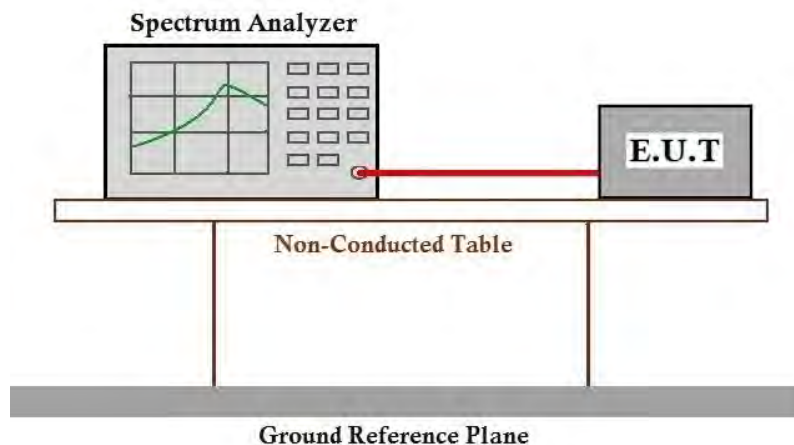

7.3.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.4 Hopping Channel Number

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)

Test Method: ANSI C63.10 (2013) Section 7.8.3

Limit:

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

7.4.1 E.U.T. Operation


Operating Environment:

Temperature: 26.0 °C Humidity: 70.5 % RH Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

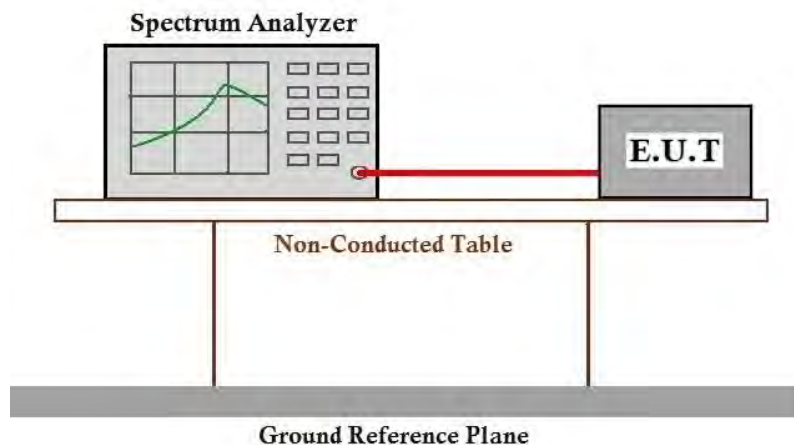

7.4.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.5 Dwell Time

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)

Test Method: ANSI C63.10 (2013) Section 7.8.4

Limit:

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 25.9 °C


Humidity: 70.5 % RH

Atmospheric Pressure: 1010 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

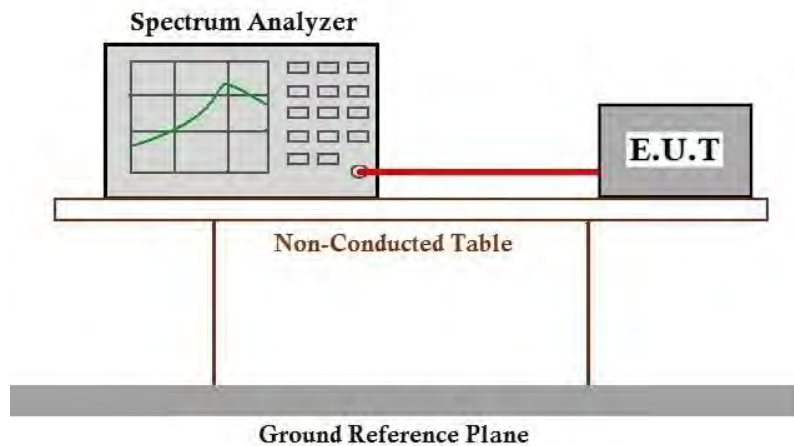

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.6 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 7.8.6

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.6.1 E.U.T. Operation


Operating Environment:

Temperature: 26.0 °C Humidity: 70.5 % RH Atmospheric Pressure: 1010 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.6.3 Test Setup Diagram

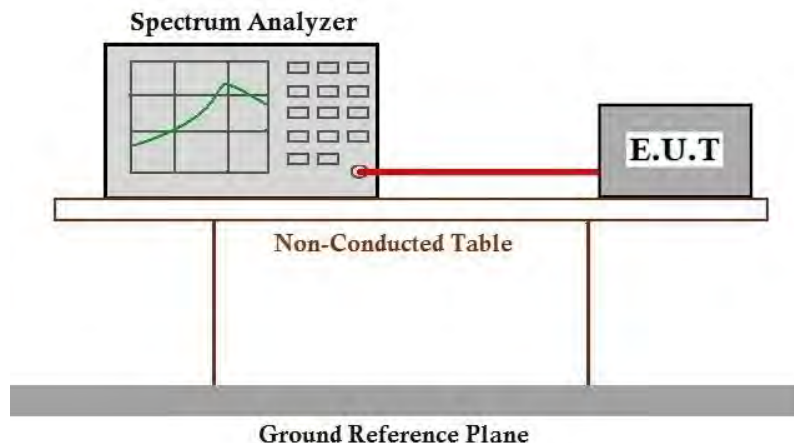

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 7.8.8

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.7.1 E.U.T. Operation


Operating Environment:

Temperature: 26.0 °C Humidity: 70.5 % RH Atmospheric Pressure: 1010 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

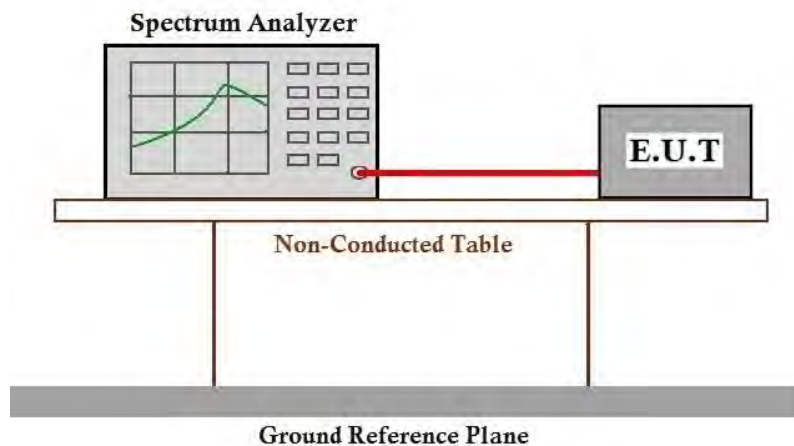

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 26.0 °C


Humidity: 70.5 % RH

Atmospheric Pressure: 1010 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

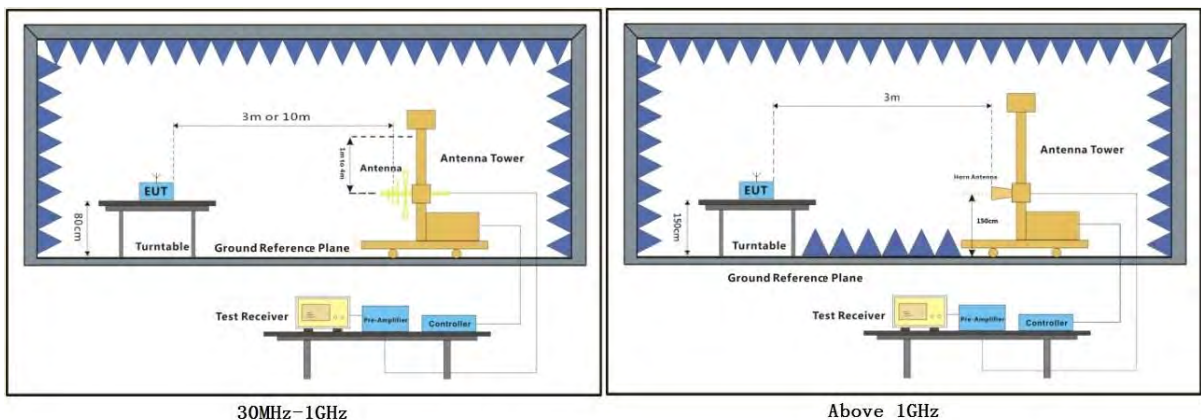

7.8.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $Level = Read\ Level + Cable\ Loss + Antenna\ Factor - Preamp\ Factor$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 22 of 112

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:Low

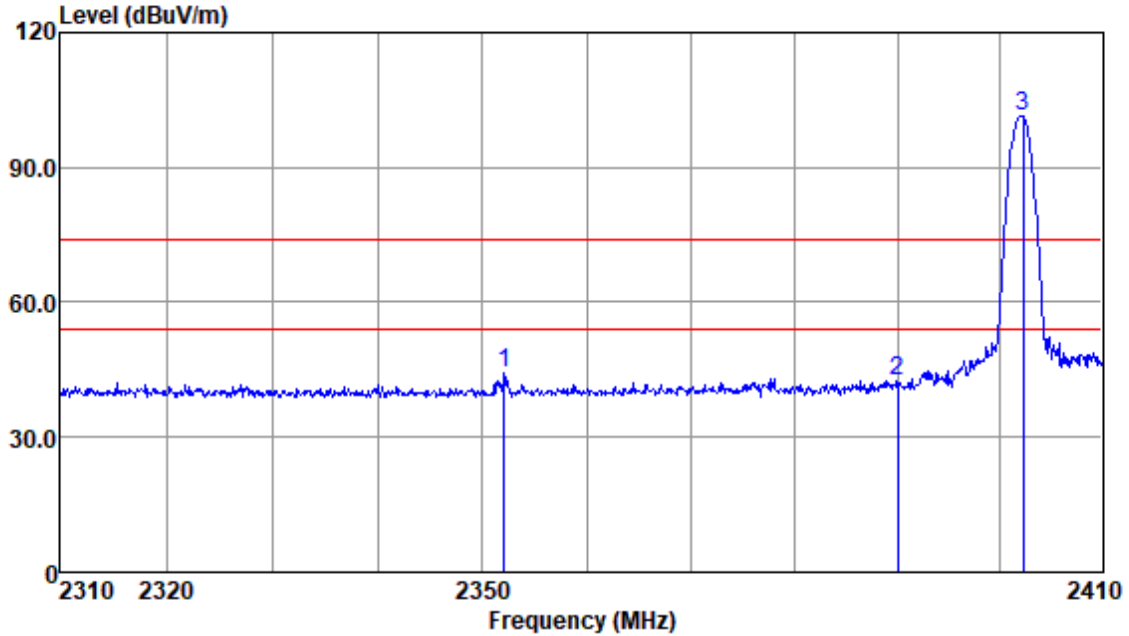

Antenna Polarity :HORIZONTAL
 EUT/Project :1076ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2352.08	47.61	28.61	3.29	35.15	44.36	74.00	-29.64	Peak
2390.00	45.60	28.80	3.34	35.18	42.56	74.00	-31.44	Peak
2402.25	104.33	28.85	3.34	35.19	101.33	74.00	27.33	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 23 of 112

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:Low

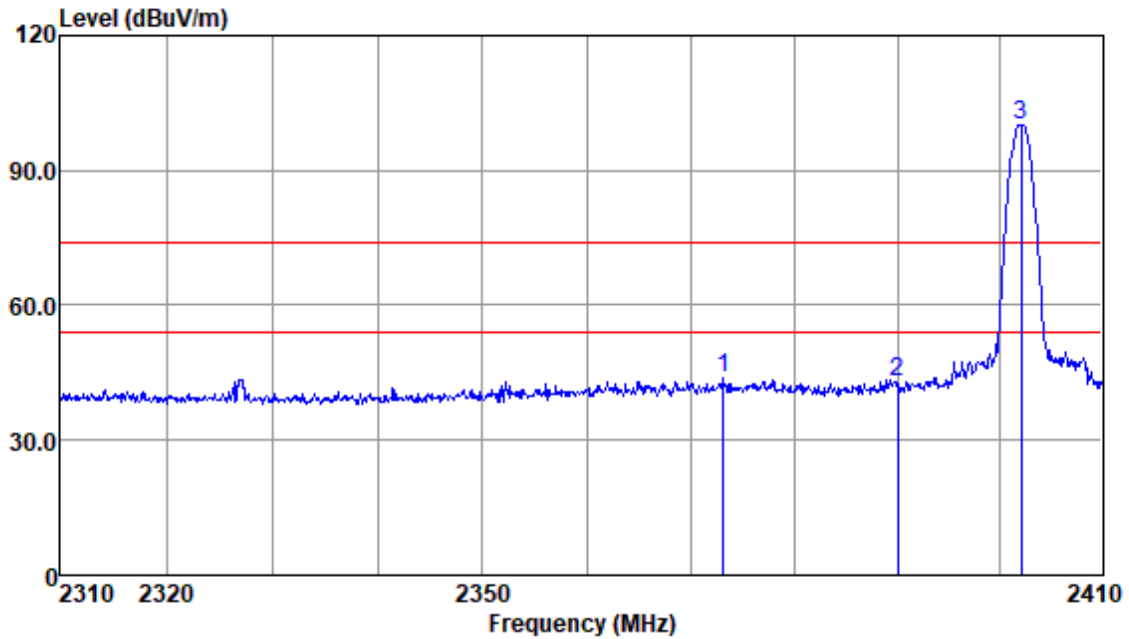

Antenna Polarity :VERTICAL
EUT/Project :1076ME

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2373.11	47.08	28.71	3.32	35.17	43.94	74.00	-30.06	Peak
2390.00	46.10	28.80	3.34	35.18	43.06	74.00	-30.94	Peak
2402.05	103.18	28.85	3.34	35.19	100.18	74.00	26.18	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 24 of 112

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

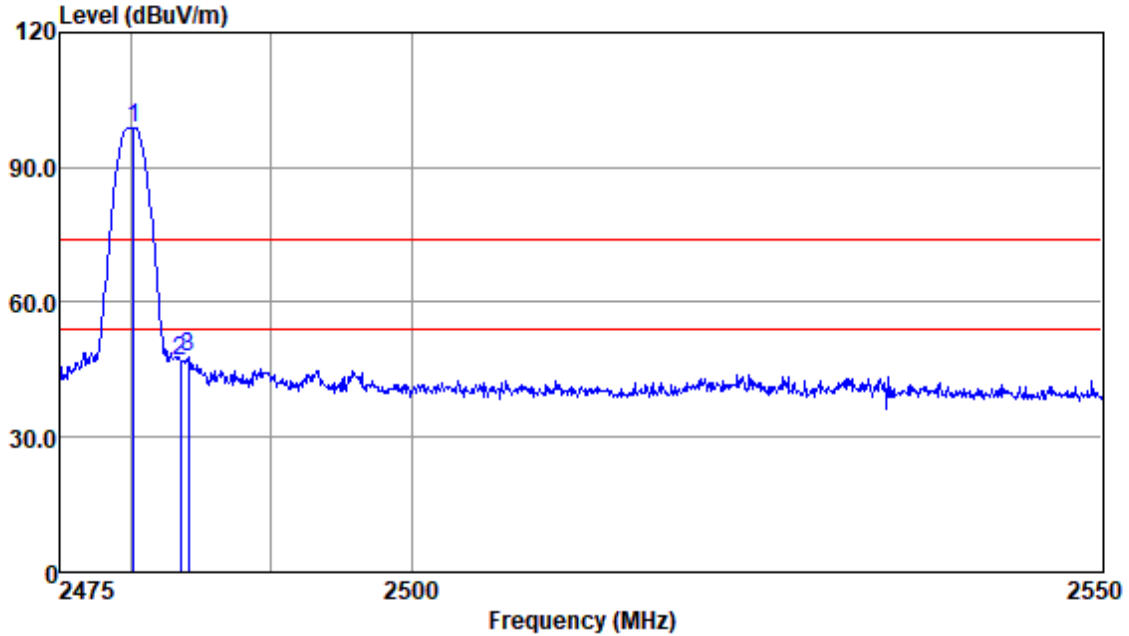

Antenna Polarity :HORIZONTAL
EUT/Project :1076ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2480.18	101.73	29.08	3.40	35.25	98.96	74.00	24.96	Peak
2483.50	49.53	29.09	3.36	35.26	46.72	74.00	-27.28	Peak
2484.11	50.54	29.09	3.36	35.26	47.73	74.00	-26.27	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 25 of 112

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:High

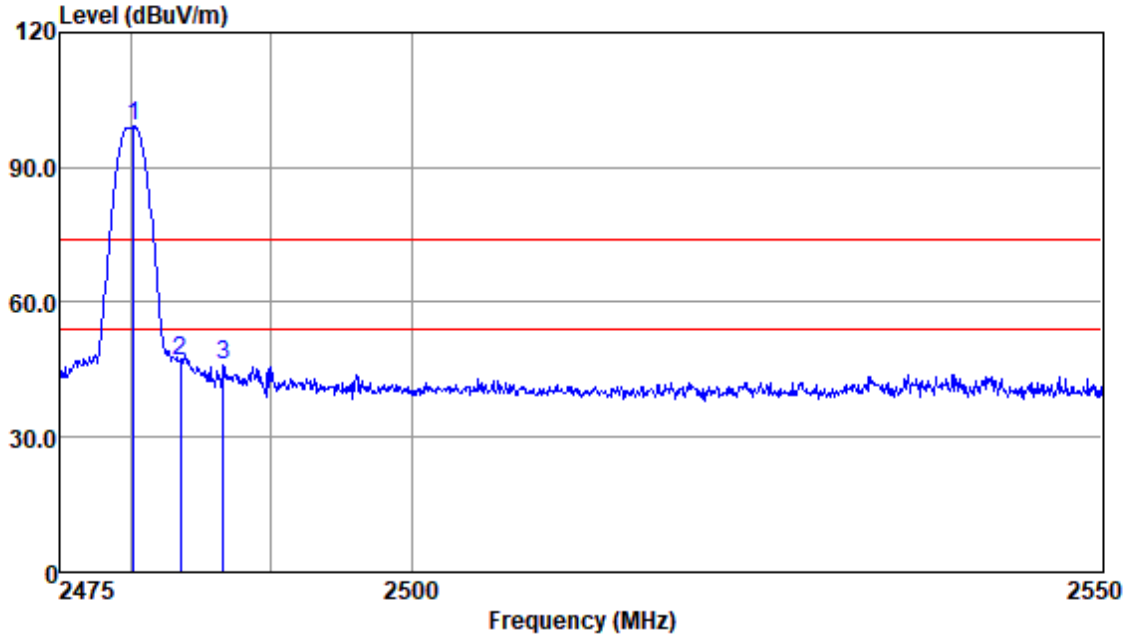


Antenna Polarity :VERTICAL
EUT/Project :1076ME

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2480.18	101.75	29.08	3.40	35.25	98.98	74.00	24.98	Peak
2483.50	49.83	29.09	3.36	35.26	47.02	74.00	-26.98	Peak
2486.55	48.76	29.09	3.36	35.26	45.95	74.00	-28.05	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation: $\pi/4$ DQPSK; Channel: Low

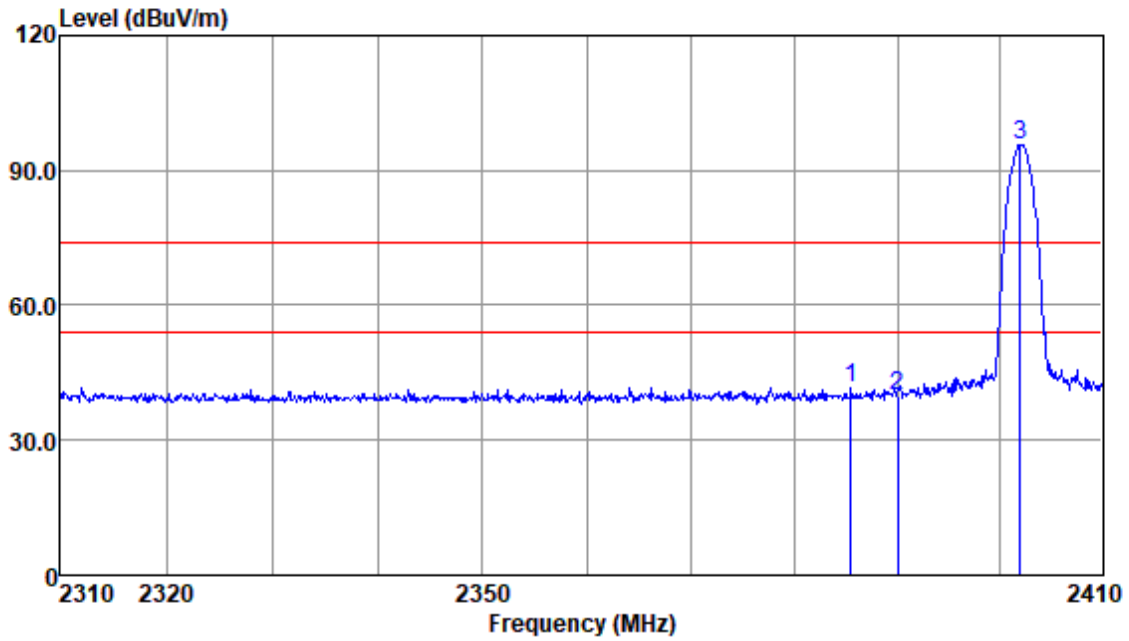


Antenna Polarity :HORIZONTAL
 EUT/Project :1076ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2385.51	44.77	28.80	3.34	35.18	41.73	74.00	-32.27	Peak
2390.00	42.71	28.80	3.34	35.18	39.67	74.00	-34.33	Peak
2401.95	98.86	28.85	3.34	35.19	95.86	74.00	21.86	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation: $\pi/4$ DQPSK; Channel: Low

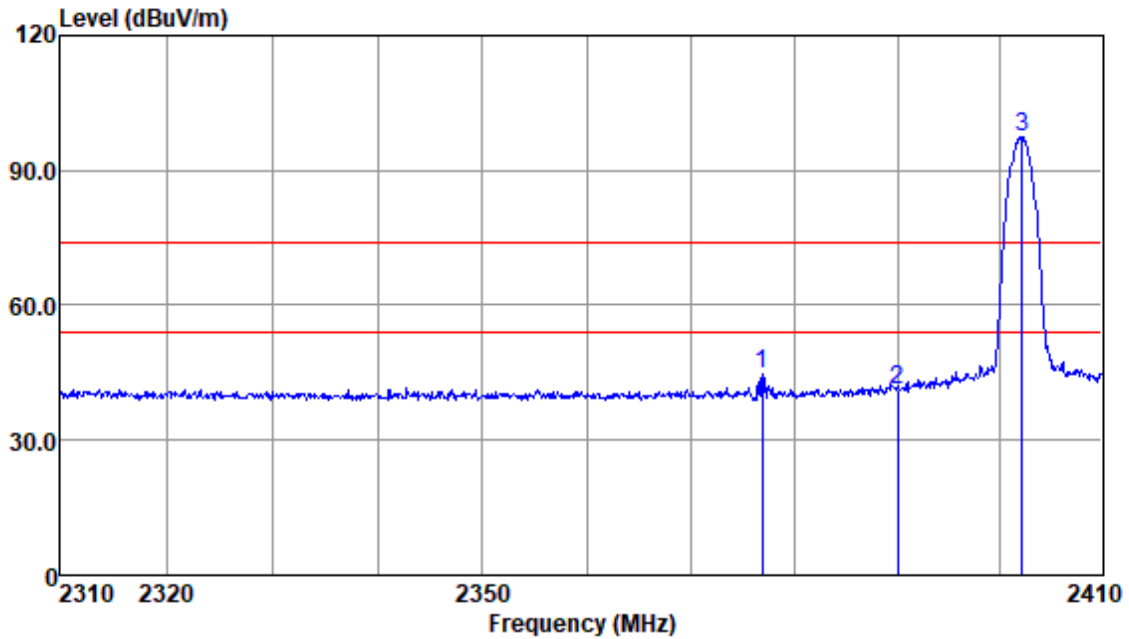

Antenna Polarity :VERTICAL
EUT/Project :1076ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2376.93	47.82	28.76	3.33	35.17	44.74	74.00	-29.26	Peak
2390.00	44.09	28.80	3.34	35.18	41.05	74.00	-32.95	Peak
2402.15	100.30	28.85	3.34	35.19	97.30	74.00	23.30	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 28 of 112

Test Mode: 00; Polarity: Horizontal; Modulation: $\pi/4$ DQPSK; Channel: High

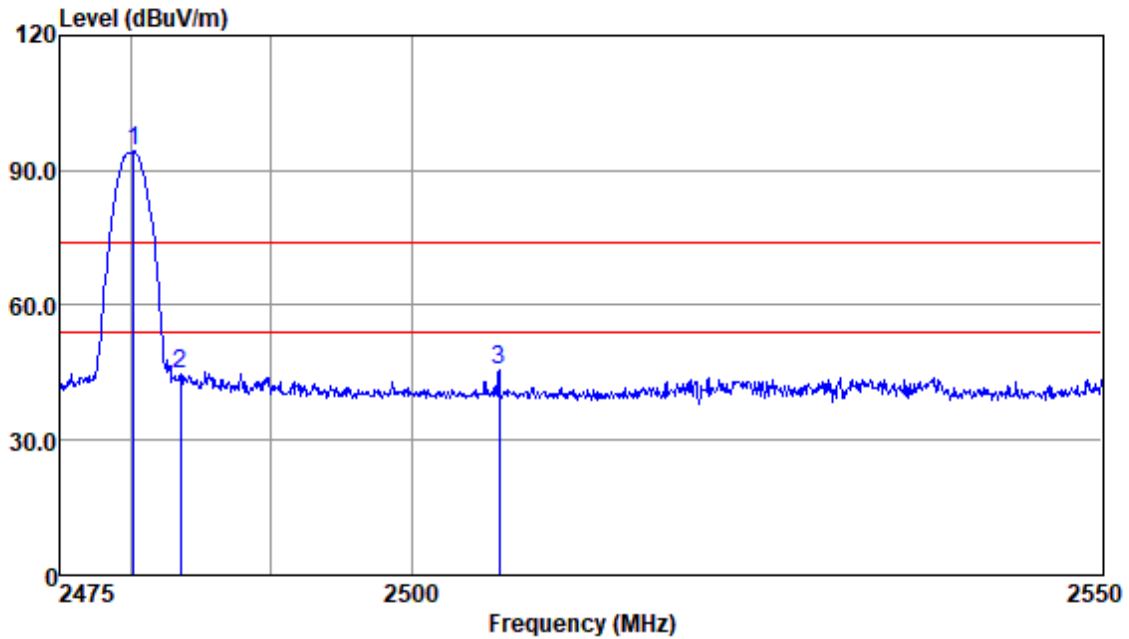


Antenna Polarity :HORIZONTAL
EUT/Project :1076ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2480.18	97.01	29.08	3.40	35.25	94.24	74.00	20.24	Peak
2483.50	47.68	29.09	3.36	35.26	44.87	74.00	-29.13	Peak
2506.30	48.32	29.13	3.39	35.28	45.56	74.00	-28.44	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation: $\pi/4$ DQPSK; Channel: High

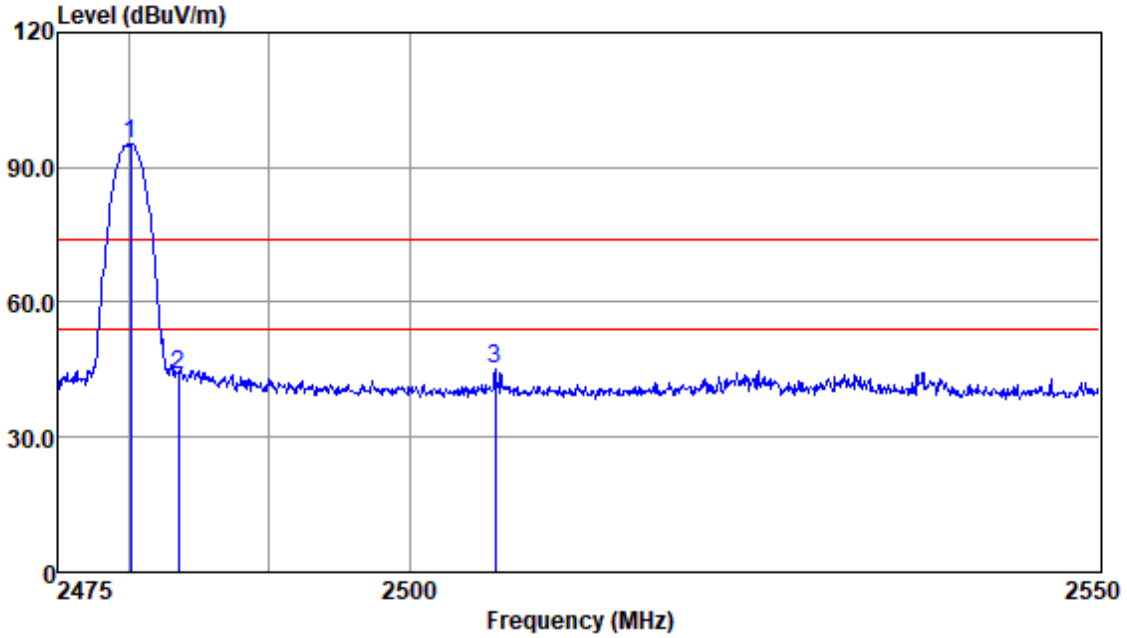

Antenna Polarity :VERTICAL
 EUT/Project :1076ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2480.10	98.00	29.08	3.40	35.25	95.23	74.00	21.23	Peak
2483.50	46.48	29.09	3.36	35.26	43.67	74.00	-30.33	Peak
2506.15	47.73	29.13	3.39	35.28	44.97	74.00	-29.03	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 30 of 112

Test Mode: 00; Polarity: Horizontal; Modulation: 8DPSK; Channel: Low

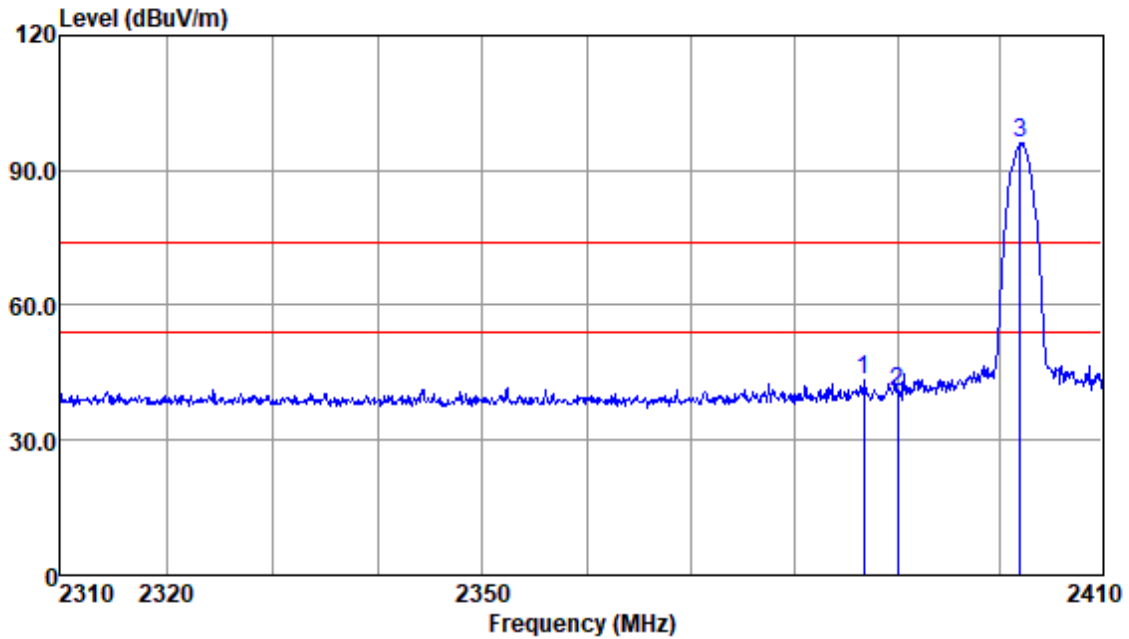


Antenna Polarity : HORIZONTAL
 EUT/Project : 1076ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2386.72	46.22	28.80	3.34	35.18	43.18	74.00	-30.82	Peak
2390.00	43.66	28.80	3.34	35.18	40.62	74.00	-33.38	Peak
2401.95	99.11	28.85	3.34	35.19	96.11	74.00	22.11	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:8DPSK; Channel:Low

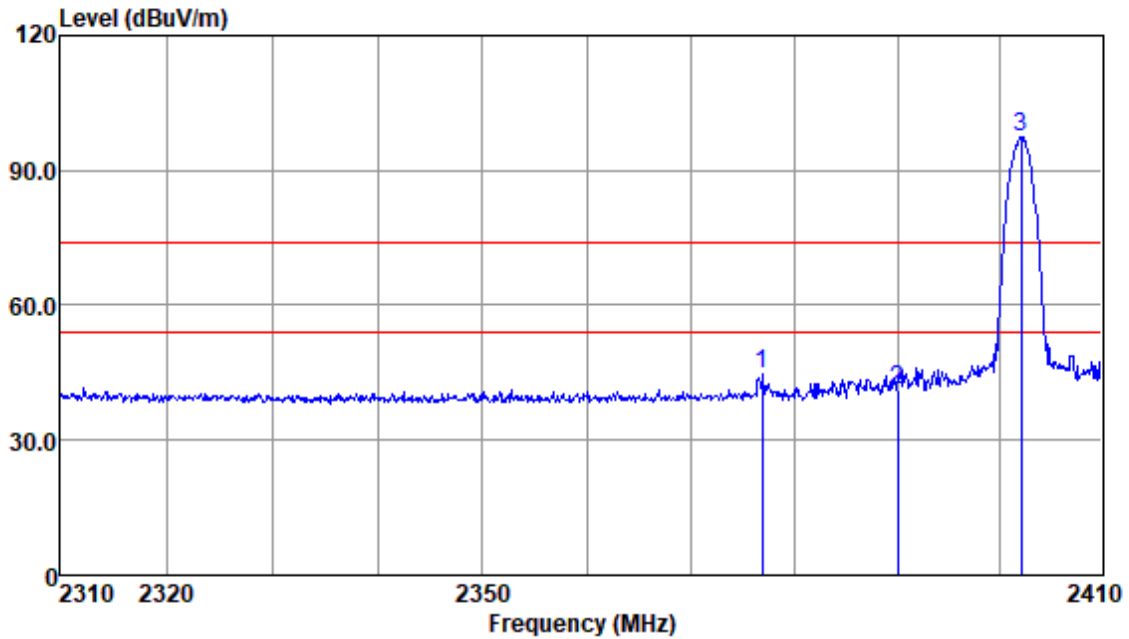

Antenna Polarity :VERTICAL
EUT/Project :1076ME

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2376.93	47.97	28.76	3.33	35.17	44.89	74.00	-29.11	Peak
2390.00	44.25	28.80	3.34	35.18	41.21	74.00	-32.79	Peak
2402.05	100.42	28.85	3.34	35.19	97.42	74.00	23.42	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 32 of 112

Test Mode: 00; Polarity: Horizontal; Modulation: 8DPSK; Channel: High

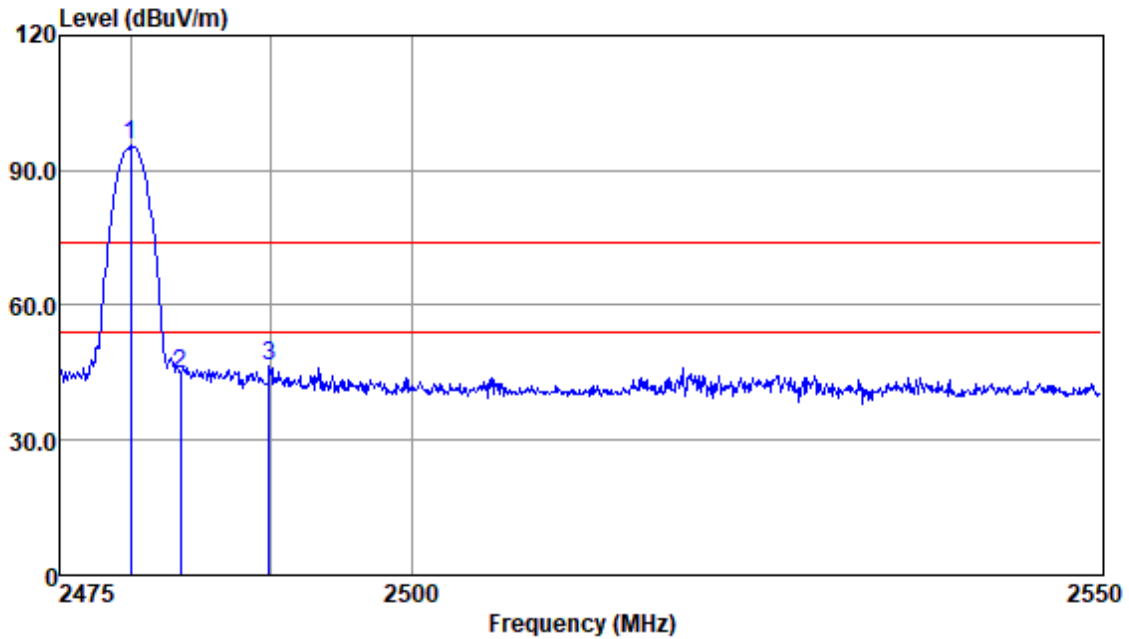

Antenna Polarity :HORIZONTAL
 EUT/Project :1076ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2479.96	98.33	29.08	3.40	35.25	95.56	74.00	21.56	Peak
2483.50	47.56	29.09	3.36	35.26	44.75	74.00	-29.25	Peak
2489.82	49.35	29.10	3.33	35.26	46.52	74.00	-27.48	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 33 of 112

Test Mode: 00; Polarity: Vertical; Modulation:8DPSK; Channel:High

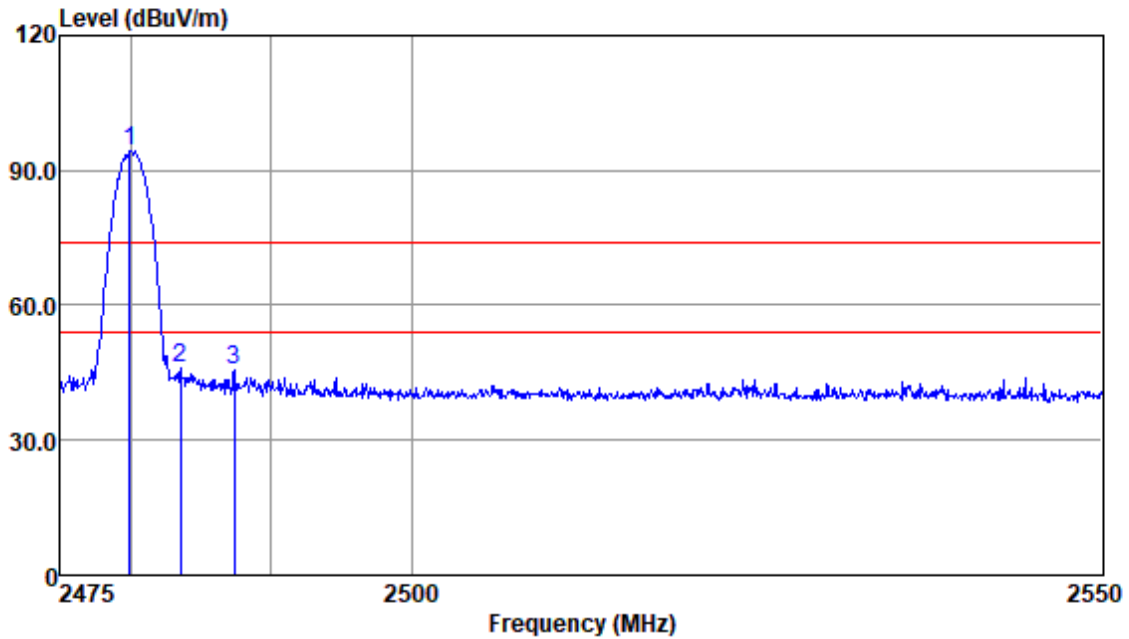

Antenna Polarity :VERTICAL
EUT/Project :1076ME

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2479.88	97.09	29.08	3.40	35.25	94.32	74.00	20.32	Peak
2483.50	48.82	29.09	3.36	35.26	46.01	74.00	-27.99	Peak
2487.37	48.33	29.09	3.36	35.26	45.52	74.00	-28.48	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

7.9 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.9.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.9.3 Test Setup Diagram

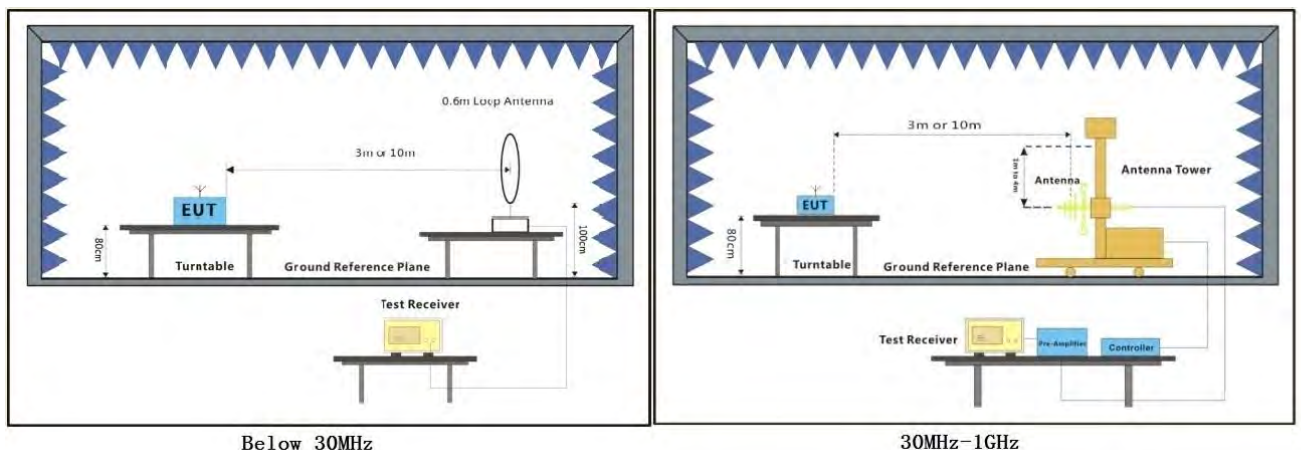


7.9.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
- 2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test Mode: 00; Polarity: Horizontal

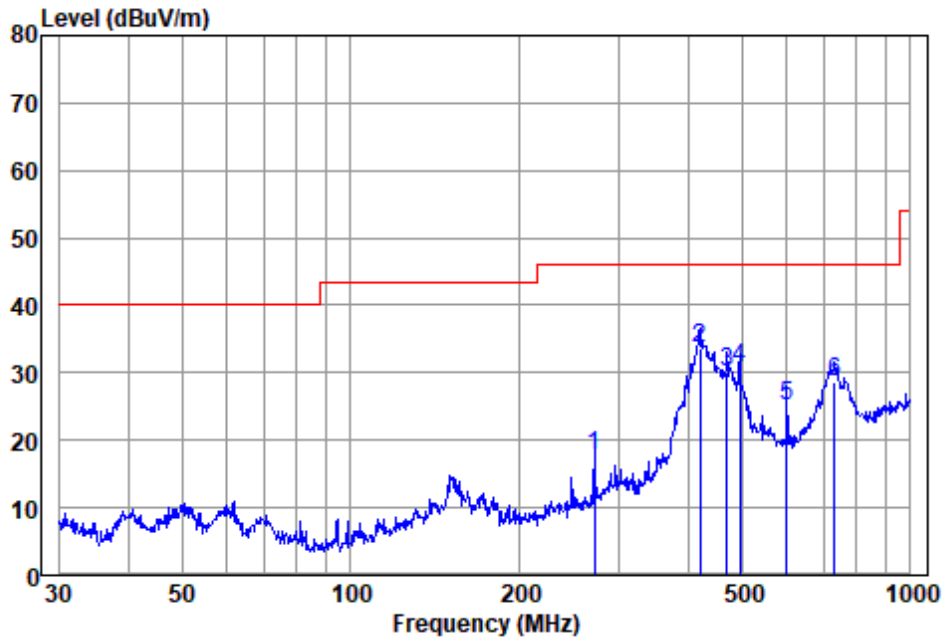

Antenna Polarity :HORIZONTAL
 EUT/Project :1076ME
 Test mode :00

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	272.278	34.44	12.40	3.58	32.80	17.62	46.00	-28.38	QP
2	420.580	45.64	16.20	4.53	32.76	33.61	46.00	-12.39	QP
3	470.523	40.41	17.50	4.79	32.70	30.00	46.00	-16.00	QP
4	495.934	40.69	17.92	4.90	32.70	30.81	46.00	-15.19	QP
5	601.427	32.32	20.02	5.44	32.69	25.09	46.00	-20.91	QP
6	731.920	33.24	21.88	6.09	32.59	28.62	46.00	-17.38	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 37 of 112

Test Mode: 00; Polarity: Vertical

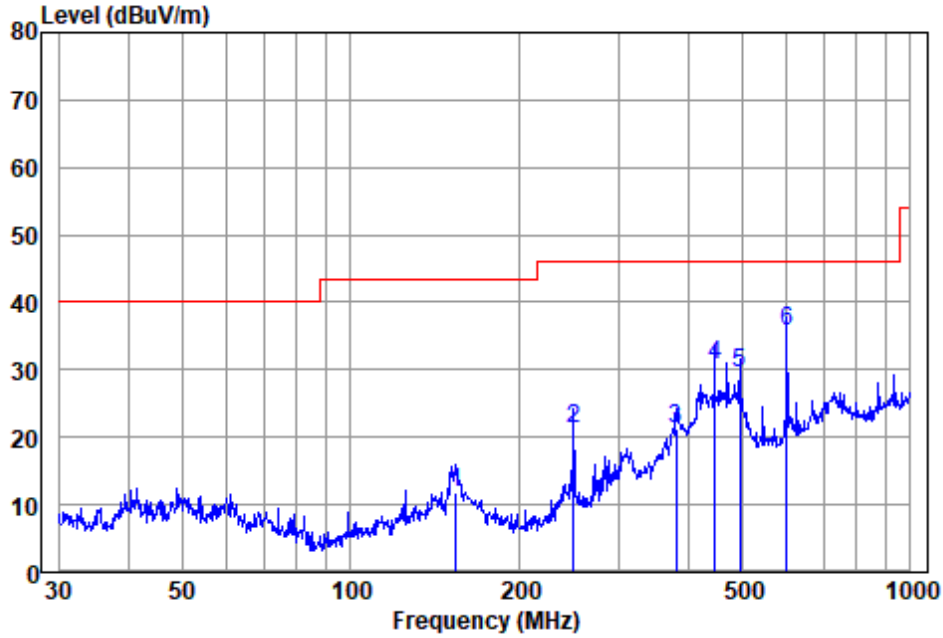

Antenna Polarity :VERTICAL
 EUT/Project :1076ME
 Test mode :00

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	154.279	28.51	13.80	2.62	33.00	11.93	43.50	-31.57	QP
2	250.301	39.08	11.70	3.35	32.80	21.33	46.00	-24.67	QP
3	381.249	34.34	15.36	4.18	32.76	21.12	46.00	-24.88	QP
4	446.414	41.51	17.13	4.70	32.71	30.63	46.00	-15.37	QP
5	495.934	39.40	17.92	4.90	32.70	29.52	46.00	-16.48	QP
6	601.427	42.99	20.02	5.44	32.69	35.76	46.00	-10.24	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

7.10 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 26.0 °C


Humidity: 70.4 % RH

Atmospheric Pressure: 1010 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.10.3 Test Setup Diagram

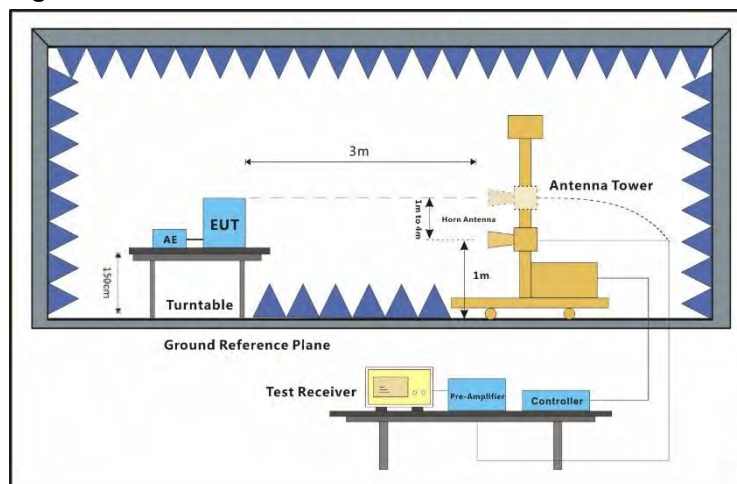

7.10.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1. $Level = Read\ Level + Cable\ Loss + Antenna\ Factor - Preamp\ Factor$
- 2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.




Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 40 of 112

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:Low

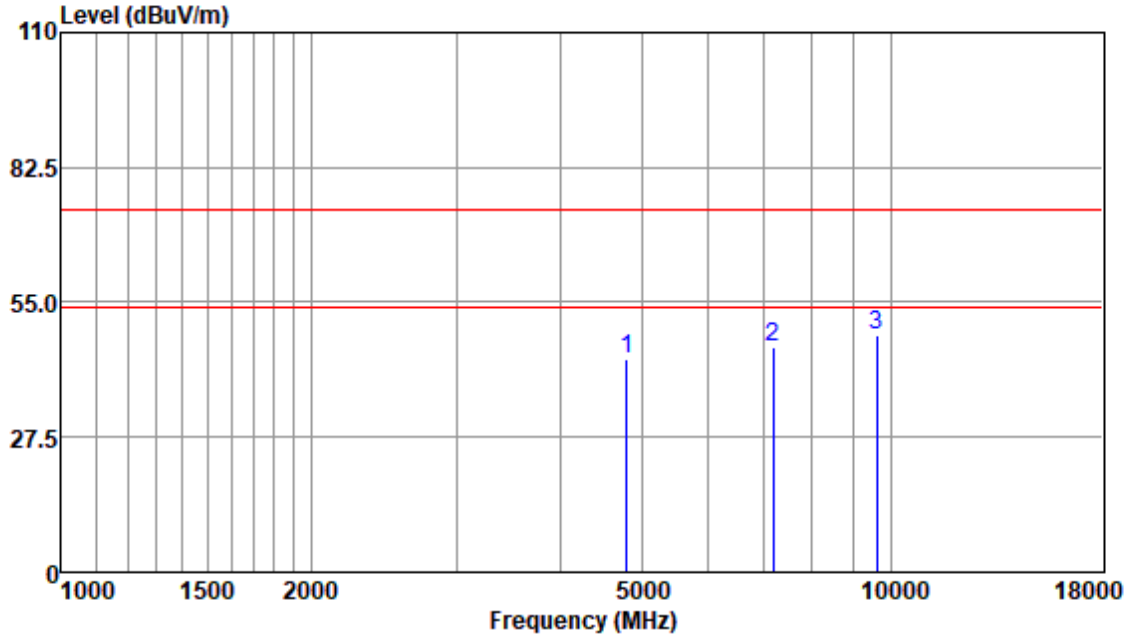

Antenna Polarity :HORIZONTAL
EUT/Project :1076ME

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4804.11	41.56	33.57	5.22	36.79	43.56	74.00	-30.44	Peak
7206.31	37.93	36.24	7.13	35.53	45.77	74.00	-28.23	Peak
9608.43	35.33	37.75	8.66	33.58	48.16	74.00	-25.84	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 41 of 112

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:Low

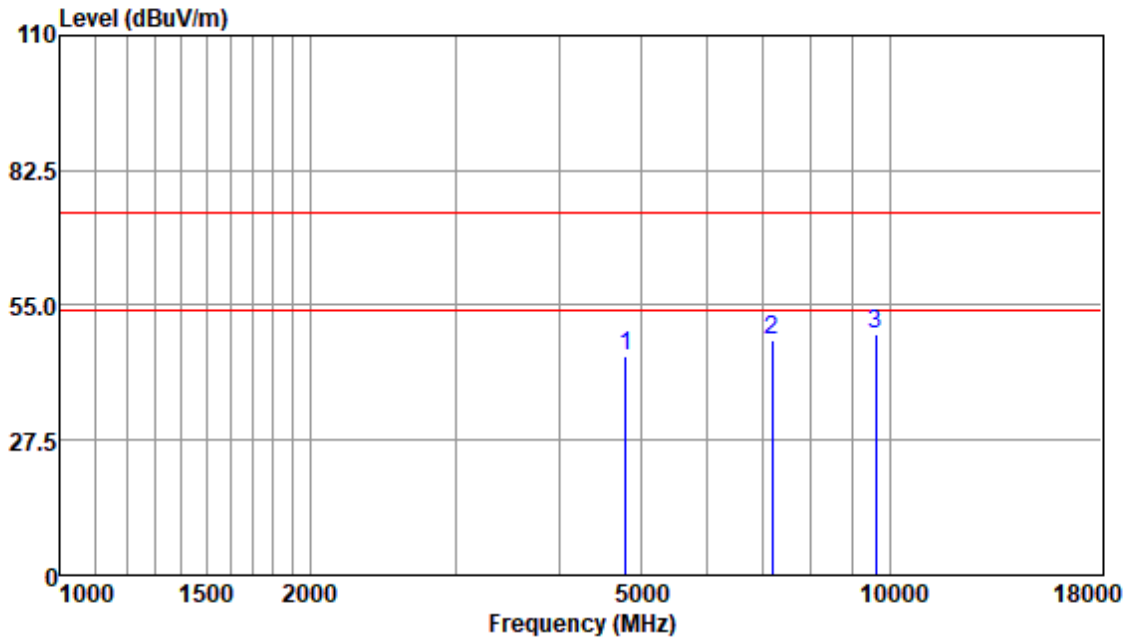

Antenna Polarity :VERTICAL
EUT/Project :1076ME

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4804.11	42.55	33.57	5.22	36.79	44.55	74.00	-29.45	Peak
7206.31	40.14	36.24	7.13	35.53	47.98	74.00	-26.02	Peak
9608.43	36.49	37.75	8.66	33.58	49.32	74.00	-24.68	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 42 of 112

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:middle

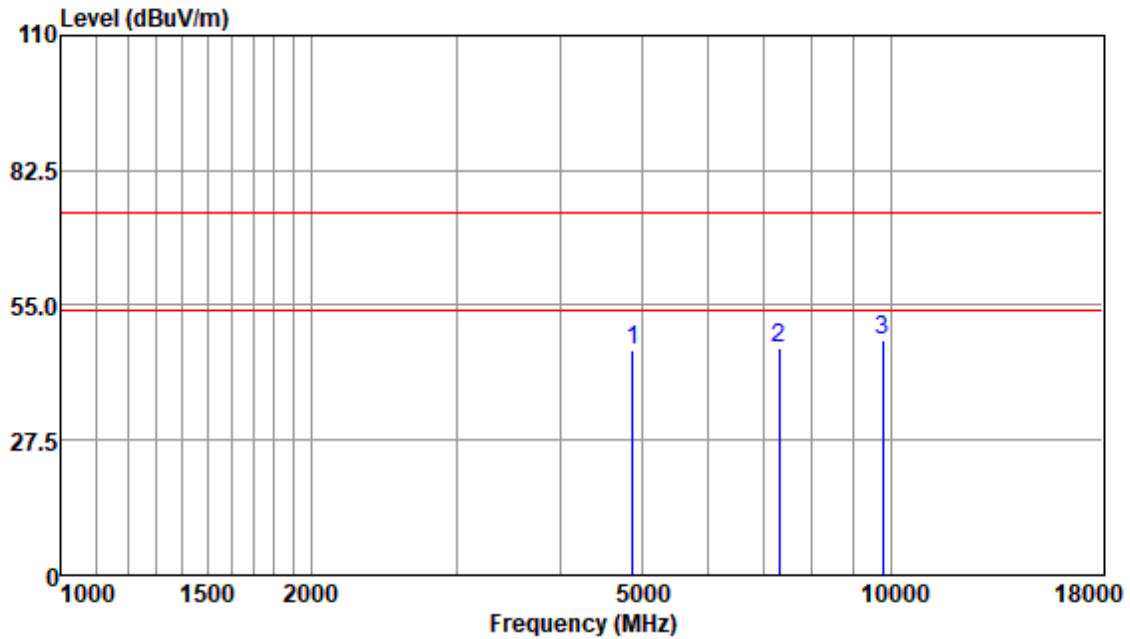


Antenna Polarity :HORIZONTAL
 EUT/Project :1076ME

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4882.15	43.79	33.66	5.36	36.81	46.00	74.00	-28.00	Peak
7323.27	38.07	36.33	7.33	35.42	46.31	74.00	-27.69	Peak
9764.37	34.87	37.54	8.84	33.50	47.75	74.00	-26.25	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:middle

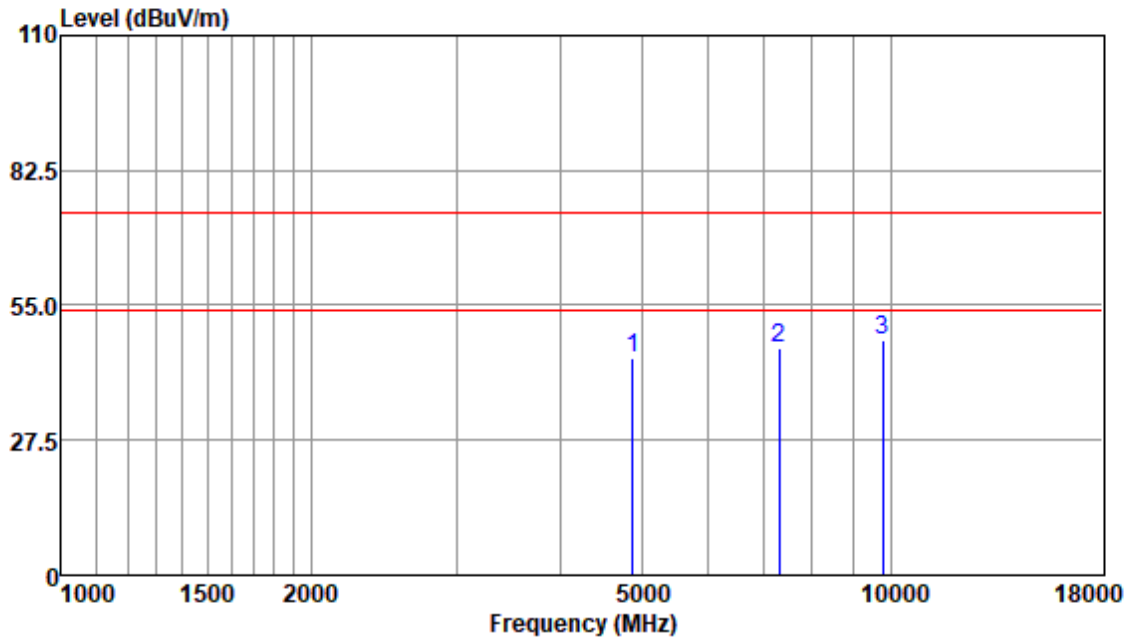

Antenna Polarity :VERTICAL
EUT/Project :1076ME

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4882.15	41.89	33.66	5.36	36.81	44.10	74.00	-29.90	Peak
7323.27	38.18	36.33	7.33	35.42	46.42	74.00	-27.58	Peak
9764.37	34.84	37.54	8.84	33.50	47.72	74.00	-26.28	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 44 of 112

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

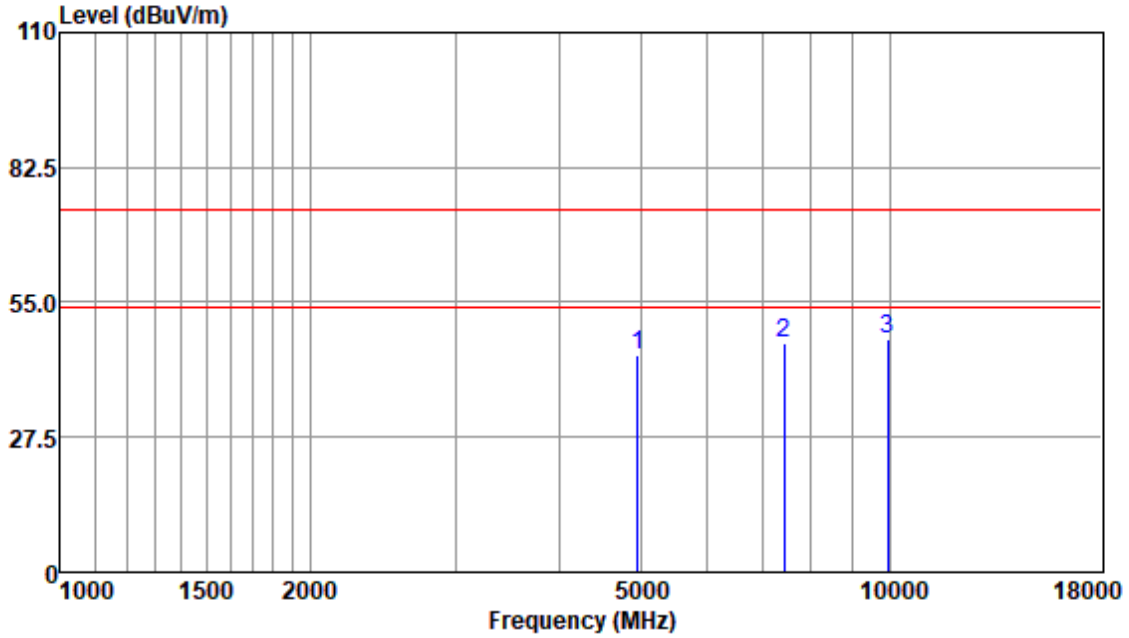

Antenna Polarity :HORIZONTAL
EUT/Project :1076ME

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4960.31	42.08	33.65	5.46	36.83	44.36	74.00	-29.64	Peak
7440.91	38.48	36.31	7.43	35.34	46.88	74.00	-27.12	Peak
9920.99	34.41	37.62	8.69	33.41	47.31	74.00	-26.69	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 45 of 112

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:High

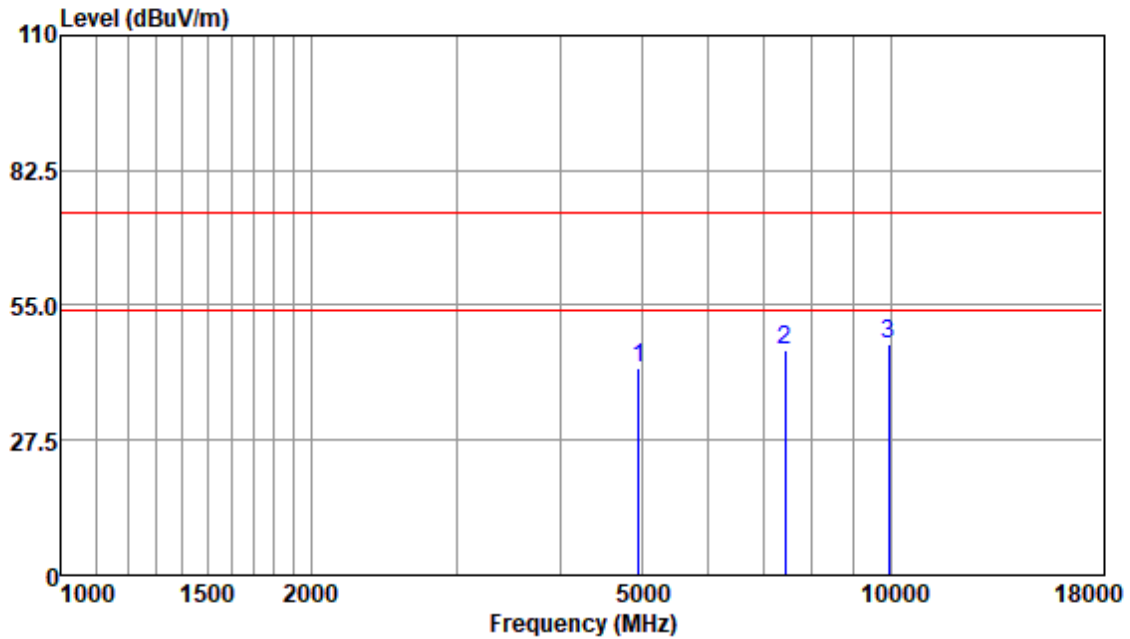

Antenna Polarity :VERTICAL
 EUT/Project :1076ME

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4960.31	39.82	33.65	5.46	36.83	42.10	74.00	-31.90	Peak
7440.91	37.51	36.31	7.43	35.34	45.91	74.00	-28.09	Peak
9920.99	34.10	37.62	8.69	33.41	47.00	74.00	-27.00	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 46 of 112

Test Mode: 00; Polarity: Horizontal; Modulation: $\pi/4$ DQPSK; Channel: Low

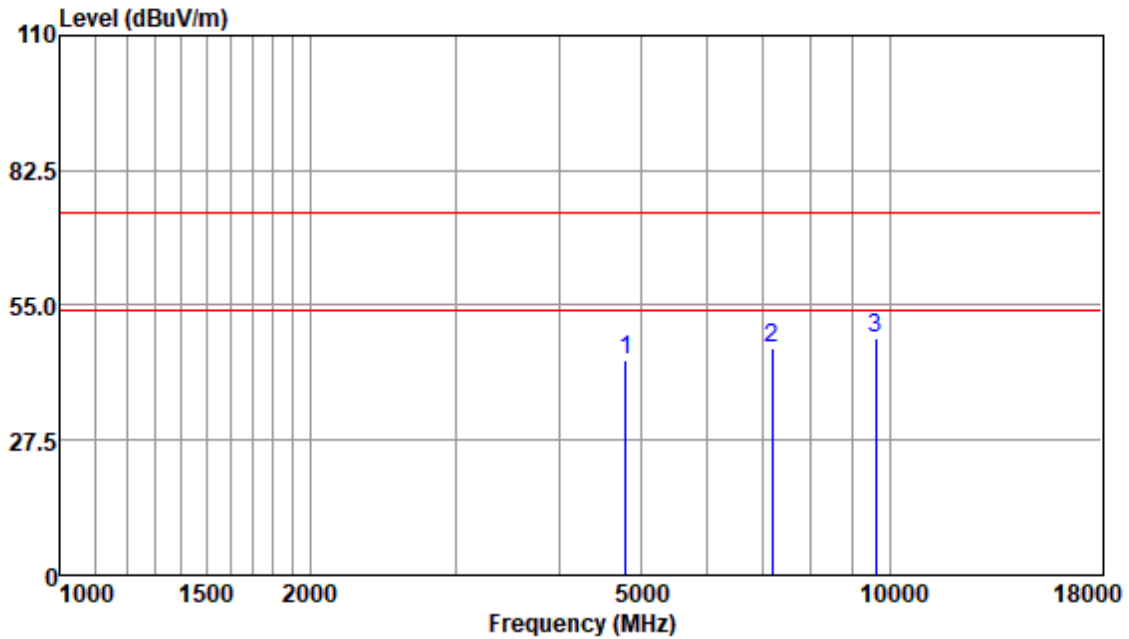

Antenna Polarity : HORIZONTAL
 EUT/Project : 1076ME

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4804.11	41.82	33.57	5.22	36.79	43.82	74.00	-30.18	Peak
7206.31	38.60	36.24	7.13	35.53	46.44	74.00	-27.56	Peak
9608.43	35.29	37.75	8.66	33.58	48.12	74.00	-25.88	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 47 of 112

Test Mode: 00; Polarity: Vertical; Modulation: $\pi/4$ DQPSK; Channel: Low

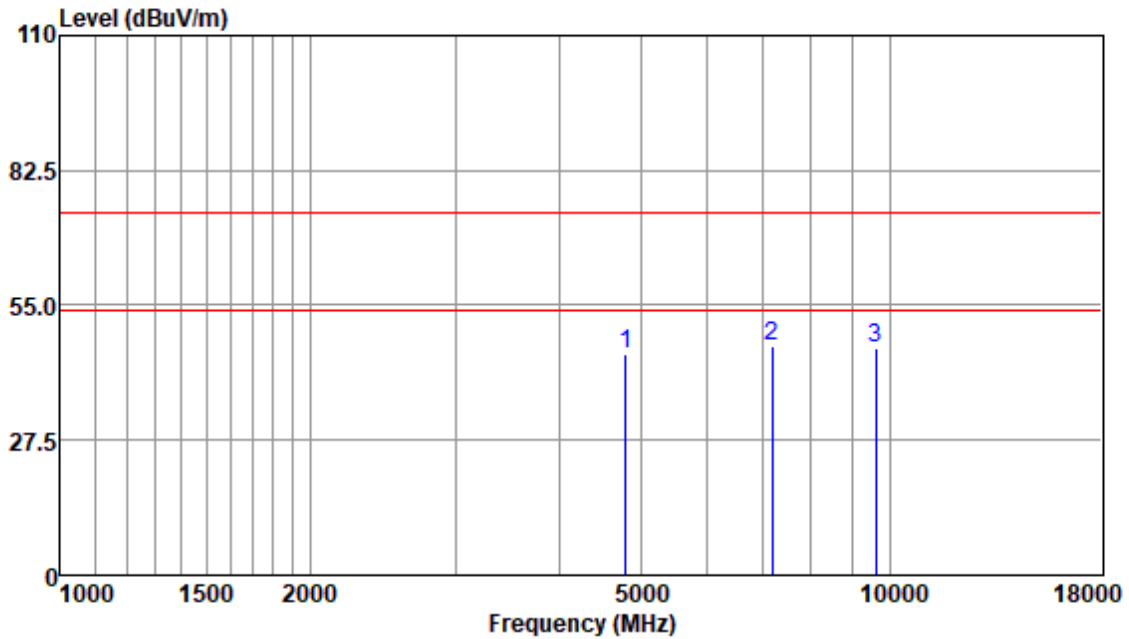

Antenna Polarity : VERTICAL
 EUT/Project : 1076ME

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4804.11	42.96	33.57	5.22	36.79	44.96	74.00	-29.04	Peak
7206.31	38.67	36.24	7.13	35.53	46.51	74.00	-27.49	Peak
9608.43	33.34	37.75	8.66	33.58	46.17	74.00	-27.83	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 48 of 112

Test Mode: 00; Polarity: Horizontal; Modulation: $\pi/4$ DQPSK; Channel: middle

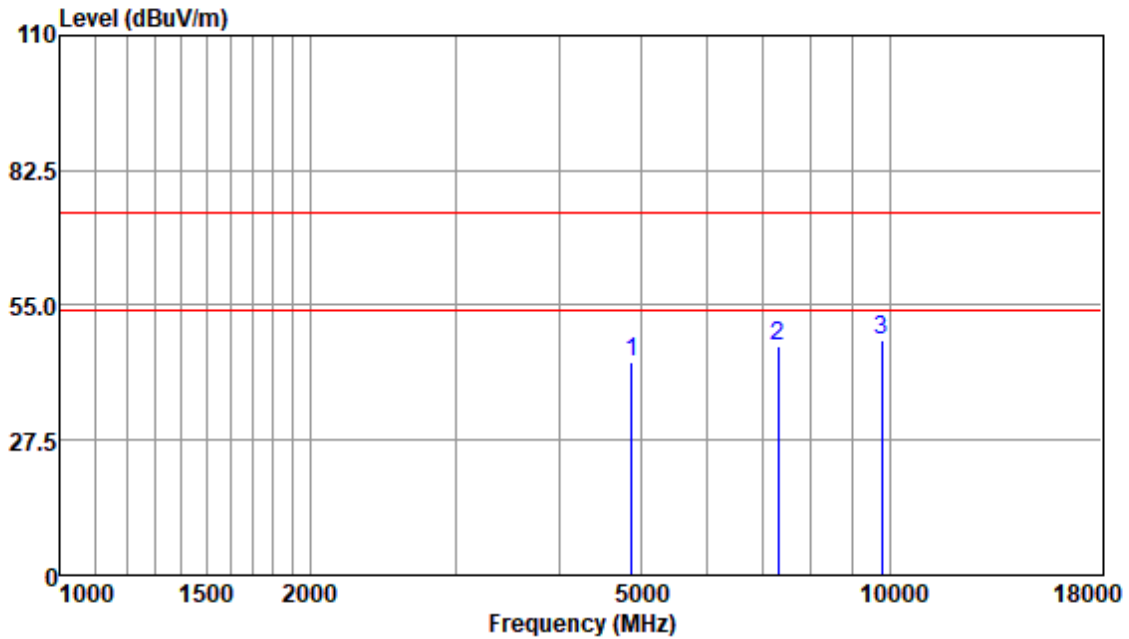

Antenna Polarity :HORIZONTAL
EUT/Project :1076ME

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4882.15	41.11	33.66	5.36	36.81	43.32	74.00	-30.68	Peak
7323.27	38.41	36.33	7.33	35.42	46.65	74.00	-27.35	Peak
9764.37	35.02	37.54	8.84	33.50	47.90	74.00	-26.10	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 49 of 112

Test Mode: 00; Polarity: Vertical; Modulation: $\pi/4$ DQPSK; Channel: middle

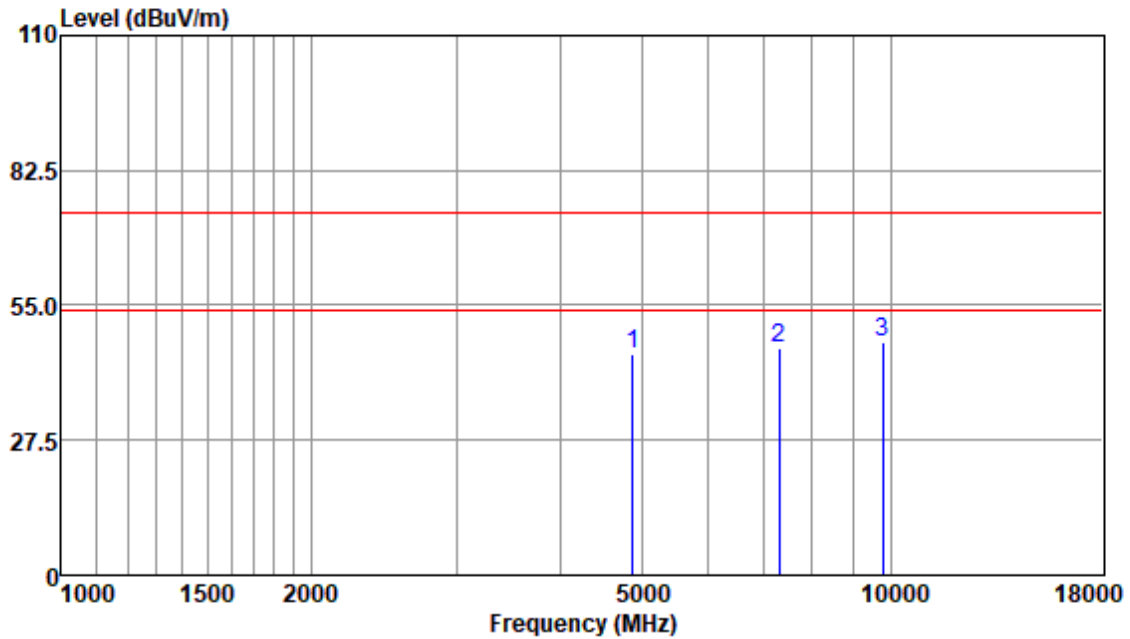

Antenna Polarity :VERTICAL
EUT/Project :1076ME

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4882.15	42.75	33.66	5.36	36.81	44.96	74.00	-29.04	Peak
7323.27	37.93	36.33	7.33	35.42	46.17	74.00	-27.83	Peak
9764.37	34.47	37.54	8.84	33.50	47.35	74.00	-26.65	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 50 of 112

Test Mode: 00; Polarity: Horizontal; Modulation: $\pi/4$ DQPSK; Channel: High

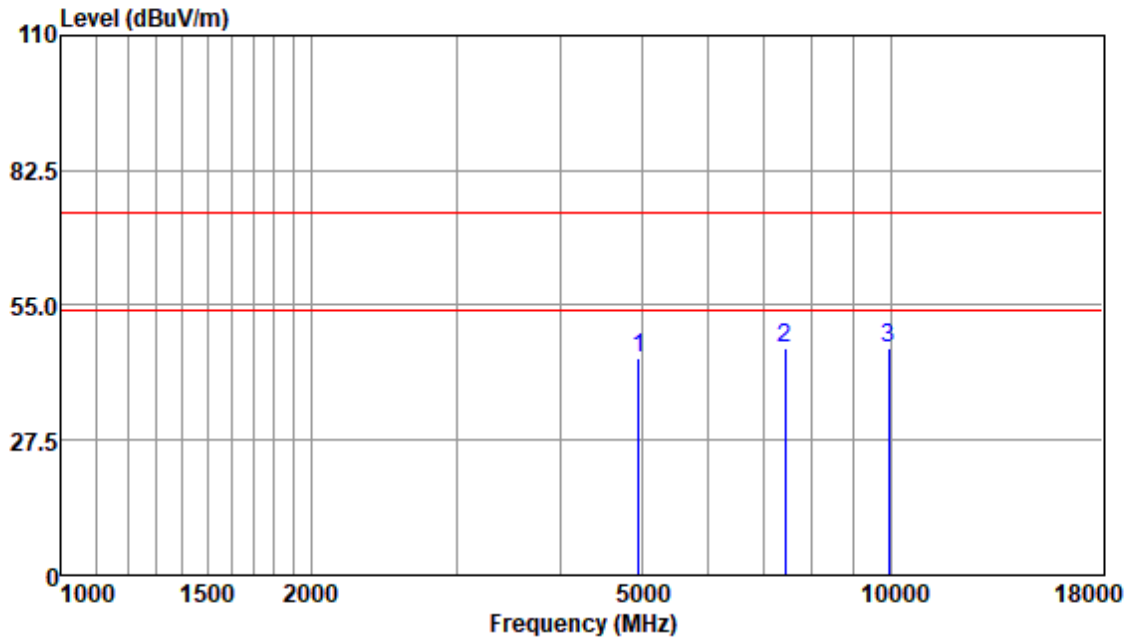

Antenna Polarity :HORIZONTAL
EUT/Project :1076ME

Read Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4960.31	41.95	33.65	5.46	36.83	44.23	74.00	-29.77	Peak
7440.91	38.01	36.31	7.43	35.34	46.41	74.00	-27.59	Peak
9920.99	33.46	37.62	8.69	33.41	46.36	74.00	-27.64	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor




Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 51 of 112

Test Mode: 00; Polarity: Vertical; Modulation: $\pi/4$ DQPSK; Channel: High

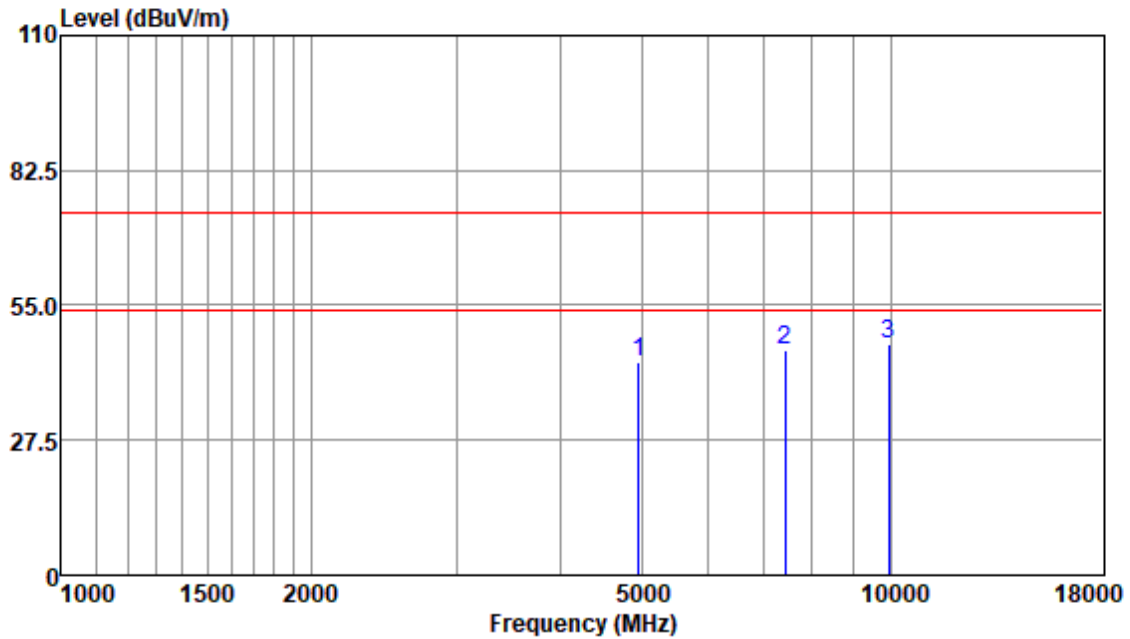

Antenna Polarity : VERTICAL
EUT/Project : 1076ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4960.31	41.07	33.65	5.46	36.83	43.35	74.00	-30.65	Peak
7440.91	37.46	36.31	7.43	35.34	45.86	74.00	-28.14	Peak
9920.99	34.18	37.62	8.69	33.41	47.08	74.00	-26.92	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 52 of 112

Test Mode: 00; Polarity: Horizontal; Modulation:8DPSK; Channel:Low

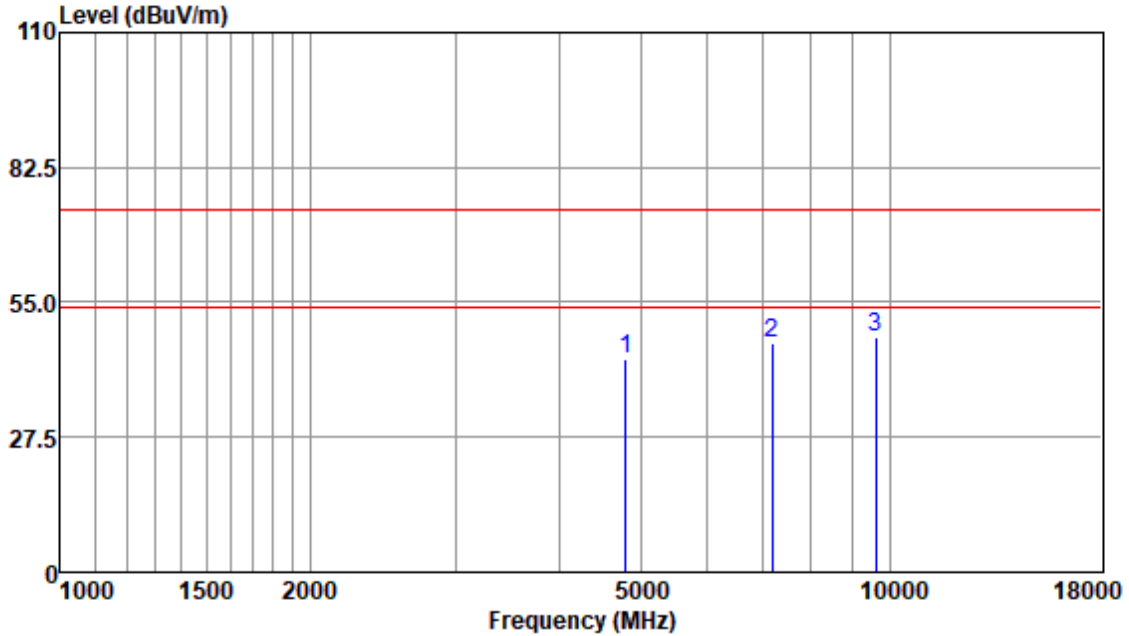

Antenna Polarity :HORIZONTAL
EUT/Project :1076ME

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4804.11	41.52	33.57	5.22	36.79	43.52	74.00	-30.48	Peak
7206.31	38.66	36.24	7.13	35.53	46.50	74.00	-27.50	Peak
9608.43	35.06	37.75	8.66	33.58	47.89	74.00	-26.11	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 53 of 112

Test Mode: 00; Polarity: Vertical; Modulation:8DPSK; Channel:Low

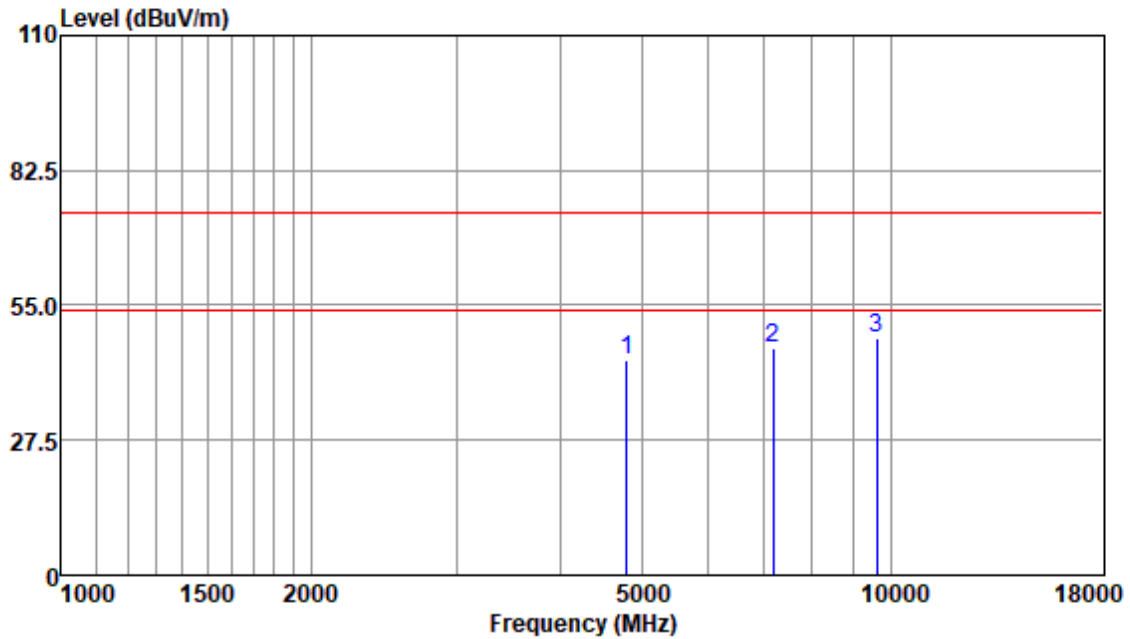

Antenna Polarity :VERTICAL
EUT/Project :1076ME

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4804.11	41.84	33.57	5.22	36.79	43.84	74.00	-30.16	Peak
7206.31	38.37	36.24	7.13	35.53	46.21	74.00	-27.79	Peak
9608.43	35.36	37.75	8.66	33.58	48.19	74.00	-25.81	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 54 of 112

Test Mode: 00; Polarity: Horizontal; Modulation:8DPSK; Channel:middle

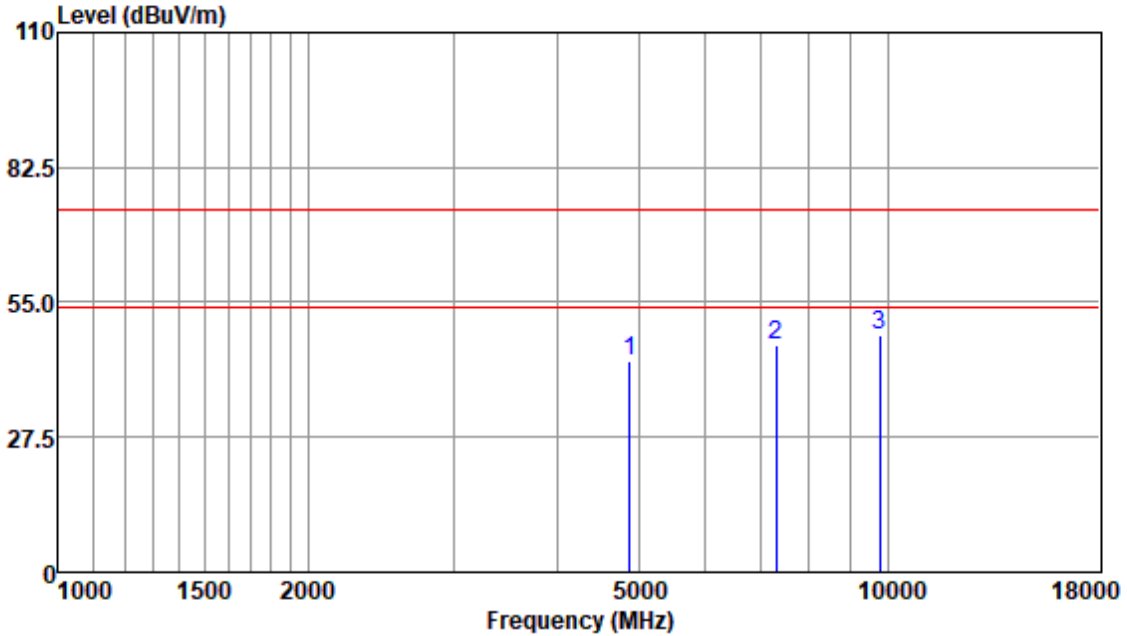

Antenna Polarity :HORIZONTAL
EUT/Project :1076ME

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4882.15	40.97	33.66	5.36	36.81	43.18	74.00	-30.82	Peak
7323.27	38.08	36.33	7.33	35.42	46.32	74.00	-27.68	Peak
9764.37	35.62	37.54	8.84	33.50	48.50	74.00	-25.50	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 55 of 112

Test Mode: 00; Polarity: Vertical; Modulation:8DPSK; Channel:middle

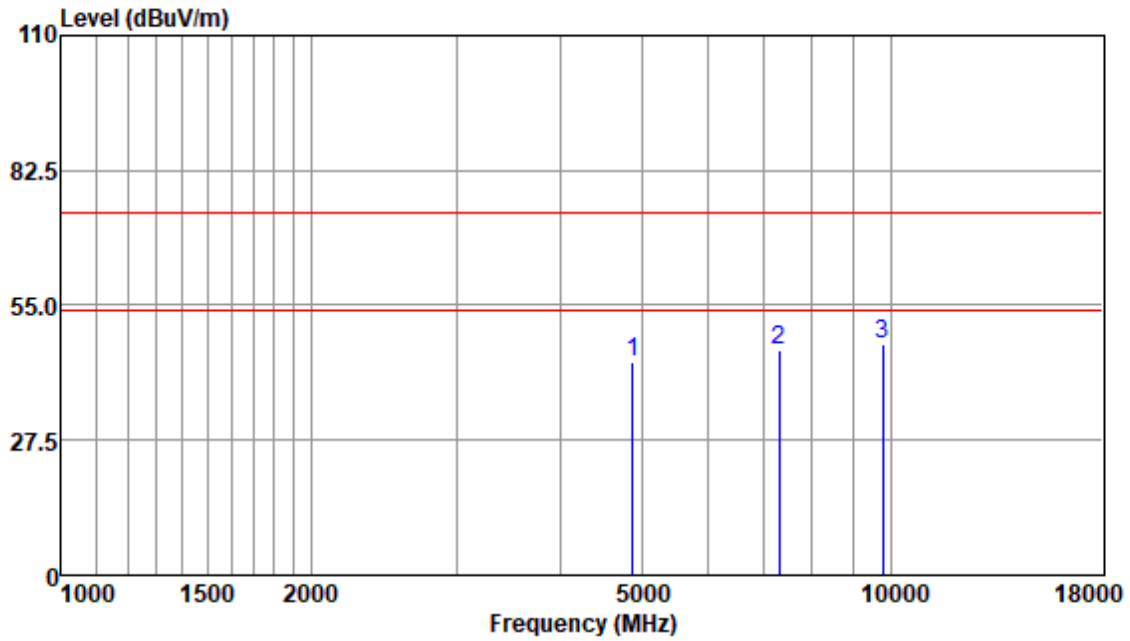

Antenna Polarity :VERTICAL
EUT/Project :1076ME

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4882.15	41.21	33.66	5.36	36.81	43.42	74.00	-30.58	Peak
7323.27	37.69	36.33	7.33	35.42	45.93	74.00	-28.07	Peak
9764.37	34.27	37.54	8.84	33.50	47.15	74.00	-26.85	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 56 of 112

Test Mode: 00; Polarity: Horizontal; Modulation:8DPSK; Channel:High

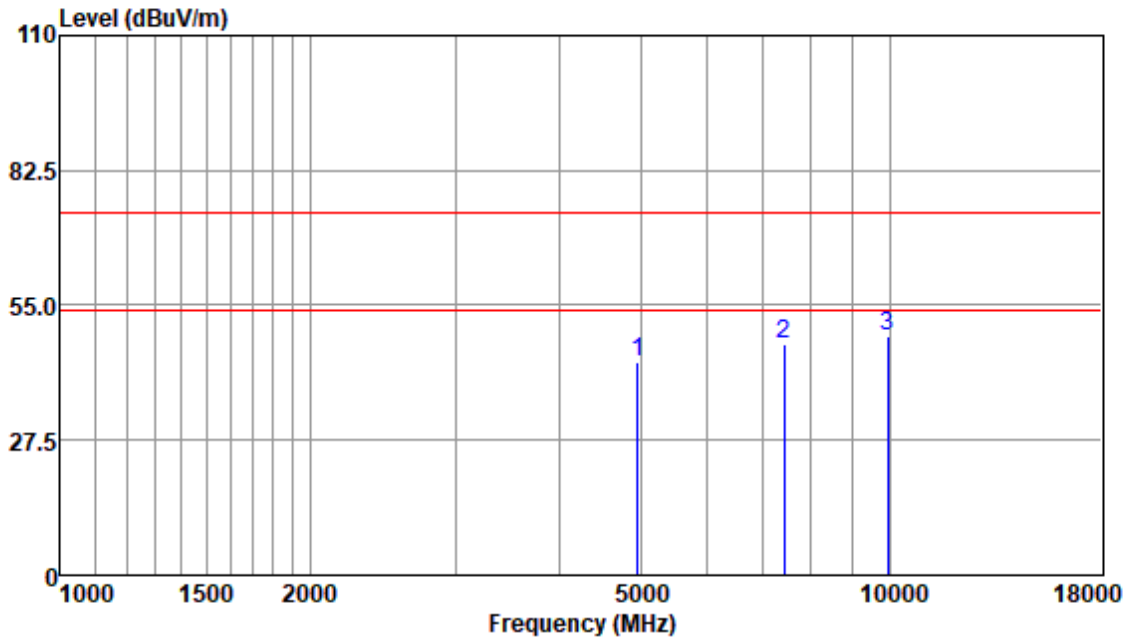

Antenna Polarity :HORIZONTAL
 EUT/Project :1076ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4960.31	41.02	33.65	5.46	36.83	43.30	74.00	-30.70	Peak
7440.91	38.52	36.31	7.43	35.34	46.92	74.00	-27.08	Peak
9920.99	35.89	37.62	8.69	33.41	48.79	74.00	-25.21	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 57 of 112

Test Mode: 00; Polarity: Vertical; Modulation:8DPSK; Channel:High

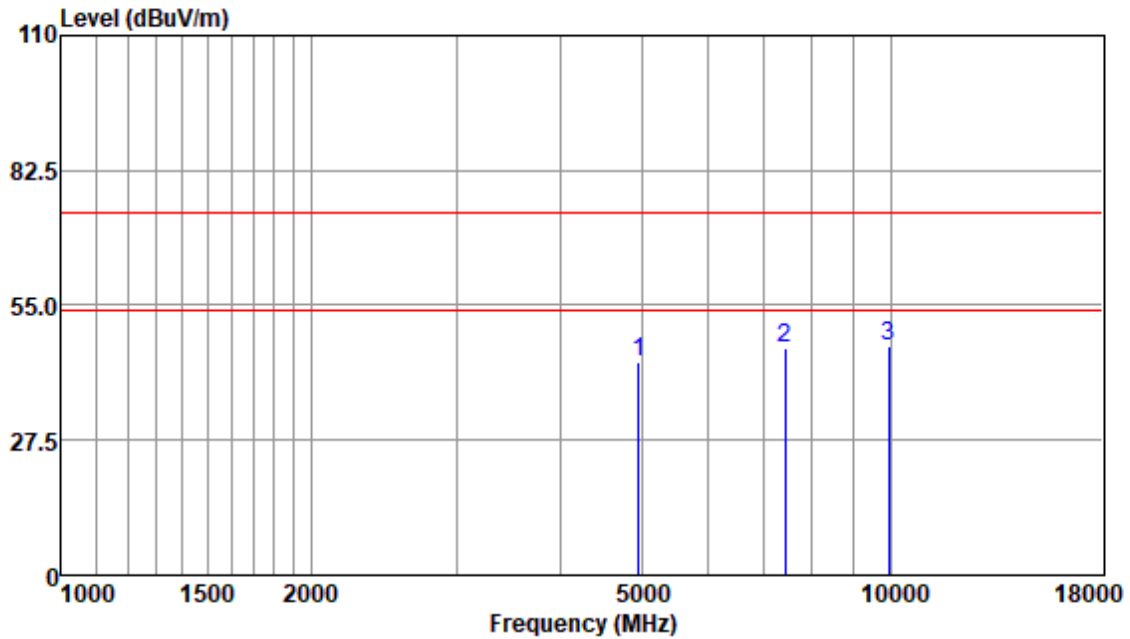

Antenna Polarity :VERTICAL
EUT/Project :1076ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4960.31	41.32	33.65	5.46	36.83	43.60	74.00	-30.40	Peak
7440.91	37.73	36.31	7.43	35.34	46.13	74.00	-27.87	Peak
9920.99	33.93	37.62	8.69	33.41	46.83	74.00	-27.17	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 58 of 112

7.11 99% Bandwidth

Test Requirement RSS-Gen Section 6.7
 Test Method: ANSI C63.10 (2013) Section 6.9.3


7.11.1 E.U.T. Operation

Operating Environment:
 Temperature: 26.0 °C Humidity: 70.4 % RH Atmospheric Pressure: 1010 mbar

7.11.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.11.3 Test Setup Diagram

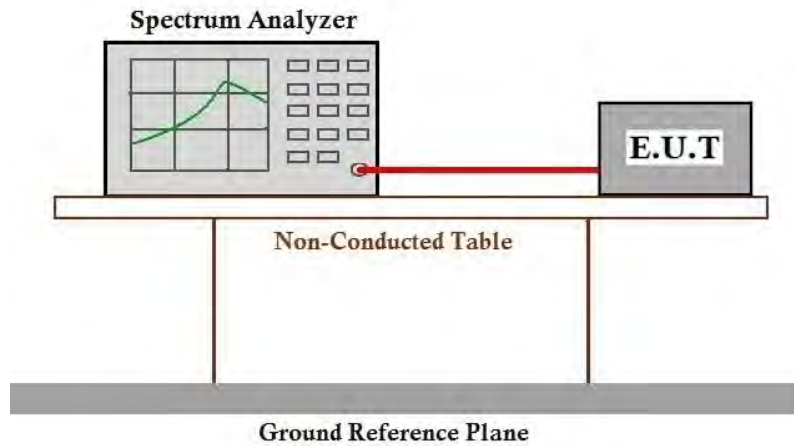

7.11.4 Measurement Procedure and Data

Please Refer to Appendix for Details

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for KSCR2410002068HS

9 EUT Constructional Details (EUT Photos)

Refer to Appendix - Photographs of EUT Constructional Details for KSCR2410002068HS


10 Appendix

10.1 Appendix A: 20dB Emission Bandwidth

10.1.1 Test Result

Test Mode	Antenna	Channel	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.957	2401.529	2402.486	---	---
		2441	0.957	2440.529	2441.486	---	---
		2480	0.957	2479.532	2480.489	---	---
2DH5	Ant1	2402	1.374	2401.313	2402.687	---	---
		2441	1.368	2440.319	2441.687	---	---
		2480	1.377	2479.310	2480.687	---	---
3DH5	Ant1	2402	1.356	2401.319	2402.675	---	---
		2441	1.356	2440.319	2441.675	---	---
		2480	1.356	2479.319	2480.675	---	---

10.1.2 Test Graphs

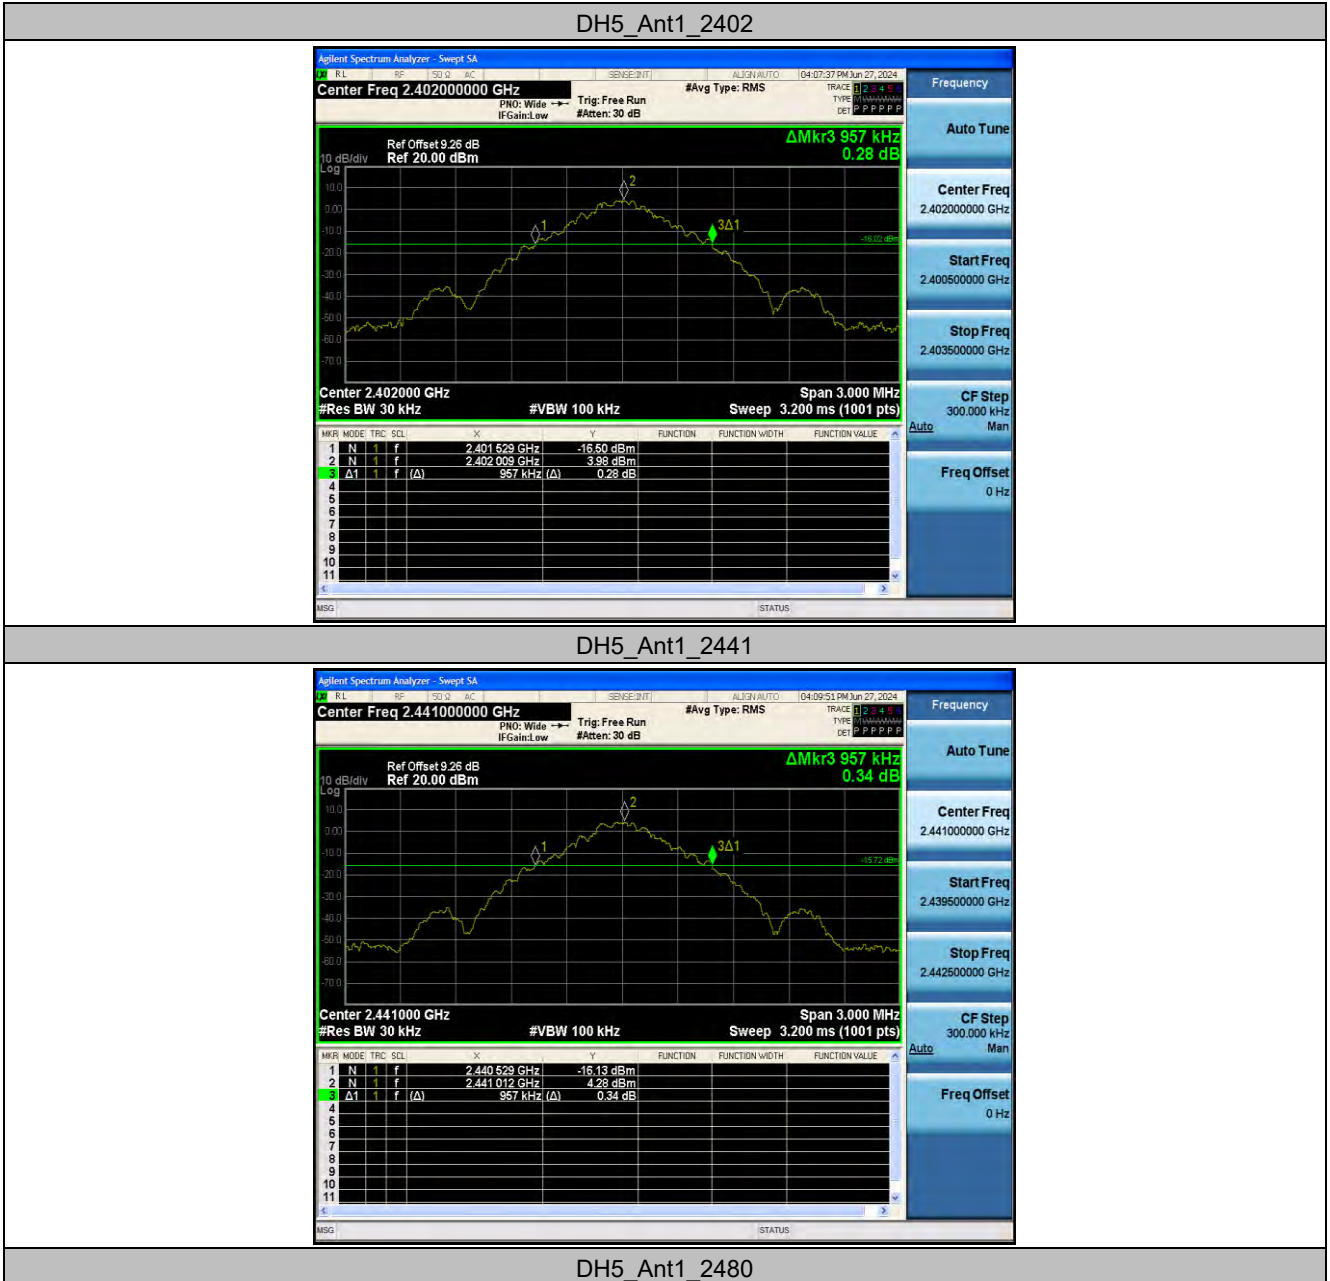

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 61 of 112



2DH5_Ant1_2402



2DH5_Ant1_2441

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 62 of 112



2DH5_Ant1_2480



3DH5_Ant1_2402

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 63 of 112



3DH5_Ant1_2441



3DH5_Ant1_2480

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 64 of 112



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801


Page: 65 of 112

10.2 Appendix B: Occupied Channel Bandwidth

10.2.1 Test Result

Test Mode	Antenna	Channel	OCB[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.86770	2401.5616	2402.4293	---	---
		2441	0.86220	2440.5651	2441.4273	---	---
		2480	0.86412	2479.5638	2480.4279	---	---
2DH5	Ant1	2402	1.2073	2401.3953	2402.6026	---	---
		2441	1.2081	2440.3950	2441.6031	---	---
		2480	1.2097	2479.3940	2480.6037	---	---
3DH5	Ant1	2402	1.2113	2401.3844	2402.5957	---	---
		2441	1.2121	2440.3842	2441.5963	---	---
		2480	1.2119	2479.3841	2480.5960	---	---

10.2.2 Test Graphs

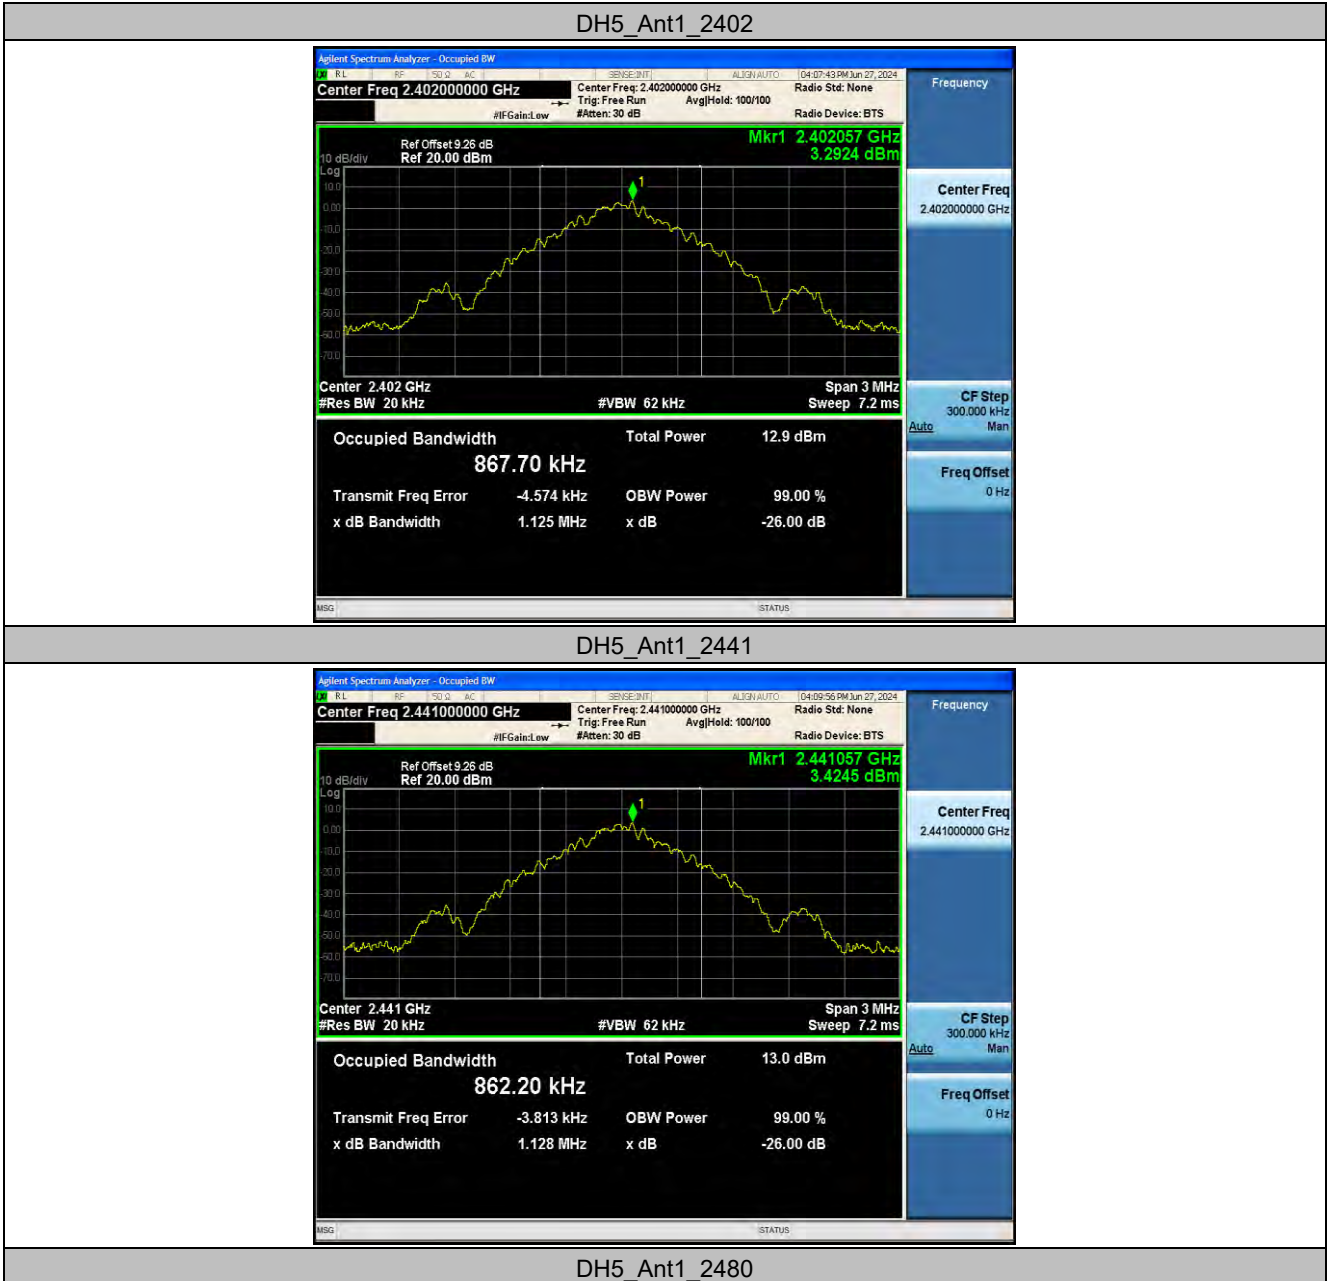


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 67 of 112

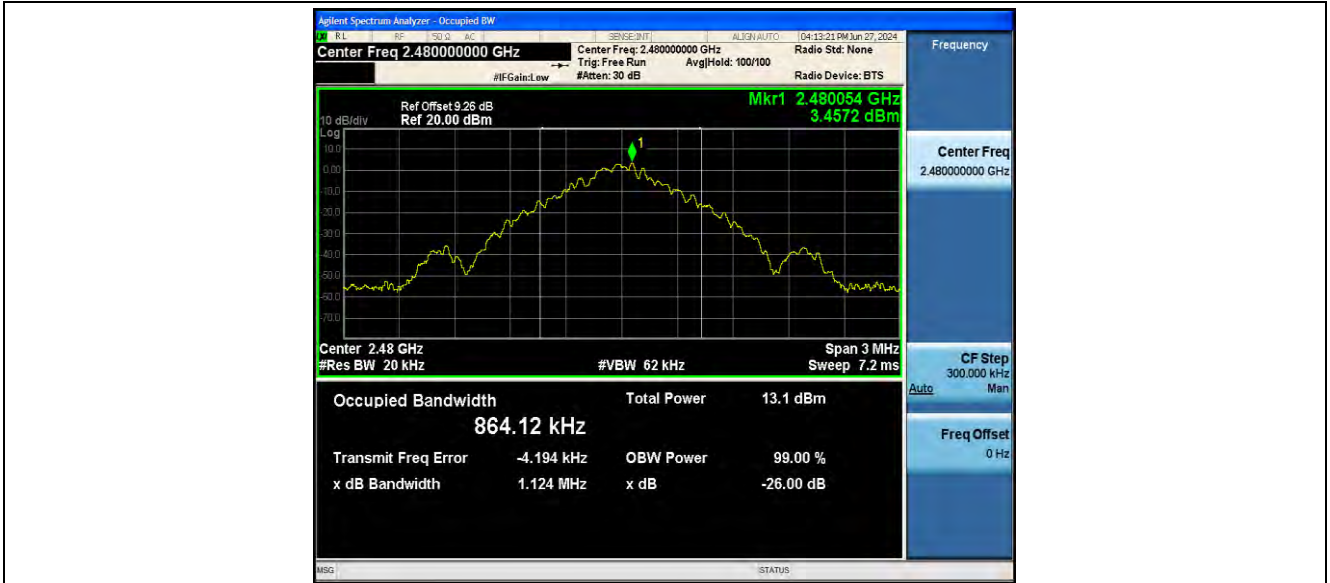

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 68 of 112



2DH5_Ant1_2480



3DH5_Ant1_2402

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 69 of 112



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 70 of 112




10.3 Appendix C: Maximum conducted output power

10.3.1 Test Result

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	6.62	≤20.97	PASS
		2441	6.79	≤20.97	PASS
		2480	6.83	≤20.97	PASS
2DH5	Ant1	2402	3.37	≤20.97	PASS
		2441	3.57	≤20.97	PASS
		2480	3.74	≤20.97	PASS
3DH5	Ant1	2402	4.01	≤20.97	PASS
		2441	4.19	≤20.97	PASS
		2480	4.33	≤20.97	PASS

10.3.2 Test Graphs

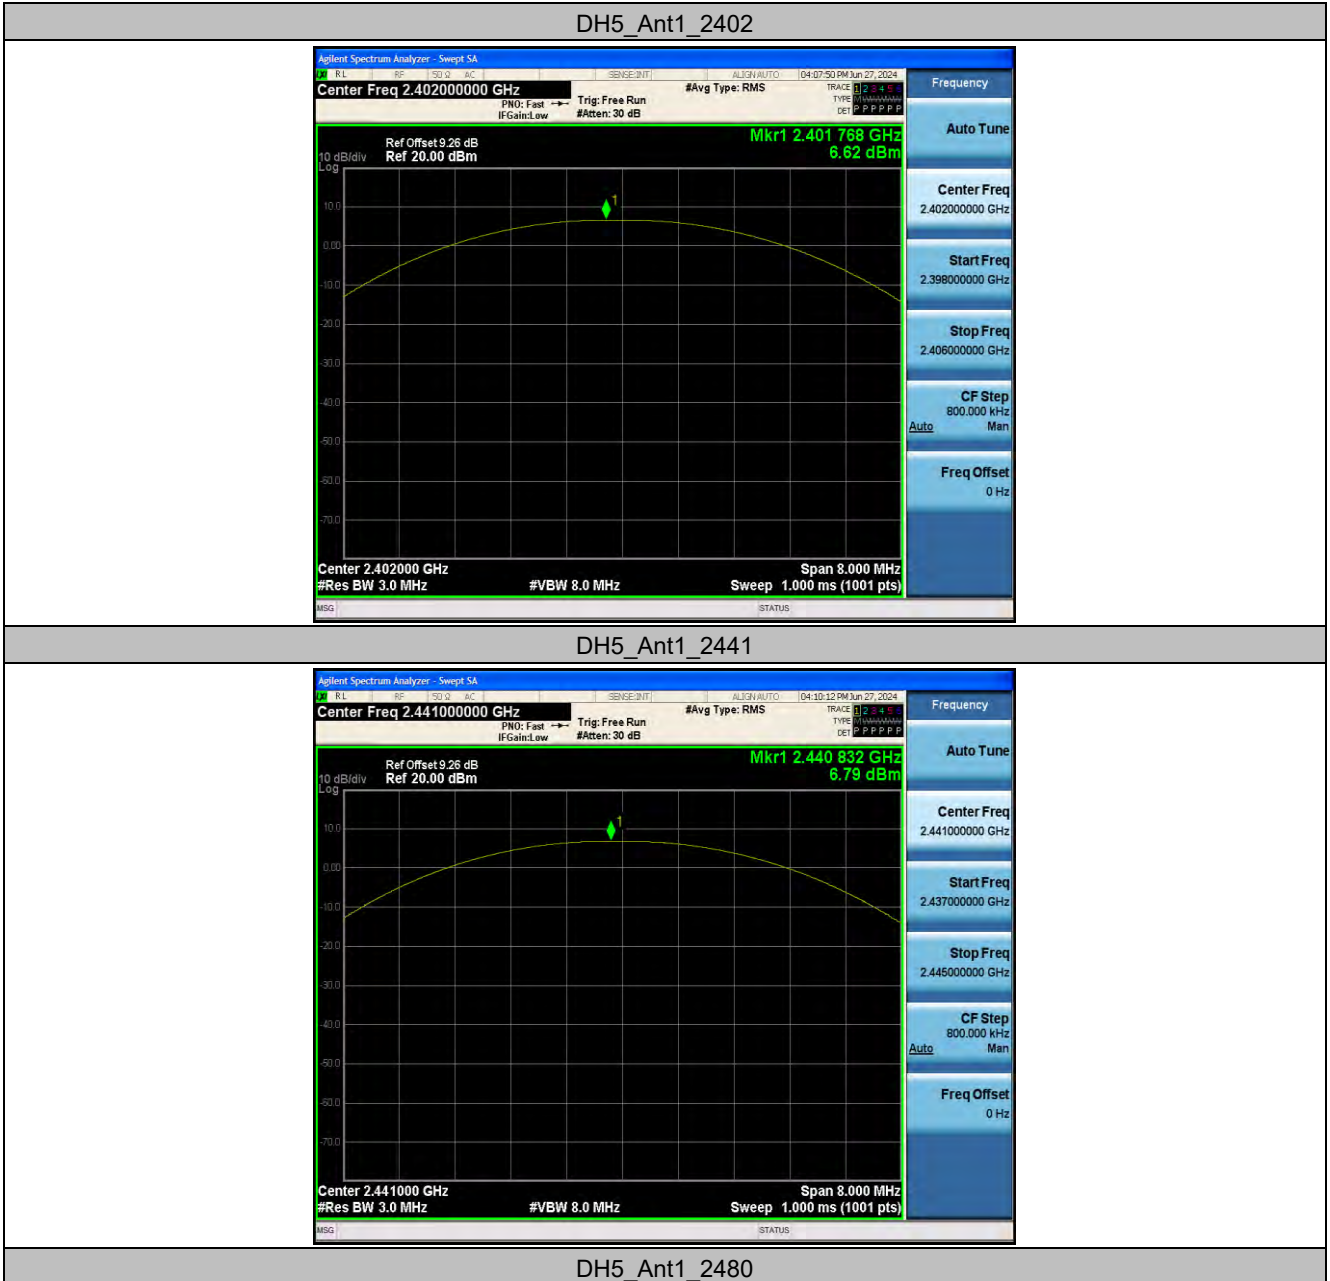


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 73 of 112

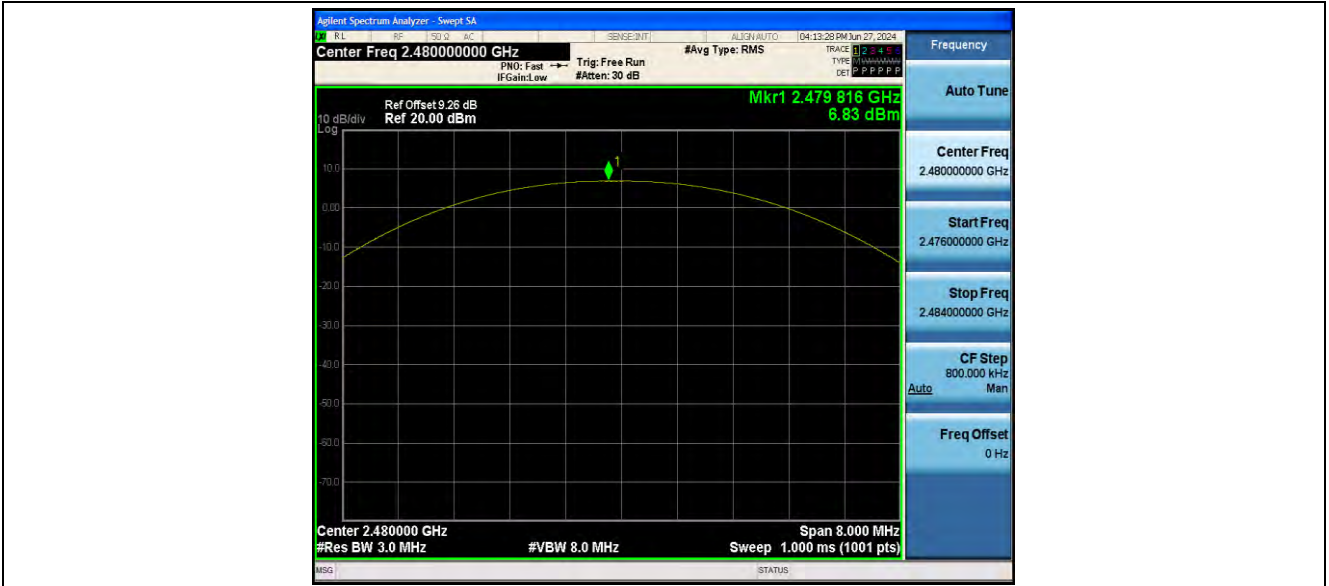

2DH5_Ant1_2402



2DH5_Ant1_2441

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 74 of 112



2DH5_Ant1_2480



3DH5_Ant1_2402

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 75 of 112



3DH5_Ant1_2441



3DH5_Ant1_2480

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 76 of 112





Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 77 of 112

10.4 Appendix D: Carrier frequency separation

10.4.1 Test Result

Test Mode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.04	≥ 0.957	PASS
2DH5	Ant1	Hop	1.004	≥ 0.918	PASS
3DH5	Ant1	Hop	1.012	≥ 0.904	PASS

10.4.2 Test Graphs



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 79 of 112





Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801


Page: 80 of 112

10.5 Appendix E: Time of occupancy



10.5.1 Test Result

Test Mode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.403	320	0.129	≤0.4	PASS
DH3	Ant1	Hop	1.658	140	0.232	≤0.4	PASS
DH5	Ant1	Hop	1.986	140	0.278	≤0.4	PASS
2DH1	Ant1	Hop	0.296	320	0.095	≤0.4	PASS
2DH3	Ant1	Hop	0.921	160	0.147	≤0.4	PASS
2DH5	Ant1	Hop	1.086	40	0.043	≤0.4	PASS
3DH1	Ant1	Hop	0.256	280	0.072	≤0.4	PASS
3DH3	Ant1	Hop	0.920	160	0.147	≤0.4	PASS
3DH5	Ant1	Hop	1.086	130	0.141	≤0.4	PASS


10.5.2 Test Graphs

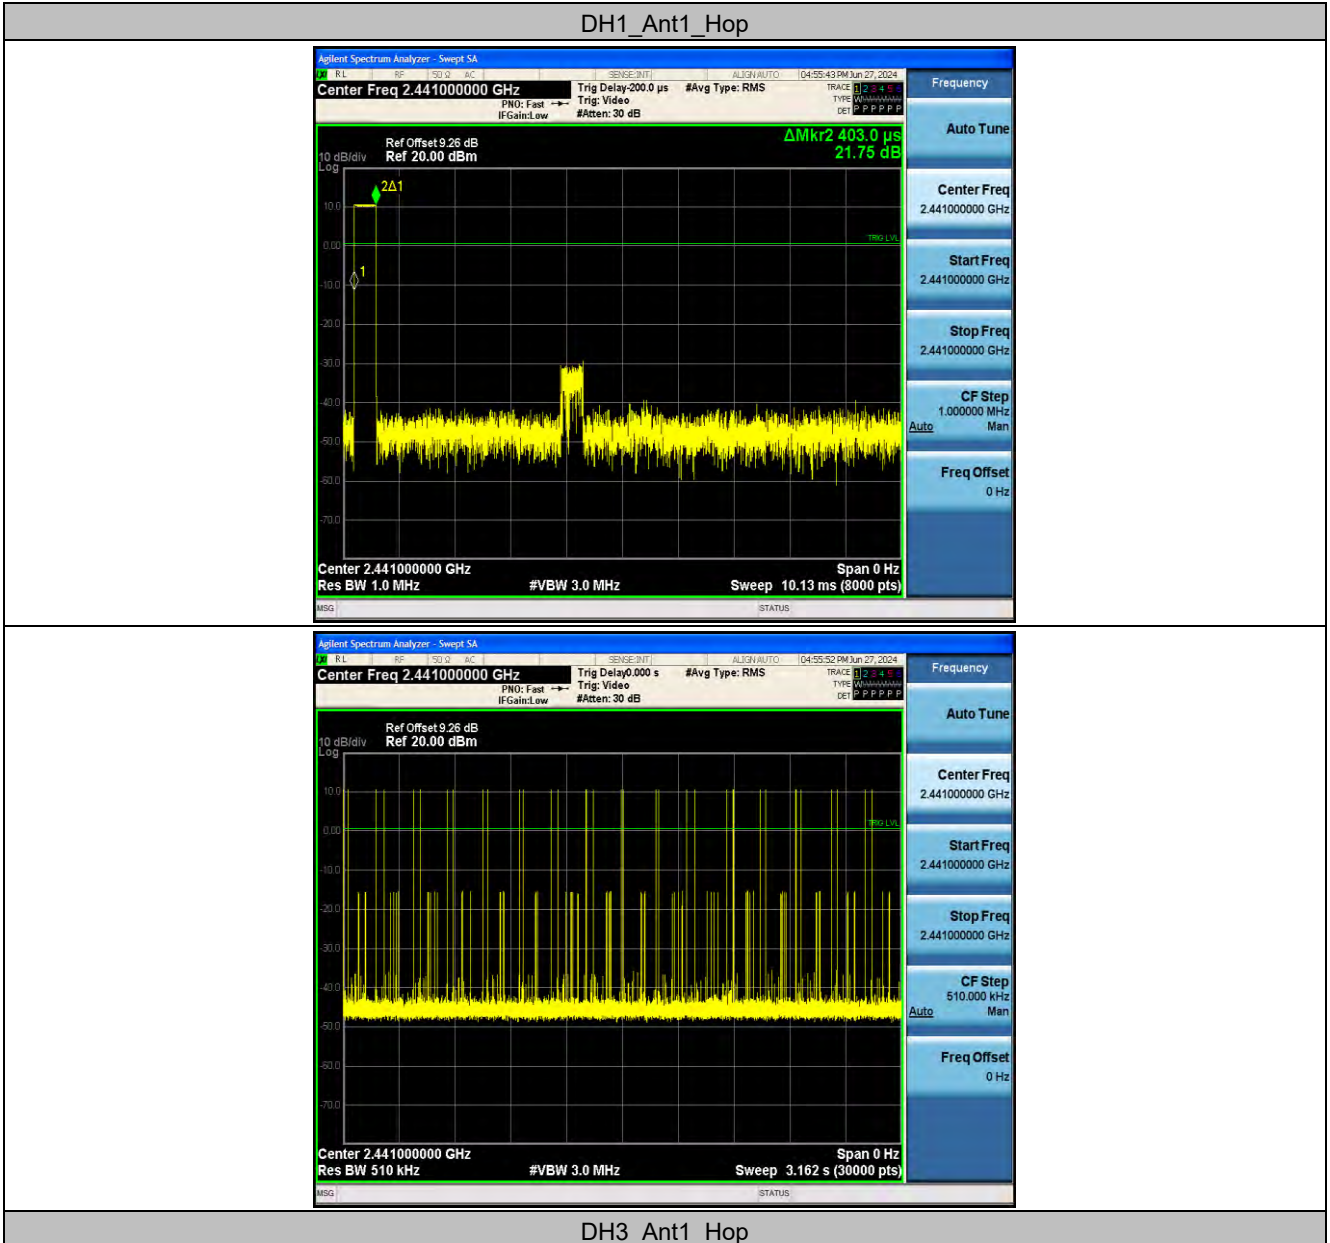


DH3_Ant1_Hop

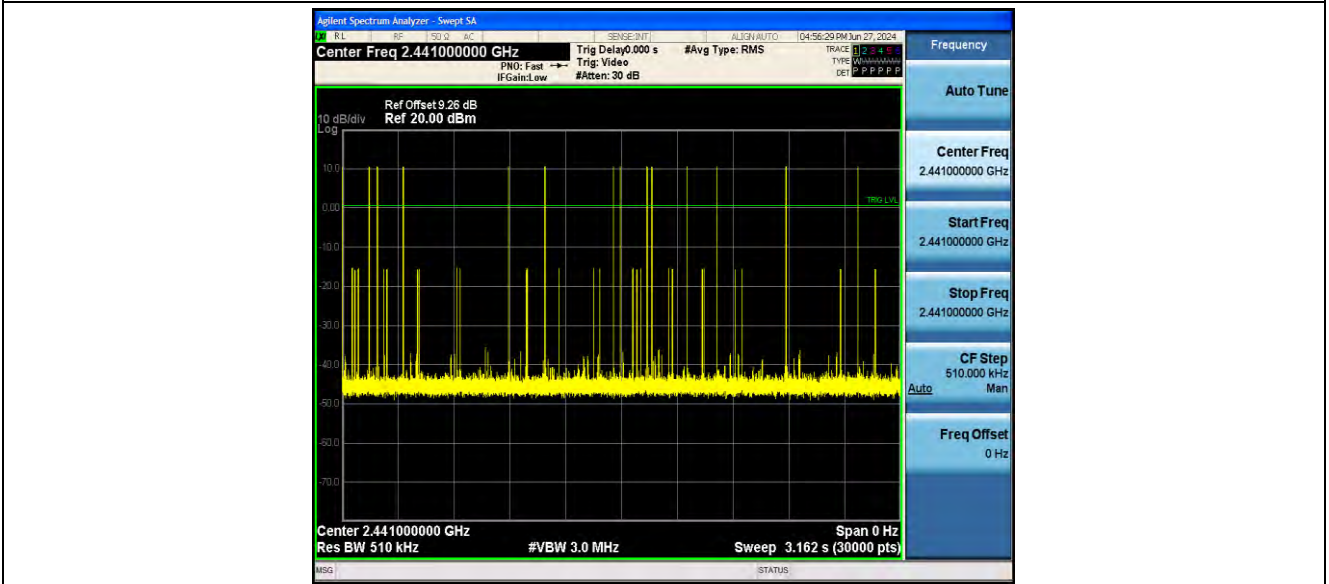
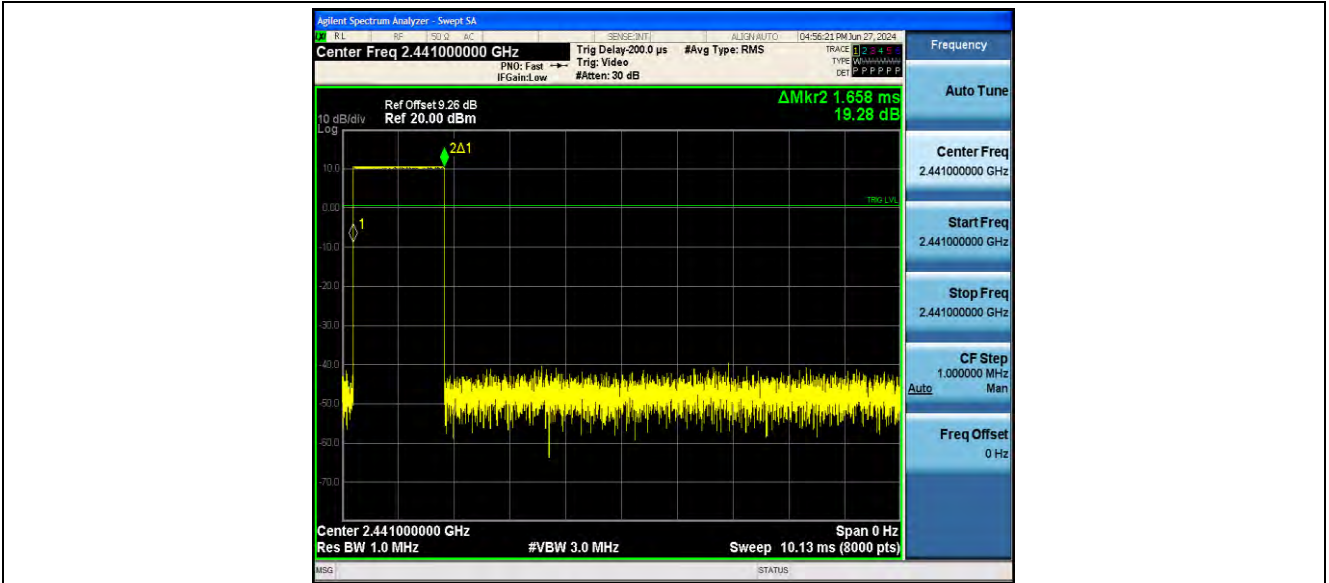


DH5_Ant1_Hop

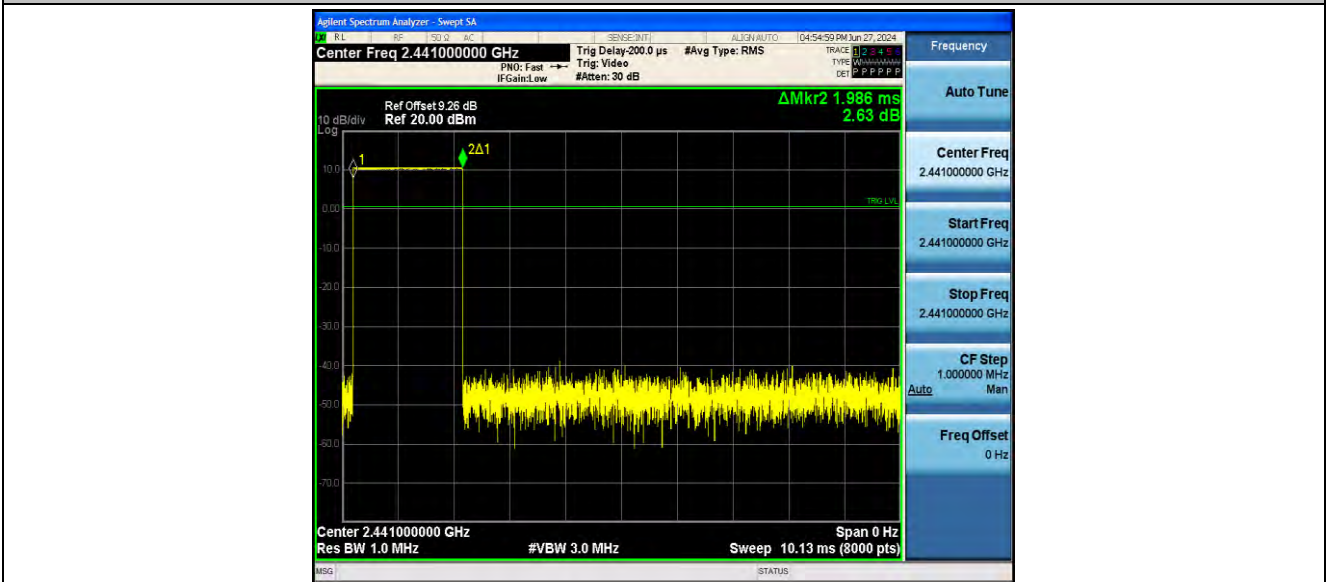


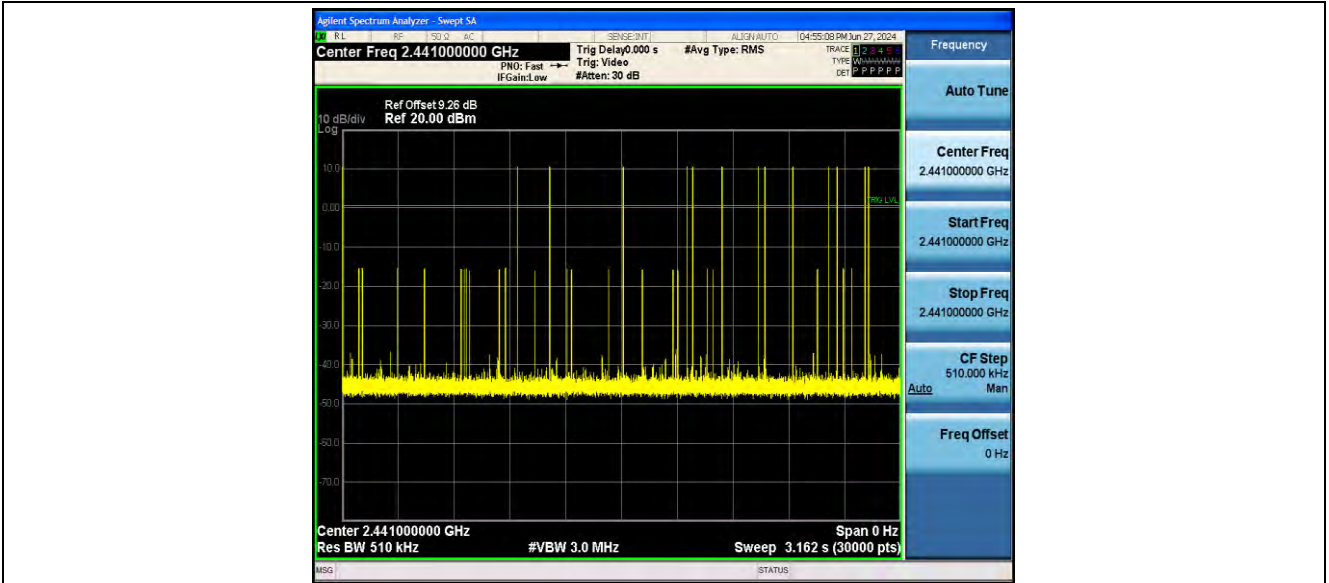

2DH1_Ant1_Hop

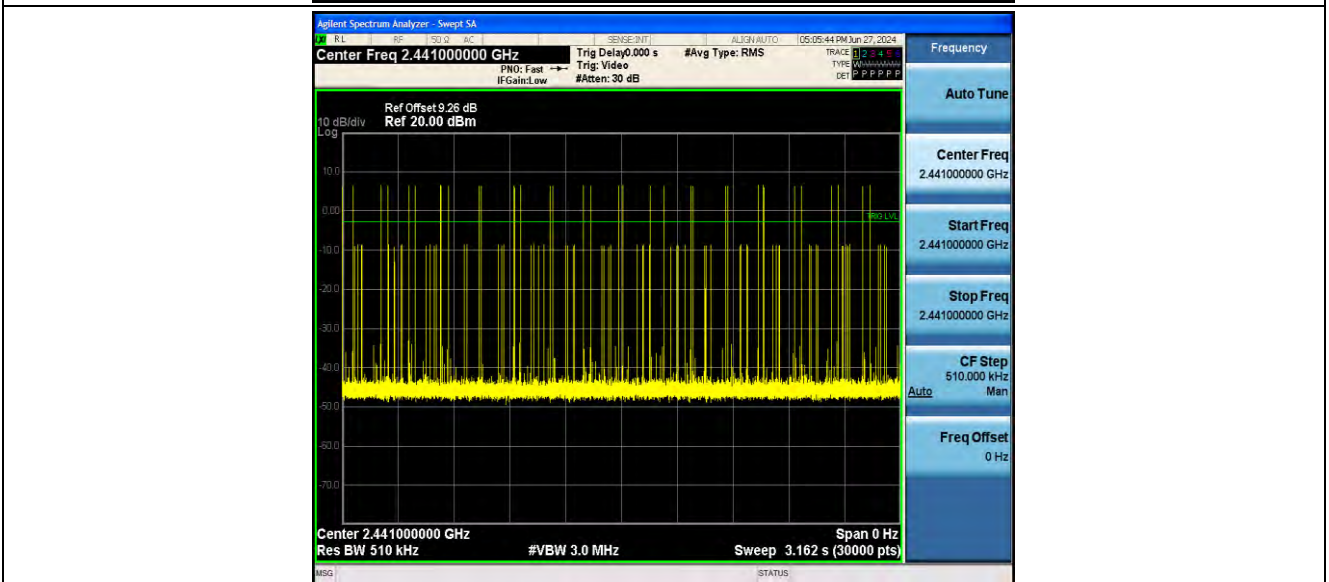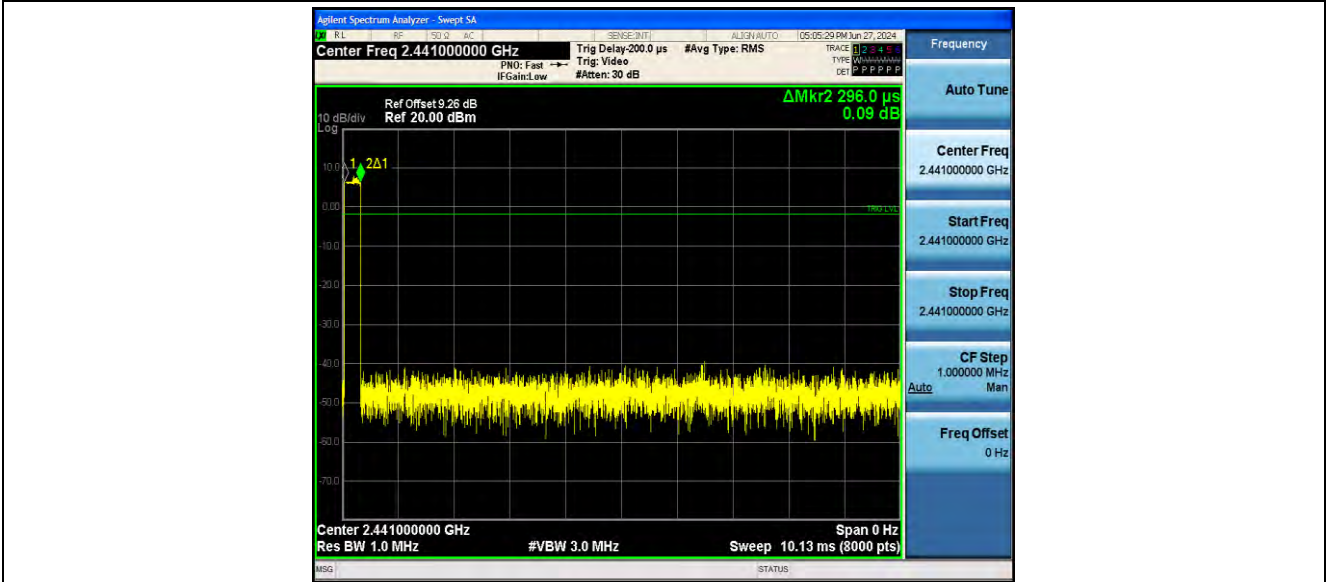

2DH3_Ant1_Hop

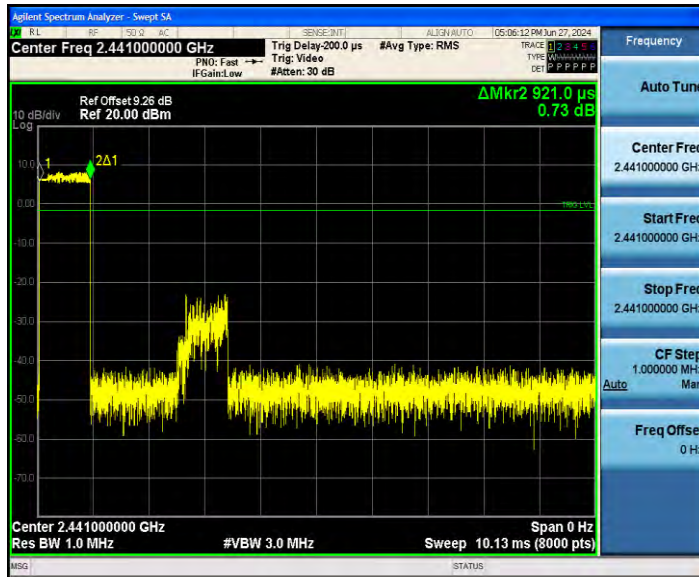



2DH5_Ant1_Hop

Compliance Certification Services (Kunshan) Inc.


CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR241000206801

Page: 85 of 112

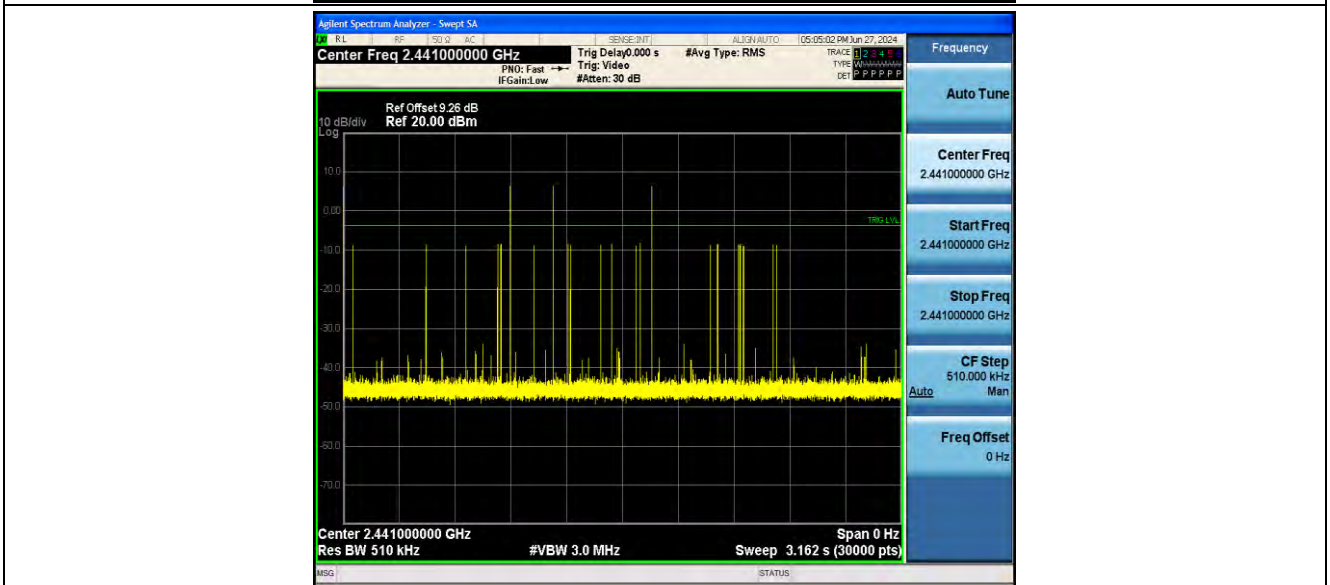
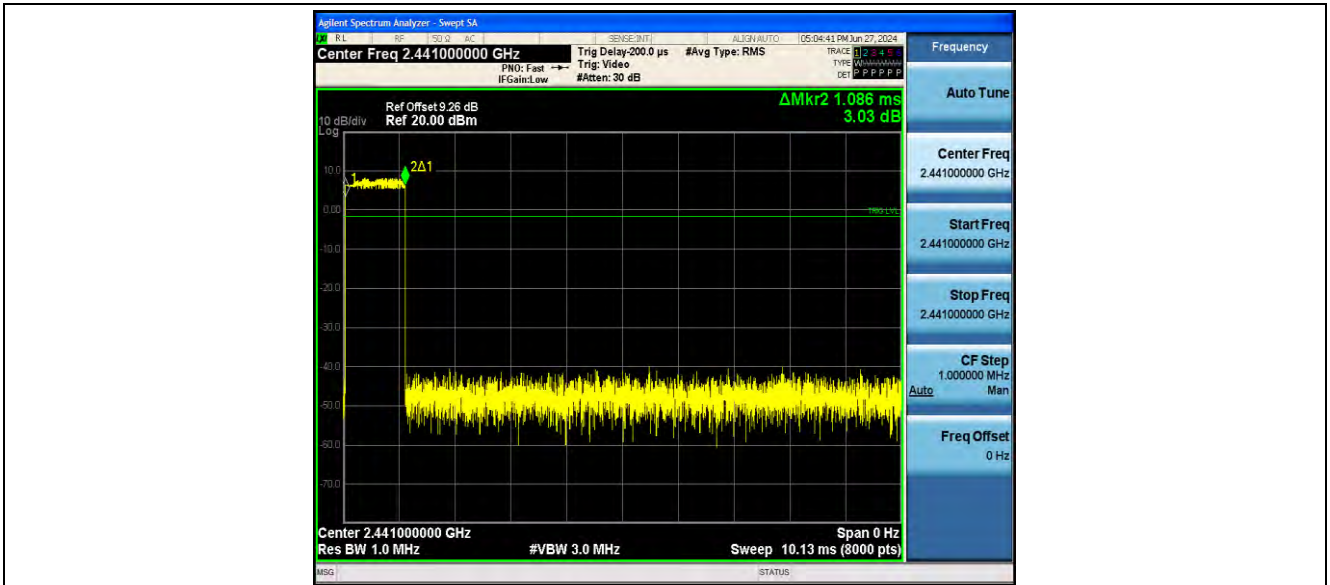


3DH1_Ant1_Hop

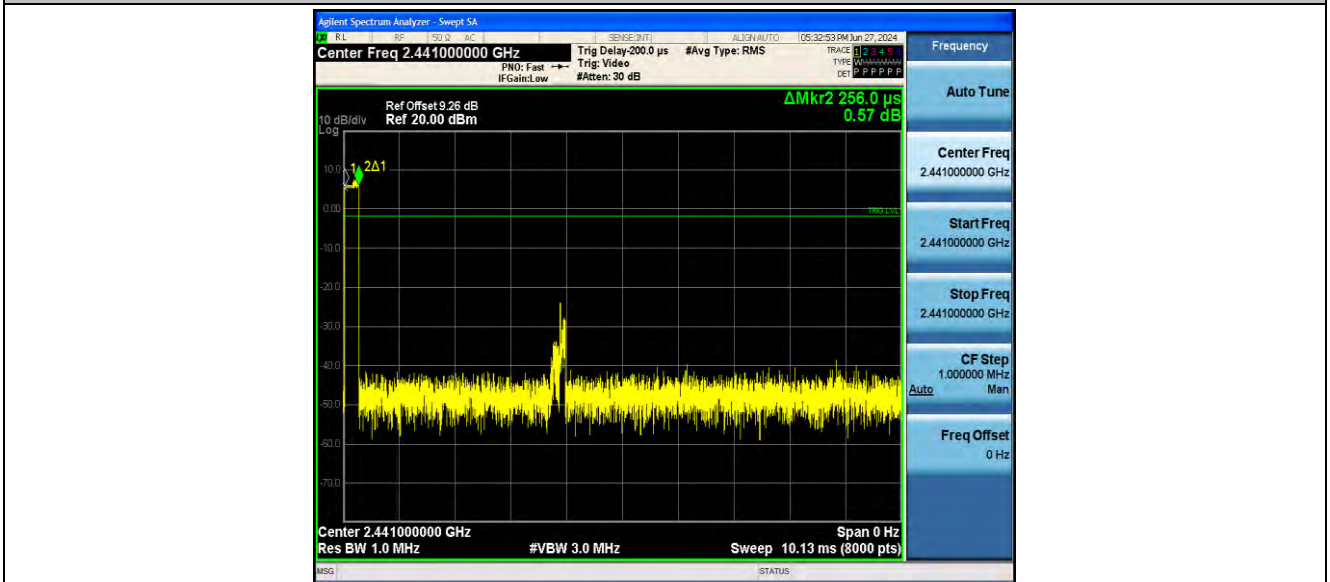

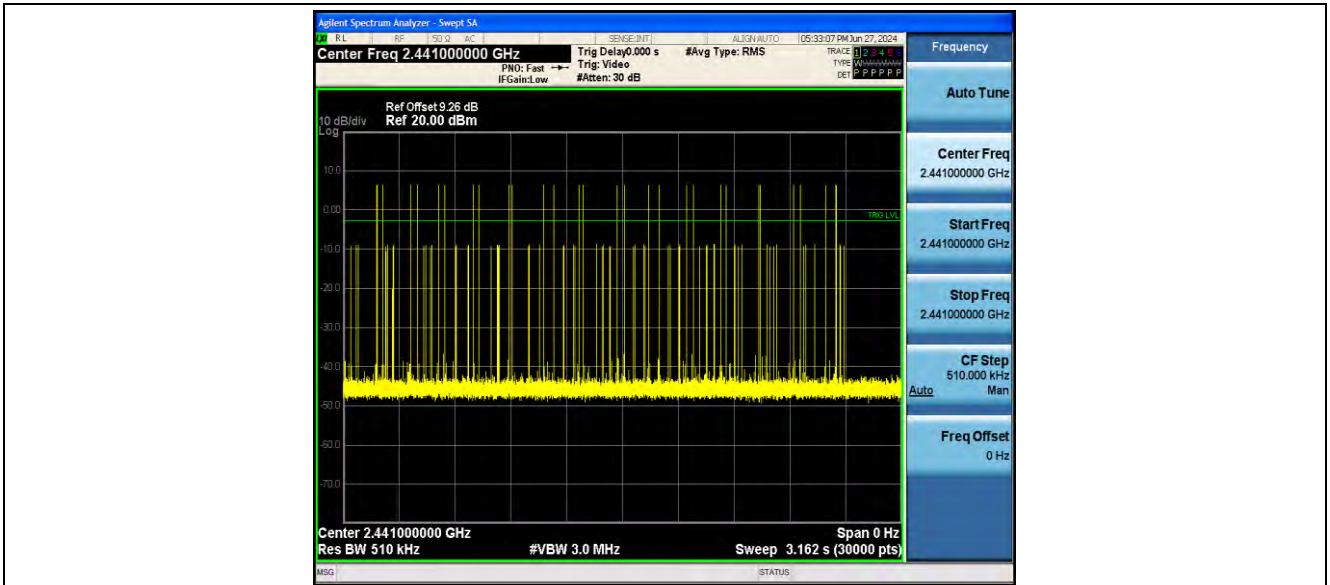

3DH3_Ant1_Hop

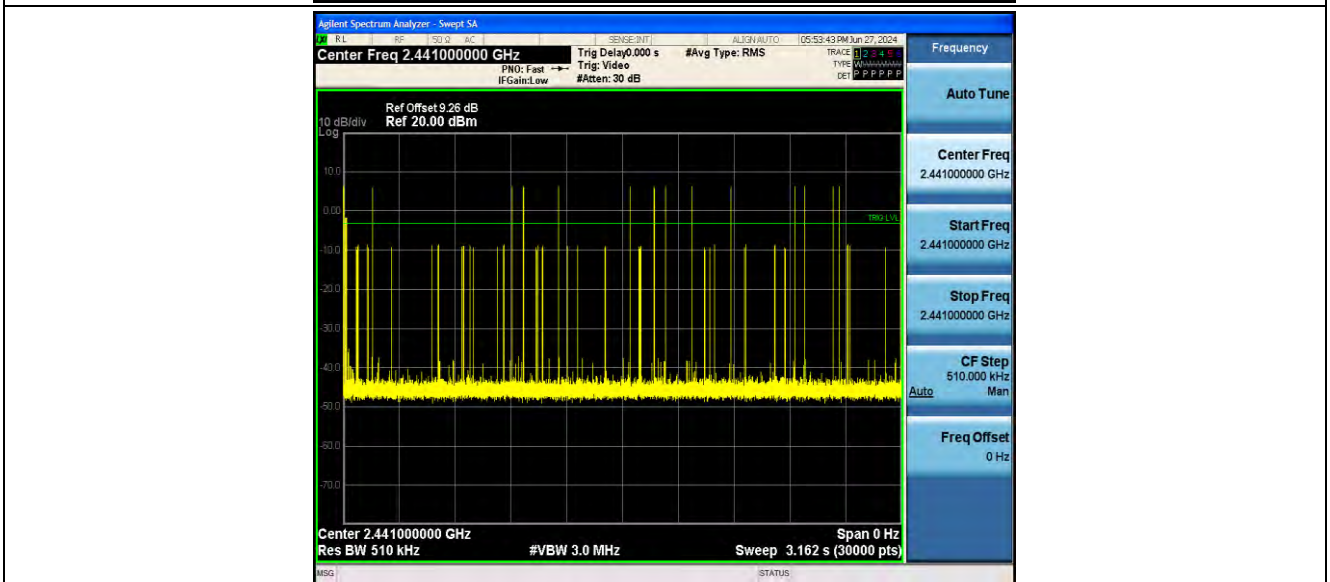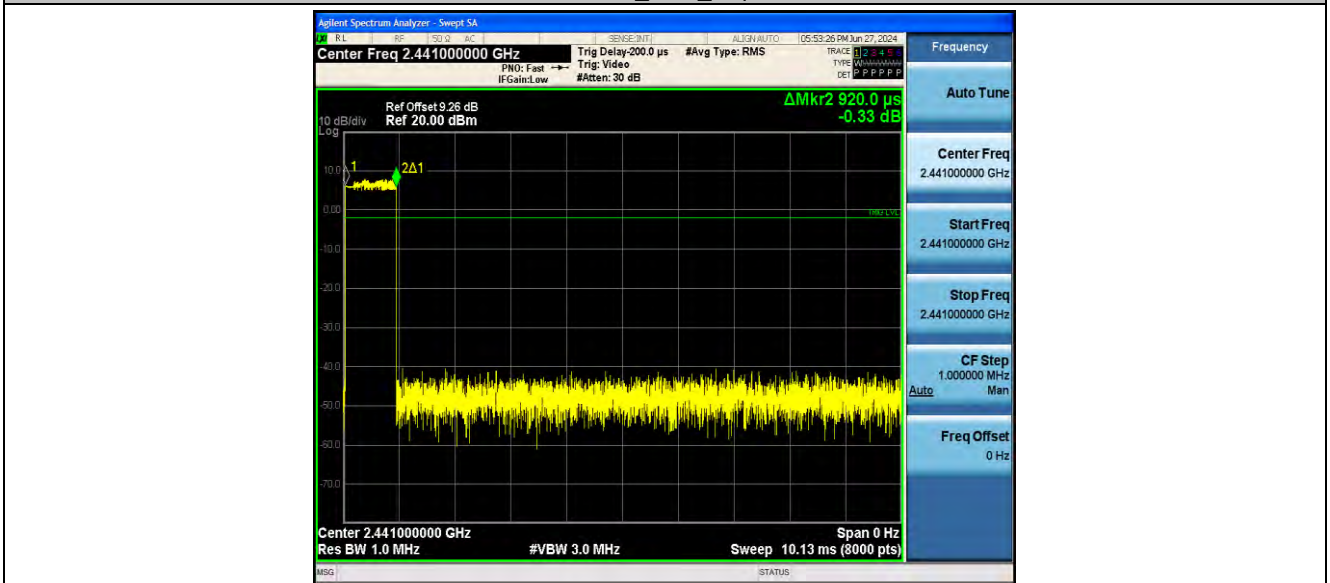



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 87 of 112

3DH5_Ant1_Hop

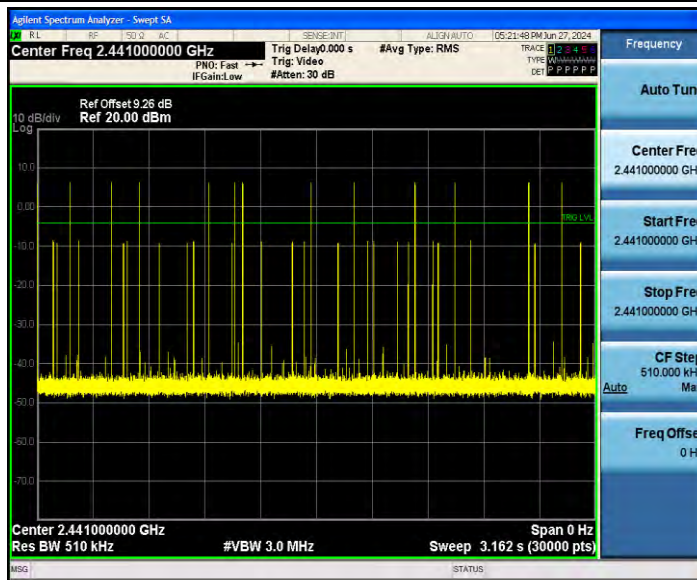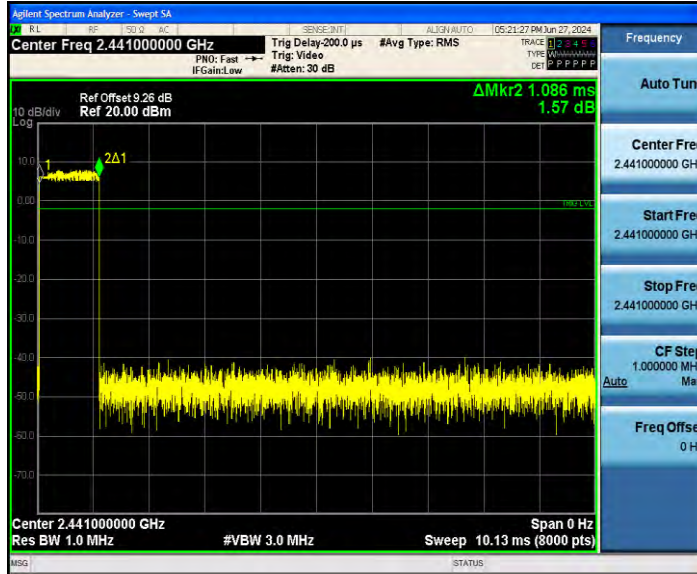



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801


Page: 88 of 112

10.6 Appendix F: Number of hopping channels

10.6.1 Test Result

Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥ 15	PASS
2DH5	Ant1	Hop	79	≥ 15	PASS
3DH5	Ant1	Hop	79	≥ 15	PASS

10.6.2 Test Graphs

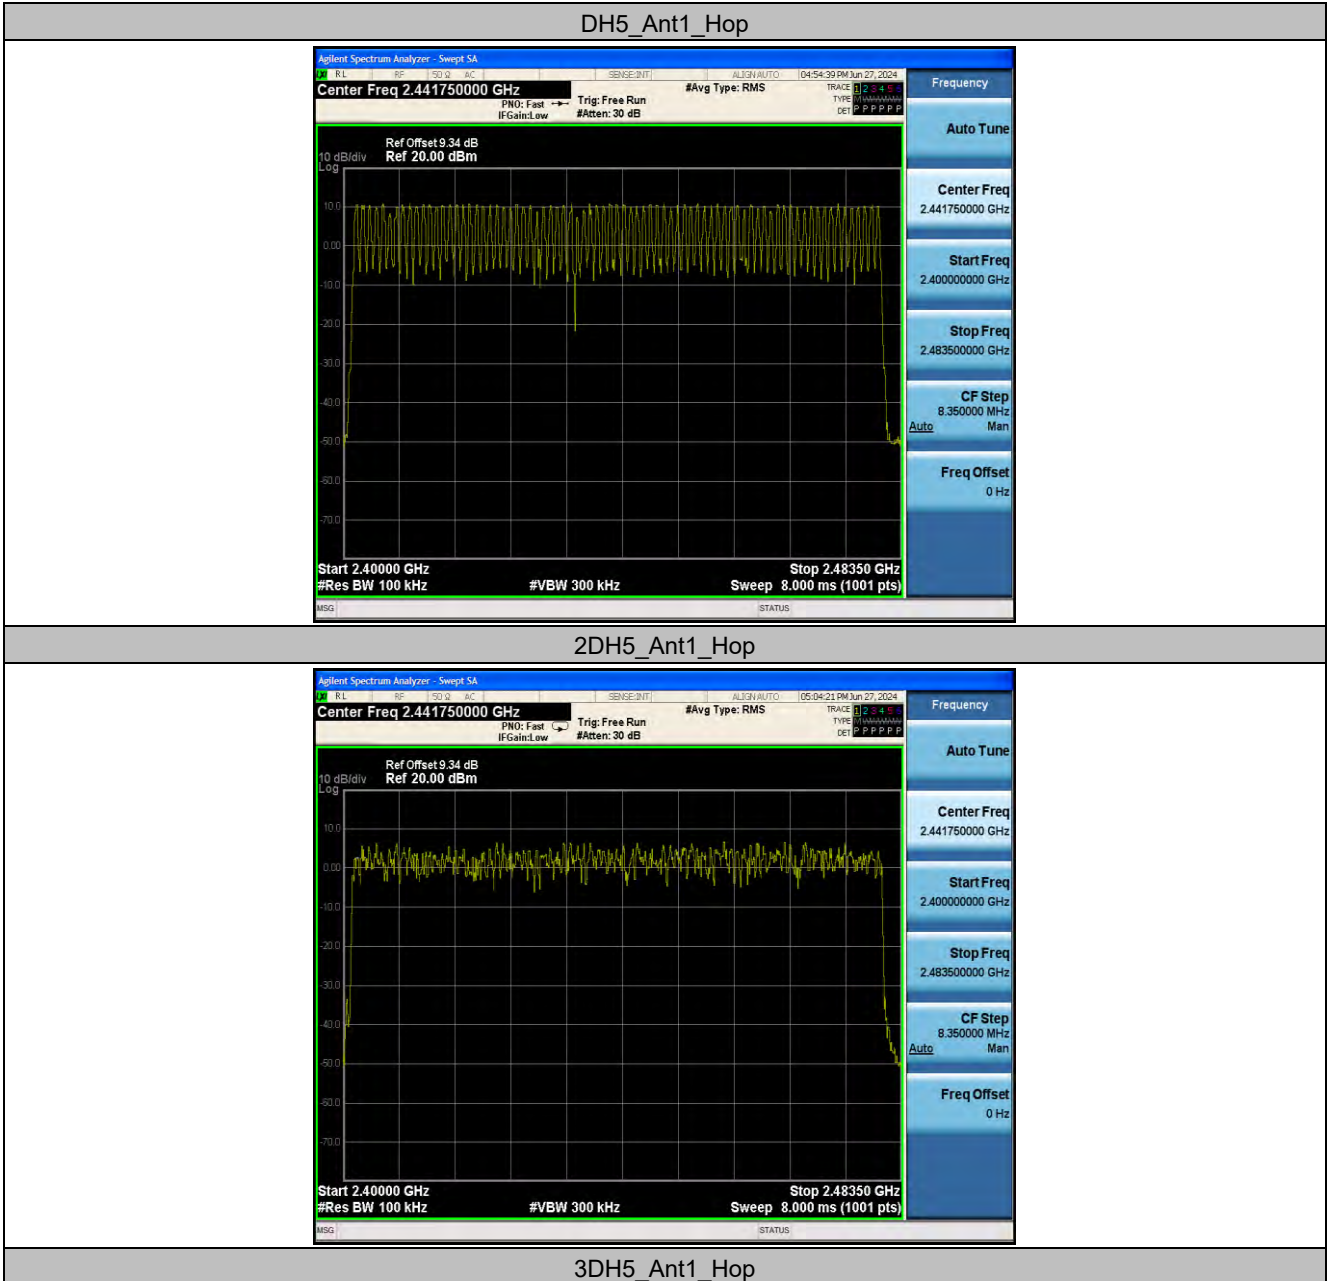


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 90 of 112

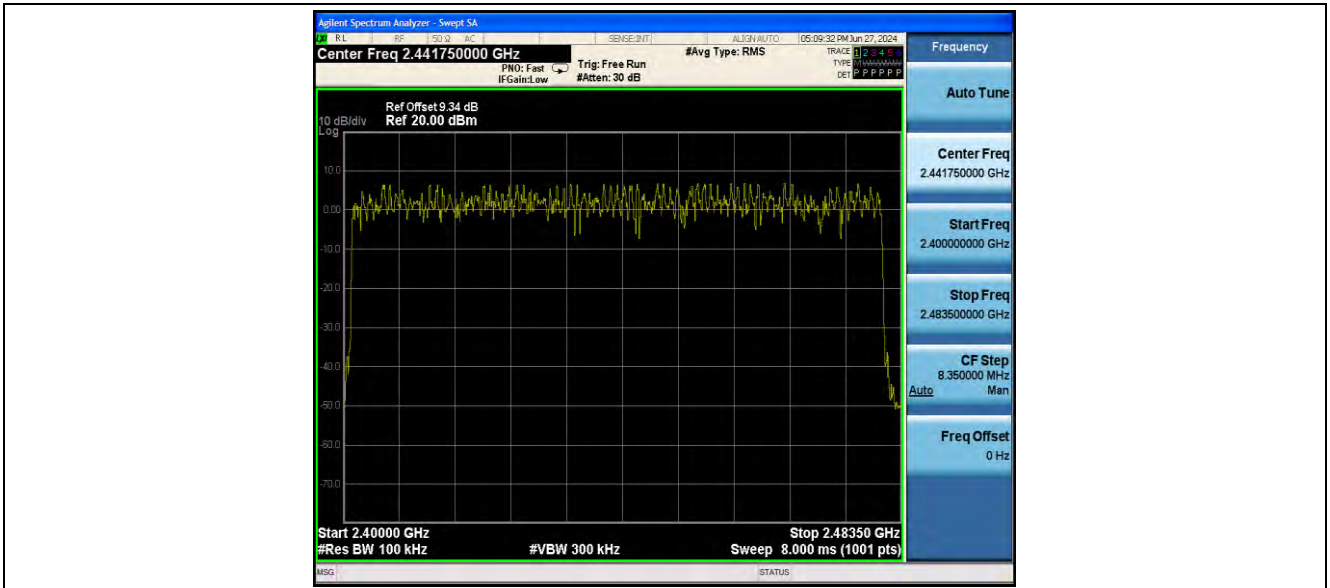



10.7 Appendix G: Band edge measurements

10.7.1 Test Result


Test Mode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	6.37	-48.45	≤-13.63	PASS
		High	2480	6.59	-47.99	≤-13.41	PASS
		Low	Hop_2402	9.48	-46.31	≤-10.52	PASS
		High	Hop_2480	10.20	-42.89	≤-9.8	PASS
2DH5	Ant1	Low	2402	-1.20	-48.94	≤-21.2	PASS
		High	2480	-0.81	-47.93	≤-20.81	PASS
		Low	Hop_2402	5.87	-48.53	≤-14.13	PASS
		High	Hop_2480	6.55	-46.82	≤-13.45	PASS
3DH5	Ant1	Low	2402	-0.67	-48.65	≤-20.67	PASS
		High	2480	-0.34	-45.46	≤-20.34	PASS
		Low	Hop_2402	3.03	-48.41	≤-16.97	PASS
		High	Hop_2480	6.58	-46.92	≤-13.42	PASS

10.7.2 Test Graphs

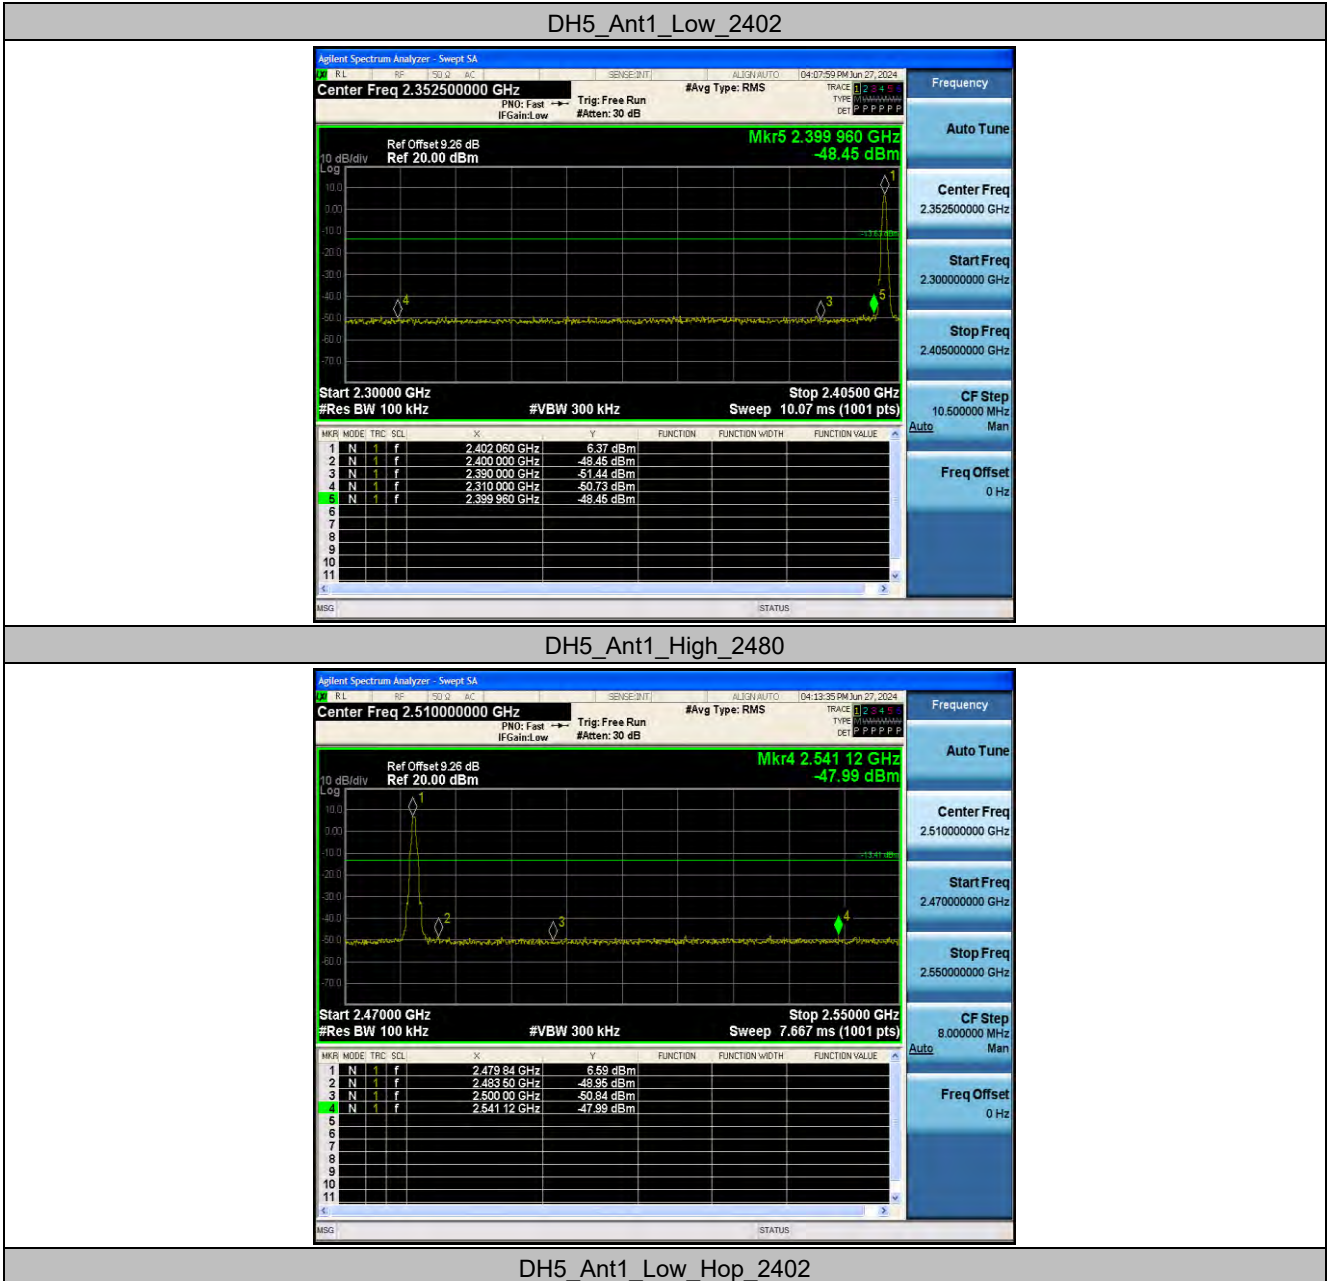


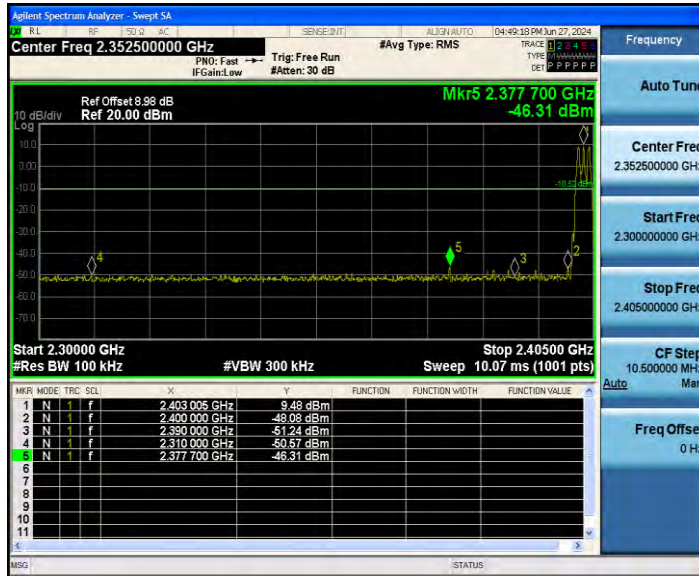


DH5_Ant1_High_Hop_2480

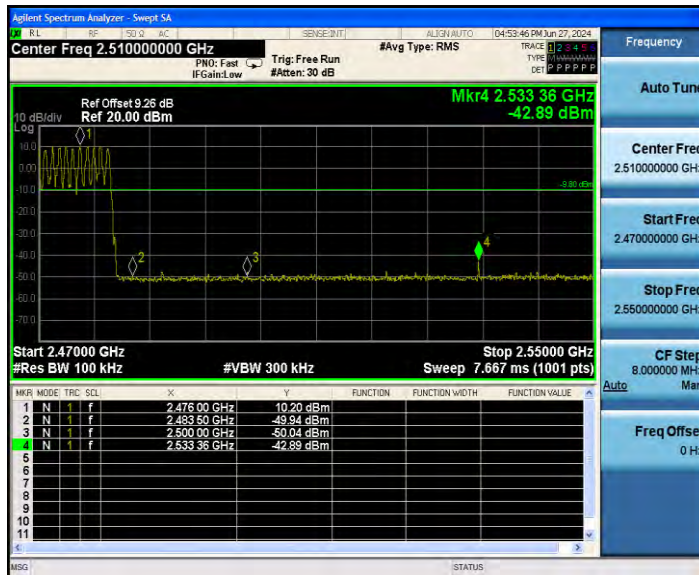

2DH5_Ant1_Low_2402

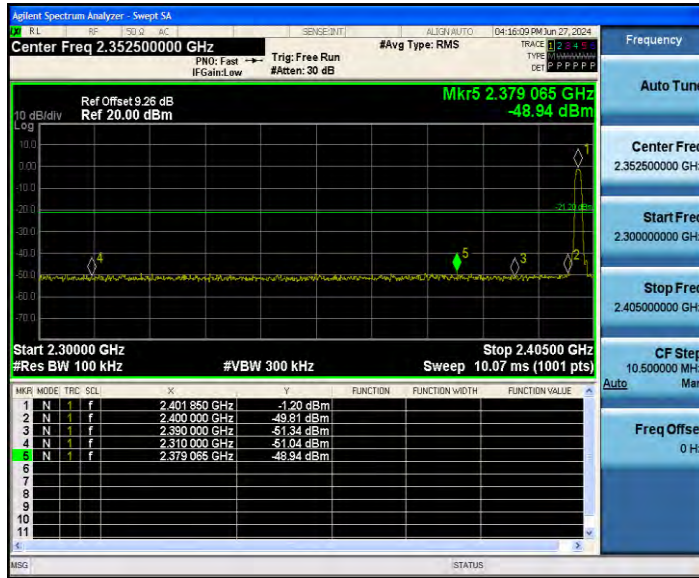

2DH5_Ant1_High_2480

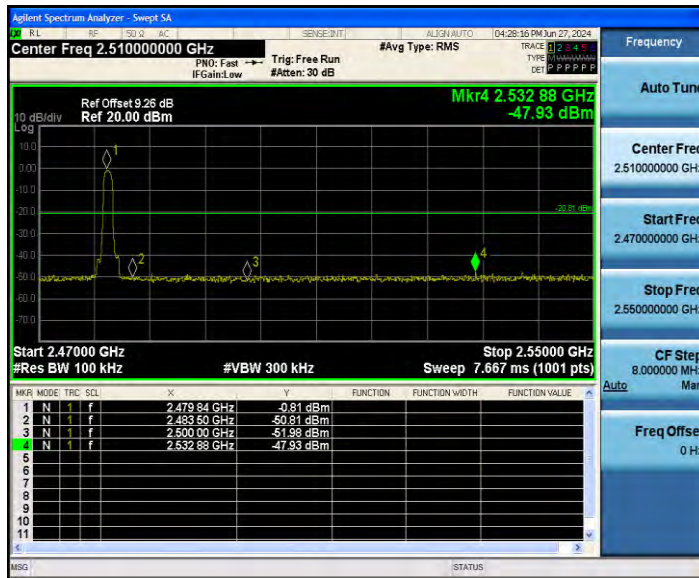


2DH5_Ant1_Low_Hop_2402

Compliance Certification Services (Kunshan) Inc.


CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 95 of 112

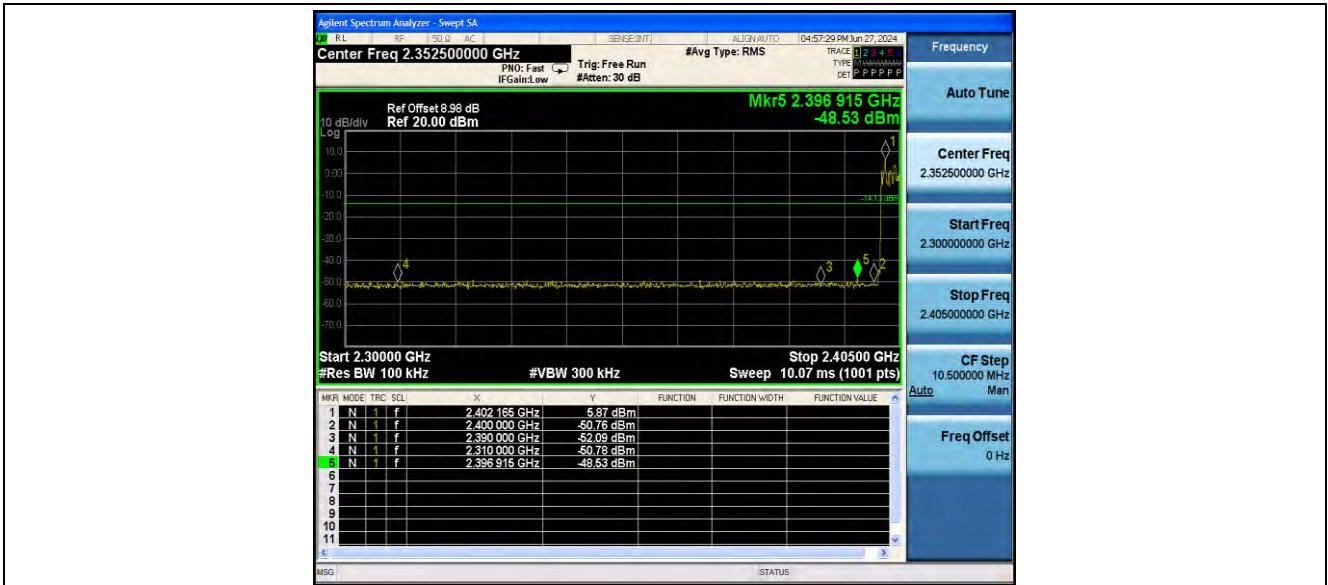

2DH5_Ant1_High_Hop_2480

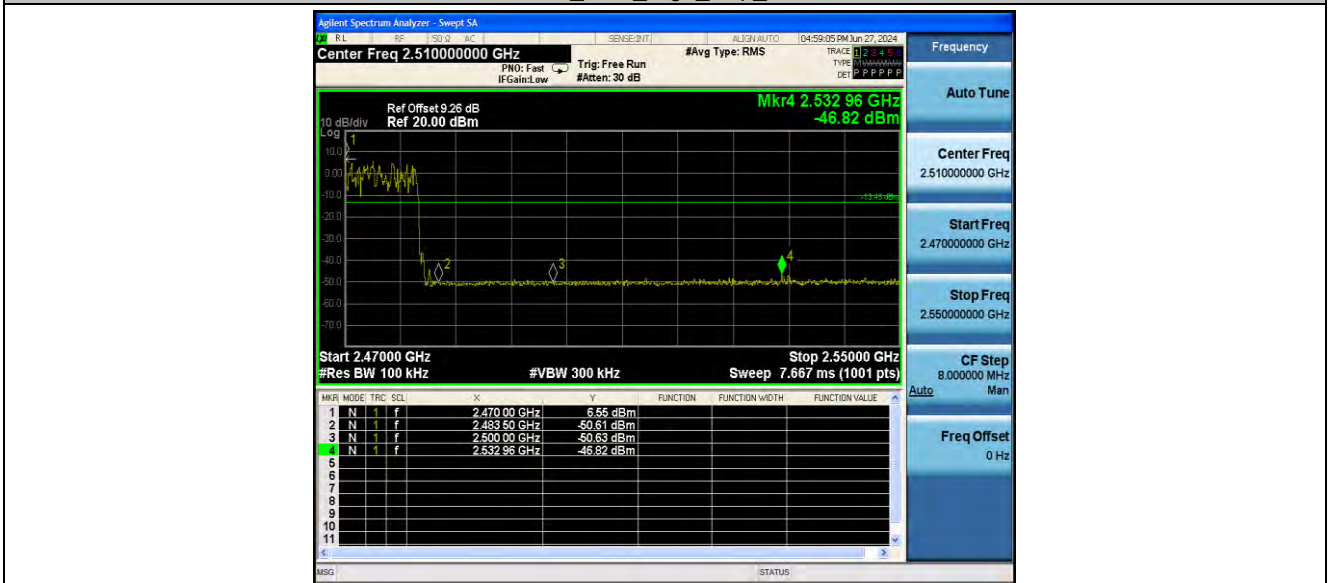


3DH5_Ant1_Low_2402

Compliance Certification Services (Kunshan) Inc.


CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 96 of 112

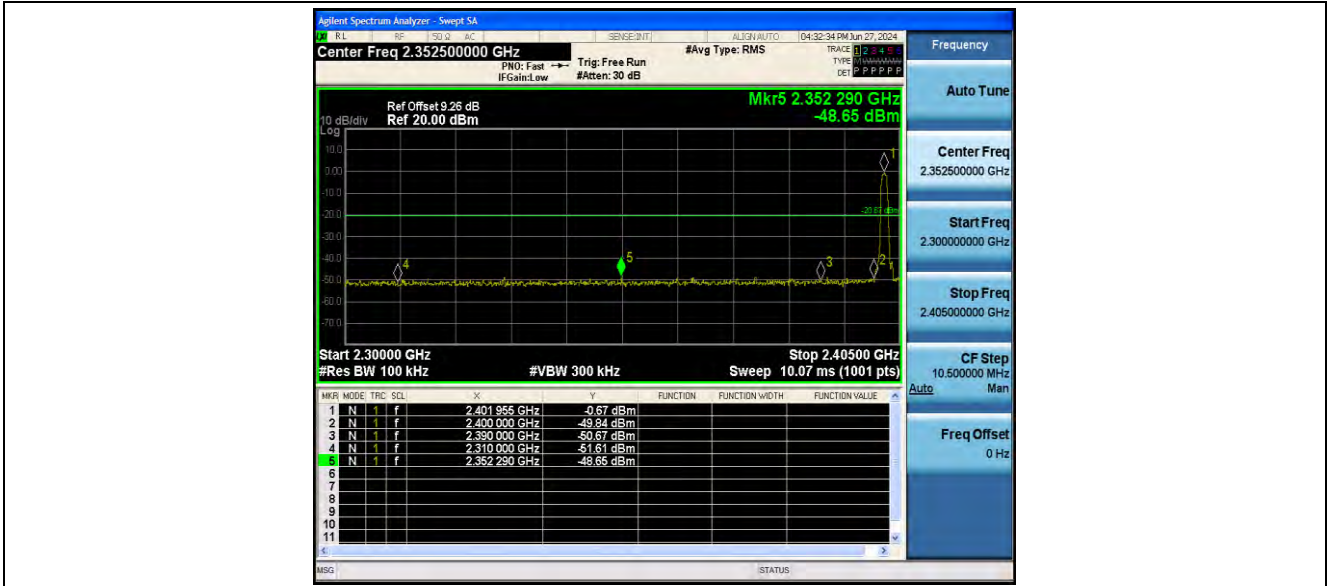

3DH5_Ant1_High_2480

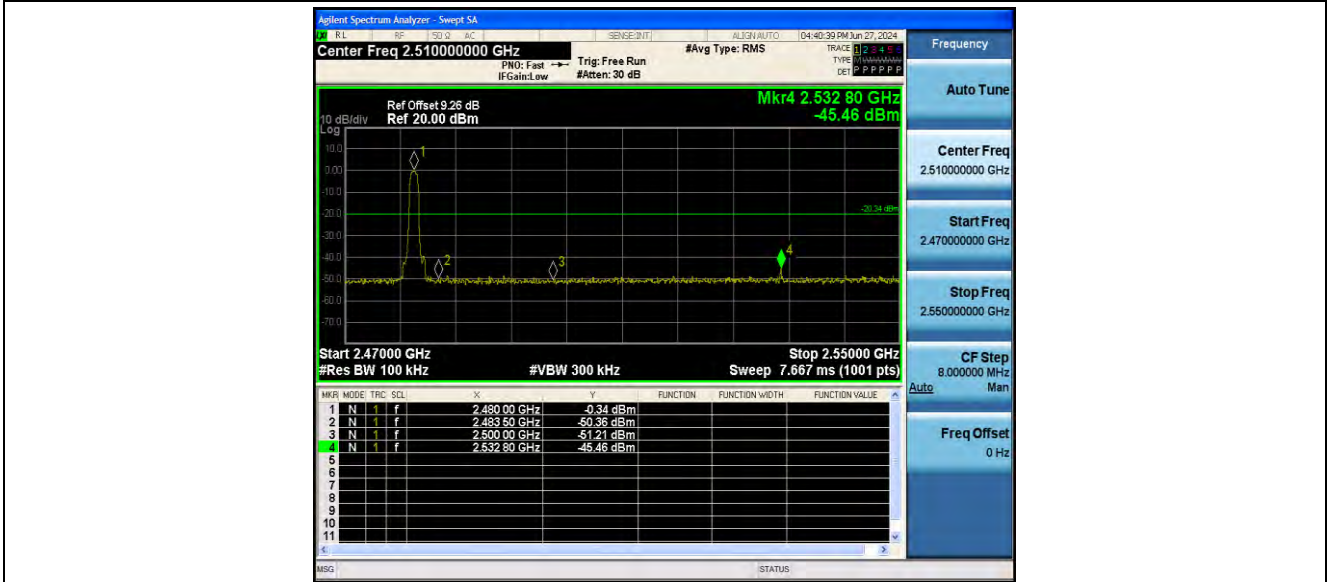


3DH5_Ant1_Low_Hop_2402

Compliance Certification Services (Kunshan) Inc.


CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 97 of 112

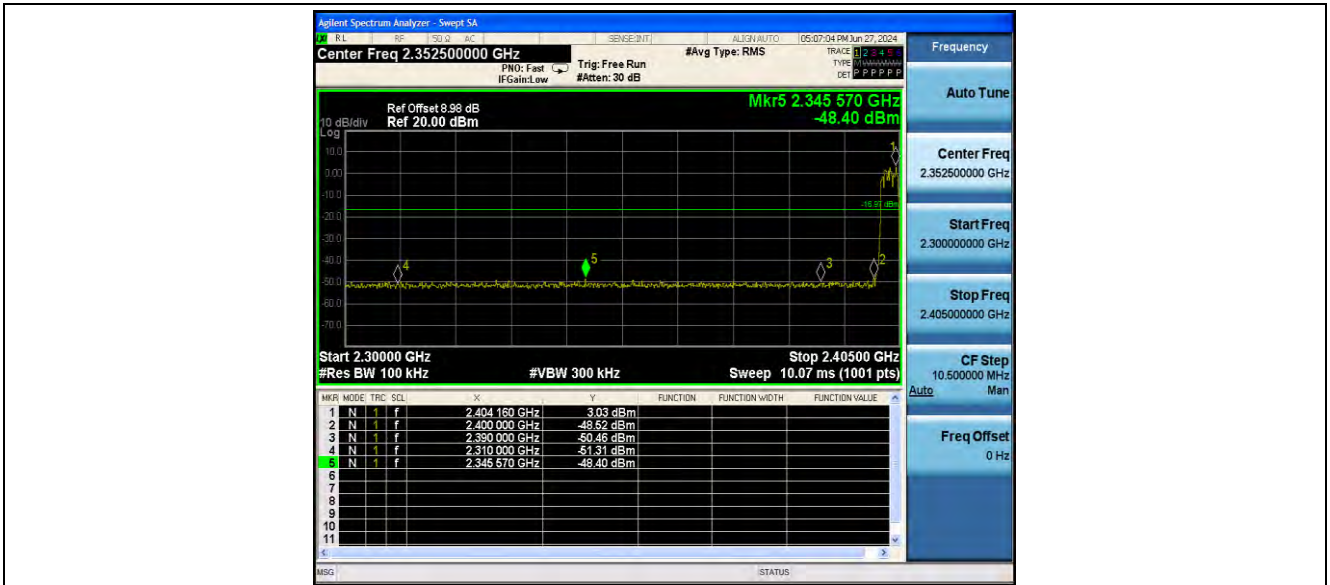

3DH5_Ant1_High_Hop_2480

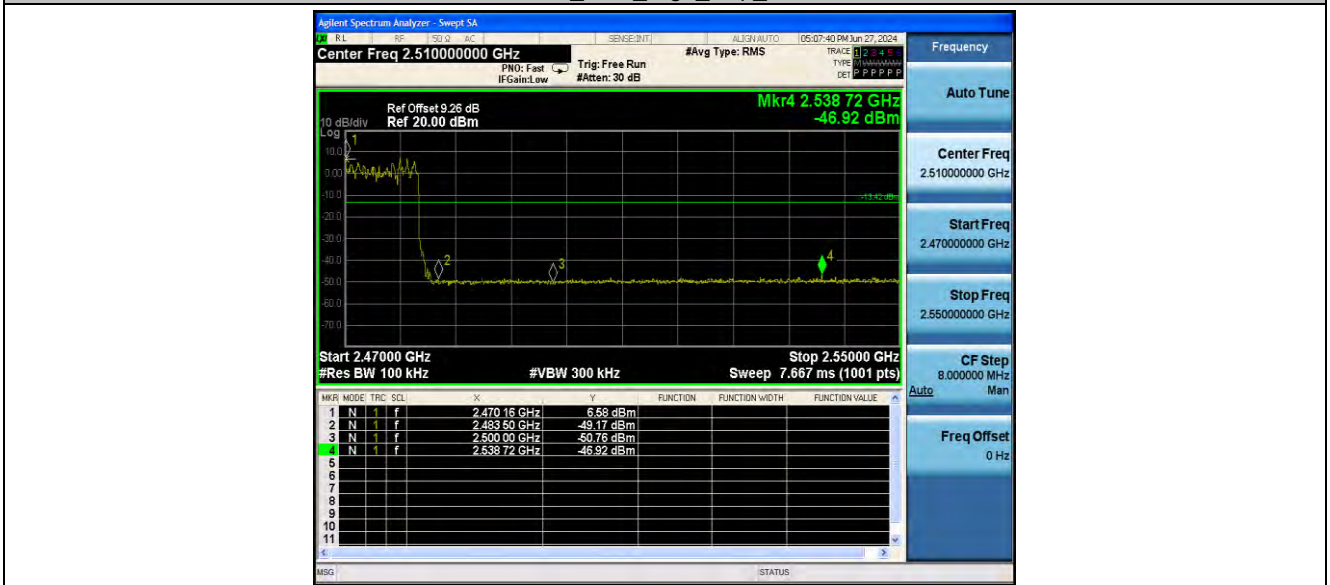


10.8 Appendix H: Conducted Spurious Emission

10.8.1 Test Result

Test Mode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	5.78	5.78	---	PASS
			30~1000	5.78	-58.16	≤-14.22	PASS
			1000~26500	5.78	-40.51	≤-14.22	PASS
		2441	Reference	6.11	6.11	---	PASS
			30~1000	6.11	-58.36	≤-13.89	PASS
			1000~26500	6.11	-41.34	≤-13.89	PASS
		2480	Reference	6.17	6.17	---	PASS
			30~1000	6.17	-59.45	≤-13.83	PASS
			1000~26500	6.17	-41.73	≤-13.83	PASS
2DH5	Ant1	2402	Reference	-1.47	-1.47	---	PASS
			30~1000	-1.47	-60.48	≤-21.47	PASS
			1000~26500	-1.47	-41.39	≤-21.47	PASS
		2441	Reference	-1.53	-1.53	---	PASS
			30~1000	-1.53	-60.22	≤-21.53	PASS
			1000~26500	-1.53	-40.76	≤-21.53	PASS
		2480	Reference	-0.77	-0.77	---	PASS
			30~1000	-0.77	-60.14	≤-20.77	PASS
			1000~26500	-0.77	-41.81	≤-20.77	PASS
3DH5	Ant1	2402	Reference	-1.24	-1.24	---	PASS
			30~1000	-1.24	-60.41	≤-21.24	PASS
			1000~26500	-1.24	-41.31	≤-21.24	PASS
		2441	Reference	-1.12	-1.12	---	PASS
			30~1000	-1.12	-60.04	≤-21.12	PASS
			1000~26500	-1.12	-41.92	≤-21.12	PASS
		2480	Reference	-0.69	-0.69	---	PASS
			30~1000	-0.69	-59.98	≤-20.69	PASS
			1000~26500	-0.69	-41.71	≤-20.69	PASS

10.8.2 Test Graphs

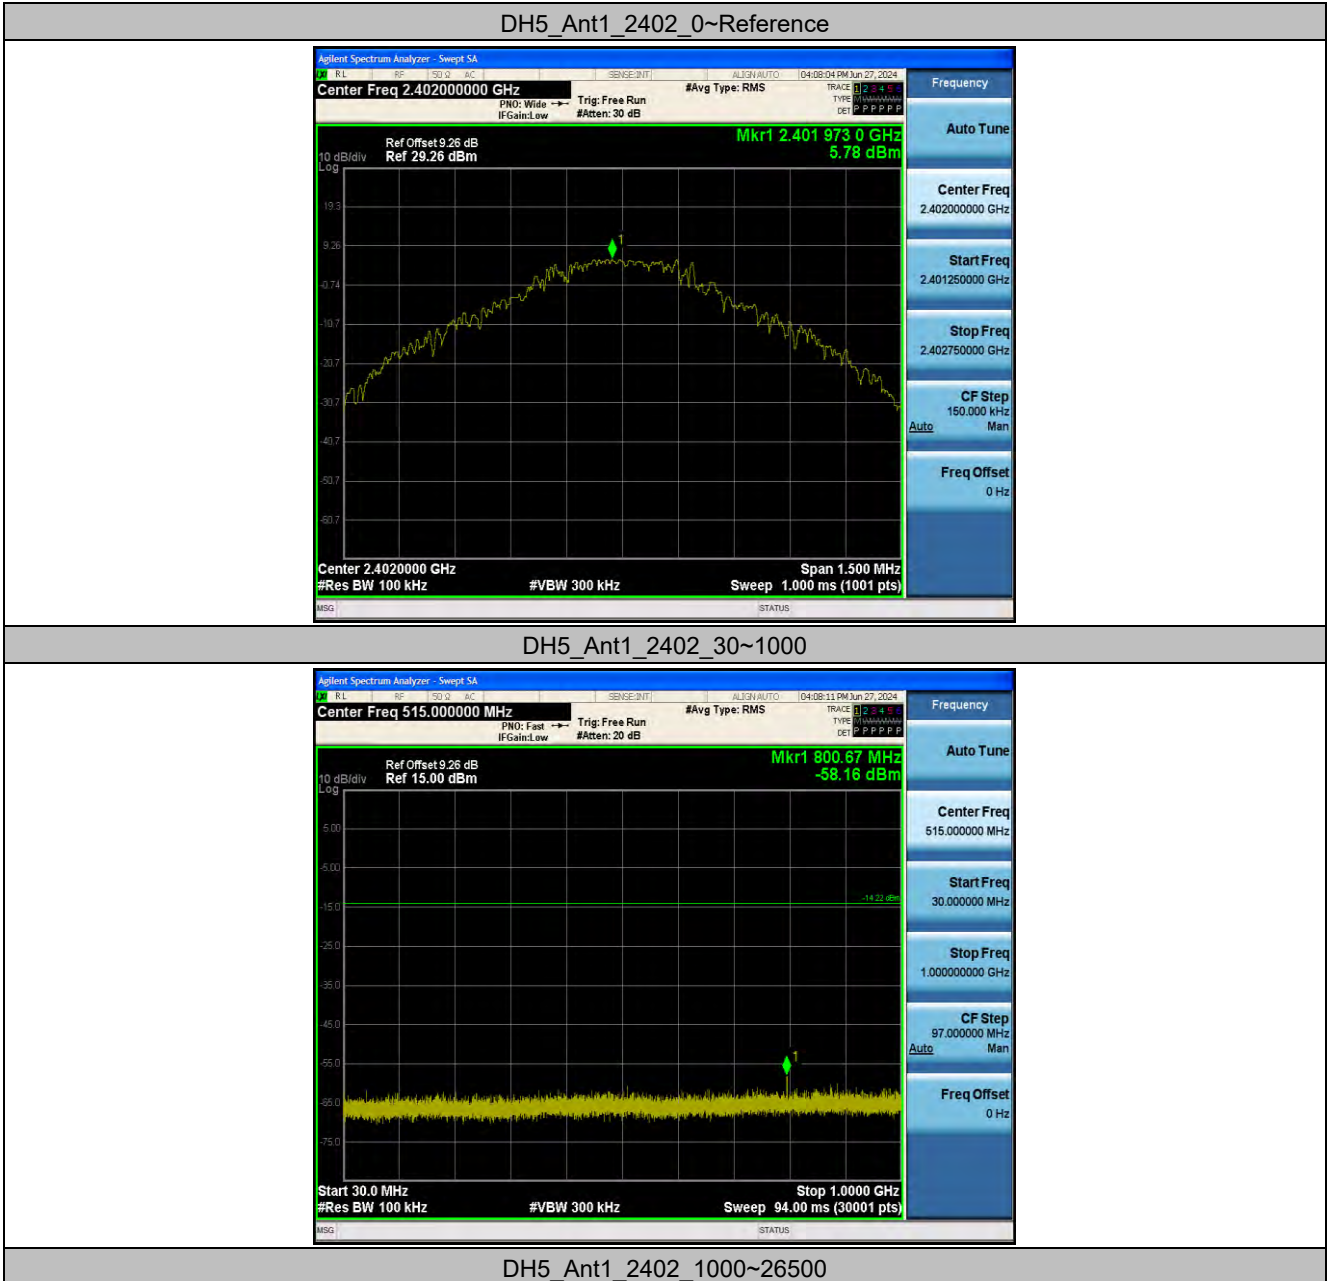

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 100 of 112



DH5_Ant1_2441_0~Reference




DH5_Ant1_2441_30~1000

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 101 of 112

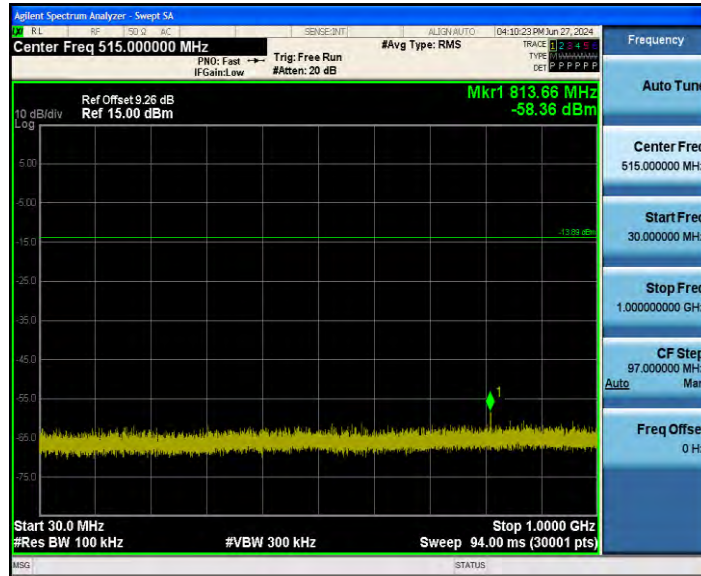

DH5_Ant1_2441_1000~26500



DH5_Ant1_2480_0~Reference

Compliance Certification Services (Kunshan) Inc.


CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 102 of 112



DH5_Ant1_2480_30~1000

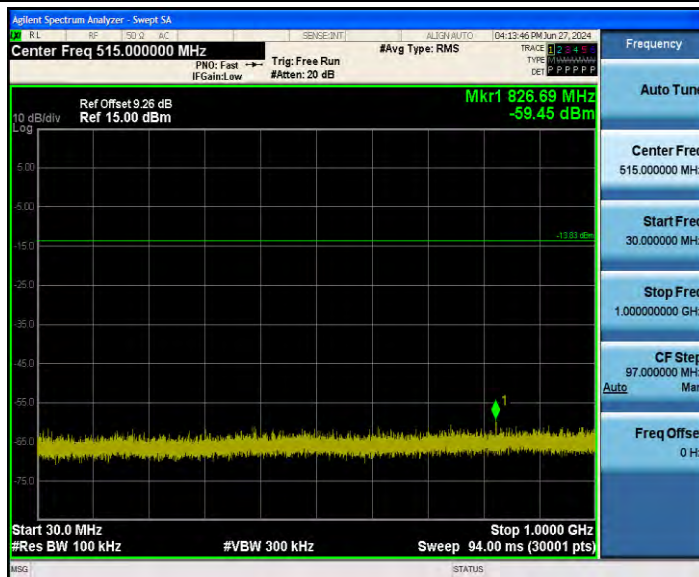


DH5_Ant1_2480_1000~26500

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 103 of 112

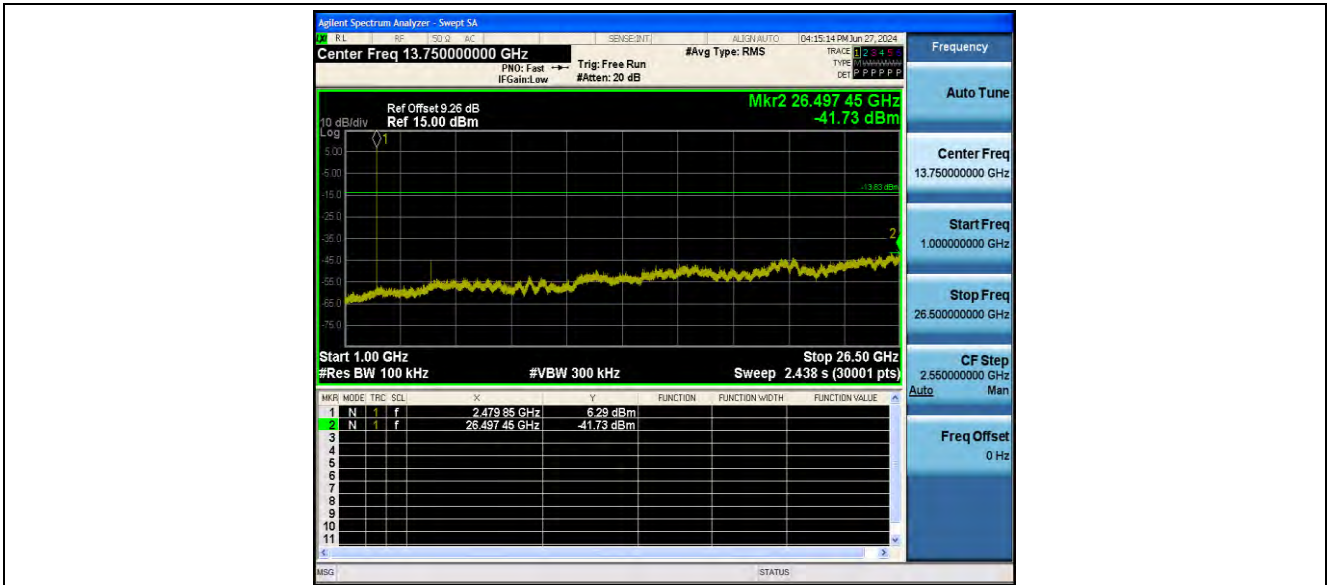

2DH5_Ant1_2402_0~Reference




2DH5_Ant1_2402_30~1000

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 104 of 112

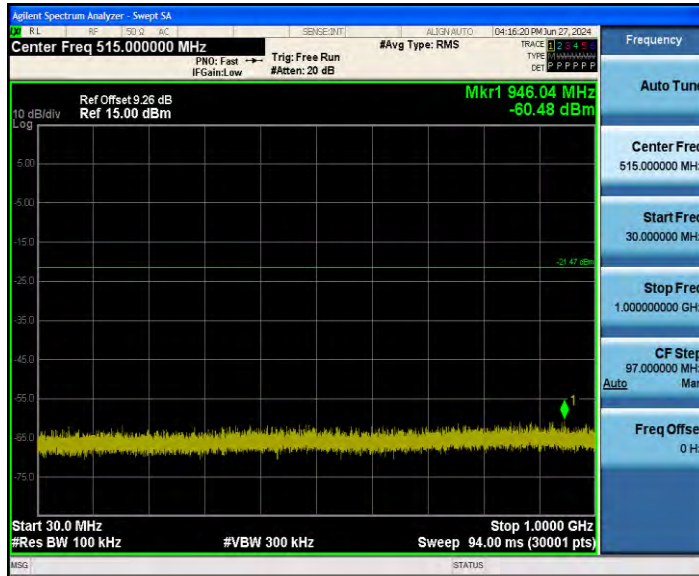

2DH5_Ant1_2402_1000~26500



2DH5_Ant1_2441_0~Reference

Compliance Certification Services (Kunshan) Inc.


CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 105 of 112



2DH5_Ant1_2441_30~1000

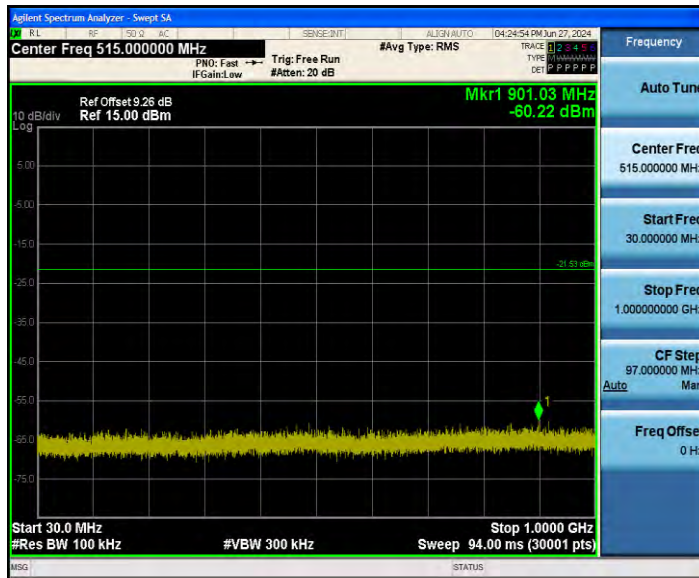


2DH5_Ant1_2441_1000~26500

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 106 of 112

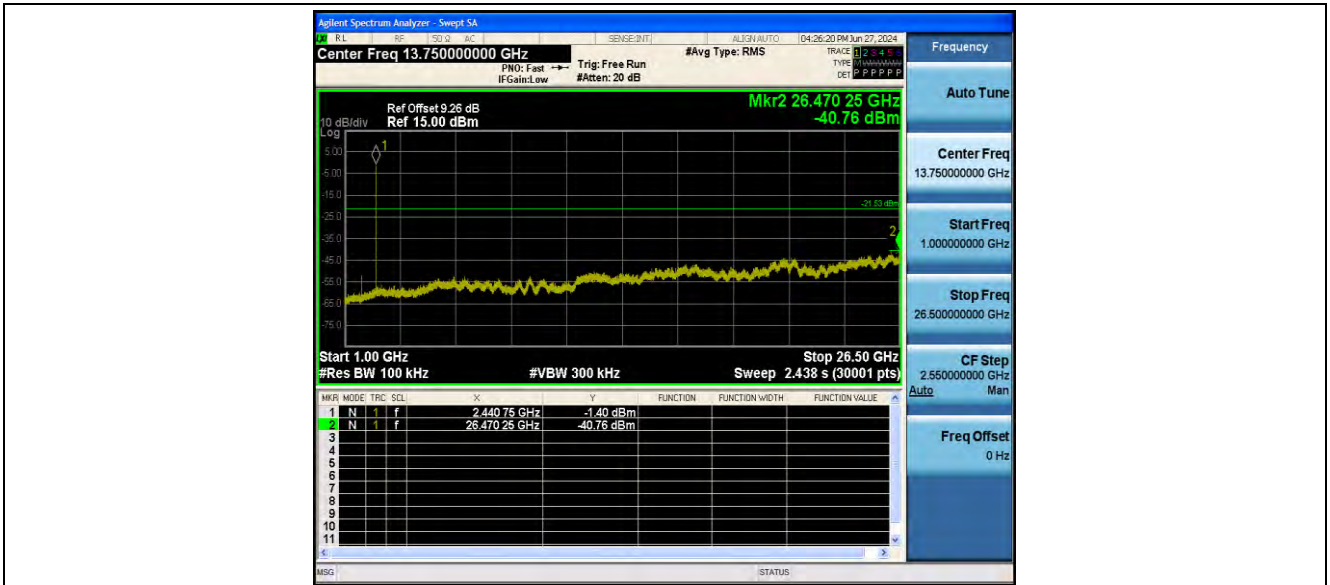

2DH5_Ant1_2480_0~Reference




2DH5_Ant1_2480_30~1000

Compliance Certification Services (Kunshan) Inc.


CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 107 of 112

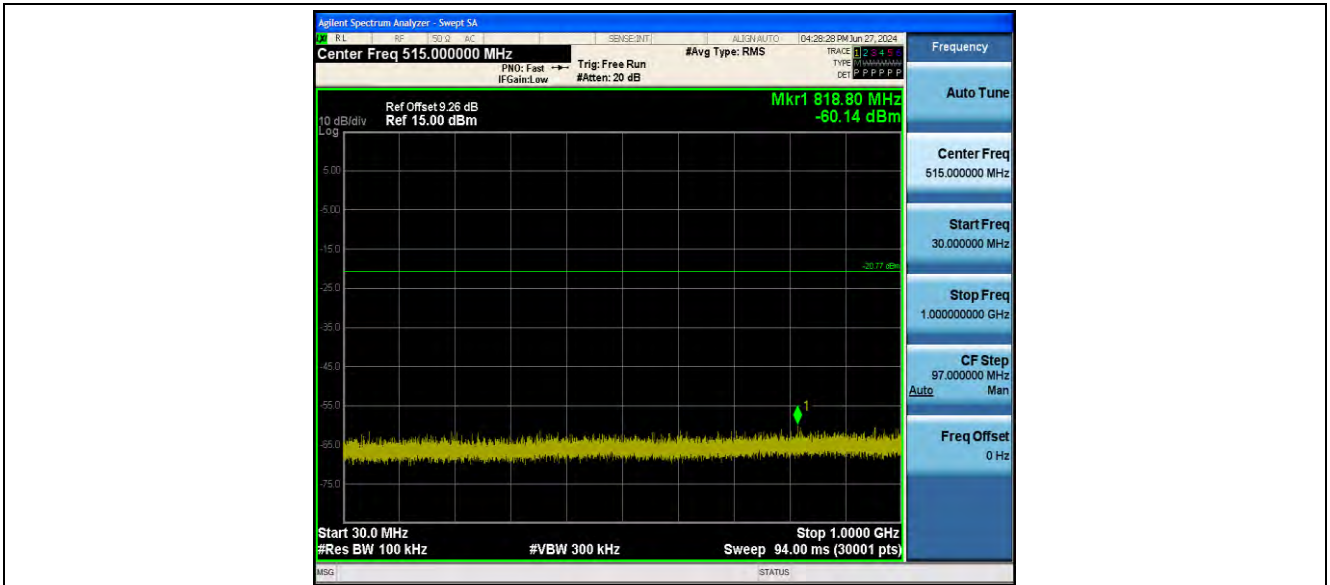

2DH5_Ant1_2480_1000~26500

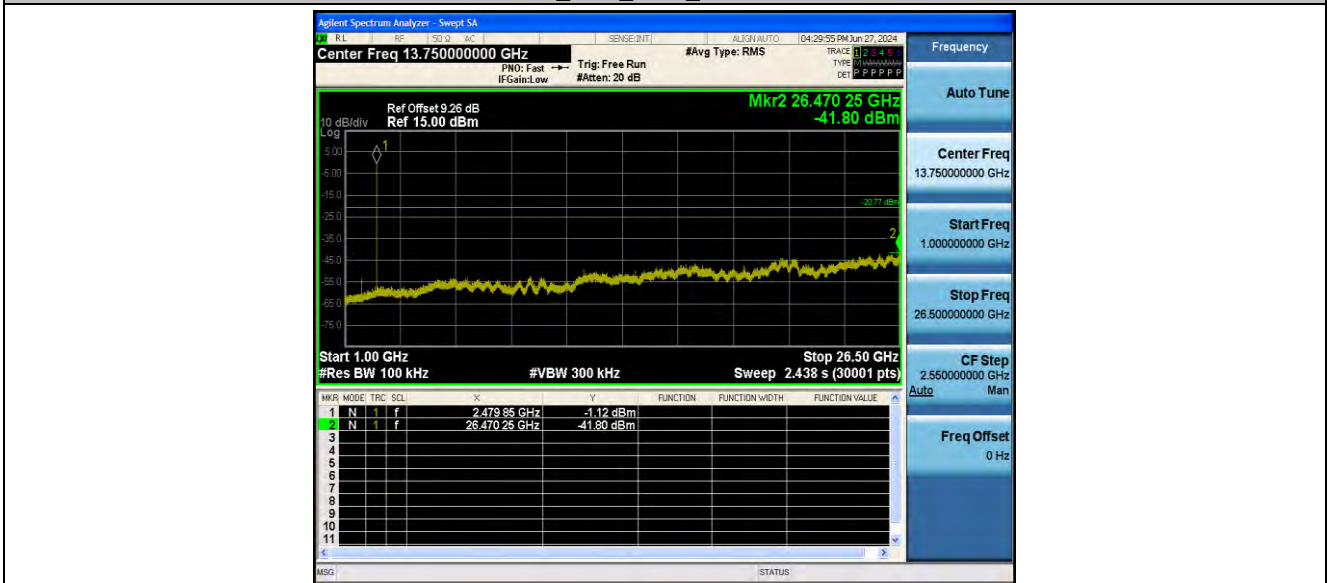

3DH5_Ant1_2402_0~Reference

Compliance Certification Services (Kunshan) Inc.


CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 108 of 112



3DH5_Ant1_2402_30~1000

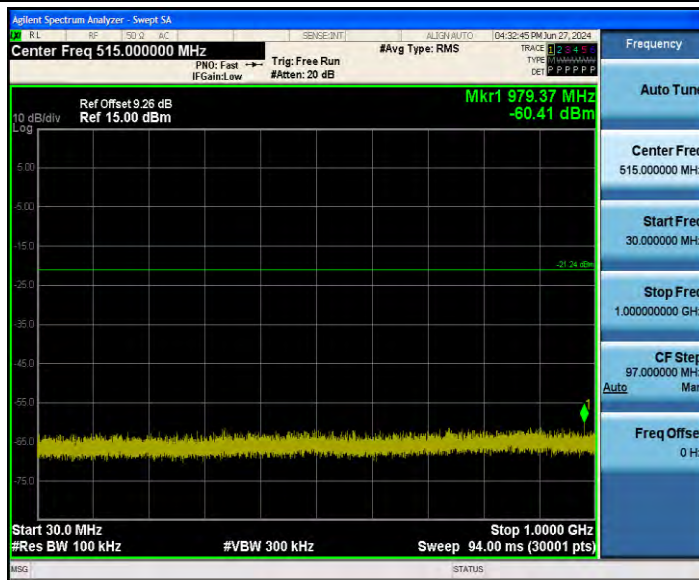



3DH5_Ant1_2402_1000~26500

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 109 of 112

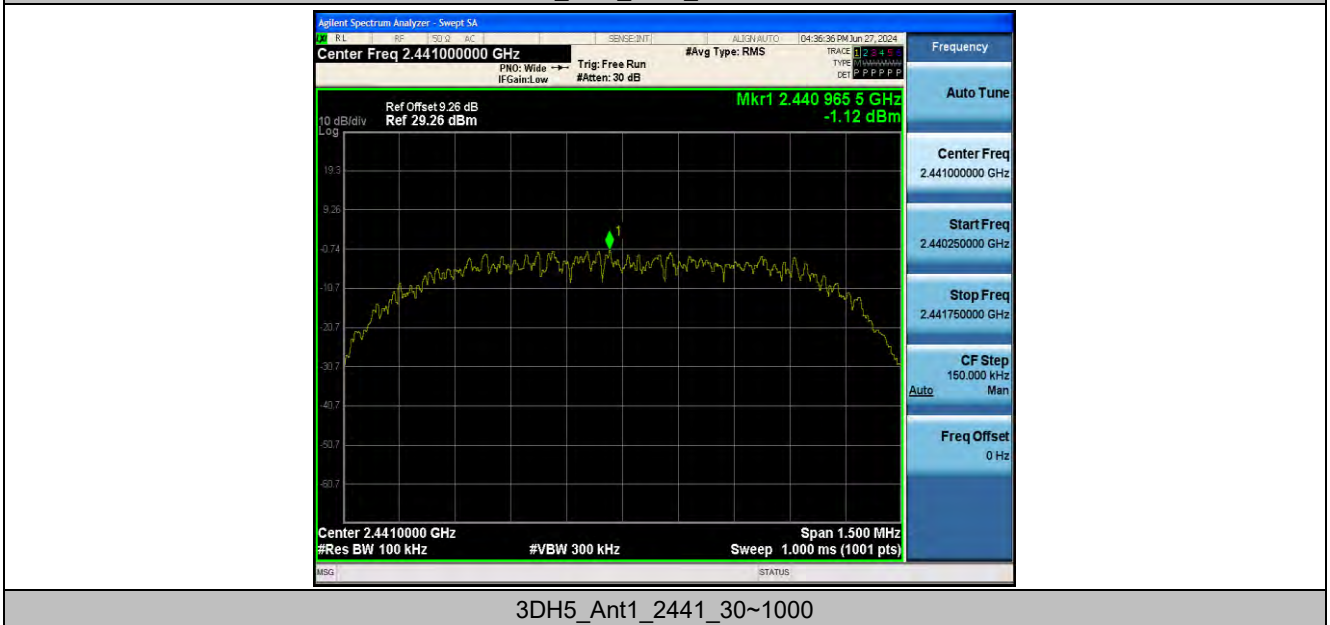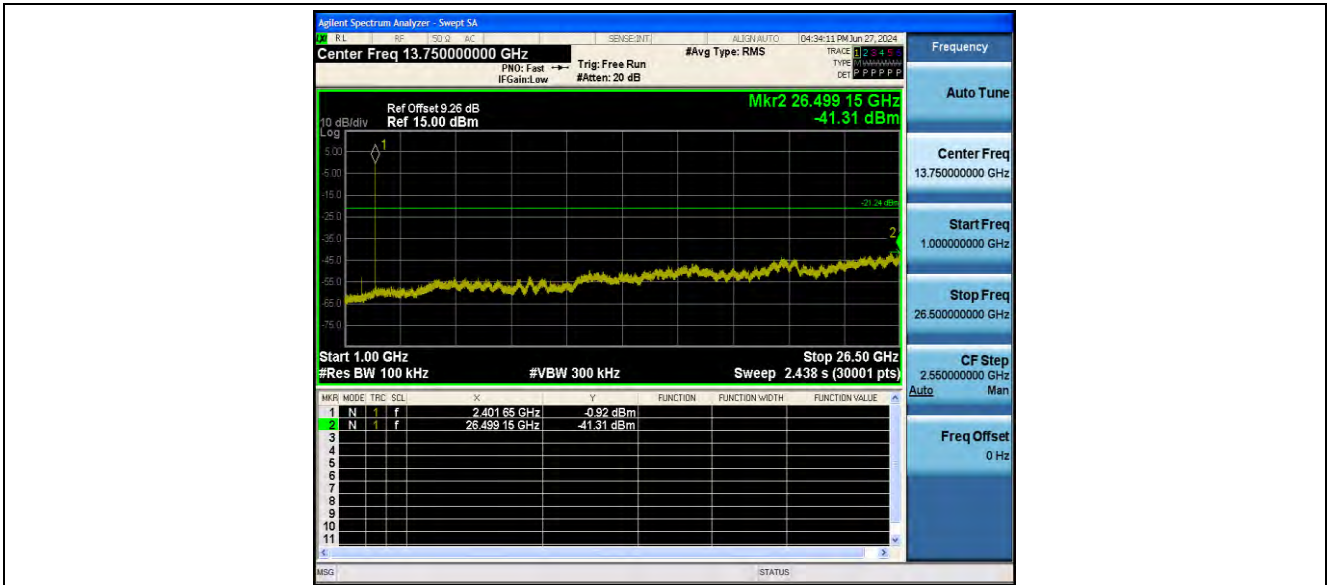


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 110 of 112

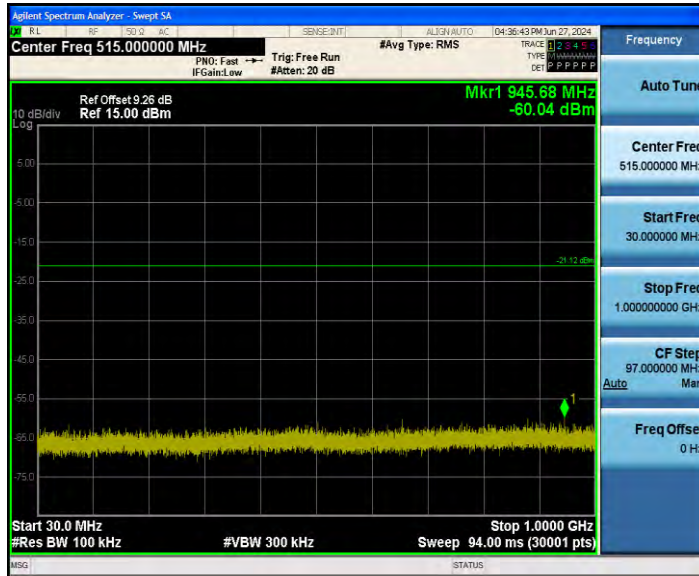

3DH5_Ant1_2441_1000~26500



3DH5_Ant1_2480_0~Reference

Compliance Certification Services (Kunshan) Inc.


CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 111 of 112



3DH5_Ant1_2480_30~1000

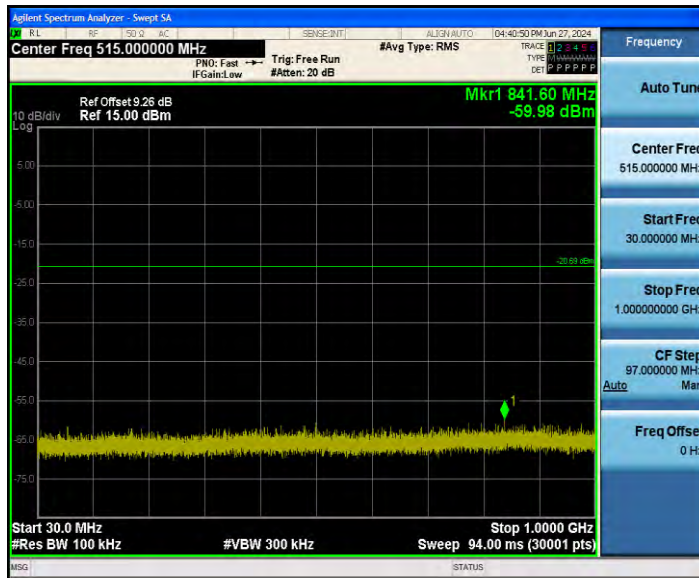


3DH5_Ant1_2480_1000~26500

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR241000206801

Page: 112 of 112

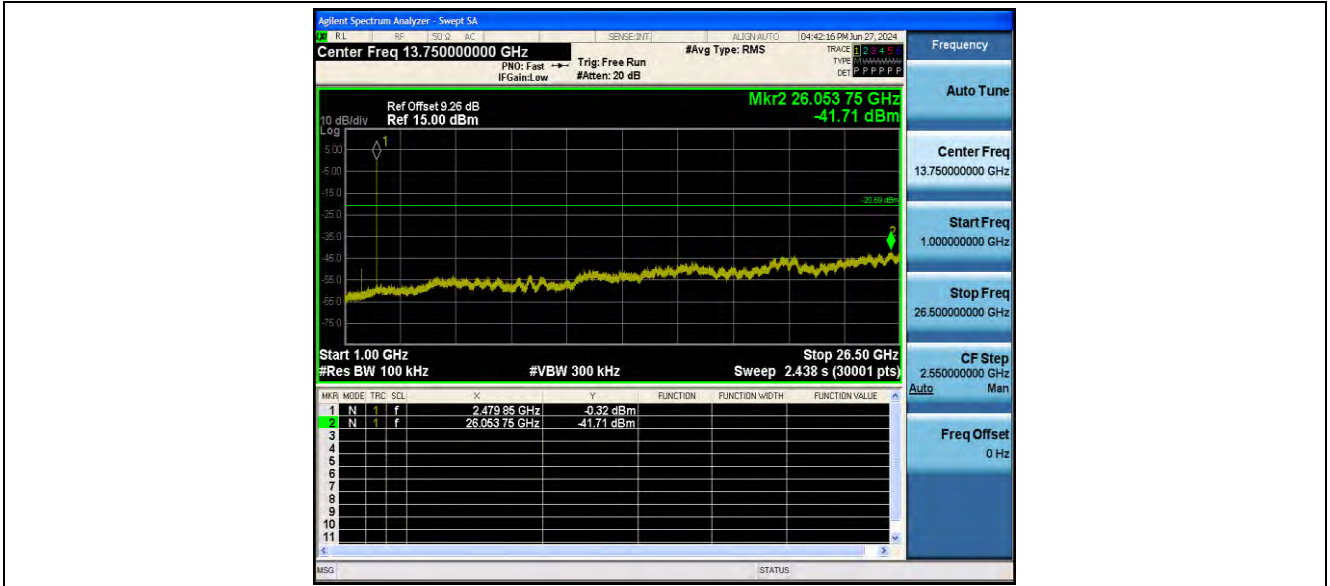

- End of the Report -