



198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technological
Development District, Guangzhou, China 510663
Telephone: +86 (0) 20 82155555
Fax: +86 (0) 20 82075059
Email: ee.guangzhou@sgs.com

Report No.: GZEM140400190701
Page: 1 of 34
FCC ID: OU9LS802-E02

TEST REPORT

Application No.:	GZEM1404001907ME
Applicant:	Guangdong Transtek Medical Electronics Co., Ltd
FCC ID:	OU9LS802-E02
Product Name:	Blood Pressure Monitor
Product Description:	Blood Pressure Monitor with 915 MHz as carrier
Model No.:	LS802-E
Trade mark:	Transtek
Standards:	CFR 47 FCC PART 15 SUBPART C:2013 section 15.249
Date of Receipt:	2014-04-29
Date of Test:	2014-06-23 to 2014-07-08
Date of Issue:	2014-07-20
Test Result :	Pass*

* In the configuration tested, the EUT complied with the standards specified above.



Richard Li
Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.




The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2014-07-20		Original

Authorized for issue by:			
Tested By		(Jack Liang) / Project Engineer	2011-01-27 to 2011-02-01 Date
Prepared By		(Liky Chen) / Clerk	2014-07-15 Date
Checked By		(Fred Zhu) / Reviewer	2014-07-20 Date

3 Test Summary

Test	Test Requirement	Test method	Result
Field Strength of Fundamental	FCC PART 15 C section 15.249 (a)	ANSI C63.10: Clause 6.6	PASS
Field Strength of Unwanted Emissions	FCC PART 15 C section 15.249 (a) section 15.249 (d)	ANSI C63.10: Clause 6.4, 6.6 and 6.7	PASS
Band Edges	FCC PART 15 C section 15.249 (d)	ANSI C63.10: Clause 6.9.2	PASS
Occupied Bandwidth	FCC PART 15 C section 15.215(c)	ANSI C63.10: Clause 6.9.1	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207	ANSI C63.10: Clause 6.2	PASS**

Remark:

EUT: In this whole report EUT means Equipment Under Test.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radio Frequency.

ANSI C63.10: the detail version is ANSI C63.10:2009 in the whole report.

** : The EUT passed Conducted Emissions at Mains Terminals test after modification carried out by applicant.



4 Contents

1	COVER PAGE.....	1
2	VERSION	2
3	TEST SUMMARY.....	3
4	CONTENTS.....	4
5	GENERAL INFORMATION.....	5
5.1	Client Information	5
5.2	General Description of E.U.T.	5
5.3	Details of E.U.T.	5
5.4	Description of Support Units.....	5
5.5	Other Information Requested by the Customer	6
5.6	Abnormalities from Standard Conditions	6
5.7	Deviation from Standards	6
5.8	Test Location	6
5.9	Test Facility	7
6	EQUIPMENT USED DURING TEST.....	8
7	TEST RESULTS.....	9
7.1	E.U.T. Operation.....	9
7.2	Antenna Requirement	10
7.3	Field Strength of Fundamental& Field Strength of Unwanted Emissions& Band Edge	11
7.4	Occupied Bandwidth	29
7.5	Conducted Emissions at Mains Terminals 150 kHz to 30 MHz.....	31

5 General Information

5.1 Client Information

Applicant: Guangdong Transtek Medical Electronics Co., Ltd
Address of Applicant: Zone A, 5/F., Investment Building, No.12 Huizhan East Rd., Torch Development District, Zhongshan, Guangdong, China, 528437

5.2 General Description of E.U.T.

Product Name: Blood Pressure Monitor
Model No.: LS802-E

5.3 Details of E.U.T.

Operating Frequency: 915 MHz, 916 MHz, 916.5 MHz
Type of Modulation: FSK
Number of Channels: 3
Channel Separation: More than 0.5MHz
Antenna Type: Integral antenna
Antenna gain: 1 dBi
Function: Blood Pressure Monitor with 915MHz as carrier
Power Supply: DC 6V = 4 x 1.5V size "AA" batteries;
AC 100-240V 50-60Hz for adapter
Adapter Information: Model: UE08WCP-060100SPA
Input: AC 100-240V 50-60Hz
Output DC 6V 1A
Power cord: 1.5m x 2 wires unshielded DC cable

EUT channels and frequencies list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	915	2	916
3	916.5		

5.4 Description of Support Units

The EUT has been test as an independent unit.



5.5 Other Information Requested by the Customer

None.

5.6 Abnormalities from Standard Conditions

The EUT passed Conducted Emissions at Mains Terminals test after modification carried out by applicant.

5.7 Deviation from Standards

Biconical and log periodic antennas were used instead of dipole antennas.

5.8 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory,
198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

6 Equipment Used during Test

RE in Chamber						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. date	Cal.Due date
					(YYYY-MM-DD)	(YYYY-MM-DD)
EMC0525	Compact Semi-Anechoic Chamber	ChangZhou ZhongYu	N/A	N/A	2012-08-30	2014-08-30
EMC0522	EMI Test Receiver	Rohde & Schwarz	ESIB26	100283	2014-04-19	2015-04-19
EMC0056	EMI Test Receiver	Rohde & Schwarz	ESCI	100236	2014-03-03	2015-03-03
EMC0528	RI High frequency Cable	SGS	20 m	N/A	2014-05-09	2015-05-09
EMC2025	Trilog Broadband Antenna 30-3000MHz	SCHWARZBECK MESS-ELEKTRONIK	VULB 9163	9163-450	2013-08-31	2016-08-31
EMC0524	Bi-log Type Antenna	Schaffner -Chase	CBL6112B	2966	2013-08-31	2016-08-31
EMC0519	Bilog Type Antenna	Schaffner -Chase	CBL6143	5070	2012-06-02	2015-06-02
EMC2026	Horn Antenna 1-18GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	9120D-841	2013-08-31	2016-08-31
EMC0518	Horn Antenna	Rohde & Schwarz	HF906	100096	2012-07-01	2015-07-01
EMC0521	1-26.5 GHz Pre-Amplifier	Agilent	8449B	3008A01649	2014-03-03	2015-03-03
EMC2065	Amplifier	HP	8447F	N/A	2013-08-31	2014-08-31
EMC2063	1-26GHz Pre Amplifier	Compliance Direction System Inc.	PAP-1G26-48	6279.628	2013-08-31	2014-08-31
EMC0075	310N Amplifier	Sonoma	310N	272683	2014-03-03	2015-03-03
EMC0523	Active Loop Antenna	EMCO	6502	42963	2014-03-03	2016-03-03
EMC2041	Broad-Band Horn Antenna (14)15-26.5(40)GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9170	9170-375	2014-05-26	2017-05-26
EMC2069	2.4GHz filter	Micro-Tronics	BRM 50702	149	2014-04-19	2015-04-19
EMC0530	10m Semi-Anechoic Chamber	ETS	N/A	N/A	2014-05-03	2016-05-03

General used equipment						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. date	Cal.Due date
					(YYYY-MM-DD)	(YYYY-MM-DD)
EMC0006	DMM	Fluke	73	70681569	2013-09-13	2014-09-13
EMC0007	DMM	Fluke	73	70671122	2013-09-13	2014-09-13

7 Test Results

7.1 E.U.T. Operation

Test Voltage: DC 6V or AC 120V/60Hz for adapter

Temperature: 20.0 -25.0 °C

Humidity: 38-50 % RH

Atmospheric Pressure: 1000 -1010 mbar

Test frequencies and frequency range: According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

Frequency range of radiated emission measurements

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

7.2 Antenna Requirement


Standard requirement

15.203 requirement:

For intentional device. According to 15.203, an intentional radiator shall be designed to Ensure that no antenna other than that furnished by the responsible party shall be used with the device.

EUT Antenna

The antenna is PCB Layout antenna and no consideration of replacement. The maximum gain of the antenna is 1dBi.

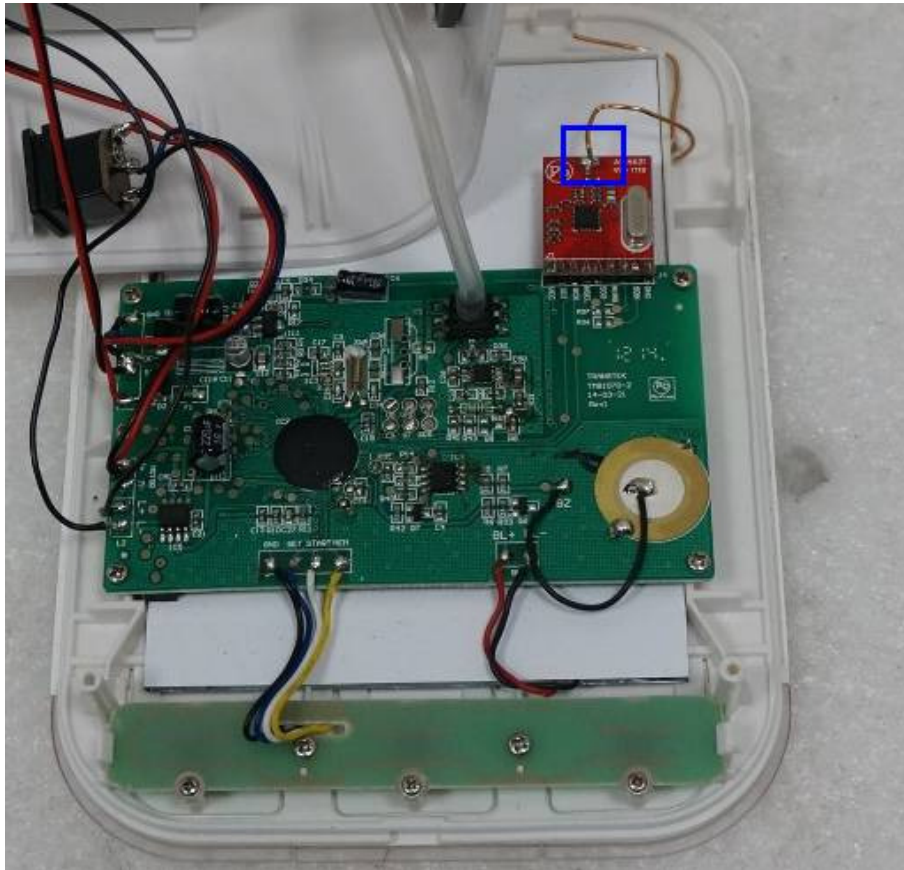

Test result: The unit does meet the FCC requirements.

7.3 Field Strength of Fundamental & Field Strength of Unwanted Emissions & Band Edge

Test Requirement: FCC Part 15 C section 15.249

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dB μ V/m @ 3m)	Field Strength of Harmonics (dB μ V/m @ 3m)
902 to 928	94.0	54.0
2400 to 2483.5	94.0	54.0
5725 to 5875	94.0	54.0
24000 to 24250	108.0	68.0

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Limits: The fundamental frequency range is in the frequency band of the EUT is 902 MHz ~ 928 MHz.

The limit for QP field strength dB μ V/m for the fundamental frequency = 94.0 dB μ V/m.

No fundamental is allowed in the restricted bands.

The limit for AVG field strength dB μ V/m for the harmonics and other above 1G frequencies = 54.0 dB μ V/m.

The limit for Peak field strength dB μ V/m for the harmonics and other above 1G frequencies = 74.0 dB μ V/m.

Test Method: ANSI C63.10: Clause 6.4, 6.6 and 6.7 for Field Strength of Fundamental & Field Strength of Unwanted Emissions

ANSI C63.10: Clause 6.9.2 for Band Edge

Status: Pre-test the EUT in continuous transmitting mode with setup as stand-alone in X, Y, Z three axes, found the worst case is X axes and report the data.

Measurement Distance: 3m (Semi-Anechoic Chamber)

Frequency range: 9 kHz – 10 GHz for transmitting mode.

Test instrumentation resolution bandwidth

9 kHz (9 kHz - 30 MHz), 120 kHz (30 MHz - 1000 MHz), 1 MHz (1000 MHz – 10 GHz)



Detector: For PK and QP value:
RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz
VBW \geq RBW
Sweep = auto
Detector function = peak
Trace = max hold
For AV value:
RBW = 1 MHz for $f \geq 1$ GHz,
VBW = 10 Hz
Sweep = auto
Detector function = peak
Trace = max hold

And according 15.35(a)


15.35(a) On any frequency or frequencies below or equal to 1000 MHz, the limits shown are based on measuring equipment employing a CISPR quasi-peak detector function and related measurement bandwidths, unless otherwise specified. The specifications for the measuring instrument using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Interference (CISPR) of the International Electrotechnical Commission. As an alternative to CISPR quasi-peak measurements, the responsible party, at its option, may demonstrate compliance with the emission limits using measuring equipment employing a peak detector function, properly adjusted for such factors as pulse desensitization, as long as the same bandwidths as indicated for CISPR quasi-peak measurements are employed.

Note: For pulse modulated devices with a pulse-repetition frequency of 20 Hz or less and for which CISPR quasi-peak measurements are specified, compliance with the regulations shall be demonstrated using measuring equipment employing a peak detector function, properly adjusted for such factors as pulse desensitization, using the same measurement bandwidths that are indicated for CISPR quasi-peak measurements.

According to 15.35 (b) Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz. When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§ 15.250, 15.252, 15.255, and 15.509-15.519 of this part, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device, e.g., the total peak power level. Note that the use of a pulse desensitization correction factor may be needed to determine the total peak emission level. The instruction manual or application note for the measurement instrument should be consulted for determining pulse desensitization factors, as necessary.

The average correction factor is computed by analyzing the on time in 100ms over one complete pulse train. Analysis of the remote transmitter on time in one complete pulse train, therefore the average value of fundamental frequency is: Average = Peak value + 20log (Duty cycle), where the duty factor is calculated from following formula:

$$20\log (\text{Duty cycle}) = 20\log(0.2863) = -10.86\text{dB}$$

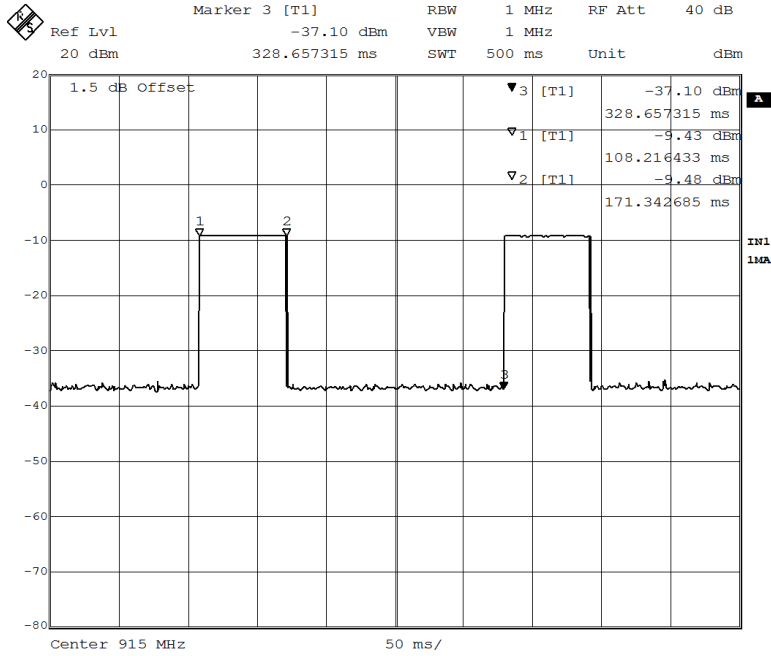

Test Procedure:

1) 9 kHz to 30 MHz emissions:

For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.10. The centre of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT, During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

2) 30 MHz to 1 GHz emissions:

For testing performed with the bi-log type antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.


3) 1 GHz to 10 GHz emissions:

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2007 was used to perform radiated emission test above 1 GHz.


For testing performed with the horn antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scan between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

Test Configuration:


1) 9 kHz to 30 MHz emissions:

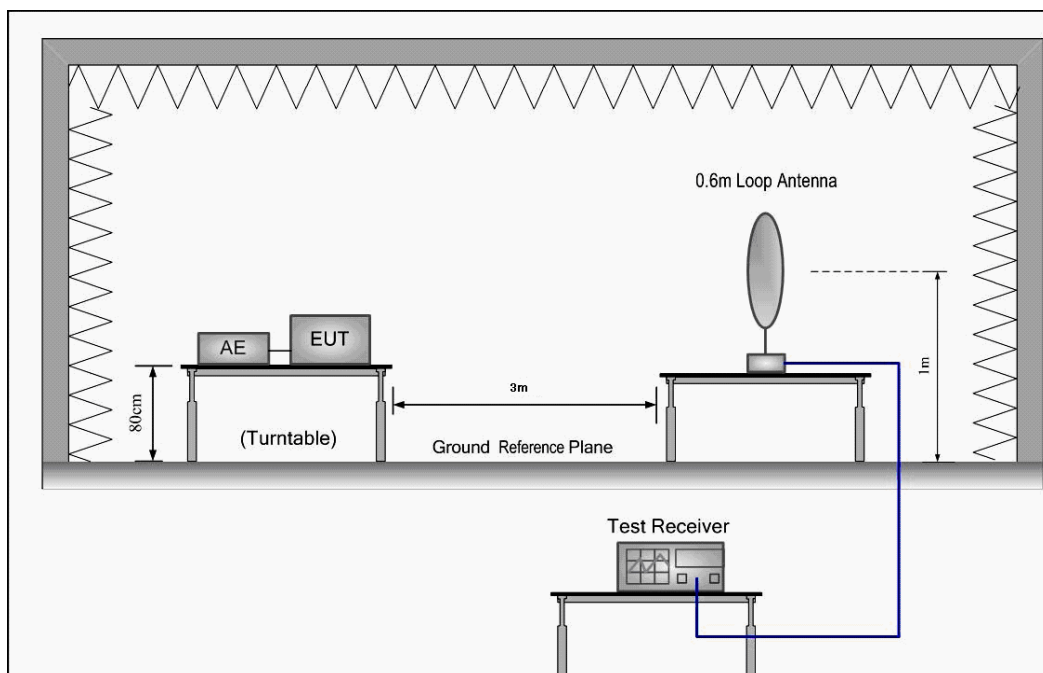

2) 30 MHz to 1 GHz emissions:

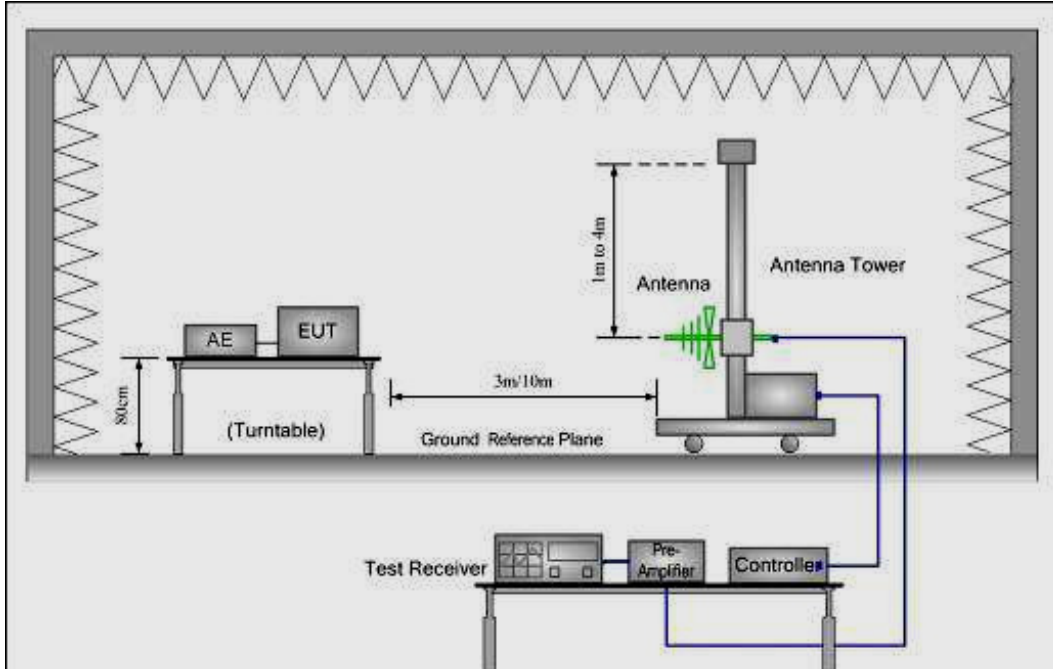

3) 1 GHz to 10 GHz emissions:

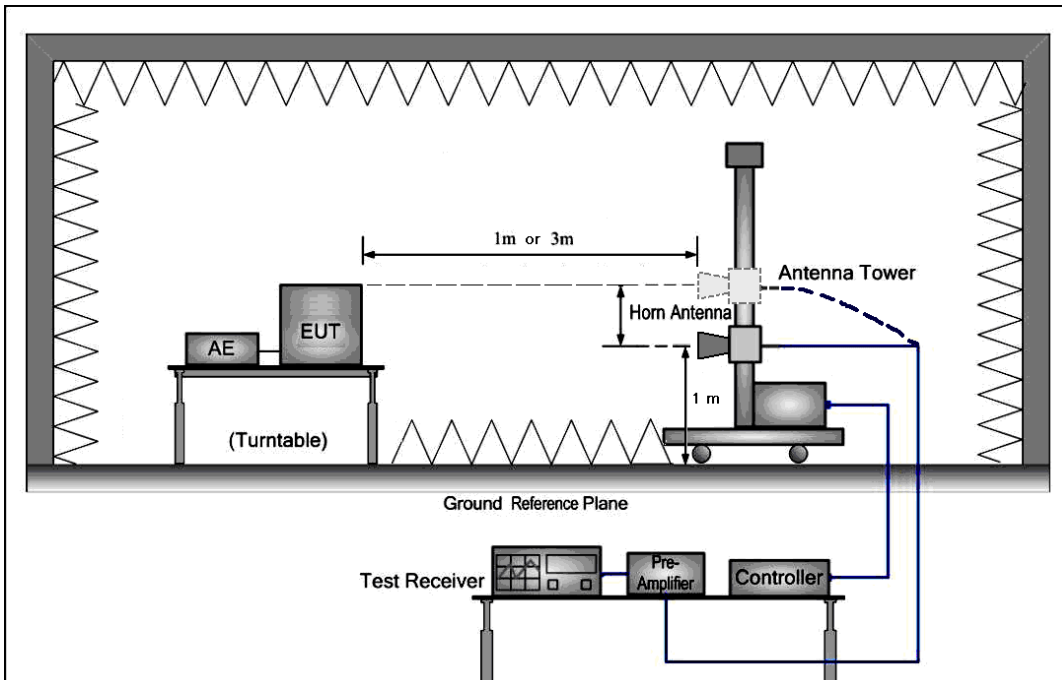

The field strength is calculated by adding the Antenna Factor, Cable Loss & Pre-amplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Preamplifier Factor}$$



Quasi-peak measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
915.0	21.18	4.01	30.88	96.08	90.39	94.00	V
916.0	21.21	4.02	30.88	95.15	89.50	94.00	V
916.5	21.21	4.03	30.88	95.72	90.08	94.00	V
915.0	21.18	4.01	30.88	96.24	90.55	94.00	H
916.0	21.21	4.02	30.88	96.29	90.64	94.00	H
916.5	21.21	4.03	30.88	95.71	90.07	94.00	H

9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement


The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

30 MHz~1 GHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

Vertical:

Peak scan

Level (dB μ V/m)

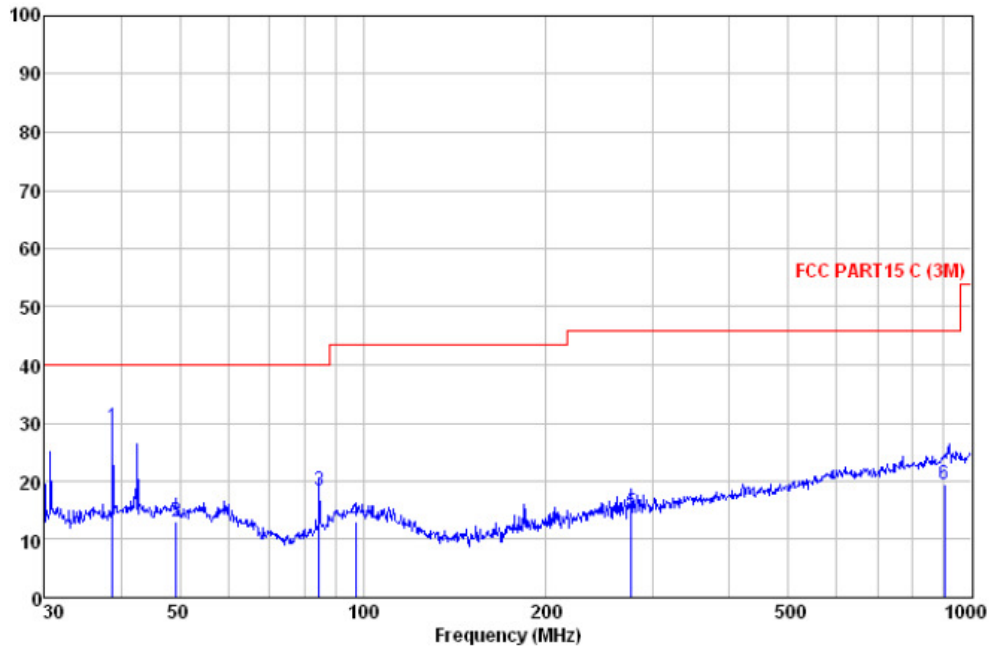

Quasi-peak measurement

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Remark
	MHz	Level	Loss	Factor	dBuV/m	Line	Limit	
		dB μ V	dB	dB		dB μ V/m	dB	
		dB/m						
1	38.752	47.14	13.25	0.98	31.01	30.36	40.00	-9.64 QP
2	49.359	30.69	13.29	1.09	31.00	14.07	40.00	-25.93 QP
3	84.702	39.35	10.16	1.30	31.00	19.81	40.00	-20.19 QP
4	97.115	31.14	12.97	1.37	31.00	14.48	43.50	-29.02 QP
5	276.124	33.11	12.55	2.33	31.01	16.98	46.00	-29.02 QP
6	902.000	29.19	21.12	4.00	30.90	23.41	46.00	-22.59 QP

9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement


The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

30 MHz~1 GHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dB μ V/m)

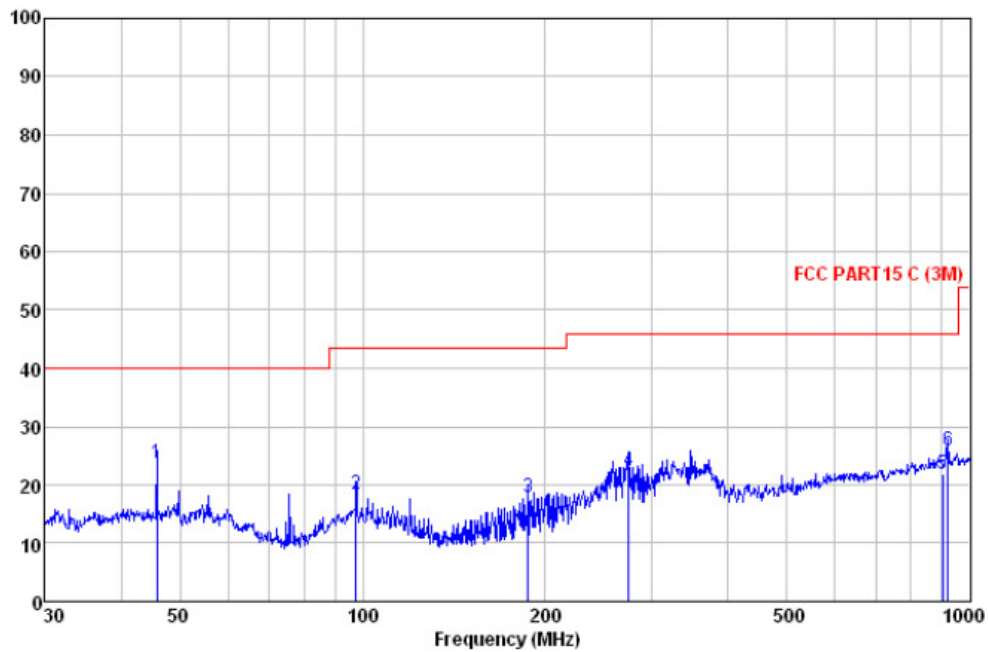

Quasi-peak measurement

	Read Freq	Antenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Remark
	MHz	dB μ V	dB/m	dB	dB	dB μ V/m	dB μ V/m	dB	
1	45.855	41.31	13.49	1.65	31.00	24.85	40.00	-15.15	QP
2	97.456	36.44	13.00	1.38	31.00	19.82	43.50	-23.68	QP
3	187.096	38.55	10.32	1.67	31.09	19.65	43.50	-23.85	QP
4	274.194	41.02	12.50	2.33	31.01	24.84	46.00	-21.16	QP
5	902.000	31.77	21.12	4.00	30.90	25.99	46.00	-20.01	QP
6	919.287	35.52	21.21	4.02	30.86	29.89	46.00	-16.11	QP



1~10 GHz Field Strength of Unwanted Emissions.

Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
1830.000	25.42	6.06	38.22	50.16	43.42	74.00	V
2745.000	28.27	7.48	38.31	49.79	47.23	74.00	V
3660.000	29.22	9.64	38.56	48.52	48.82	74.00	V
1830.000	25.42	6.06	38.22	46.76	40.02	74.00	H
2745.000	28.27	7.48	38.31	53.75	51.19	74.00	H
3660.000	29.22	9.64	38.56	52.99	53.29	74.00	H

Average Measurement:

Frequency (MHz)	20log (Duty cycle) (dB)	Peak value (dBμV/m)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
1830.000	-10.86	43.42	32.56	54.00	V
2745.000		47.23	36.37	54.00	V
3660.000		48.82	37.96	54.00	V
1830.000		40.02	29.16	54.00	H
2745.000		51.19	40.33	54.00	H
3660.000		53.29	42.43	54.00	H

Remark:

1). The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Loss – Preamplifier Factor.

2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

4). The average value is: Average = Peak value + 20log (Duty cycle), where the duty factor is calculated from following formula: 20log (Duty cycle) = 20log(0.2863) = -10.86dB

Test result: The unit does meet the FCC requirements.

9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement


The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

30 MHz~1 GHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

Vertical:

Peak scan

Level (dB μ V/m)

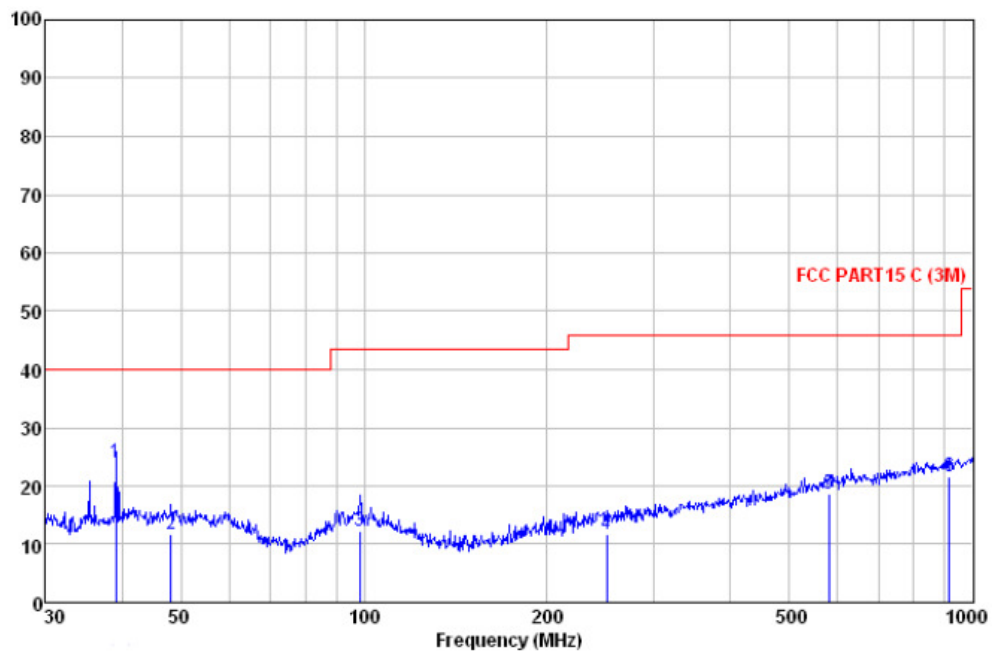

Quasi-peak measurement

	ReadAntenna	Cable	Preamp		Limit	Over			
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dB μ V	dB/m	dB	dB	dB μ V/m	dB μ V/m	dB	
1	39.162	41.55	13.34	0.98	31.01	24.86	40.00	-15.14	QP
2	48.163	29.36	13.36	1.00	31.00	12.80	40.00	-27.20	QP
3	98.487	30.27	13.06	1.39	31.00	13.72	43.50	-29.78	QP
4	250.301	30.75	12.07	2.16	31.04	13.94	46.00	-32.06	QP
5	580.703	31.32	18.14	3.19	30.92	21.73	46.00	-24.27	QP
6	916.069	31.22	21.21	4.02	30.88	25.57	46.00	-20.43	QP

9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement


The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

30 MHz~1 GHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dB μ V/m)

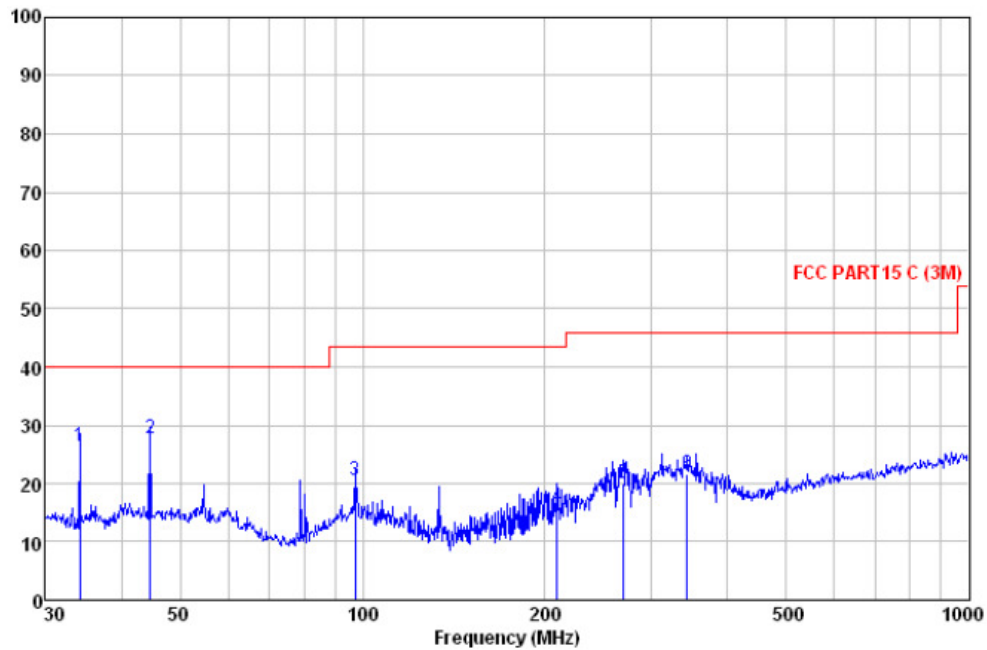

Quasi-peak measurement

	ReadAntenna	Cable	Preamp		Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit Remark
NHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	34.156	45.18	12.31	0.88	31.01	27.36	40.00 -12.64 QP
2	44.587	45.08	13.55	1.04	31.00	28.67	40.00 -11.33 QP
3	97.115	38.60	12.97	1.37	31.00	21.94	43.50 -21.56 QP
4	209.313	36.20	10.87	1.92	31.09	17.90	43.50 -25.60 QP
5	268.485	38.78	12.34	2.30	31.02	22.40	46.00 -23.60 QP
6	343.180	38.45	14.17	2.54	30.95	24.21	46.00 -21.79 QP

1~10 GHz Field Strength of Unwanted Emissions.

Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
1832.000	25.42	6.06	38.22	52.95	46.21	74.00	V
2748.000	28.29	7.49	38.31	53.65	51.12	74.00	V
3664.000	29.22	9.64	38.56	47.53	47.83	74.00	V
1832.000	25.42	6.06	38.22	49.33	42.59	74.00	H
2748.000	28.29	7.49	38.31	54.97	52.44	74.00	H
3664.000	29.22	9.64	38.56	54.64	54.94	74.00	H

Average Measurement:

Frequency (MHz)	20log (Duty cycle) (dB)	Peak value (dBμV/m)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
1832.000	-10.86	46.21	35.35	54.00	V
2748.000		51.12	40.26	54.00	V
3664.000		47.83	36.97	54.00	V
1832.000		42.59	31.73	54.00	H
2748.000		52.44	41.58	54.00	H
3664.000		54.94	44.08	54.00	H

Remark:

1). The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Preamplifier Factor.}$$

2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

4). The average value is: Average = Peak value + 20log (Duty cycle), where the duty factor is calculated from following formula: $20\log (\text{Duty cycle}) = 20\log(0.2863) = -10.86\text{dB}$

Test result: The unit does meet the FCC requirements.

9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement


The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

30 MHz~1 GHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

Vertical:

Peak scan

Level (dB μ V/m)

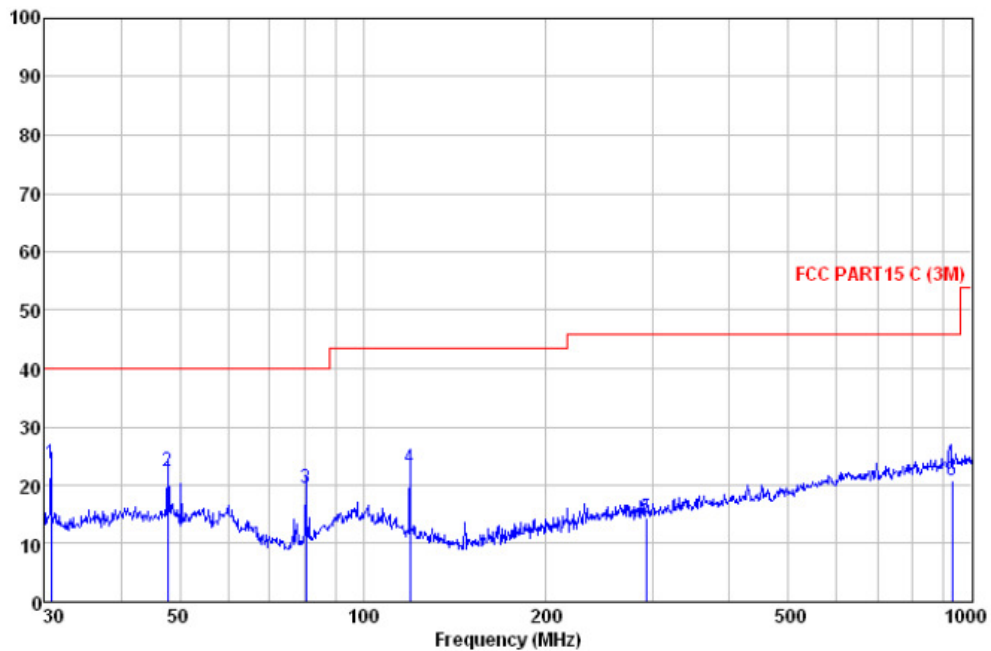

Quasi-peak measurement

	ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dB μ V	dB/m	dB	dB	dB μ V/m	dB μ V/m	dB	
1	30.745	42.39	12.32	0.62	31.02	24.51	40.00	-15.49 QP
2	47.826	39.90	13.38	1.07	31.00	23.35	40.00	-16.65 QP
3	80.644	41.76	8.64	1.30	31.00	20.90	40.00	-19.10 QP
4	119.436	43.25	10.58	1.45	31.02	24.26	43.50	-19.24 QP
5	292.058	32.55	12.69	2.38	31.00	16.62	46.00	-29.18 QP
6	928.000	30.44	21.28	4.04	30.64	24.92	46.00	-21.06 QP

N

9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement


The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

30 MHz~1 GHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dB μ V/m)

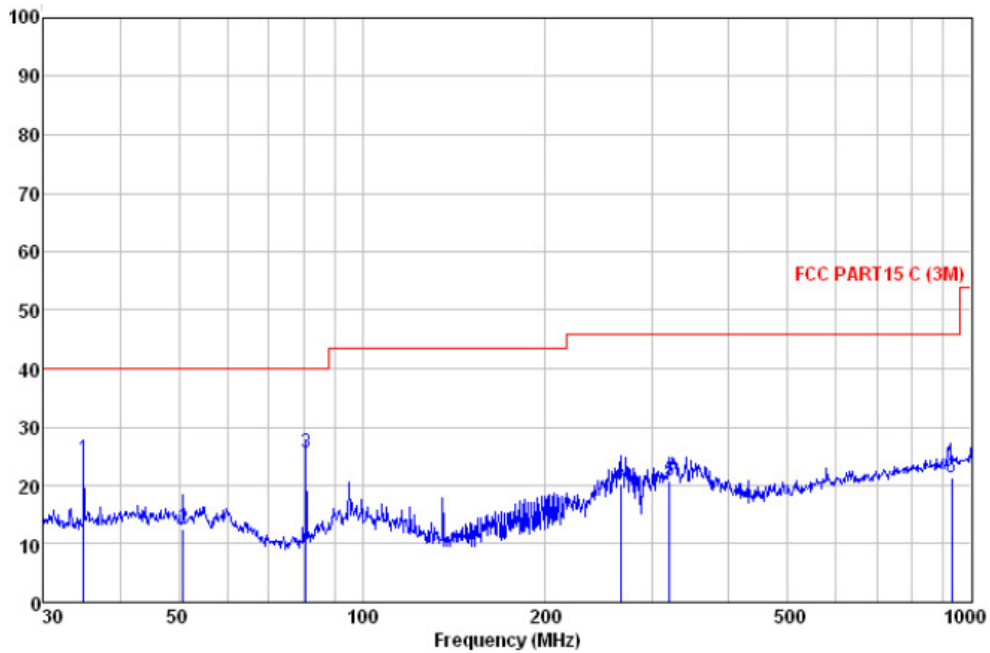

Quasi-peak measurement

	ReadAntenna	Cable Preamp		Limit	Over			
Freq	Level	Factor	Loss	Line	Limit	Remark		
MHz	dB μ V	dB/m	dB	dB	dB μ V/m	dB μ V/m	dB	
1	34.882	43.15	12.30	0.90	31.01	25.34	40.00	-14.66 QP
2	50.764	30.25	13.21	1.10	31.00	13.56	40.00	-26.44 QP
3	80.927	47.63	8.84	1.30	31.00	26.77	40.00	-13.23 QP
4	265.676	38.93	12.26	2.29	31.02	22.46	46.00	-23.54 QP
5	319.937	38.46	13.33	2.45	30.98	23.26	46.00	-22.74 QP
6	928.000	30.83	21.28	4.04	30.84	25.31	46.00	-20.69 QP



1~10 GHz Field Strength of Unwanted Emissions.

Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
1833.000	25.45	6.07	38.22	52.91	46.21	74.00	V
2749.000	28.29	7.49	38.31	53.65	51.12	74.00	V
3666.000	29.22	9.64	38.56	50.36	50.66	74.00	V
1833.000	25.45	6.07	38.22	50.21	43.51	74.00	H
2749.000	28.29	7.49	38.31	54.86	52.33	74.00	H
3666.000	29.22	9.64	38.56	55.61	55.91	74.00	H

Average Measurement:

Frequency (MHz)	20log (Duty cycle) (dB)	Peak value (dBμV/m)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
1833.000	-10.86	46.21	35.35	54.00	V
2749.000		51.12	40.26	54.00	V
3666.000		50.66	39.80	54.00	V
1833.000		43.51	32.65	54.00	H
2749.000		52.33	41.47	54.00	H
3666.000		55.91	45.05	54.00	H

Remark:

1). The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Loss –Preamplifier Factor.

2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.


3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

4). The average value is: Average = Peak value + 20log (Duty cycle), where the duty factor is calculated from following formula:20log (Duty cycle) = 20log(0.2863) = -10.86dB


Test result: The unit does meet the FCC requirements.

Band Edge:

Low channel:

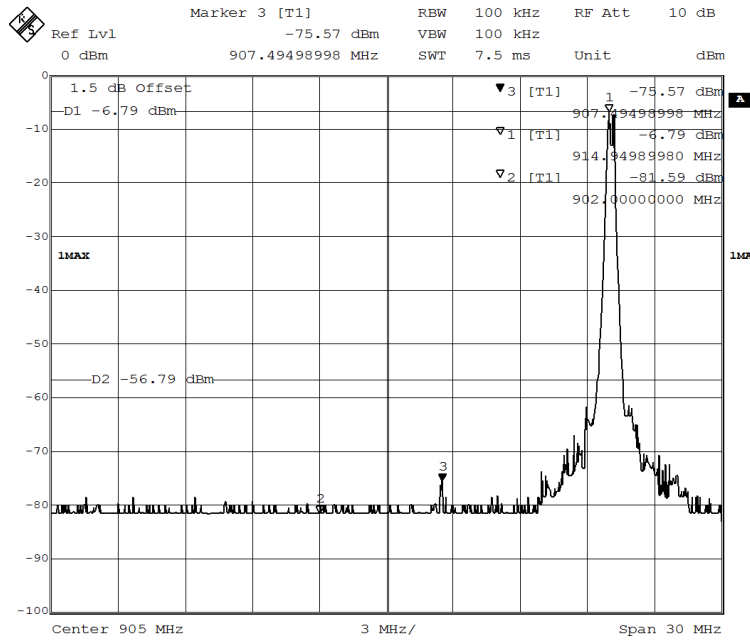

Highest Channel:

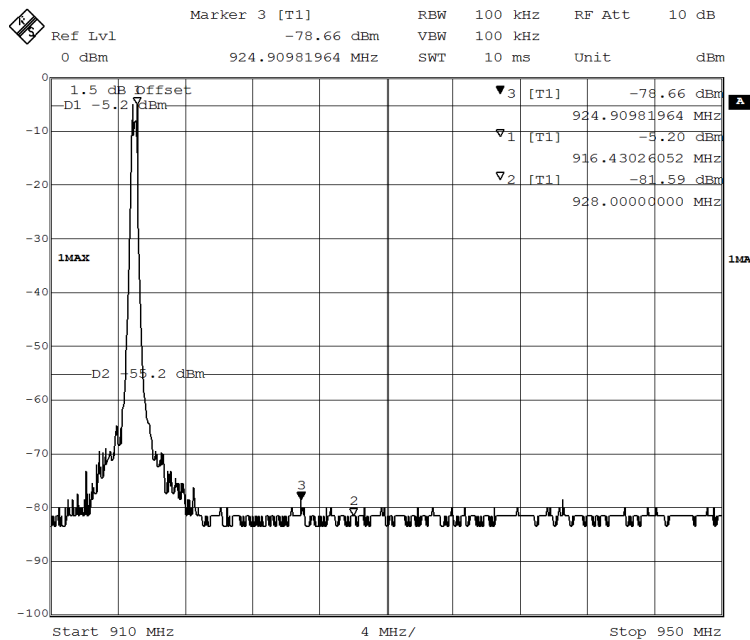

Test result: The unit does meet the FCC requirements.



Lowest 915MHz

Quasi-Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
902.00	21.12	4.00	30.90	33.39	27.61	46.00	V
928.00	21.28	4.04	30.84	33.37	27.85	46.00	V
902.00	21.12	4.00	30.90	33.69	27.91	46.00	H
928.00	21.28	4.04	30.84	33.01	27.49	46.00	H

Highest 916.5MHz

Quasi-Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
902.00	21.12	4.00	30.90	33.07	27.29	46.00	V
928.00	21.28	4.04	30.84	33.60	28.08	46.00	V
902.00	21.12	4.00	30.90	32.60	26.82	46.00	H
928.00	21.28	4.04	30.84	33.76	28.24	46.00	H

Remark:

1). The field strength is calculated by adding the Antenna Factor. Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Loss –Pre-amplifier Factor.

Test result: The unit does meet the FCC requirements.

7.4 Occupied Bandwidth

Test Requirement: FCC Part 15 C section 15.215


(c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Method: ANSI C63.10: Clause 6.9.1


Operation within the band 902 MHz to 928 MHz

Method of measurement: A small sample of the transmitter output was fed into the Spectrum Analyzer and the attached plot was taken.

Test in the frequency 915MHz (20 dB bandwidth)

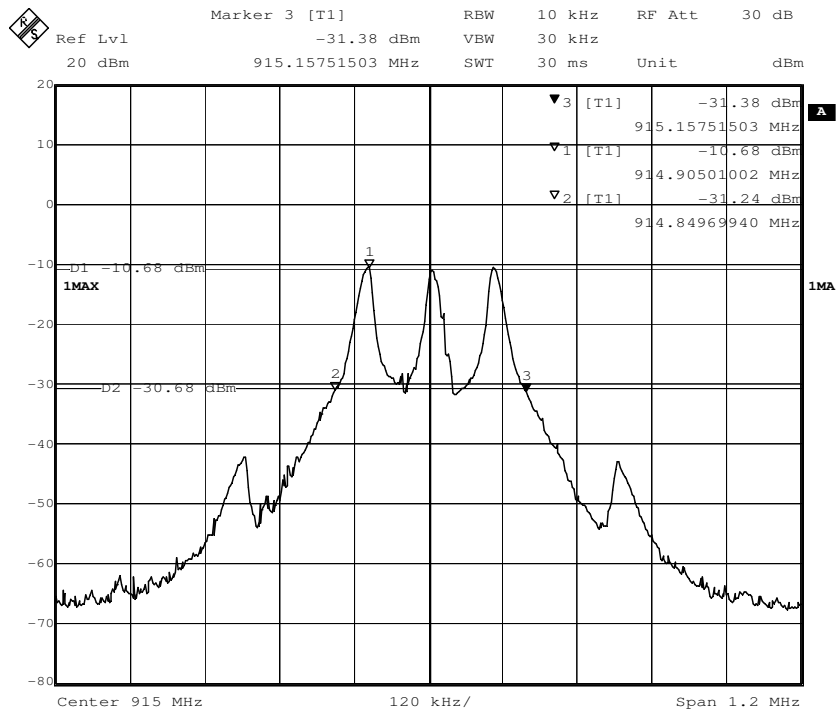

Test in the frequency 916.5MHz (20 dB bandwidth)

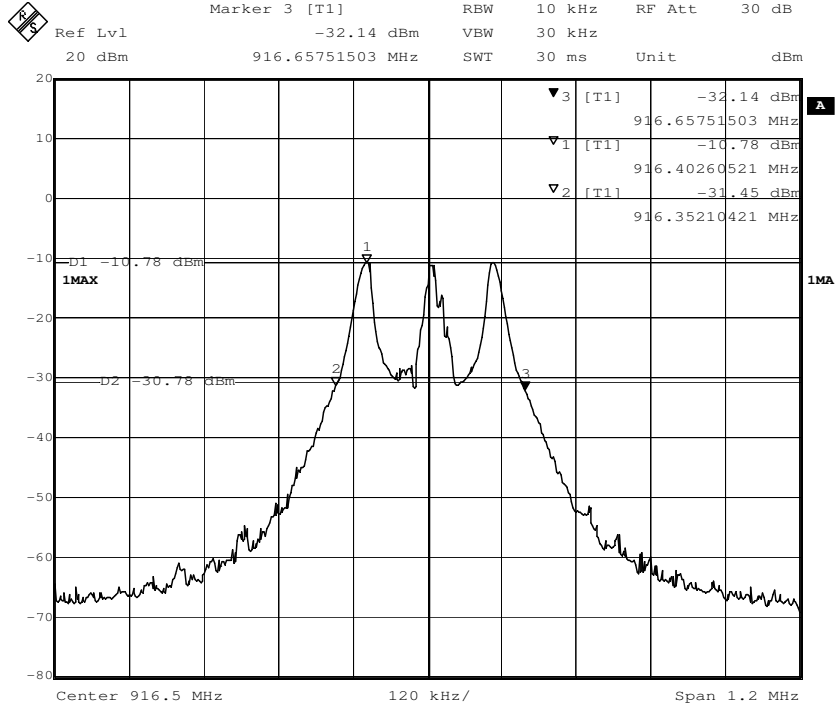

7.5 Conducted Emissions at Mains Terminals 150 kHz to 30 MHz

Test Requirement: FCC Part 15 C section 15.207
Test Method: ANSI C63.10: Clause 6.2
Frequency Range: 150 kHz to 30 MHz
Detector: Peak for pre-scan (9 kHz Resolution Bandwidth)
Test Limit

Limits for conducted disturbance at the mains ports of class B


Frequency Range (MHz)	Class B Limit dB(μV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

NOTE 1 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

EUT Operation: Test in normal operating mode. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Test Configuration:

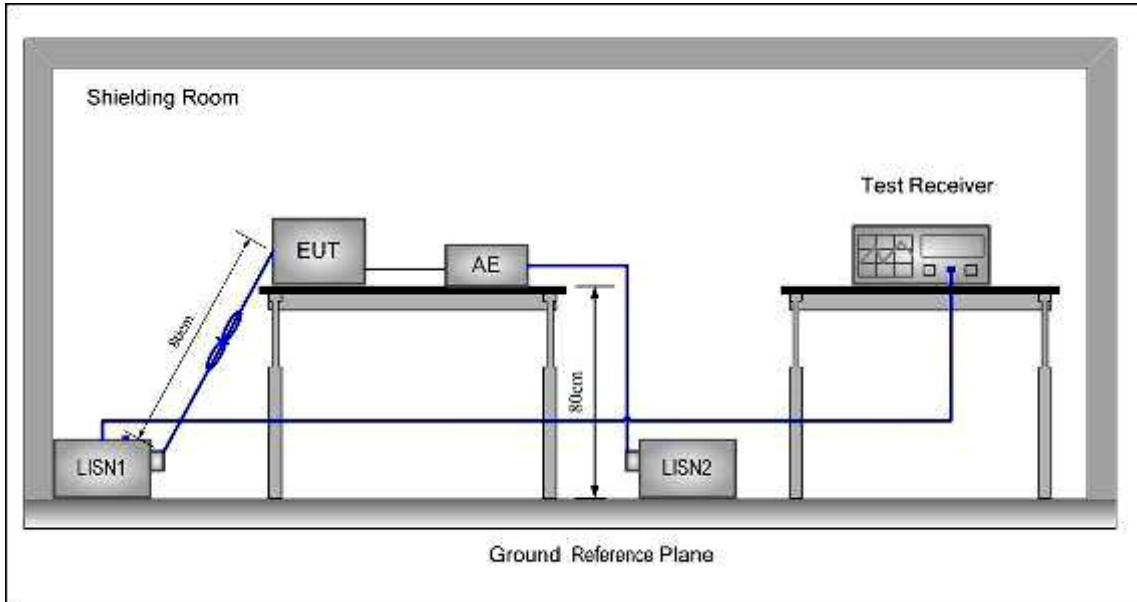

Test procedure:

1. The mains terminal disturbance voltage test was conducted in a shielded room.
2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

Measurement Data


An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected. For EUT the communicating was worst case mode.

The following Quasi-Peak and Average measurements were performed on the EUT:

Neutral Line


Level(dB μ V)

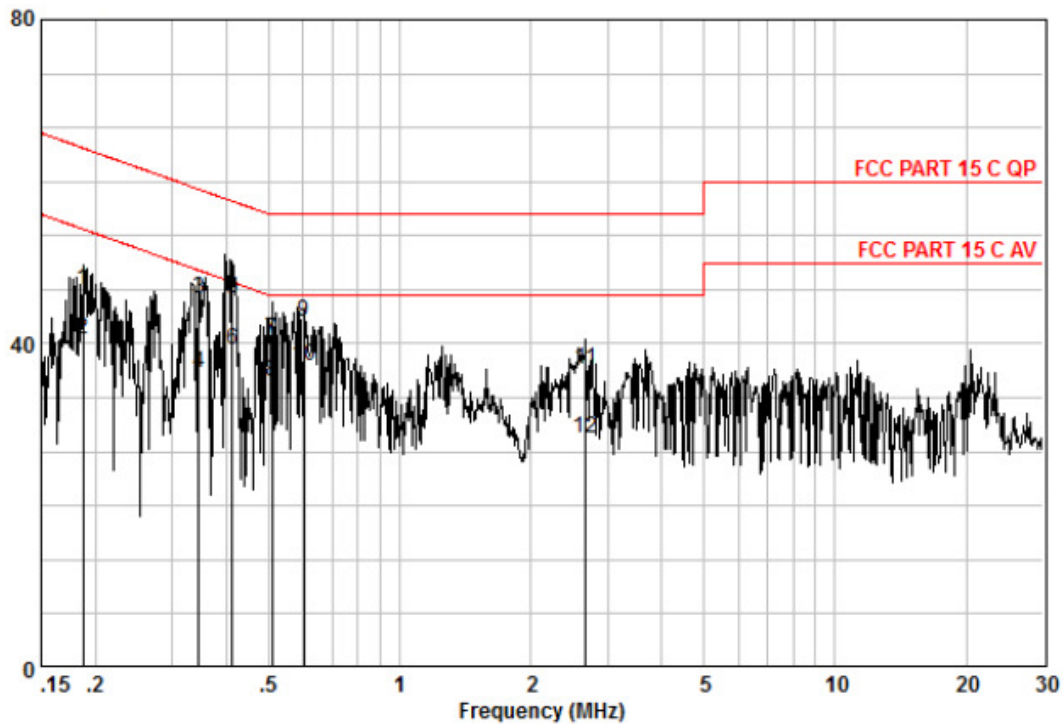

Measure data:

Freq	Read Level	Cable Loss	LISN Factor	Level	Limit Line	Over Limit	Remark
MHz	dB μ V	dB	dB	dB μ V	dB μ V	dB	
0.187	37.02	0.11	9.60	46.73	64.15	-17.42	QP
0.187	30.83	0.11	9.60	40.54	54.15	-13.61	AVERAGE
0.345	35.86	0.08	9.70	45.64	59.09	-13.45	QP
0.345	26.57	0.08	9.70	36.35	49.09	-12.74	AVERAGE
0.413	35.98	0.06	9.61	45.66	57.59	-11.94	QP
0.413	29.57	0.06	9.61	39.25	47.59	-8.35	AVERAGE
0.510	30.88	0.07	9.70	40.65	56.00	-15.35	QP
0.510	25.51	0.07	9.70	35.28	46.00	-10.72	AVERAGE
0.601	32.98	0.07	9.70	42.75	56.00	-13.25	QP
0.601	27.57	0.07	9.70	37.34	46.00	-8.66	AVERAGE
2.678	26.98	0.12	9.70	36.80	56.00	-19.20	QP
2.678	18.57	0.12	9.70	28.39	46.00	-17.61	AVERAGE

Live Line
Level(dBμV)

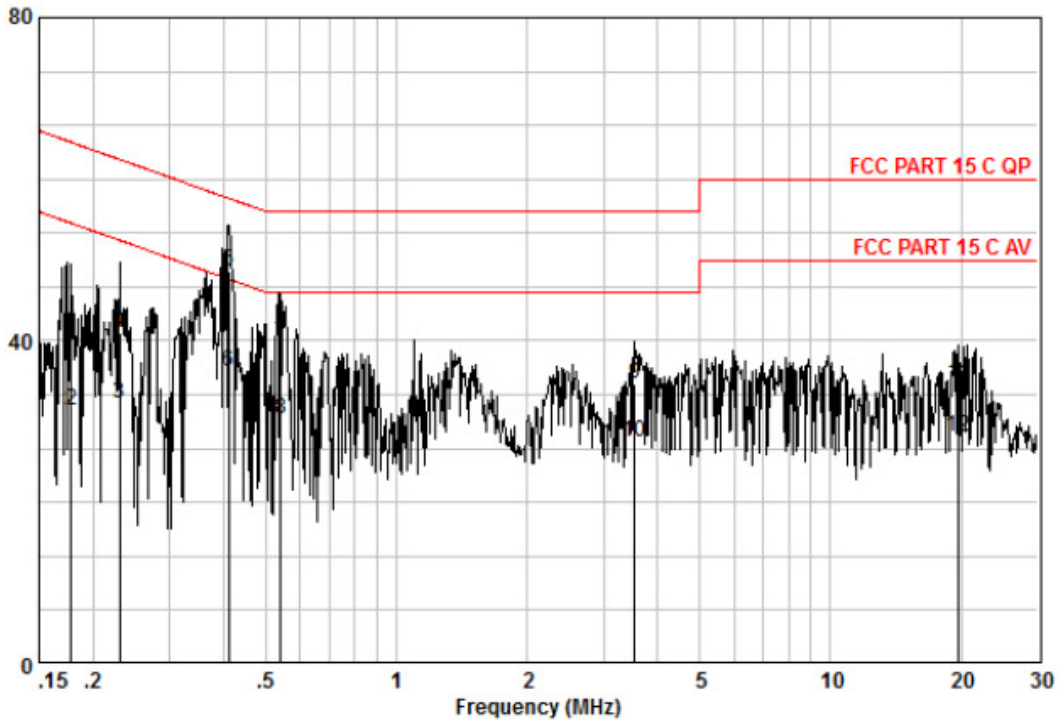

Measure result:

Freq	Read Level	Cable Loss	LISN Factor	Level	Limit Line	Over Limit	Remark
MHz	dBμV	dB	dB	dBμV	dBμV	dB	
0.178	31.38	0.10	9.66	41.14	64.59	-23.45	QP
0.178	21.70	0.10	9.66	31.46	54.59	-23.13	AVERAGE
0.230	22.57	0.11	9.66	32.34	52.44	-20.09	AVERAGE
0.230	31.10	0.11	9.66	40.87	62.44	-21.56	QP
0.410	38.92	0.06	9.66	48.64	57.64	-9.00	QP
0.410	26.57	0.06	9.66	36.29	47.64	-11.35	AVERAGE
0.541	29.84	0.07	9.66	39.57	56.00	-16.43	QP
0.541	20.57	0.07	9.66	30.30	46.00	-15.70	AVERAGE
3.547	24.90	0.16	9.71	34.76	56.00	-21.24	QP
3.547	17.51	0.16	9.71	27.37	46.00	-18.63	AVERAGE
19.740	23.86	0.42	10.28	34.56	60.00	-25.44	QP
19.740	17.51	0.42	10.28	28.21	50.00	-21.79	AVERAGE

End of the report