

# Testing Report

Product Name: TMB-1776-BZY

Issue Date: 2023. 7. 27

Engineer:		Date	2023.7.27
Auditor:		Date	2023.7.27
Approve		Date	2023.7.27

# Content

## 1. General Information

- 1.1 General information of testing institutions
- 1.2 Test equipment
- 1.3 Test environment
- 1.4 Statement

## 2. Sample Information

- 2.1 Client information
- 2.2 Description of EUT(S)
- 2.3 EUT appearance
- 2.4 DUT setup photo of free space OTA testing

## 3. Test Result


- 3.1 Test standard
- 3.2 Test uncertainty
- 3.3 Test data
  - 3.3.1 S11 parameters
  - 3.3.2 VSWR
  - 3.3.3 Typical free space efficiency and gain
  - 3.3.4 Typical free space radiation patter

# 1. General Information


## 1. 1 General information of testing institutions

Name	Shenzhen DBT Communication Device Co., Ltd
Address	Rm505, 8th building, Yungu 2nd period, pingshan No.1 Road, Xili Town,Nanshan District, ShenZhen , China
Tel	0755-83763273
E-mail	Dbt_yang@163.com
Equipment	1. RayZone 1800 2. Keysight E5071C

## 1.2 Test equipment

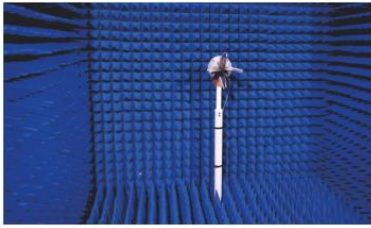

Satimo

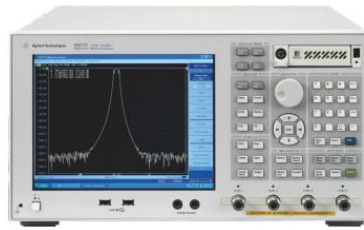

E5071C



Cmw500



8960

Model No.	Manufacturer	Calibration date	Next calibration date
Satimo	RFI-LAB-RF-A00	2022.11 13	2023.11 13
Cmw500	ROHDE&SCHWAR		
8960	Agilent		
E5071C	Agilent		

## 1.3 Test environment

<b>Temperature</b>	25.0°C
<b>Humidity</b>	59%RH
<b>Pressure</b>	100.12kPa

## 1.4 Statement

- (1) The test results in the report are only applicable to the tested samples and the tested samples work under the environment described in the report
- (2) Any objection to this report shall be raised 30 days after formal confirmation of the report.
- (3) The report is invalid without the signature of the auditor and approver.

## 2. Sample Information

### 2.1 Client information


<b>Name</b>	Guangdong Transtek Medical Electronics Co., Ltd.
<b>Address</b>	Zone A, No. 105, Dong Li Road, Torch Development District, 52837 zhongShan, Guangdong, China
<b>Contacts</b>	
<b>Tel</b>	
<b>E-mail</b>	

## 2.2 Description of EUT(S)

<b>Product Name</b>	2.4 GHz Antenna
<b>Antenna Size</b>	13.5*7.5mm
<b>Antenna Type</b>	PCB
<b>Test Item</b>	VSWR; Gain; Efficiency; Radiation pattern
<b>Frequency Range</b>	2402-2480MHz
<b>Received Date</b>	2023.7.27
<b>Test Date</b>	2023.7.27
<b>Remark</b>	i

2.3 EUT appearance  
see test report

## 2.4 DUT setup photo of free space OTA testing

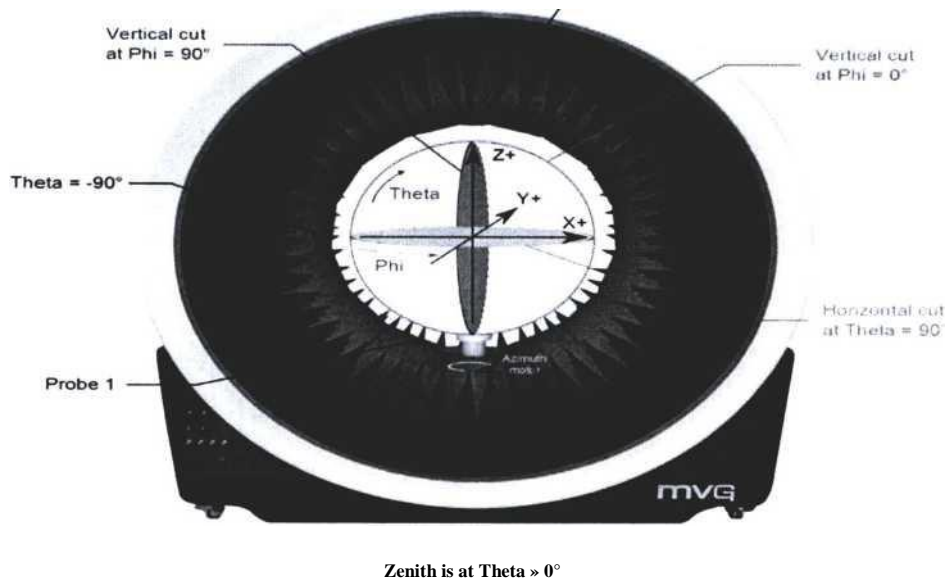

### 3. Test Results

#### 3.1 Test standard

Name	Parameter	Method	Standard no.
Mobile Communication antenna	VSWR	Generic specification for antennas used in the mobile communications	GB/T 9410-2008
	Antenna gain		
	Radiation pattern		
Antenna	Radiation efficiency	IEEE Standard Test Procedures for Antennas	ANSI/IEEE Std 149-1979


#### 3.2 Test uncertainty

The uncertainty was calculated on the basis of the GUM published by ISO.using the inclusion factor of K=2 and the 95% confidence level to express the extended uncertainty.

Item	Uncertainty
VSWR	±0.3
Antenna gain	+ 1dB
Radiation efficiency	±10%

### 3.3 Test data

#### 3.3.1 S11 parameters

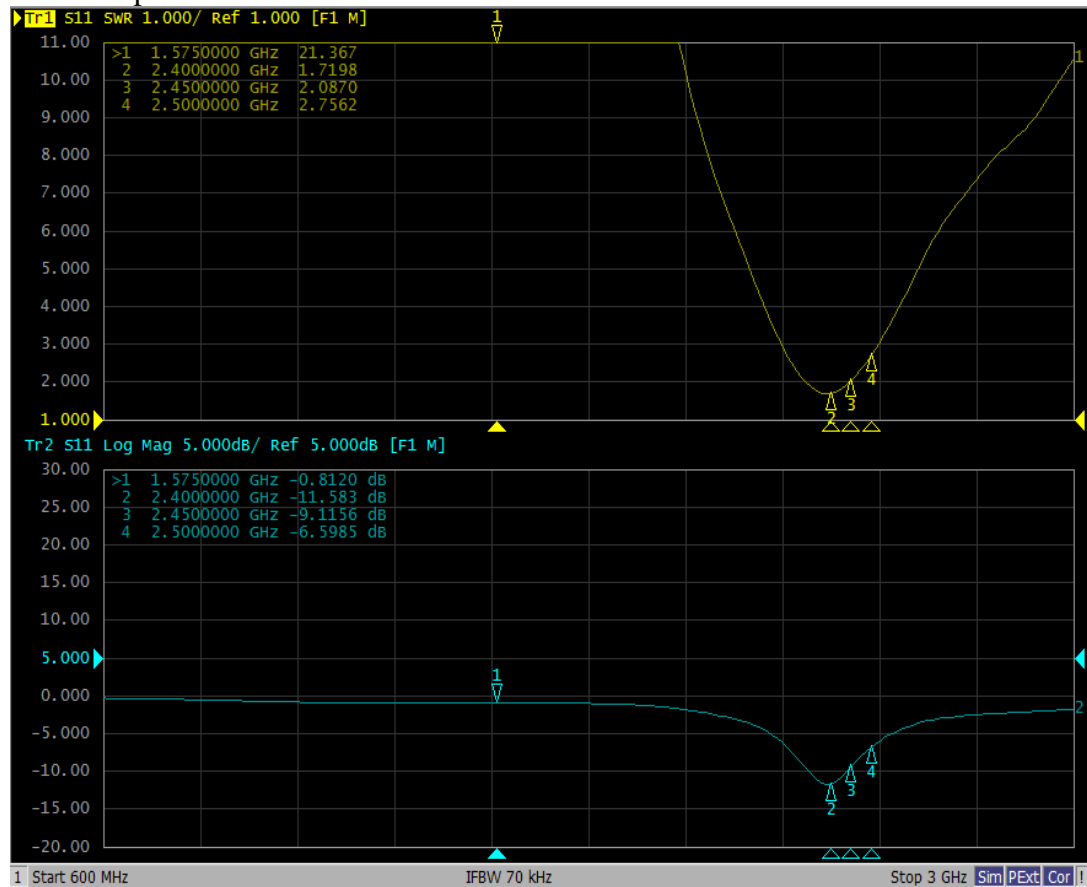

#### 3.3.2 VSWR

Frequency/MHz	2400	2450	2500
VSWR	1.7198	2.0870	2.7562

#### 3.3.3 Typical free space efficiency and gain

Frequency MHz	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Peak Gain dBi	0.29	0.27	0.15	0.18	0.15	-0.26	-0.02	-0.17	0.26	-0.62	0.43
Efficiency %	41.33	41.62	40.83	41.34	41.15	41.13	40.01	40.06	43.34	44.13	44.01



### 3.3.4 Typical free space radiation pattern

