

# EMISSION TEST REPORT

Test Report No. : 19E0038-02-1

**Applicant:** OMRON Corporation

**Type of Equipment:** Keyless Entry System (Transmitter)

**Model No.:** G8D-355H-A

**Test standard:** FCC Part 15 Subpart C  
IC RSS-210 (Issue No. 2)

\*IC RSS-210 (Issue No. 2) is based upon FCC Part 15.

**Test Result:** Complies

This report may not be reproduced in full, partial reproduction may only be made with the written consent of the laboratory.

The results in this report apply only to the sample tested.

Date of test: May 20, 2000

**Tested by:** \_\_\_\_\_

Naoki Sakamoto

**Approved by:** \_\_\_\_\_

Kazutoyo Nakanishi

Group Leader of EMC section

Issued date: May 24, 2000

Testing Laboratory

**A-pex International Co., Ltd.**

Telephone: +81 596 39 1485

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN Facsimile: +81 596 39 0232

<b>Table of Contents</b>	<b>Page</b>
<b>1 GENERAL INFORMATION</b>	<b>3</b>
1.1 Tested Methodology	4
1.2 Test Facility	4
<b>2 PRODUCT DESCRIPTION</b>	<b>5</b>
<b>3 TESTED SYSTEM DETAILS</b>	<b>5</b>
<b>4 SYSTEM TEST CONFIGURATION</b>	<b>6</b>
4.1 Justification	6
4.2 Test Procedure	6
Figure 4.2 Configuration of Tested System	7
<b>5 RADIATED MEASUREMENT PHOTOS</b>	<b>8</b>
Figure 5.1 Radiated Measurement Photos	8
5.1 Measurement Uncertainty	9
<b>6 RADIATED EMISSION DATA</b>	<b>10</b>
6.1 Field Strength Calculation	11
<b>7 TEST EQUIPMENT USED</b>	<b>12</b>
<b>APPENDIX</b>	<b>13</b>
Test Data	<b>A1 - A3</b>

## 1 GENERAL INFORMATION

APPLICANT : OMRON Corporation

ADDRESS : 1-501, Yashirogaoka, Meito-ku, Nagoya-city  
Aichi, 465-0051 Japan  
Tel: +81-52-704-2525  
Fax: +81-52-704-2769

REGULATION(S) : FCC Part 15 Subpart C

MODEL NUMBER : G8D-355H-A

SERIAL NUMBER : -

KIND OF EQUIPMENT : Keyless Entry System (Transmitter)

TESTED DATE : May 20, 2000

RECEIPT DATE OF SAMPLE : May 16, 2000

REPORT FILE NUMBER : 19E0038-02-1

TEST SITE : A-PEX Yokowa NO.3 Open Test Site

## 1.1 Tested Methodology

Radiated testing were performed according to the procedures in FCC/ANSI C63.4(1992).  
Radiated testing was performed at a distance of 3 meters from the antenna to EUT.

## 1.2 Test Facility

The open area site measurement facility used to collect the radiated data is located on 108, Yokowa-cho, Ise-shi, Mie-ken, 516-1106 Japan.

This site has been fully described in a report dated August 1, 1997 submitted to FCC office, and listed dated September 16, 1997 (31040/SIT 1300F2) and accepted Feb. 19, 1998 (IC2973-3) by Industry Canada.

## 2 PRODUCT DESCRIPTION

OMRON Corporation, Model G8D-355H-A (referred to as the EUT in this report) is a Keyless Entry System (Transmitter).

The specification is as following :

Operation Frequency : 4.19MHz  
Carrier Frequency : 313.85MHz  
Modulation : FSK  
Operation Voltage : DC 3V, 20mA (Battery)

## 3 TESTED EQUIPMENT DETAILS

The FCC IDs for all equipment, plus description of all cables used in the tested system are:

<u>Model</u>	<u>FCC ID</u>	<u>Description</u>	<u>Cable description</u>	<u>Backshell Material</u>
(1) OMRON M/N: G8D-355H-A S/N: - (EUT)	OUCG8D-355H-A	Keyless Entry System (Transmitter)	-	-

## 4 SYSTEM TEST CONFIGURATION

### 4.1 Justification

The measurement was performed with the system configuration shown in Figure 4.2.  
Running mode was taken for the EUT operation mode.


### 4.2 Test Procedure

#### Tabletop Equipment Radiated Emissions


EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane.  
Test was made with the antenna positioned in both the horizontal and vertical planes of polarization.  
The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

## Figure 4.2 Configuration of Tested System

### Front View

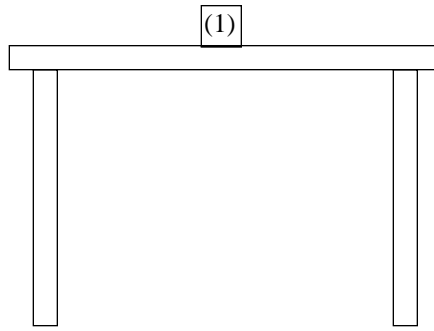

### Top View

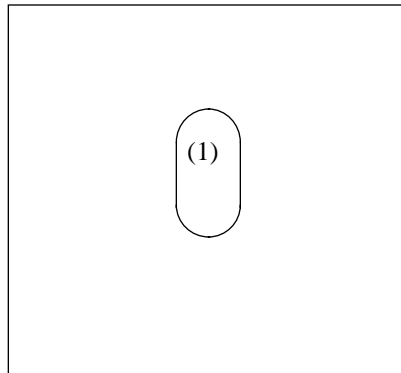

## 5 RADIATED MEASUREMENT PHOTOS

Figure 5.1 Radiated Measurement Photos



## 5.1 Measurement Uncertainty

### Radiated Emission Test

The measurement uncertainty (with a 95% confidence level) for this test was  $\pm 3.3\text{dB}$ .

The data listed in this test report has enough margin, more than 3.3dB.

## 6 RADIATED EMISSION DATA

The initial step in collecting radiated data was a spectrum analyzer peak scan of the measurement range (30MHz-3200MHz).

The final data was reported in the worst-case emissions.

The minimum margin to the limit is as follows :

- \* 30MHz - 1000MHz : QP Detect
- \*1000MHz - 3200MHz : PK Detect

Frequency (MHz)	Receiver Reading (dBuV)	Correction Factor (dBuV)	Field Strength (dBuV/m)	Limit (dBuV/m)	Margin (dBuV)
627.71	44.6	6.6	51.2	55.5	4.3

The Fundamental Frequency of this equipment is 313.85MHz. The peak of output level of fundamental frequency was confirmed at the 313.85MHz by performing the measurement.

It was corroborated that equipment was within of the tolerance which is prescribed in the FCC regulation Part 15 Subpart C sec. 15.231 (c).

Since the fundamental frequency is 313.85MHz, the upper limit could be 314.63MHz and lower limit could be 313.06MHz. The measurement result was 314.06MHz when the limit was 314.63MHz and also another measurement result was 313.67 MHz when the limit was 313.06MHz.

Any spurious emissions did not detect except fundamental frequency's spurious.

## 6.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, Cable Factor and Antenna Pad, and subtracting the Amplifier Gain from the measured reading. The sample calculation is as follows :

$$FS = RA + AF + CF + AT - AG$$

where FS = Field Strength  
RA = Receiver Reading  
AF = Antenna Factor  
CF = Cable Factor  
AT = Antenna Pad  
AG = Amplifier Gain

Assume a receiver reading of 44.6 dBuV is obtained. The antenna Factor of 18.8 dB, Cable Factor of 8.7 dB is added. The Antenna Pad of 6.0 dB (30MHz - 1000MHz) and Amplifier Gain of 26.9 dB is subtracted, giving a field strength of 51.2 dBuV/m.

$$FS = 44.6 + 18.8 + 8.7 + 6.0 - 26.9 = 51.2 \text{ dBuV/m}$$

## 7 TEST EQUIPMENT USED

NAME	MANUFACTURER	MODEL	Control No.	Calibrated Until
Pre Amplifier	Hewlett Packard	8447D	AF1	November 16, 2000
Pre Amplifier	Hewlett Packard	8449B	AF4	November 16, 2000
Biconical Antenna	Schwarzbeck	BBA9106	BA3	April 29, 2001
Logperiodic Antenna	Schwarzbeck	UHALP9108-A	LA5	August 8, 2000
Horn Antenna	AH System, Inc	SAS-200/571	HA1	February 4 , 2001
Spectrum Analyzer	Advantest	R3271	SA5	September 27, 2000
Test Receiver	Rohde & Schwarz	ESVS-30	TR2	July 4, 2000

indicates EMI Test Equipment used.

All measurement equipment is traceable to national standard

## APPENDIX

### Test Data

Radiated emissions

A 1 - A 3