



EMI TEST REPORT

JQA APPLICATION NO. : 400-10689
Model No. : G8D-380H-B
Type of Equipment : Keyless Entry System
(Receiver)
Regulations Applied : CFR 47 FCC Rules and Regulations Part 15
FCC ID : OJCG8D-380H-B
Applicant : OMRON Corporation
Address : 6368 Kenjo zaka, Okusa Komaki-city,
Aichi 485-0802, Japan
Manufacture : OMRON Corporation
Address : 6368 Kenjo-zaka, Okusa Komaki-city,
Aichi 485-0802, Japan
Received date of EUT : January 23, 2002
Final Judgment : Passed

TEST RESULTS IN THIS REPORT are obtained in use of equipment that is traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and Communication Research Laboratory (CRL) of Japan.

The test results only respond to the tested sample. This report should not be reproduced except in full, without the written approval of JQA EMC Engineering Dept. Testing Div.

TABLE OF CONTENTS

	Page
1 Documentation	
1.1 Test Regulation	<u>3</u>
1.2 General Information	<u>3</u>
1.3 Test Condition	<u>4 - 6</u>
1.4 EUT Modifications / Deviation from Standard	<u>7</u>
1.5 Test results / Uncertainty	<u>8</u>
1.6 Summary	<u>9</u>
1.7 Test Configuration / Operation of EUT	<u>10</u>
1.8 EUT Arrangement (Drawings)	<u>11</u>
1.9 Preliminary Test and Test-setup (Drawings)	<u>12 - 14</u>
1.10 EUT Arrangement (Photographs)	<u>15 - 16</u>
2 Test Data	
2.1 AC Power Line Conducted Emission 0.45 MHz - 30 MHz	<u>N/A</u>
2.2 Radiated Emission (Electric Field) 30 MHz - 1000 MHz	<u>17 - 18</u>

1 DOCUMENTATION**1.1 TEST REGULATION**

FCC Rules and Regulations Part 15 Subpart A and B (June 23, 1989) All other receivers subject to part 15

Test procedure :

AC power line conducted emission and radiated emission tests were performed according to the procedures in ANSI C63.4-1992.

1.2 GENERAL INFORMATION**1.2.1 Test facility :**

- 1) Test Facility Located at EMC Engineering Dept. Testing Div. :
 - No.2 and 3 Anechoic Chambers(3 meters Site).
 - Shielded Enclosure.Expiration date of FCC test facility filing : June 04, 2002

- 2) EMC Engineering Dept. Testing Div. is recognized under the National Voluntary Laboratory accreditation Program for satisfactory compliance established in title 15, Part 285 Code of Federal Regulations.
NVLAP Lab Code : 200189-0 (Effective through : June 30, 2002)

1.2.2 Description of the Equipment Under Test (EUT) :

- | | |
|--------------------------------------|--|
| 1) Type of Equipment | : Keyless Entry System(Receiver) |
| 2) Product Type | : Pre-production |
| 3) Category | : All other receivers subject to part 15 |
| 4) EUT Authorization | : Certification |
| 5) FCC ID | : OUCGSD-380H-B |
| 6) Trade Name | : OMRON |
| 7) Model No. | : GBD 380H-B |
| 8) Tuning Frequency Range | : 313.85 MHz |
| 9) Highest Frequency Used in the EUT | : 324.55 MHz |
| 10) Serial No. | : None |
| 11) Date of Manufacture | : None |
| 12) Power Rating | : DC 12V |
| 13) EUT Grounding | : None |

1.2.3 Definitions for symbols used in this test report :

- x - indicates that the listed condition, standard or equipment is applicable for this report.
- - indicates that the listed condition, standard or equipment is not applicable for this report.

1.3 TEST CONDITION

1.3.1 The measurement of the AC Power Line Conducted Emission

- was performed in the following test site.
 - was not applicable.

Test location :

Safety & EMC Center EMC Engineering Dept. Testing Div.
 21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

- Shielded Enclosure
 - Anechoic Chamber No. 2 (portable Type)

Used test instruments :

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
<input type="checkbox"/> - Test Receiver	ESH-2	Rohde & Schwarz	860370/016	June 2001	1 Year
<input type="checkbox"/> - Test Receiver	ESH-3	Rohde & Schwarz	861460/030	May 2001	1 Year
<input type="checkbox"/> - Test Receiver	BEHS10	Rohde & Schwarz	835871/004	Aug. 2001	1 Year
<input type="checkbox"/> - LISN(for Peripheral)	KNW-407	Kyoritsu Electrical	8-933-6	Apr. 2001	1 Year
<input type="checkbox"/> - LISN(for EMT)	KNW-407	Kyoritsu Electrical	8-855-2	Apr. 2001	1 Year
<input type="checkbox"/> - LISN	KNW-407	Kyoritsu Electrical	8-757-1	Apr. 2001	1 Year
<input type="checkbox"/> - RF Cable	30-2W	Fujikura	155-21-006E0	Apr. 2001	1 Year
<input type="checkbox"/> - RF Cable	30-2W	Fujikura	155-21-007E0	Apr. 2001	1 Year
<input type="checkbox"/> - 50ohm Termination	-	SUHNER	154-06-501E0	Jan. 2002	1 Year
<input type="checkbox"/> - 50ohm Termination	-	SUHNER	154-06-502E0	Jan. 2002	1 Year

1.3.2 The measurement of the Radiated Emission(30 MHz - 1000 MHz)

- was performed in the following test site.
 - was not applicable.

Test location :

Safety & EMC Center EMC Engineering Dept. Testing Div.
 21-25, Kinuta 1-chome, Setagaya-KU, Tokyo 157-8573, Japan

- Anechoic Chamber No. 2 (3 meters)
 - Anechoic Chamber No. 3 (3 meters)

Validation of Site Attenuation :

- 1) Last Confirmed Date :March, 2001
 2) Interval :1 year

Used test instruments :

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
<input type="checkbox"/> - Spectrum Analyzer	8560E	Hewlett Packard	3240A00289	Nov. 2001	1 Year
<input type="checkbox"/> - Spectrum Analyzer	8560E	Hewlett Packard	2140A01091	Apr. 2001	1 Year
<input type="checkbox"/> - RF Pre-selector	85685A	Hewlett Packard	2648A00522	Apr. 2001	1 Year
<input type="checkbox"/> - Spectrum Analyzer	8566E	Hewlett Packard	2747A00855	June 2001	1 Year
<input type="checkbox"/> - RF Pre-selector	85685A	Hewlett Packard	2091A00933	June 2001	1 Year
<input type="checkbox"/> - Test Receiver	ESV	Rohde & Schwarz	972148/039	June 2000	1 Year
<input type="checkbox"/> - Test Receiver	ESVS10	Rohde & Schwarz	E26148/002	May 2001	1 Year
<input checked="" type="checkbox"/> - Test Receiver	ESVS10	Rohde & Schwarz	E32699/001	May 2001	1 Year
<input type="checkbox"/> - Antenna	KBA-511	Kyoritsu Electrical	C-170-1	Nov. 2001	1 Year
<input type="checkbox"/> - Antenna	KBA-511A	Kyoritsu Electrical	C-201-13	Nov. 2001	1 Year
<input type="checkbox"/> - Antenna	KBA-511	Kyoritsu Electrical	C-147-14	Nov. 2001	1 Year
<input type="checkbox"/> - Antenna	KBA-511	Kyoritsu Electrical	C-210-5	Nov. 2001	1 Year
<input type="checkbox"/> - Biconical Antenna	BBA910C	Schwarzbeck	VHA91031150	Nov. 2001	1 Year
<input checked="" type="checkbox"/> - Biconical Antenna	BBA910E	Schwarzbeck	11905078E0	Nov. 2001	1 Year
<input type="checkbox"/> - Log-Periodic Antenna	UHALP9107	Schwarzbeck	11905079E0	Nov. 2001	1 Year
<input checked="" type="checkbox"/> - Log-Periodic Antenna	UHALP9107	Schwarzbeck	11905110	Nov. 2001	1 Year
<input type="checkbox"/> - RF Cable	5D-2W	Fujikura	155-21-001E0	Feb. 2001	1 Year
<input checked="" type="checkbox"/> - RF Cable	5D-2W	Fujikura	155-21-002E0	Feb. 2001	1 Year

1.3.3 The measurement of the Radiated Emission(Above 1000 MHz)

- was performed in the following test site.
 - was not applicable.

Test location :

Safety & EMC Center EMC Engineering Dept. Testing Div.
 21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

- No. 2 site (3 meters)
 - No. 3 site (3 meters)

Validation of Site Attenuation :

- 1) Last Confirmed Date : N/A
 2) Interval : N/A

Used test instruments :

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
<input type="checkbox"/> - Spectrum Analyzer	8560E	Hewlett Packard	3240A00189	Nov. 2001	1 Year
<input type="checkbox"/> - Spectrum Analyzer	8566B	Hewlett Packard	2140A01091	Apr. 2001	1 Year
<input type="checkbox"/> - RF Pre-selector	85685A	Hewlett Packard	2648A00522	Apr. 2001	1 Year
<input type="checkbox"/> - Spectrum Analyzer	8566B	Hewlett Packard	2747A05855	June 2001	1 Year
<input type="checkbox"/> - RF Pre-selector	85685A	Hewlett Packard	2091A00933	June 2001	1 Year
<input type="checkbox"/> - Log Periodic Antenna	HL 025	Rohde & Schwarz	340182/015	Nov. 2001	1 Year
<input type="checkbox"/> - RF Amplifier	DBP-0102K5334272B	DRS Microwave Inc.	012	Mar. 2001	1 Year
<input type="checkbox"/> - RF Amplifier	WC-6882-814	Watkins-Johnson	0414	June 2001	1 Year
<input type="checkbox"/> - RF Amplifier	WC-5315-556	Watkins-Johnson	106	June 2001	1 Year
<input type="checkbox"/> - RF Amplifier	WC-5320-307	Watkins-Johnson	645	June 2001	1 Year
<input type="checkbox"/> - RF Cable(10m)	S 04272B	Suhner	155-21-011E0	May 2001	1 Year
<input type="checkbox"/> - RF Cable(2m)	SJCCFLEX 154	Suhner	155-21-012E0	May 2001	1 Year
<input type="checkbox"/> - RF Cable(1m)	SJCCFLEX 154	Suhner	155-21-013E0	May 2001	1 Year
<input type="checkbox"/> - RF Cable(1m)	S 04272B	Suhner	155-21-015E0	June 2001	1 Year



1.4 EUT MODIFICATION / Deviation from Standard

1.4.1 EUT MODIFICATION

- No modifications were conducted by JQA to achieve compliance to Class B levels.
- To achieve compliance to Class B levels, the following changes were made by JQA during the compliance test.

The modifications will be implemented in all production models of this equipment.

Applicant : _____ Date : _____
Typed Name : _____ Position : _____

1.4.2 Deviation from Standard:

- No deviations from the standard described in clause 1.1.
- The following deviations were employed from the standard described in clause 1.1:



1.5 TEST RESULTS / UNCERTAINTY

AC Power Line Conducted Emission - Applicable - NOT Applicable

The requirements are - PASSED - NOT PASSED

Min. Limit Margin dB at MHz

Max. Limit Exceeding dB at MHz

Uncertainty of Measurement Results +/- 2.4 dB (level of confidence: 95%)

Remarks :

Radiated Emission [§15.109(a)] - Applicable - NOT Applicable

The requirements are - PASSED - NOT PASSED

Min. Limit Margin 8.0 dB at 40.0 MHz

Max. Limit Exceeding dB at MHz

Uncertainty of Measurement Results +/- 3.8 dB (level of confidence: 95%)

Biconical Antenna +/- 3.8 dB (level of confidence: 95%)

Log-Periodic Antenna +/- 4.7 dB (level of confidence: 95%)

Half Wave Dipole Antenna +/- 3.4 dB (level of confidence: 95%)

Remarks:

1.6 SUMMARY**General Remarks :**

The EUT was tested according to the requirements of FCC Rules and Regulations Part 15 Subpart A and B (June 23, 1989) under the test configuration, as shown in clause 1.7 to 1.10.

The conclusion for the test items which are required by the applied regulation is indicated under the final judgment.

Final Judgment :


The "as received" sample;

- fulfill the test requirements of the regulation mentioned on clause 1.1.
- fulfill the test requirements of the regulation mentioned on clause 1.1, but with certain qualifications.
- doesn't fulfill the test regulation mentioned on clause 1.1.


Begin of testing : January 28, 2002

End of testing : January 28, 2002

- JAPAN QUALITY ASSURANCE ORGANIZATION -
Approved by:


Masaaki Takahashi
Manager
JQA EMC Engineering Dept.

Signatories:
Issued by:


Shigeru Osawa
Assistant Manager
JQA EMC Engineering Dept.

1.7 TEST CONFIGURATION / OPERATION OF EUT**1.7.1 Test Configuration**

The equipment under test (EUT) consists of :

Symbol	Item	Manufacturer	Model No.	FCC ID	Serial No.
A	Keyless Entry System (Receiver)	OMRON Corporation	36D380H-B	OUCG8D-380H-B	None

The measurement was carried out with the following support equipment connected :

Symbol	Item	Manufacturer	Model No.	Serial No.
B	Simulator	OMRON Corporation	None	None


Type of Cable :

Symbol	Description	Identification (Manufacturer etc.)	Shielded YES / NO	Ferrite Core	Connector Type Shielded YES / NO	Length (m)
1	Cable	-	NO	NO	NO	1.0
2	Cable	-	NO	NO	NO	1.0

1.7.2 Operating condition

Power supply Voltage : DC 12V

The tests have been carried out under the receiving condition.

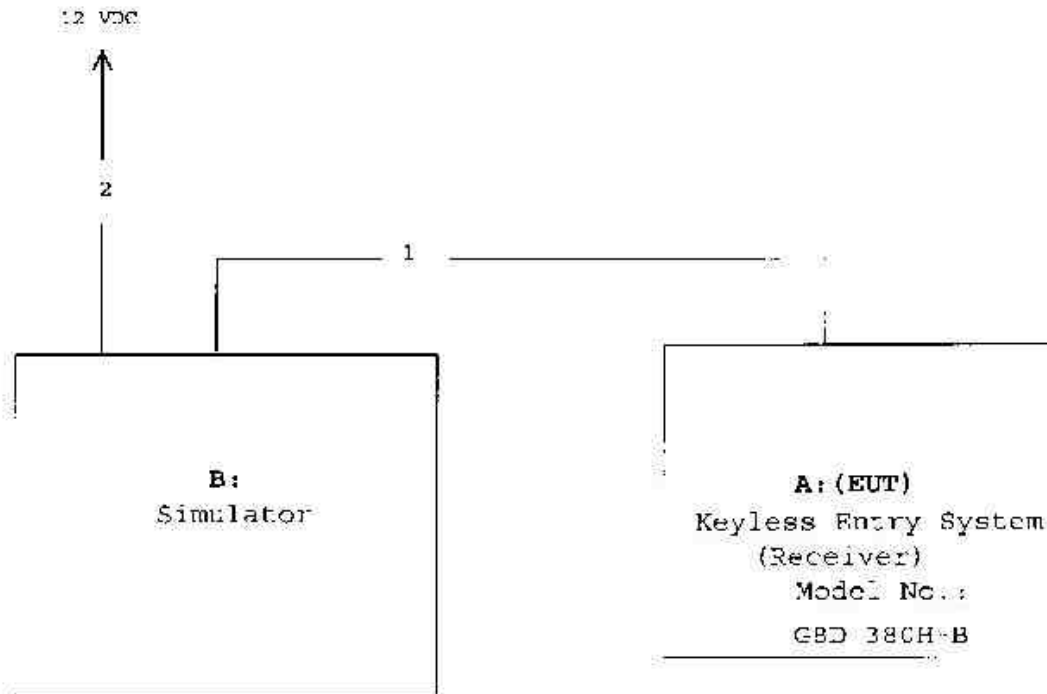1.8 EUT ARRANGEMENT (DRAWINGS)

1.9 PRELIMINARY TEST AND TEST-SETUP (DRAWINGS)


1.9.1 AC Power Line Conducted Emission (450 kHz - 30 MHz) :

According to description of ANSI C63.4-1992 sec.7.2.3, the AC power line preliminary conducted emissions measurements were carried out.
 The preliminary conducted measurements were performed using the spectrum analyzer to observe the emission characteristics of the EUT.
 The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for final AC power line conducted emissions measurements.

Shielded Enclosure

- Side View -

Vertical
 Ground
 Plane

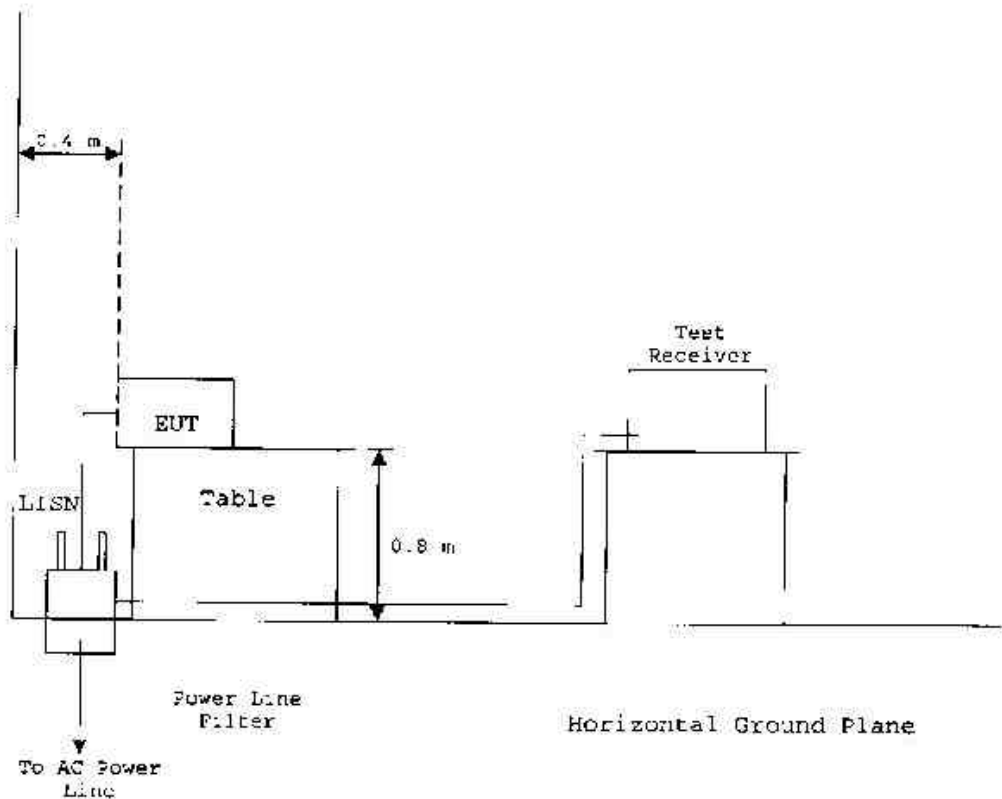


1.9.2 Radiated Emission (30 MHz - 1000 MHz) :

According to description of ANSI C63.4-1992 sec.8.3.1.1, the preliminary radiated emissions measurements were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements.

Anechoic Chamber

- Side View -

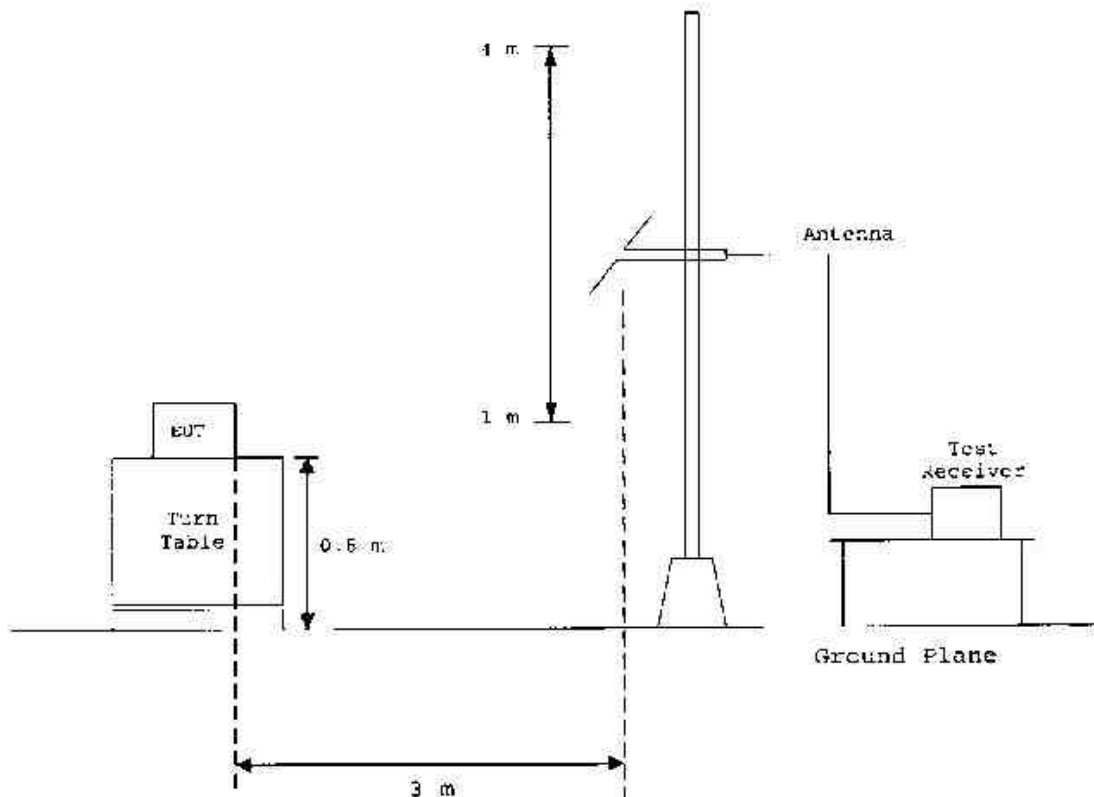


1.9.3 Radiated Emission (Above 1 GHz) :

According to description of ANSI C63.4-1992 sec.8.3.1.1, the preliminary radiated emissions measurements were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements.


Anechoic Chamber


- Side View -

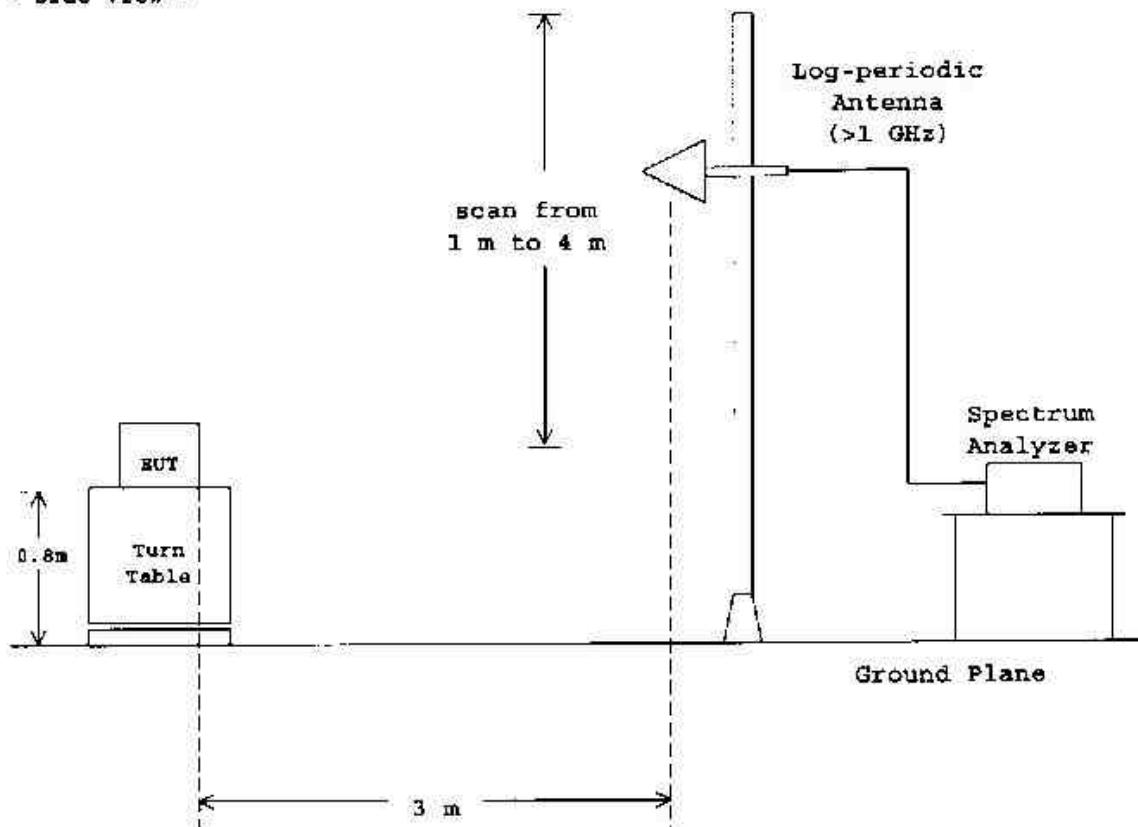

1.10 TEST ARRANGEMENT (PHOTOGRAPHS)**PHOTOGRAPHS OF EUT CONFIGURATION FOR RADIATED EMISSIONS MEASUREMENT**

Photograph present configuration with maximum emission

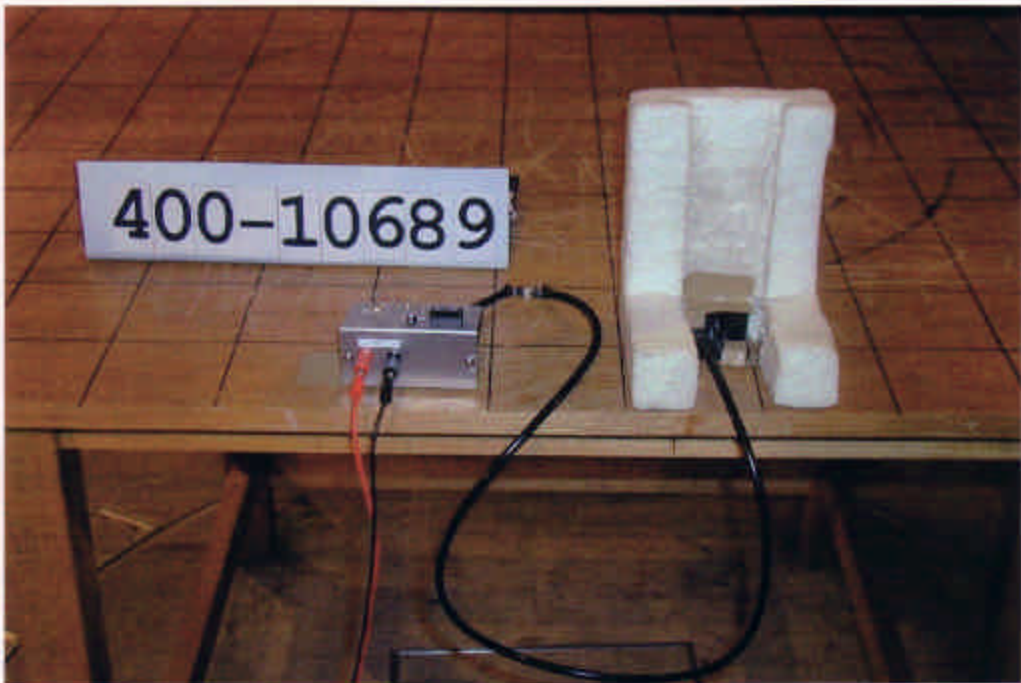

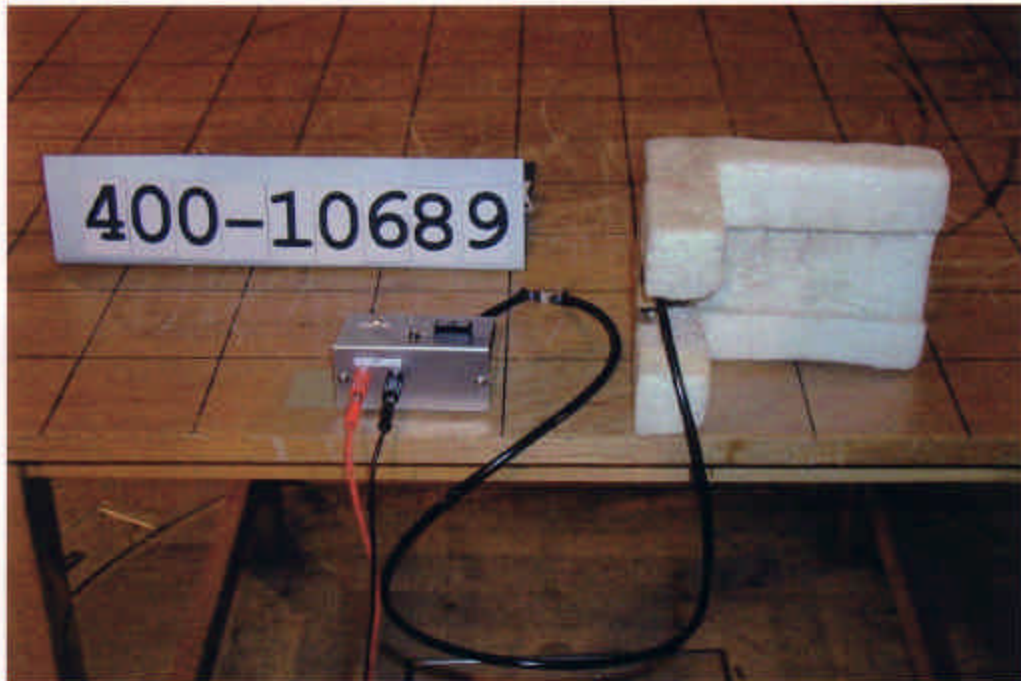

TEST DATA**2.2 Radiated Emissions Measurement (30 MHz - 1000 MHz)**

Tuning Frequency : 313.85 MHz
 Distance of Measurement : 3.0 meters


Date : January 28, 2002

Temp. : 24 °C Humi. : 34 %

Frequency (MHz)	Antenna Factor (dB)	Meter Reading (dBuV)		Limits (dBuV/m)	Emission Levels (dBuV/m)		Margins (dB)	
		Horiz.	Vert.		Horiz.	Vert.	Horiz.	Vert.
40.0	14.5	1.2	17.5	40.0	15.7	32.0	24.3	8.0
42.5	14.0	3.1	18.4	40.0	17.1	32.4	22.9	7.6
87.5	9.0	6.3	13.7	40.0	15.3	22.7	24.7	17.3
190.0	17.5	7.0	10.8	43.5	24.5	28.3	19.0	15.2
310.1	18.2	6.7	0.2	46.0	24.9	18.4	21.1	27.6

- Notes :
- 1) The spectrum was checked from 30 MHz to 1000 MHz.
 - 2) The cable loss is included in the antenna factor.
 - 3) The symbol of "<" means "or less".
 - 4) The symbol of ">" means "or greater".
 - 5) A sample calculation was made at 40 (MHz).
 $Af + Mr = 14.5 + 17.5 = 32$ (dBuV/m)
 Af = Antenna Factor
 Mr = Meter Reading
 - 6) Measuring Instrument Setting:
 Detector function : CISPR Quasi-peak
 IF Bandwidth : 120 kHz

Tested by :


 Shigeru Osawa
 Testing Engineer

RADIATED EMISSION MEASUREMENT

Model No. : G8D-380H-B

Standard : CFR 47 FCC Rules Part 15	○ Horizontal
Category : Class B	× Vertical

