

EMISSION TEST REPORT

Test Report No. : **21GE0046YW-1**

Applicant: OMRON CORPORATION.

Type of Equipment: Keyless Entry System (Transmitter)

Model No.: G8D-525M-A5/ G8D-525M-A6/ G8D-525M-A7
G8D-525M-A8/ G8D-525M-A9

FCC ID OUCG8D-525M-A

Test standard: FCC Part 15 Subpart C


Test Result: Complies

This report may not be reproduced in full, partial reproduction may only be made with the written consent of the laboratory.

The results in this report apply only to the sample tested.

Date of test: March 2, 2001

Tested by: 
Makoto Kosaka

Approved by:  Issued date: March 5, 2001
Kazuhiro Kitahara
Section Manager of EMC section

Testing Laboratory

A-pex International Co., Ltd.

Telephone: +81 596 39 1485

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Facsimile: +81 596 39 0232

Table of Contents	Page
1 GENERAL INFORMATION	3
1.1 Product Description	4
1.2 Test Specification	4
1.3 Methods & Procedures	4
1.4 Test Location	4
2 SYSTEM TEST CONFIGURATION	5
2.1 Operation Environment	5
2.2 Justification	5
2.3 EUT Exercise Software	5
2.4 Test Procedure	5
Figure 2.1 Configuration of Tested System	6
3 RADIATED MEASUREMENT PHOTOS	7
Figure 3.1 Radiated Measurement Photos	7
3.1 Measurement Uncertainty	8
4 RADIATED EMISSION DATA	9
4.1 Field Strength Calculation	9
5 TEST EQUIPMENT USED	11
APPENDIX	12
A:Test Data	A1 – A3

1 GENERAL INFORMATION

APPLICANT : OMRON CORPORATION

TRADE NAME : OMRON

ADDRESS : 6368 Nenjo-Zaka, Okusa, Komaki-City,
Aichi 485-0802 Japan
Tel: +81-568-78-6170
Fax: +81-568-78-6179

REGULATION(S) : FCC Part 15 Subpart C

MODEL NUMBER : G8D-525M-A5/ G8D-525M-A6/ G8D-525M-A7
: G8D-525M-A8/ G8D-525M-A9

FCC ID : OUCG8D-525M-A

SERIAL NUMBER : Sample No.1

KIND OF EQUIPMENT : Keyless Entry System (Transmitter)

TESTED DATE : March 2, 2001

RECEIPT DATE OF SAMPLE : February 28, 2001

REPORT FILE NUMBER : 21GE0046YW-1

TEST SITE : A-PEX Yokowa No.3 Open Test Site

Test report**Our reference** : 21GE0046YW-1**Page** : 4 of 12**Issued date** : March 5, 2001**FCC ID** : OUCG8D-525M-A

1.1 Product Description

Model: G8D-525M-A5, G8D-525M-A6, G8D-525M-A7, G8D-525M-A8 and G8D-525M-A9 (referred to as the EUT in this report) is a Keyless Entry System (Transmitter).

G8D-525M-A5, G8D-525M-A6, G8D-525M-A7, G8D-525M-A8 and G8D-525M-A9 are deemed to be equal about the level of EMC since they have few differences as remarked below, therefore, G8D-528M-A which is a top-level model was measured as their representative.

Model No	PWB	Parts on PWB	software
G8D-525M-A5	same as G8D-525M-A8	Loaded two SW (LOCK,UNLOCK)	same as G8D-525M-A8
G8D-525M-A6	same as G8D-525M-A8	Loaded three SW(LOCK,UNLOCK,PANIC)	same as G8D-525M-A8
G8D-525M-A7	same as G8D-525M-A8	Loaded three SW(LOCK,UNLOCK,TRUNK)	same as G8D-525M-A8
G8D-525M-A8	Origin	Origin(Loaded four SW) (LOCK,UNLOCK,TRUNK,PANIC)	Origin
G8D-525M-A9	same as G8D-525M-A8	Loaded two SW(LOCK,UNLOCK)	same as G8D-525M-A8

The specification is as following :

Carrier Frequency : 313.85 MHz
 Operation Voltage : Lithium Battery DC 3.0V(CR2032)
 Modulation : FSK

1.2 Test Specification

Test Specification : FCC Part 15 Subpart C

Title : FCC 47CFR Part15 Radio Frequency Device

Subpart C Intentional Radiators

§ 15.205 Restricted bands of operation

§ 15.231 Periodic operation in the band 40.66 – 40.70 MHz and above 70MHz

1.3 Methods & Procedures

No.	Item	Test Procedure	Specification	Remarks
1	Restricted bands of operation	FCC/ANSI C63.4:1992	§ 15.205	3m
2	Electric Field Strength of Fundamental Emission	FCC/ANSI C63.4:1992	§ 15.231(b)	3m
3	Electric Field Strength of Spurious Emission	FCC/ANSI C63.4:1992	§ 15.231(b)	3m
4	-20dB Bandwidth	FCC/ANSI C63.4:1992	§ 15.231(c)	-

1.4 Test Location

A-PEX International Co.,Ltd. Yokowa No.3 test site

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 Japan

Telephone number : +81-596-39-1485

Facsimile number : +81-596-39-0232

This site has been fully described in a report submitted to FCC office, and listed on September 12, 2000 (Registration number: 90412).

*NVLAP Lab. code : 200109-0

Testing Laboratory

A-pex International Co., Ltd.

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN Facsimile:

Telephone: +81 596 39 1485

+81 596 39 0232

2 SYSTEM TEST CONFIGURATION

2.1 Operation Environment

Temperature : 25
Humidity : 31%

2.2 Justification

The system was configured in typical fashion (as a customer would normally use it) for testing.

2.3 EUT Exercise Software

The EUT exercise program used during radiated testing was designed to exercise the various system components in a manner similar to typical use.

The sequence is used:

Operation Mode : Transmitting


2.4 Test Procedure

Tabletop Equipment Radiated Emissions

EUT was placed on a platform of nominal size, 1m by 1m, raised 80cm above the conducting ground plane. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength. The measurement distance was 3m.


Figure2.1 Configuration of Tested System

Front View

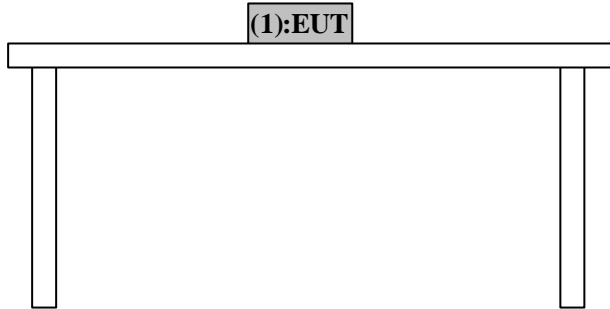

* Test data was taken under worse case conditions.

Top View

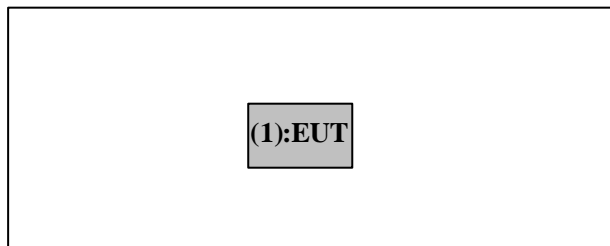

*Test data was taken under worse case conditions.

No.	Item	Model number	Serial number	Manufacturer	FCC ID
1	Keyless Entry System (Transmitter)	G8D-525M-A8	Sample No.1	OMRON	OUCG8D-525M-A

Test report

Our reference : 21GE0046YW-1

Page : 7 of 12

Issued date : March 5, 2001

FCC ID : OUCG8D-525M-A

3 RADIATED MEASUREMENT PHOTOS

Figure 3.1 Radiated Measurement Photos



Testing Laboratory

A-pex International Co., Ltd.

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN Facsimile:

Telephone: +81 596 39 1485

+81 596 39 0232

3.1 Measurement Uncertainty

Radiated Emission Test

The measurement uncertainty (with a 95% confidence level) for this test was $\pm 3.3\text{dB}$.

The data listed in this test report may exceed the test limit because it does not have enough margin (more than 3.3dB).

The data listed in this test report has enough margin, more than 3.3dB.

Test report**Our reference : 21GE0046YW-1****Page : 9 of 12****Issued date : March 5, 2001****FCC ID : OUCG8D-525M-A****4 RADIATED EMISSION DATA**

The initial step in collecting radiated data was a spectrum analyzer peak scan of the measurement range (30MHz-3200MHz).

The final data was reported in the worst-case emissions.

The minimum margin to the limit is as follows :

Frequency (MHz)	Ant Pol	Receiver Reading (dB μ V)	Correction Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
313.87	H	78.0	-3.7	74.3	75.6	1.3

* quasi-peak mode

§ 15.231(c) -20dB Bandwidth

Bandwidth Limit: Fundamental Frequency 313.85MHz \times 0.25% = 784.625kHz

Bandwidth Limit	measurement data (20dB down)	Result
Lower frequency Limit (313.45769MHz:392.31kHz)	313.632MHz(183kHz)	Pass
Upper frequency Limit (314.24231MHz:392.31kHz)	314.052MHz(163kHz)	Pass
-20dB Bandwidth (784.625kHz)	Lf + Uf = 346kHz	Pass

* See Appendix 2 and 3

Testing Laboratory

A-pex International Co., Ltd.

Telephone: +81 596 39 1485

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN Facsimile:

+81 596 39 0232

Test report

Our reference : 21GE0046YW-1

Page : 10 of 12

Issued date : March 5, 2001

FCC ID : OUCG8D-525M-A

5.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, Cable Factor and Antenna Pad, and subtracting the Amplifier Gain from the measured reading. The sample calculation is as follows :

$$FS = RA + AF + CF + AT - AG$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Factor

AT = Antenna Pad

AG = Amplifier Gain

Assume a receiver reading of 78.0 dB μ V is obtained. The antenna Factor of 14.5 dB, Cable Factor of 3.6 dB and Antenna Pad of 5.9 dB is added. The Amplifier Gain of 27.7 dB is subtracted, giving a field strength of 74.3 dB μ V/m.

$$FS = 78.0 + 14.5 + 3.6 + 5.9 - 27.7 = 74.3 \text{ dB } \mu \text{ V/m}$$

Testing Laboratory

A-pex International Co., Ltd.

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN Facsimile:

Telephone: +81 596 39 1485

+81 596 39 0232

Test report

Our reference : 21GE0046YW-1

Page : 11 of 12

Issued date : March 5, 2001

FCC ID : OUCG8D-525M-A

6 Test EQUIPMENT USED

Instrument	Mfr.	Model No.	Control No.	Calibration Until // Interval
Pre Amplifier	Hewlett Packard	8447D	AF-01	November 5, 2001 / 1 year
Pre Amplifier	Hewlett Packard	8449B	AF-04	November 4, 2001 / 1 year
Attenuator	Anritsu	MP721B	AT-06	June 8, 2001 / 1 year
Biconical Antenna	Schwarzbeck	BBA9106	BA-03	April 28, 2001 / 1 year
Logperiodic Antenna	Schwarzbeck	UHALP9108-A	LA-06	April 29, 2001 / 1 year
Horn Antenna	A.H. Systems	SAS200/571	HA-01	January 31, 2003 / 3 year
Spectrum Analyzer	Hewlett Packard	8567A	SA-04	May 5, 2001 / 6 months
Spectrum Analyzer	Advantest	R3271	SA-05	January 31, 2002 / 1 year
Test Receiver	Rohde & Schwarz	ESVS10	TR-06	August 9, 2001 / 1 year
Test Receiver	Rohde & Schwarz	ESCS30	KTR-01	August 7, 2001 / 1 year

*All measurement equipment is traceable to national standard.

Testing Laboratory

A-pex International Co., Ltd.

Telephone: +81 596 39 1485

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN Facsimile:

+81 596 39 0232

APPENDIX

A : Test Data

Radiated emissions

A1 – A3

Testing Laboratory

A-pex International Co., Ltd.

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN Facsimile:

Telephone: +81 596 39 1485

+81 596 39 0232

DATA OF RADIATION TEST

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.3 OPEN SITE

COMPANY : OMRON Corporation
 TRADE NAME: OMRON
 EQUIPMENT : keyless Entry System(Transmitter)
 MODEL : G8D-525M-A8
 POWER : DC3.0V
 Mode : Transmitting
 Serial No. : sample No.1
 Temperature : 25°C
 Humidity : 31%

REPORT NO : 21GE0046YW-1
 REGULATION : FCC15.231(b) / 15.205
 TEST DISTANCE : 3m
 DATE : 2001/3/2
 FCC ID : OUCG8D-525M-A


ENGINEER : Makoto Kosaka

No.	FREQ [MHz]	ANT TYPE	READING		ANT Factor [dB]	ATTEN [dB]	CABLE LOSS [dB]	AMP GAIN [dB]	RESULT		LIMIT dB μ V/m	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1	313.87	BB	78.0	59.1	14.5	5.9	3.6	27.7	74.3	55.4	75.6	1.3	20.2
2	627.77	BB	34.5	26.3	18.8	6.1	5.4	27.3	37.5	29.3	55.6	18.1	26.3
3	941.66	BB	38.0	28.5	22.7	5.9	7.3	27.0	46.9	37.4	55.6	8.7	18.2
4	1255.39	BB	48.5	45.8	24.4	0.0	5.6	35.1	43.4	40.7	55.6	12.2	14.9
5	1569.24	BB	45.8	42.9	25.5	0.0	6.5	34.7	43.1	40.2	54.0	10.9	13.8
6	1883.08	BB	41.9	41.4	27.1	0.0	7.8	34.5	42.3	41.8	55.6	13.3	13.8
7	2196.93	BB	44.6	41.6	28.2	0.0	8.1	34.4	46.5	43.5	55.6	9.1	12.1
8	2510.78	BB	41.3	41.3	28.9	0.0	8.3	34.5	44.0	44.0	55.6	11.6	11.6
9	2824.63	BB	43.3	42.6	29.9	0.0	8.3	34.9	46.6	45.9	54.0	7.4	8.1
10	3138.48	BB	41.5	42.6	30.4	0.0	8.9	34.9	45.9	47.0	55.6	9.7	8.6

REMARKS

Below the 1GHz QP DETECT(T/R: BW 120kHz)

Upper the 1GHz PK DETECT(S/A: RES BW 1MHz/VBW 1MHz)

ANTENNA TYPE: 30-300MHz Biconical / 300-1000MHz Logperiodic / 1-3.2GHz DRG Horn

CALCULATION(30MHz to 1000MHz) : READING + ANT Factor + ATTEN + Cable Loss - AMP Gain

CALCULATION(1.0GHz to 3.3GHz) : READING + ANT Factor + Cable Loss - AMP Gain


*Except for the above table : adequate margin data below the limits.

OMRON : G8D-525M-A8 / FCC ID : OUCG8D-525M-A
Page A2 / -20dB Bandwidth(Hor)
REF 80.0 dBuV

MAKER
313.8150 MHz
76.65 dBuV

MAKER
-183.0000 kHz
-20.00 dBuV

5 dB/

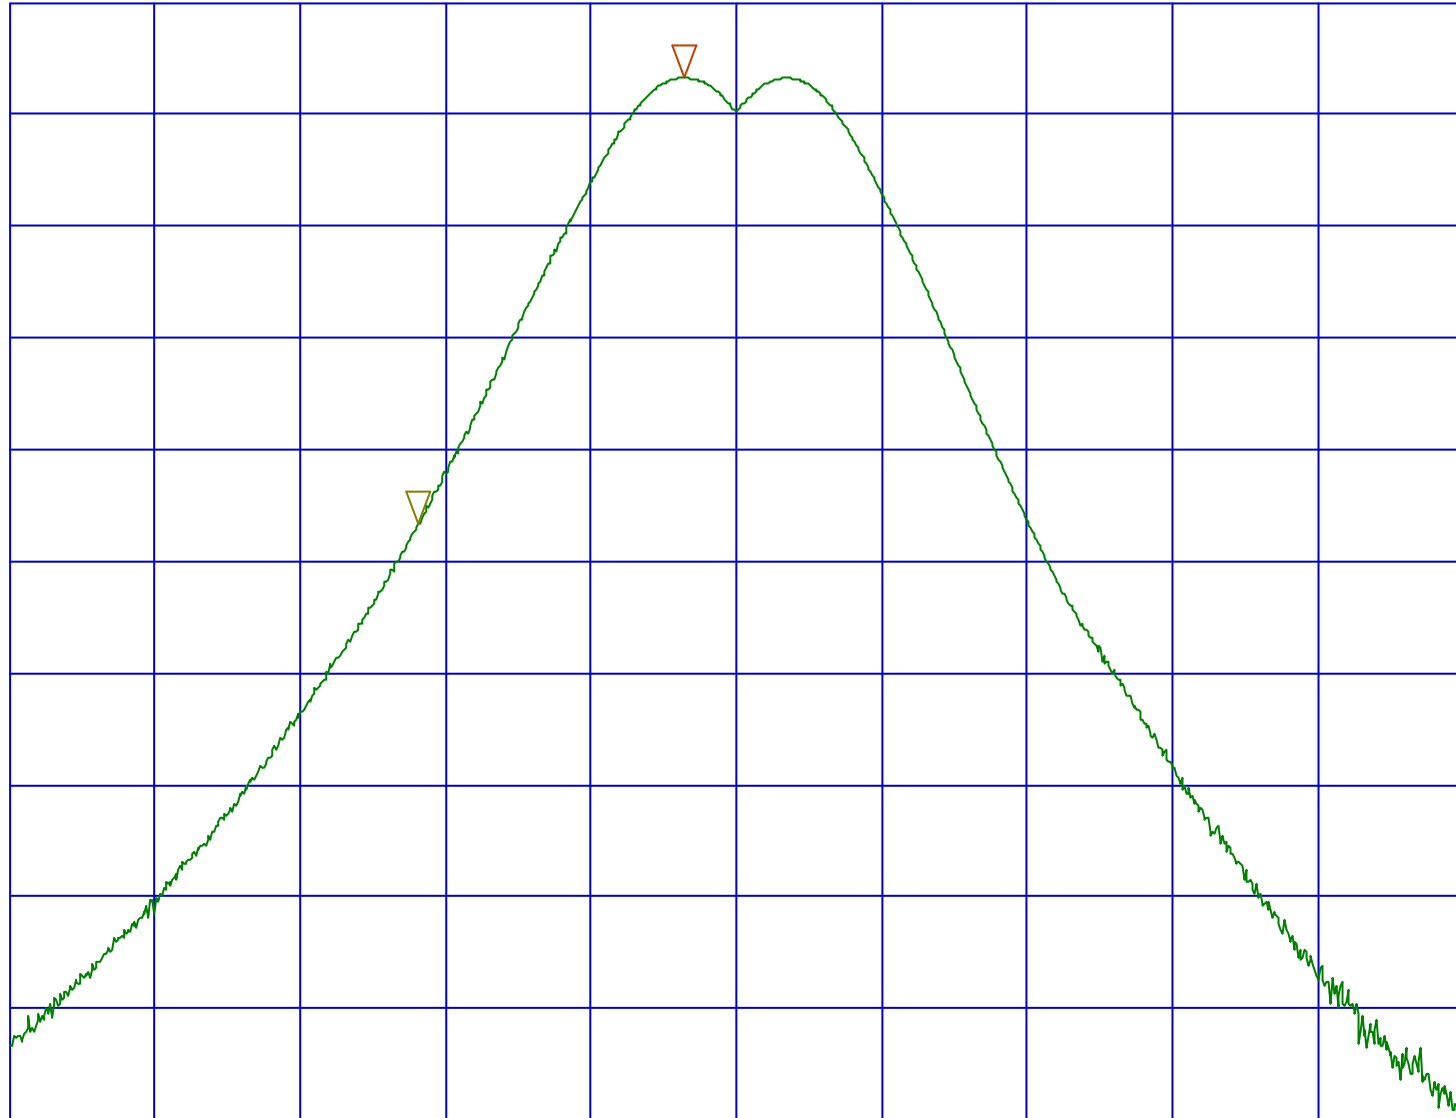

START 313.351 MHz
RES BW 100 kHz

VBW 10 kHz


STOP 314.351 MHz
SWP 20 msec

OMRON : G8D-525M-A8 / FCC ID : OUCG8D-525M-A
Page A3 / -20dB Bandwidth(Hor)
REF 80.0 dBuV ATTEN 10 dB

MAKER
313.8890 MHz
76.60 dBuV

MAKER
163.0000 kHz
-20.00 dBuV

5 dB/

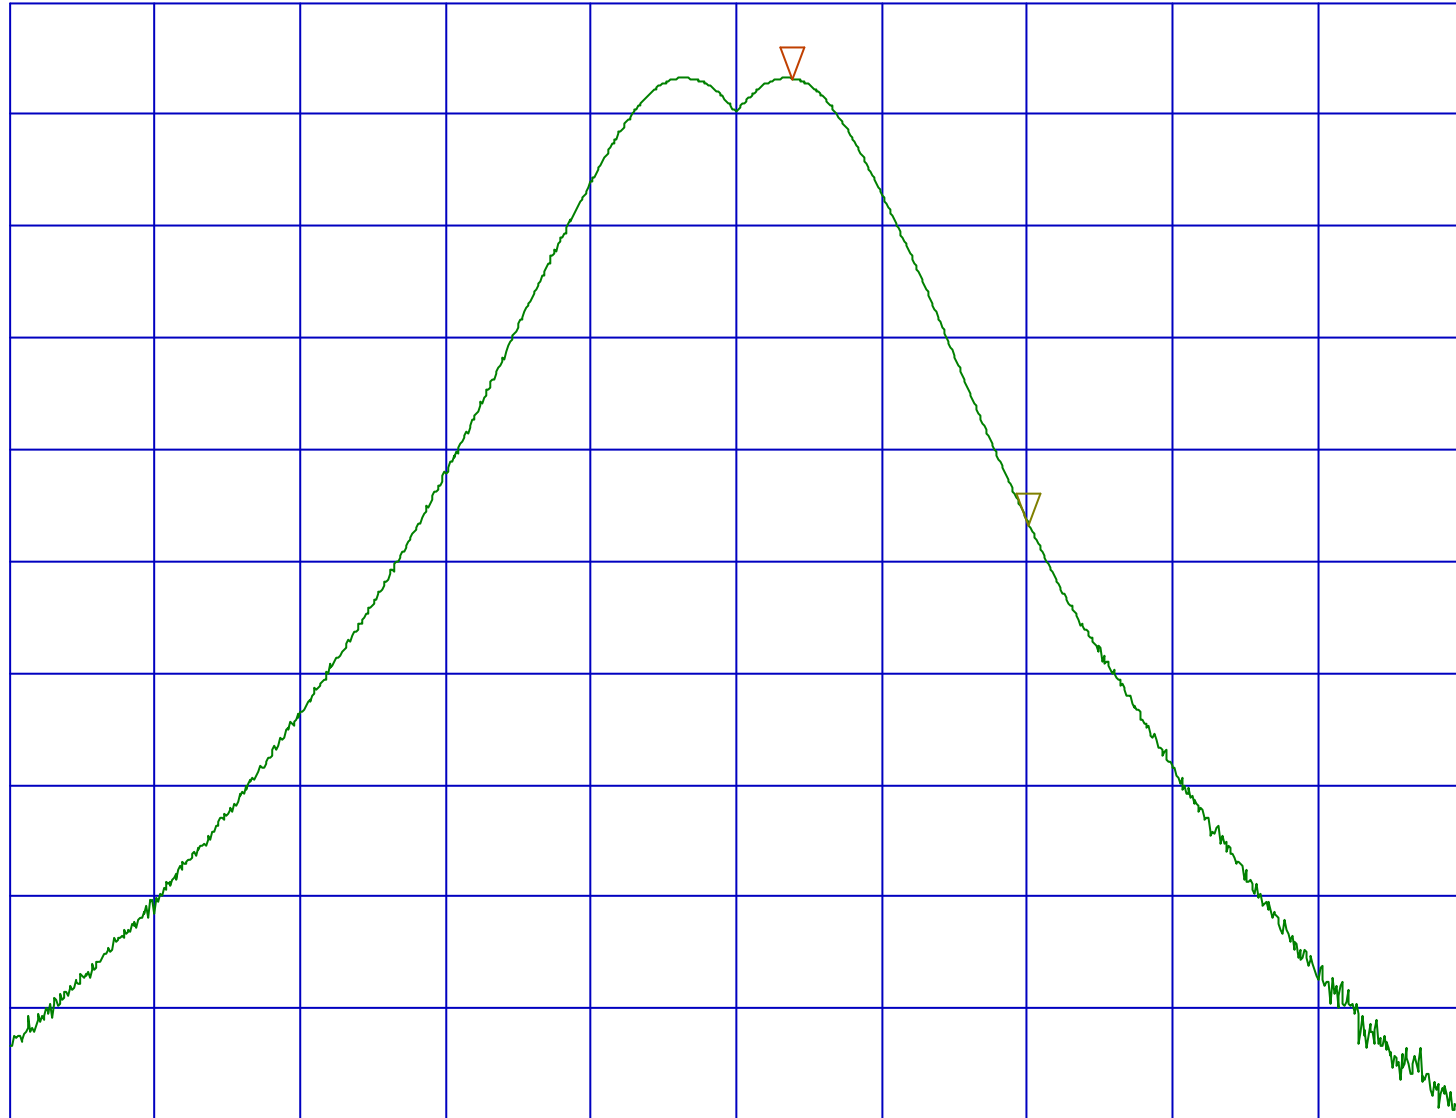

START 313.351 MHz
RES BW 100 kHz

VBW 10 kHz

STOP 314.351 MHz
SWP 20 msec