





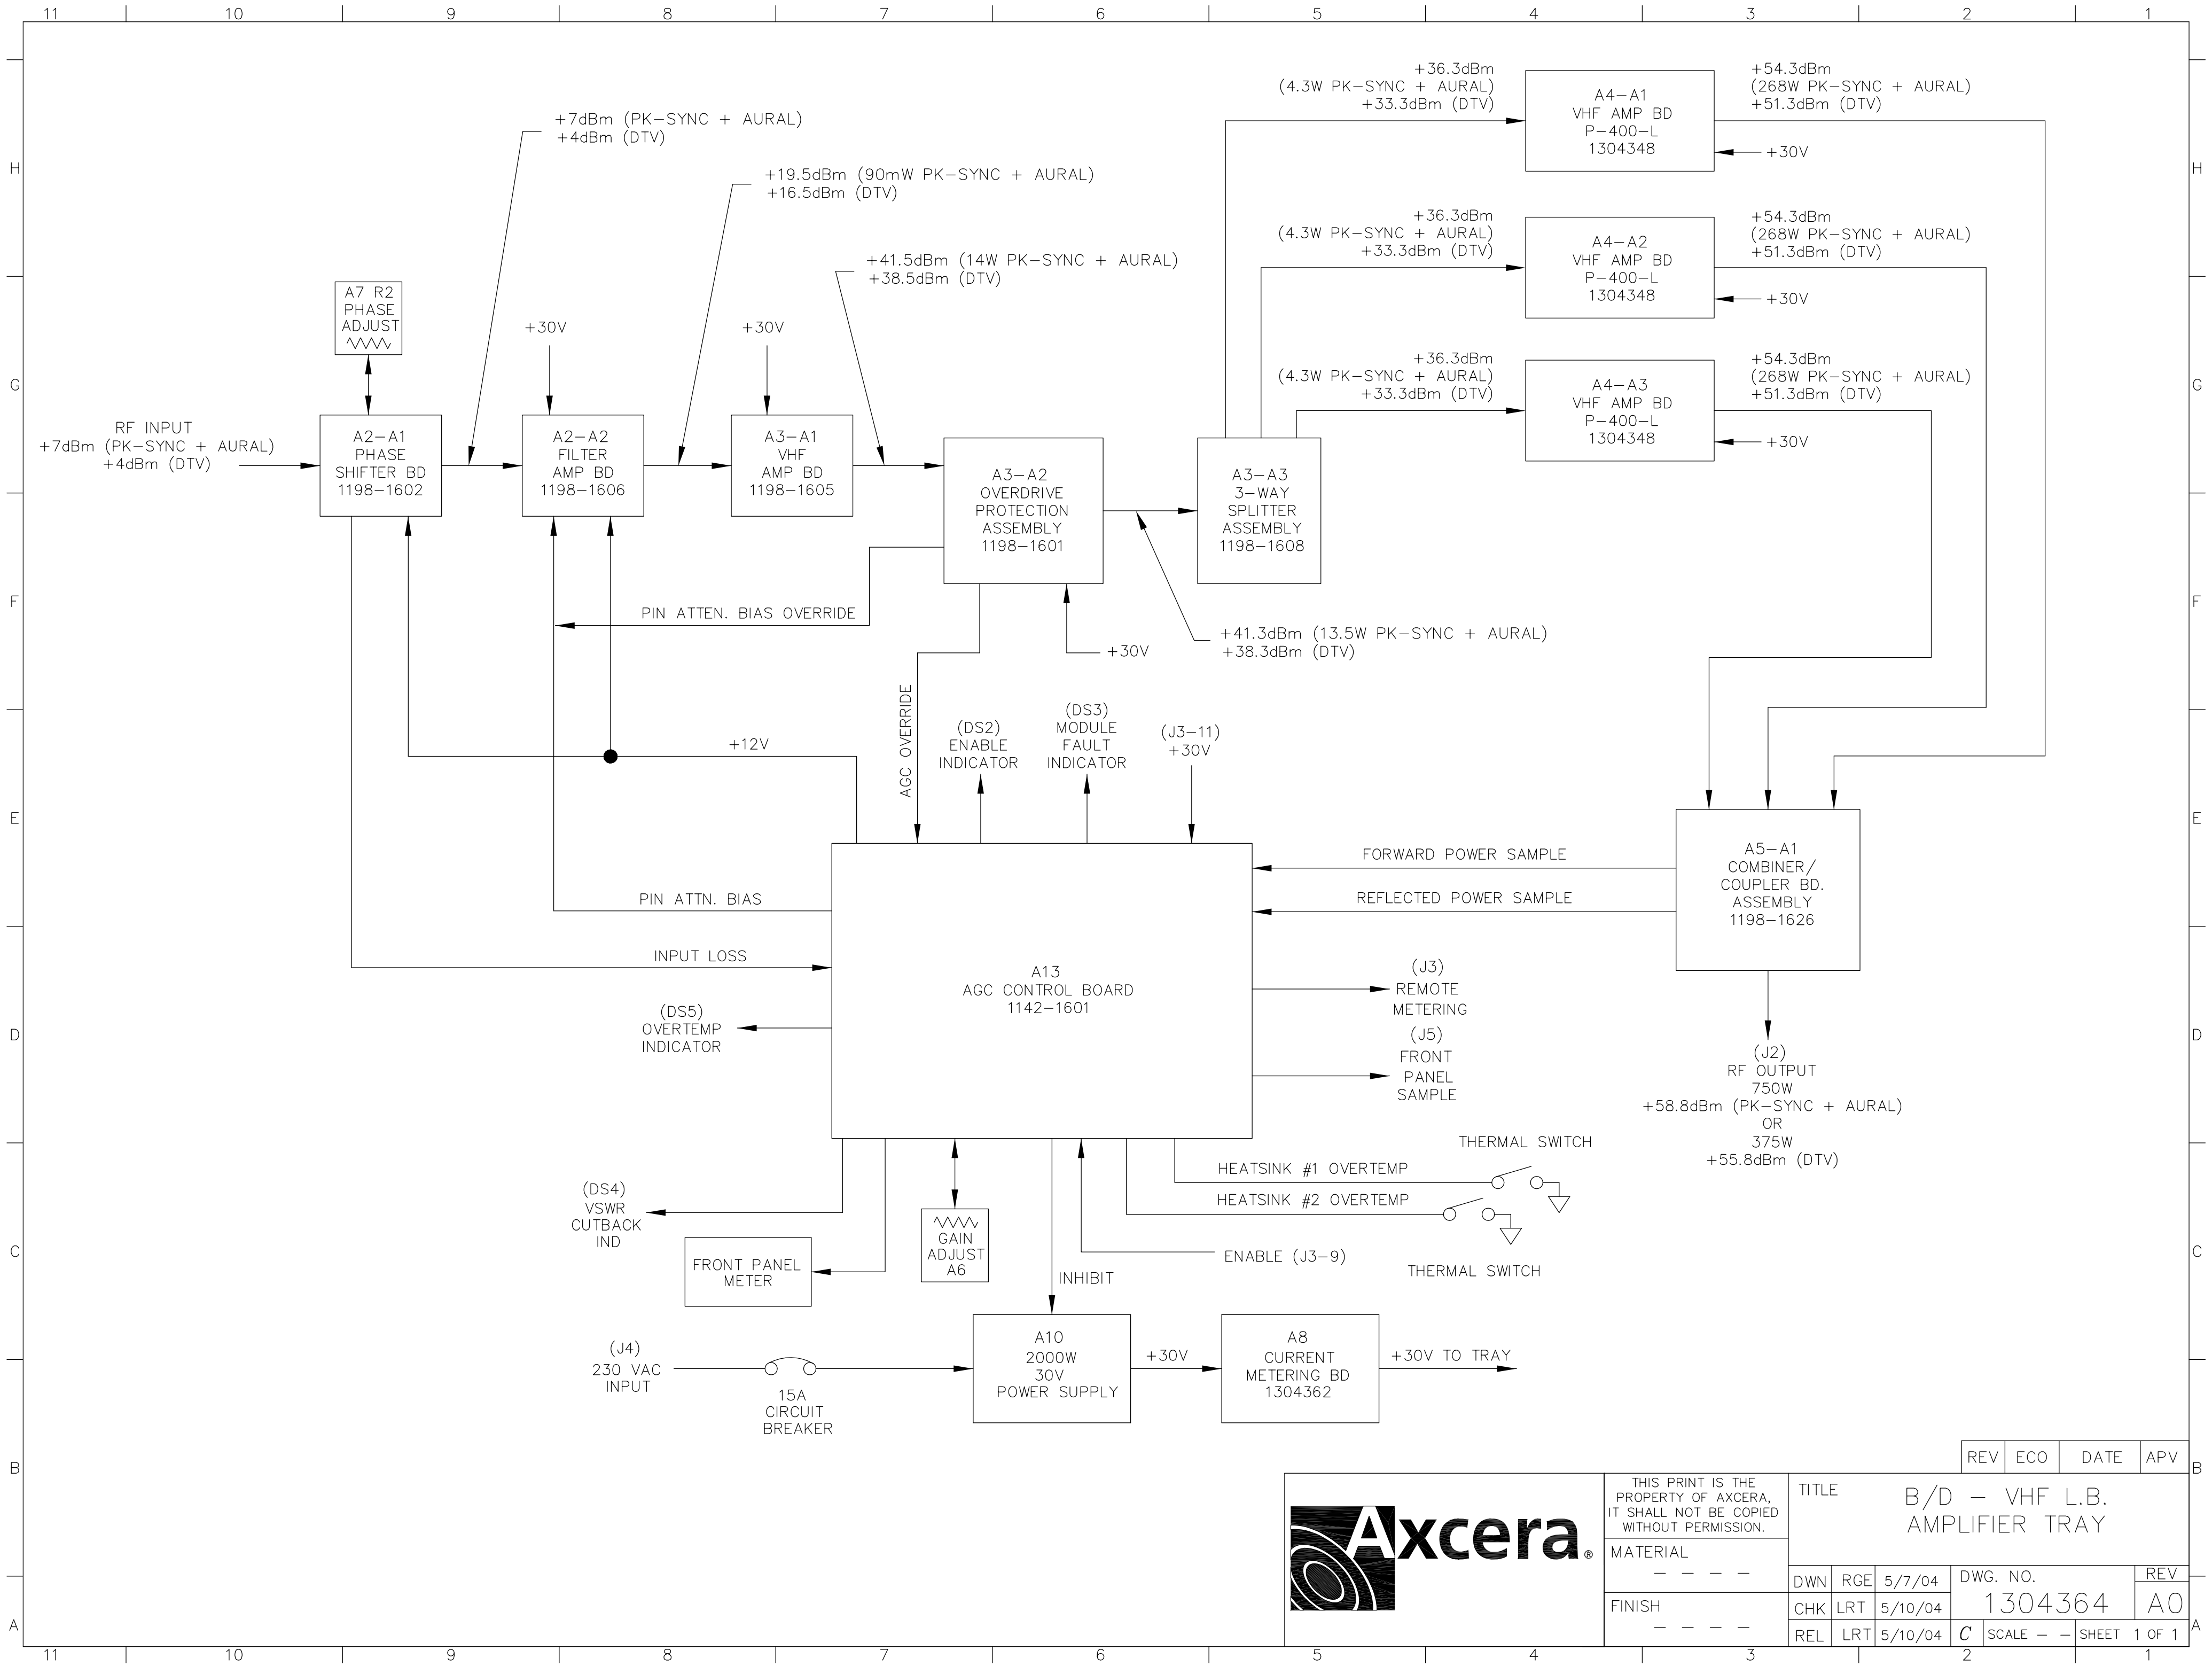

- NOTES:
- 1) ALL SINGLE WIRE IS 22 AWG UNLESS NOTED OTHERWISE.
 - 2) ALL SHIELDED WIRE IS BELDEN YR40143 UNLESS NOTED OTHERWISE.
 - 3) J3 IS A 25 POS "D" CONNECTOR.
 - 4) J4 IS A 3 POS CIRCULAR CONN.
 - 5) CABLES ARE TO BE EQUAL TO EACH OTHER IN LENGTH.
 - 6) CABLES ARE TO BE EQUAL TO EACH OTHER IN LENGTH.
 - 7) CABLES ARE TO BE EQUAL TO EACH OTHER IN LENGTH.
 - 8) INSTALL MINI-JUMP ON J100-1, 2.
 - 9) CABLES ARE TO BE EQUAL TO EACH OTHER IN LENGTH.

REVISED A5, 3 WAY COMBINER CONFIGURATION.			
REVISED A4-A5 AND A4-A6, THERMAL SWITCH WIRING.			
AT A2-A1, PHASE SHIFTER BD., J5 PIN 3 WAS TO E1. (SAK)			
BO	20111434	6/29/04	RT
REV	ECO	DATE	APV

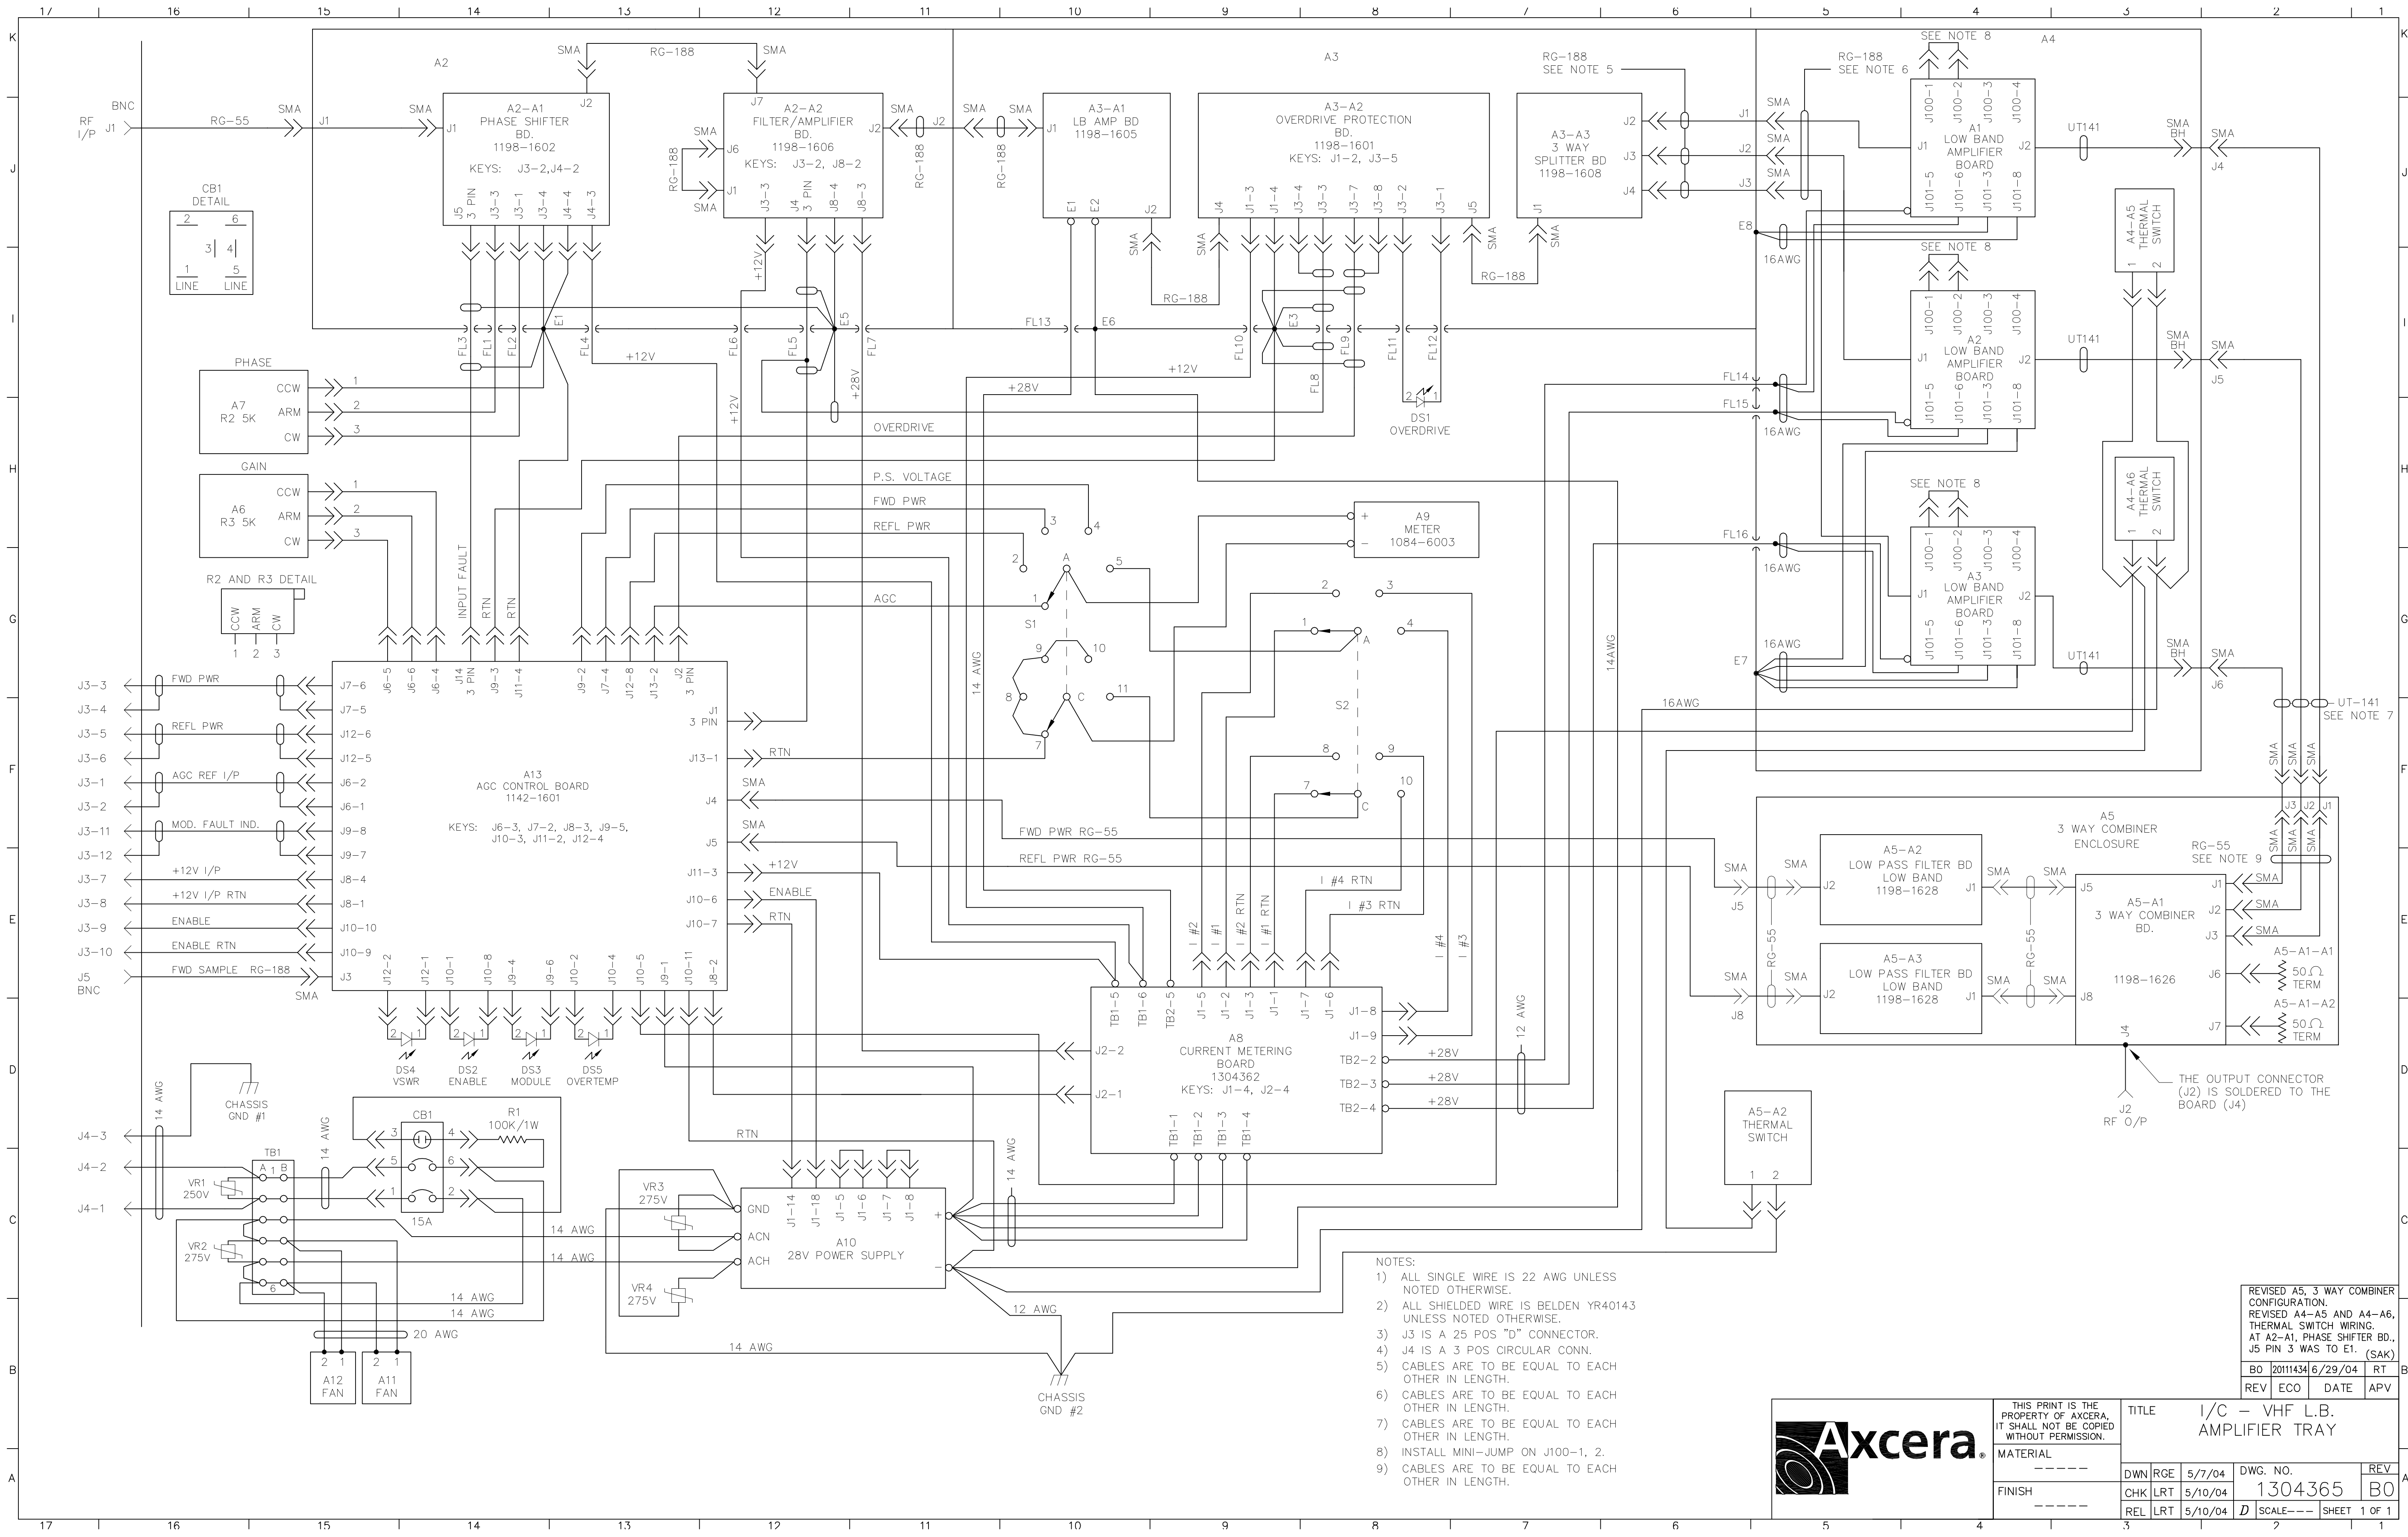

THIS PRINT IS THE PROPERTY OF AXCERA, IT SHALL NOT BE COPIED WITHOUT PERMISSION.			
MATERIAL			
FINISH			
DWN	RGE	5/7/04	DWG. NO.
CHK	LRT	5/10/04	1304365
REL	LRT	5/10/04	SCALE--
SHEET		1 OF 1	

TITLE
I/C - VHF L.B.
AMPLIFIER TRAY