




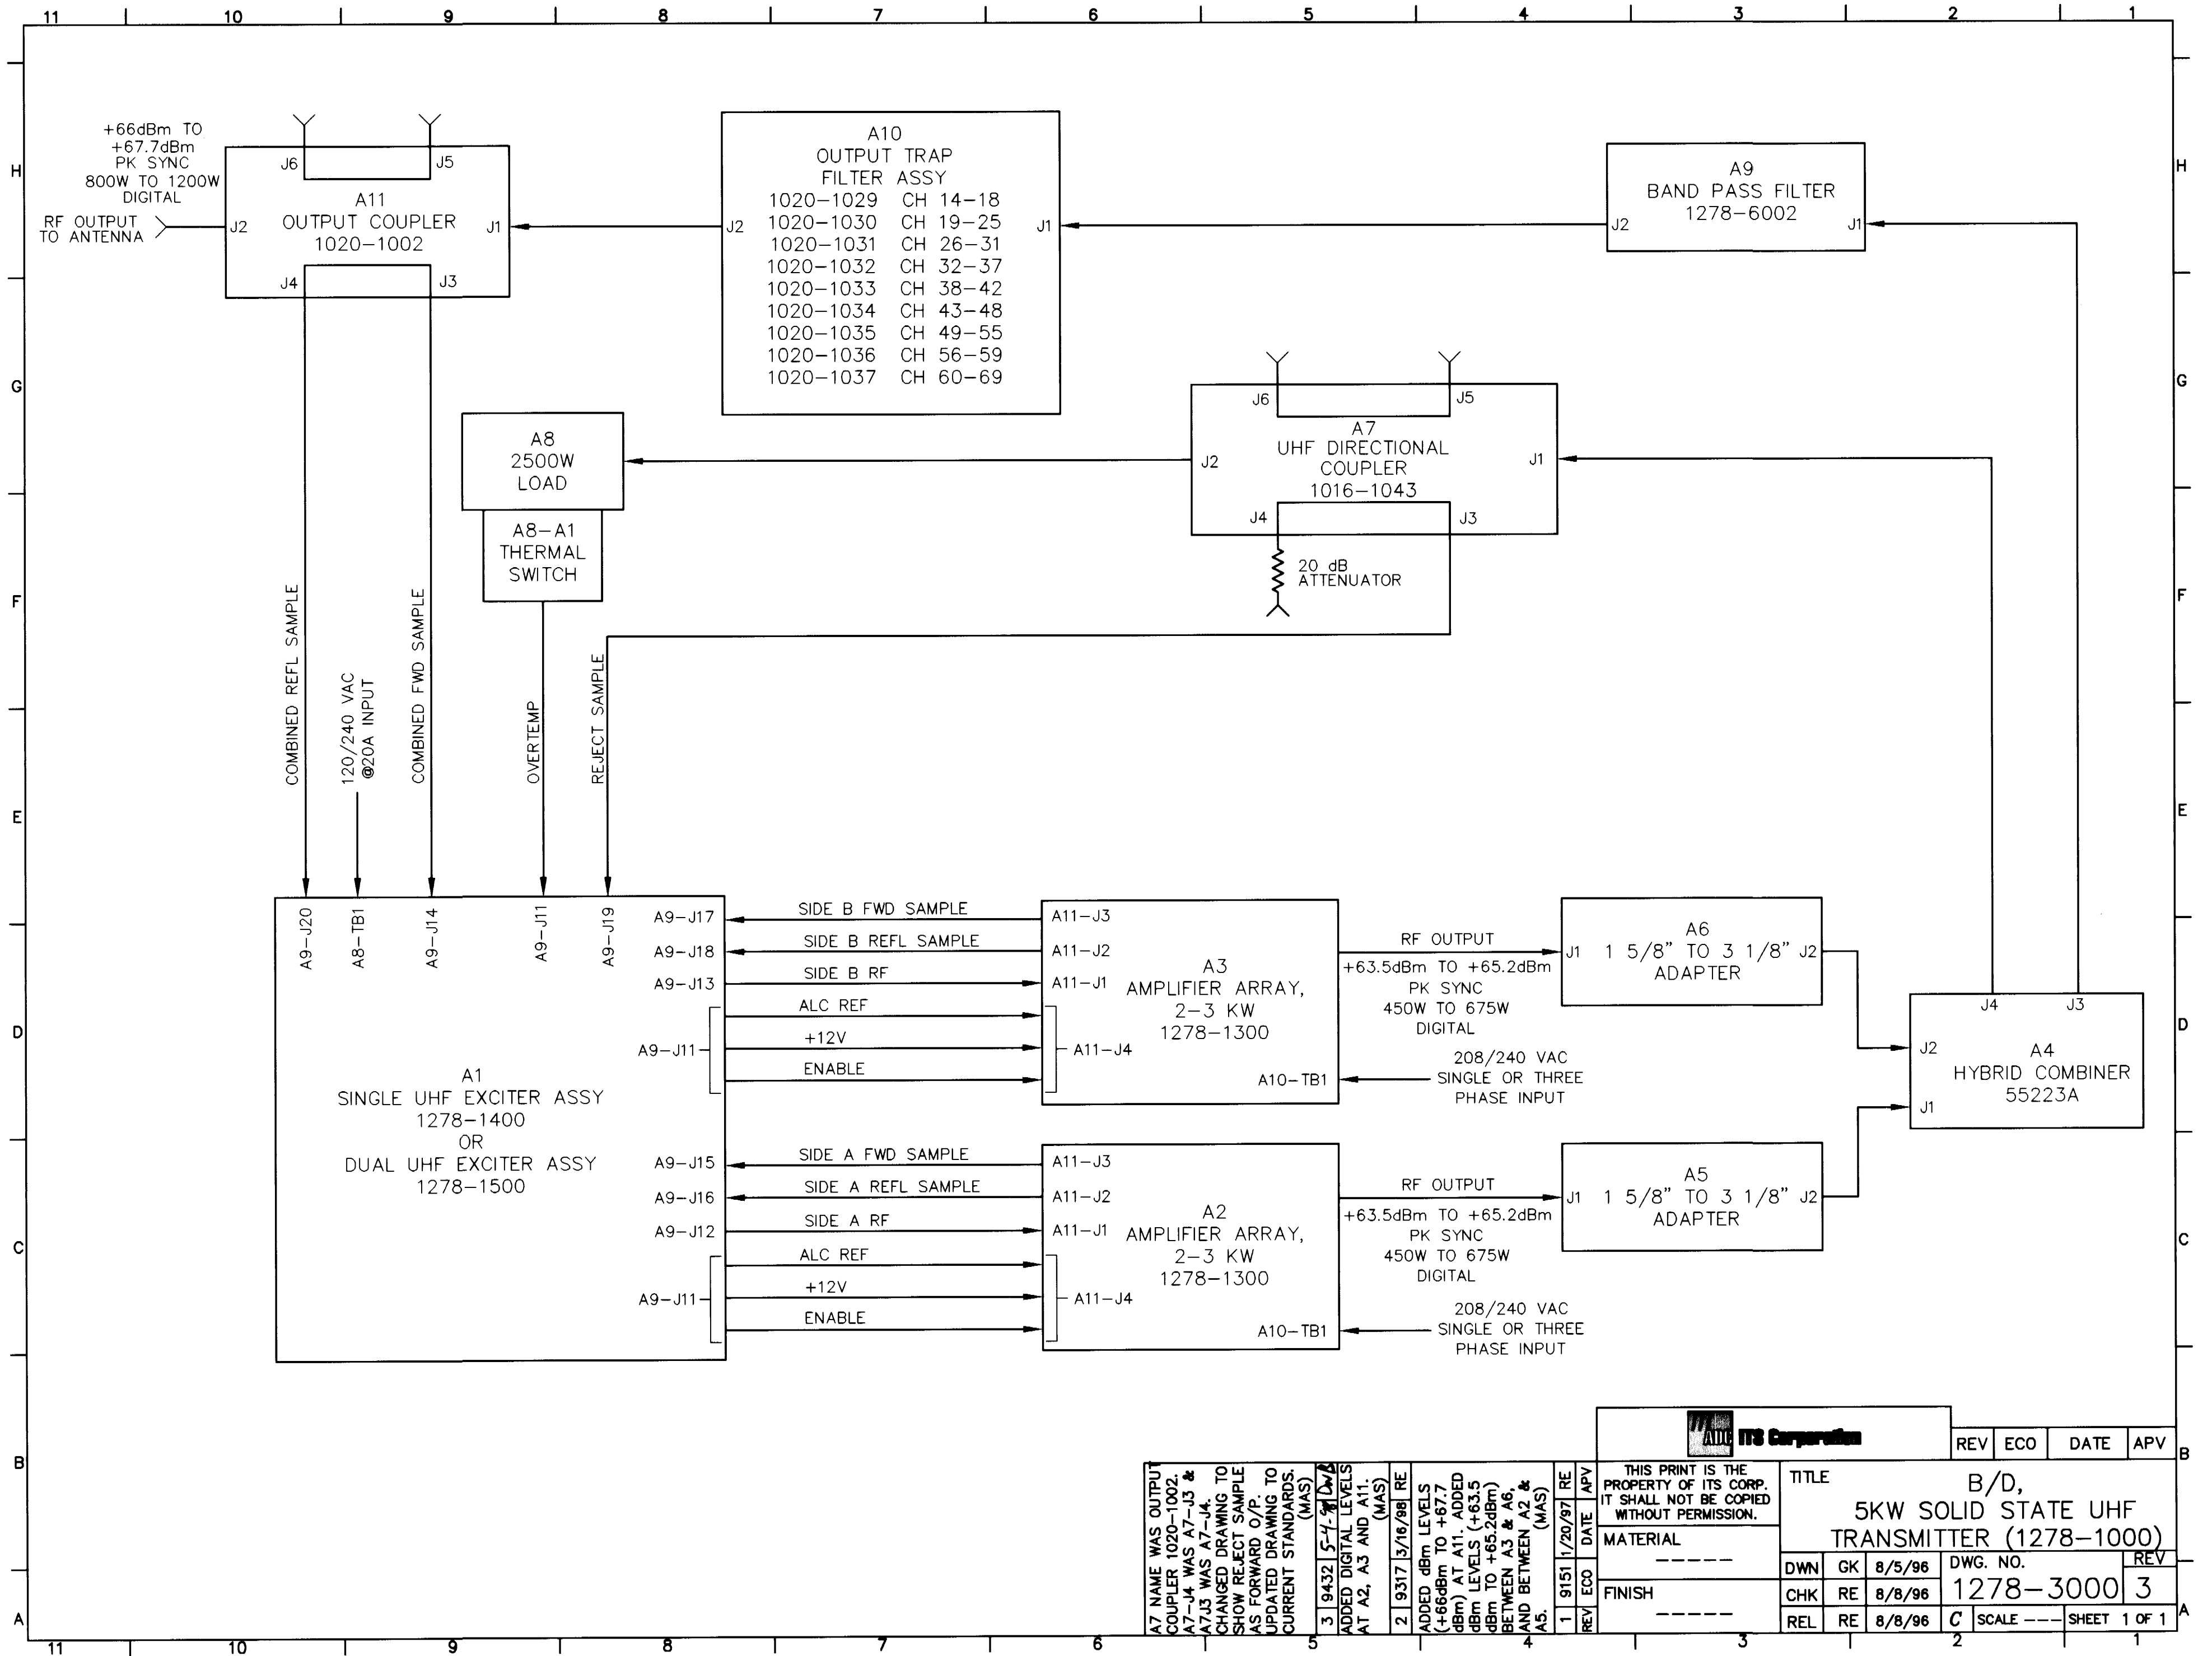

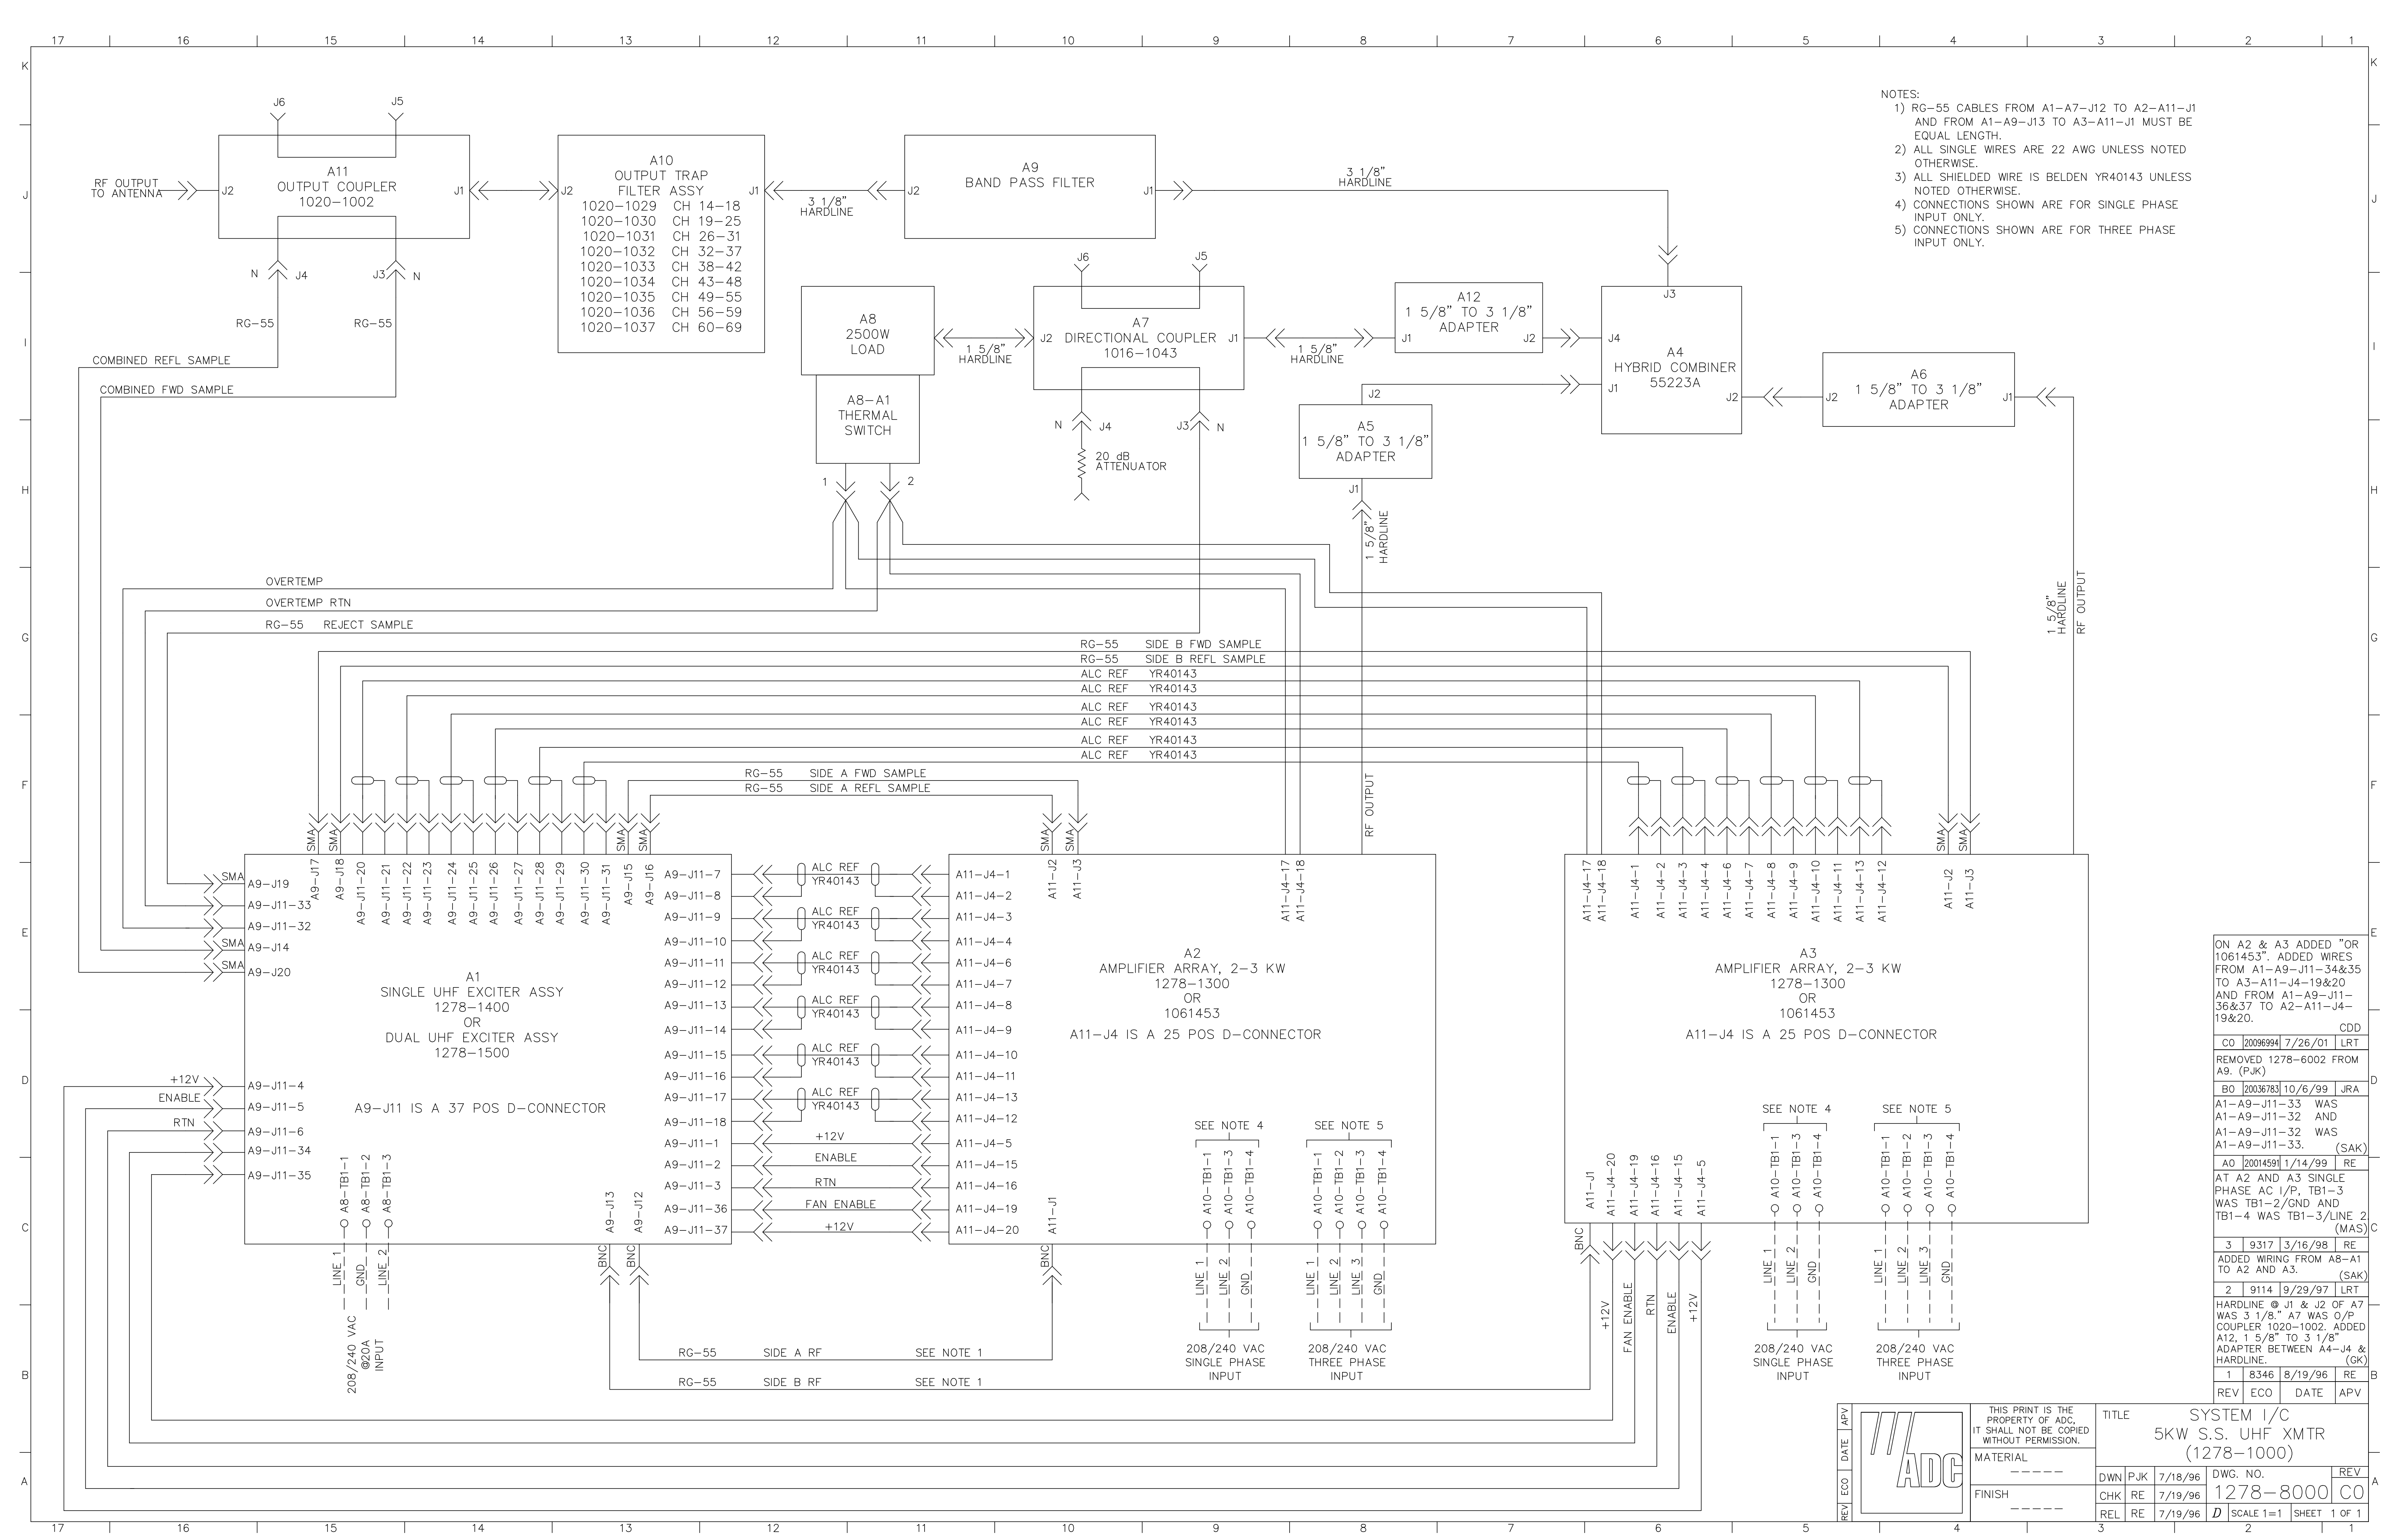



Wed Dec 31 10:07:08 1997

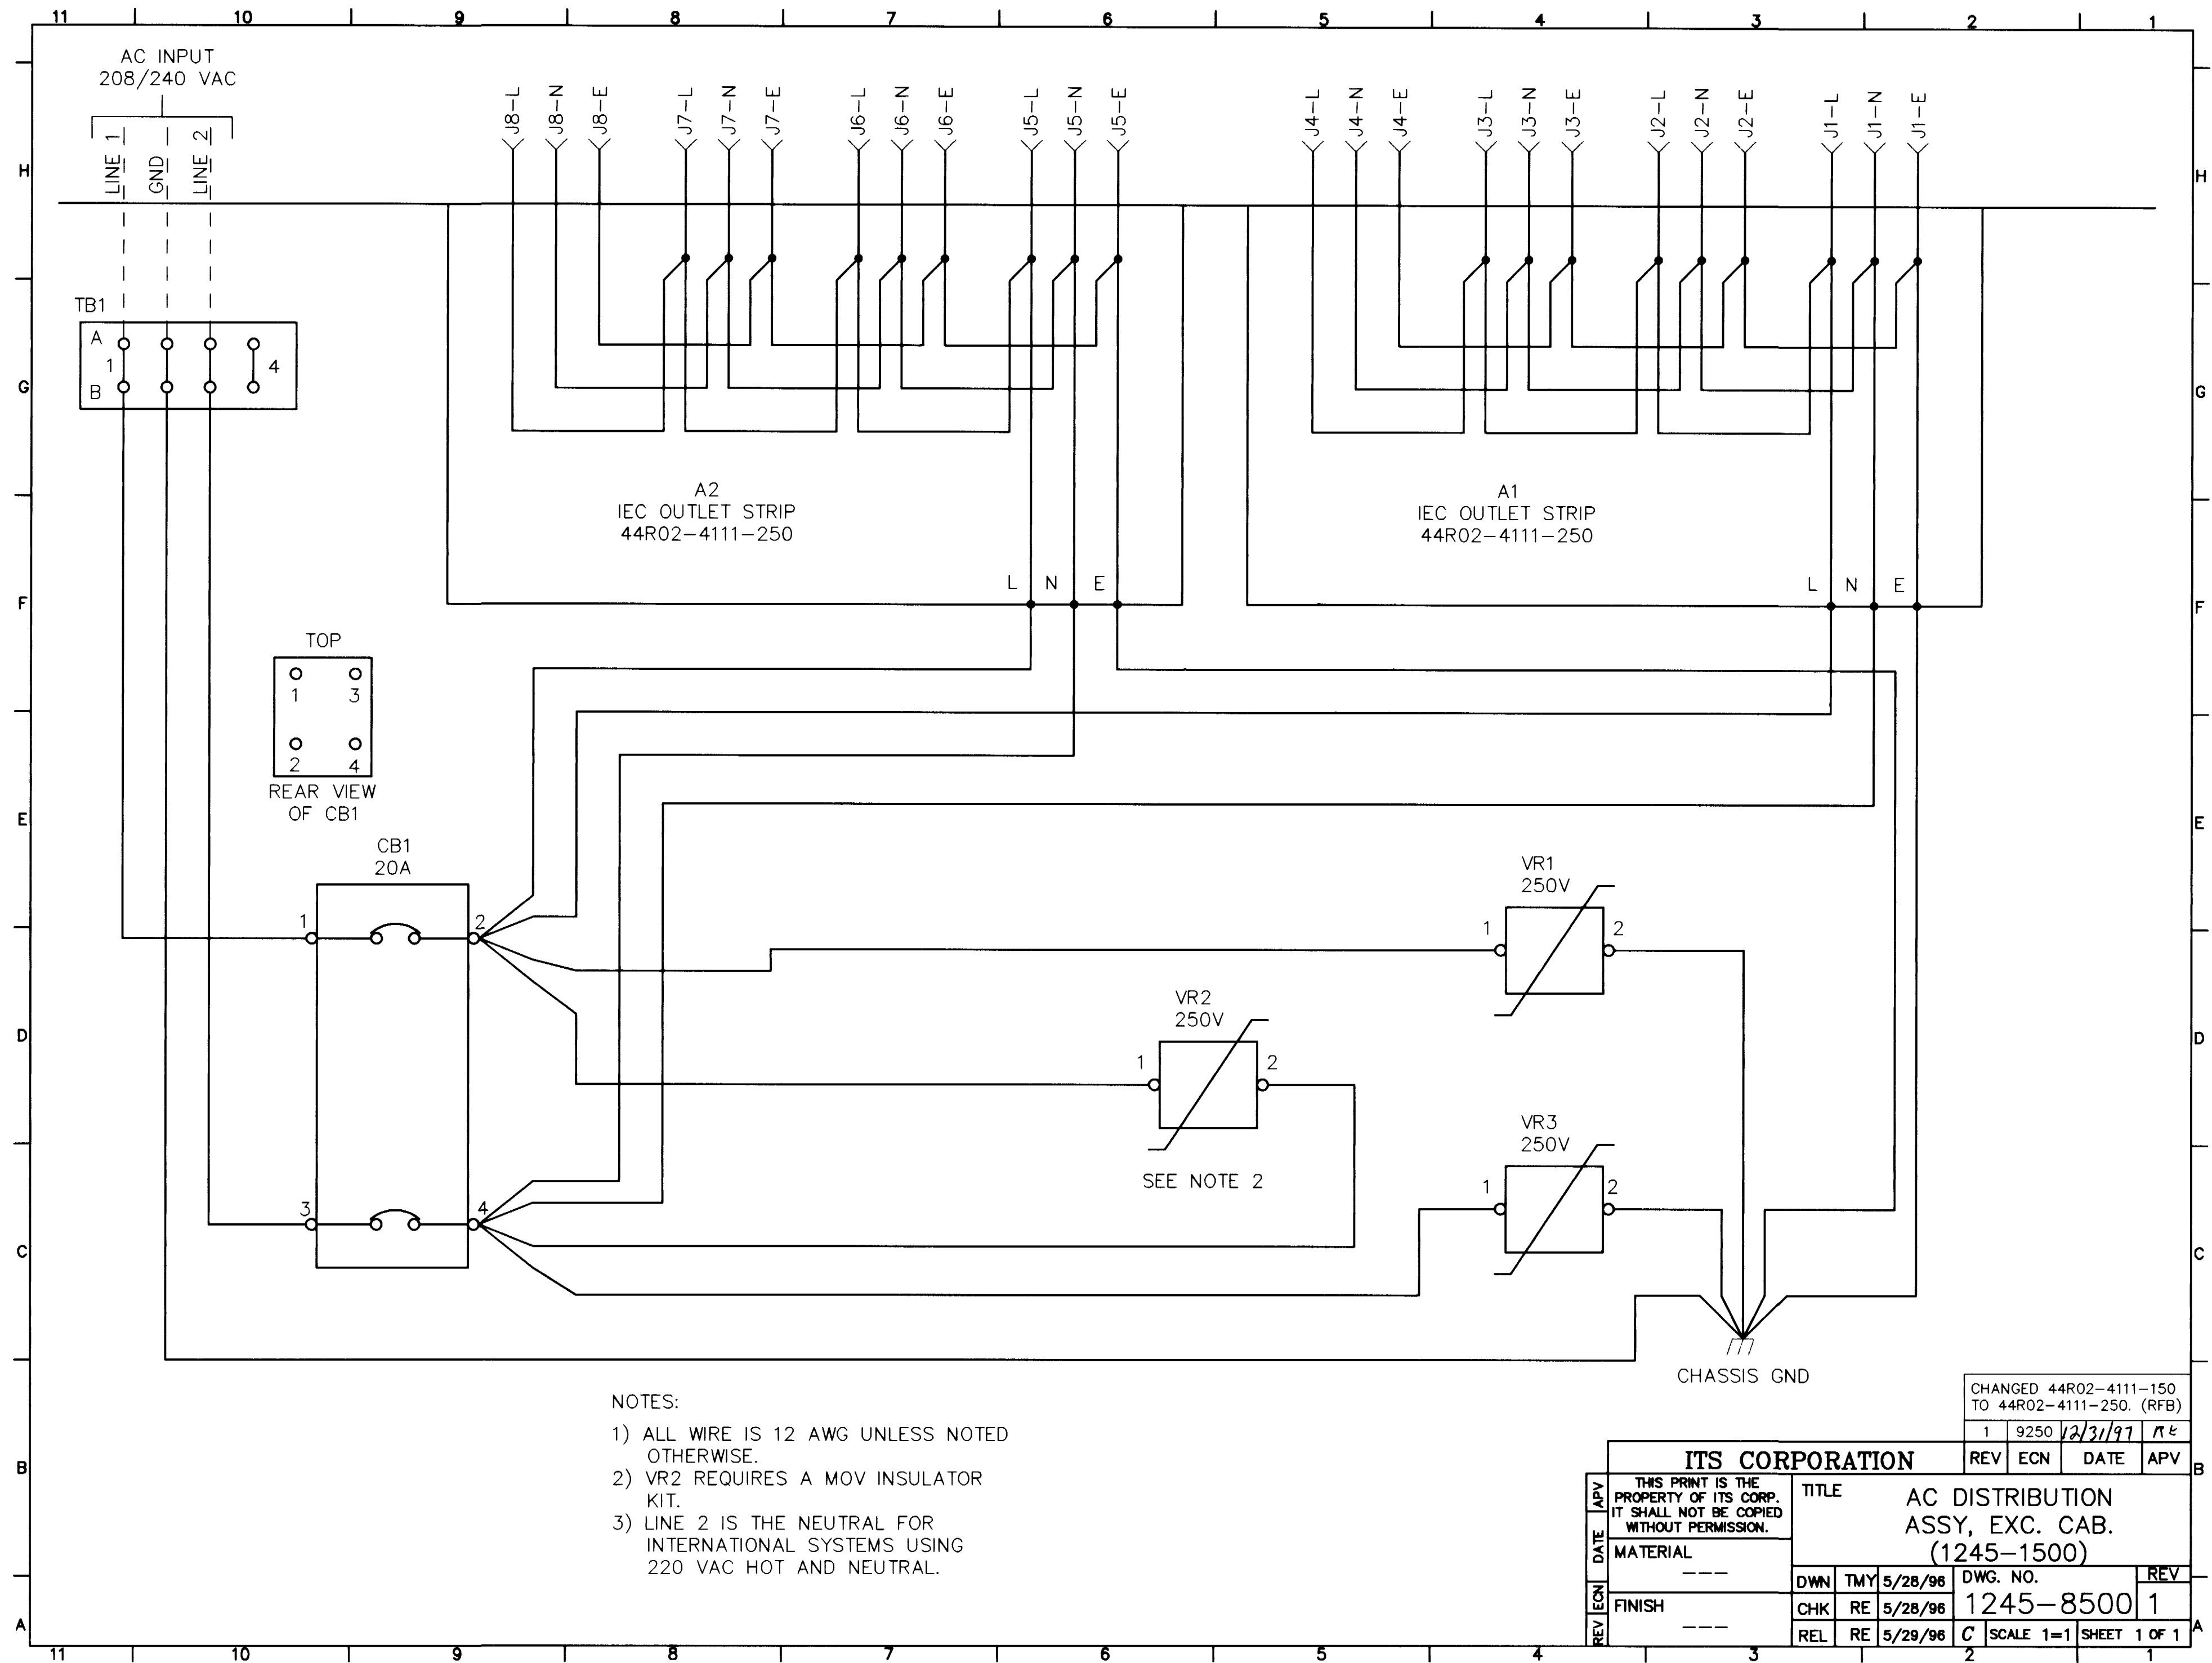

- NOTES:
- 1) ALL WIRE IS 12 AWG UNLESS NOTED OTHERWISE.
 - 2) VR2 REQUIRES A MOV INSULATOR KIT.
 - 3) LINE 2 IS THE NEUTRAL FOR INTERNATIONAL SYSTEMS USING 220 VAC HOT AND NEUTRAL.

CHANGED 44R02-4111-150 TO 44R02-4111-250. (RFB)			
1	9250	12/31/97	RE
REV	ECN	DATE	APV
THIS PRINT IS THE PROPERTY OF ITS CORP. IT SHALL NOT BE COPIED WITHOUT PERMISSION.			
MATERIAL		TITLE	
---		AC DISTRIBUTION ASSY, EXC. CAB. (1245-1500)	
FINISH		DWG. NO.	
---		1245-8500 1	
REV		SCALE 1=1	
ECN		SHEET 1 OF 1	
DATE		REV	
APV		1	
DWN		5/28/98	
CHK		5/28/98	
REL		5/29/98	



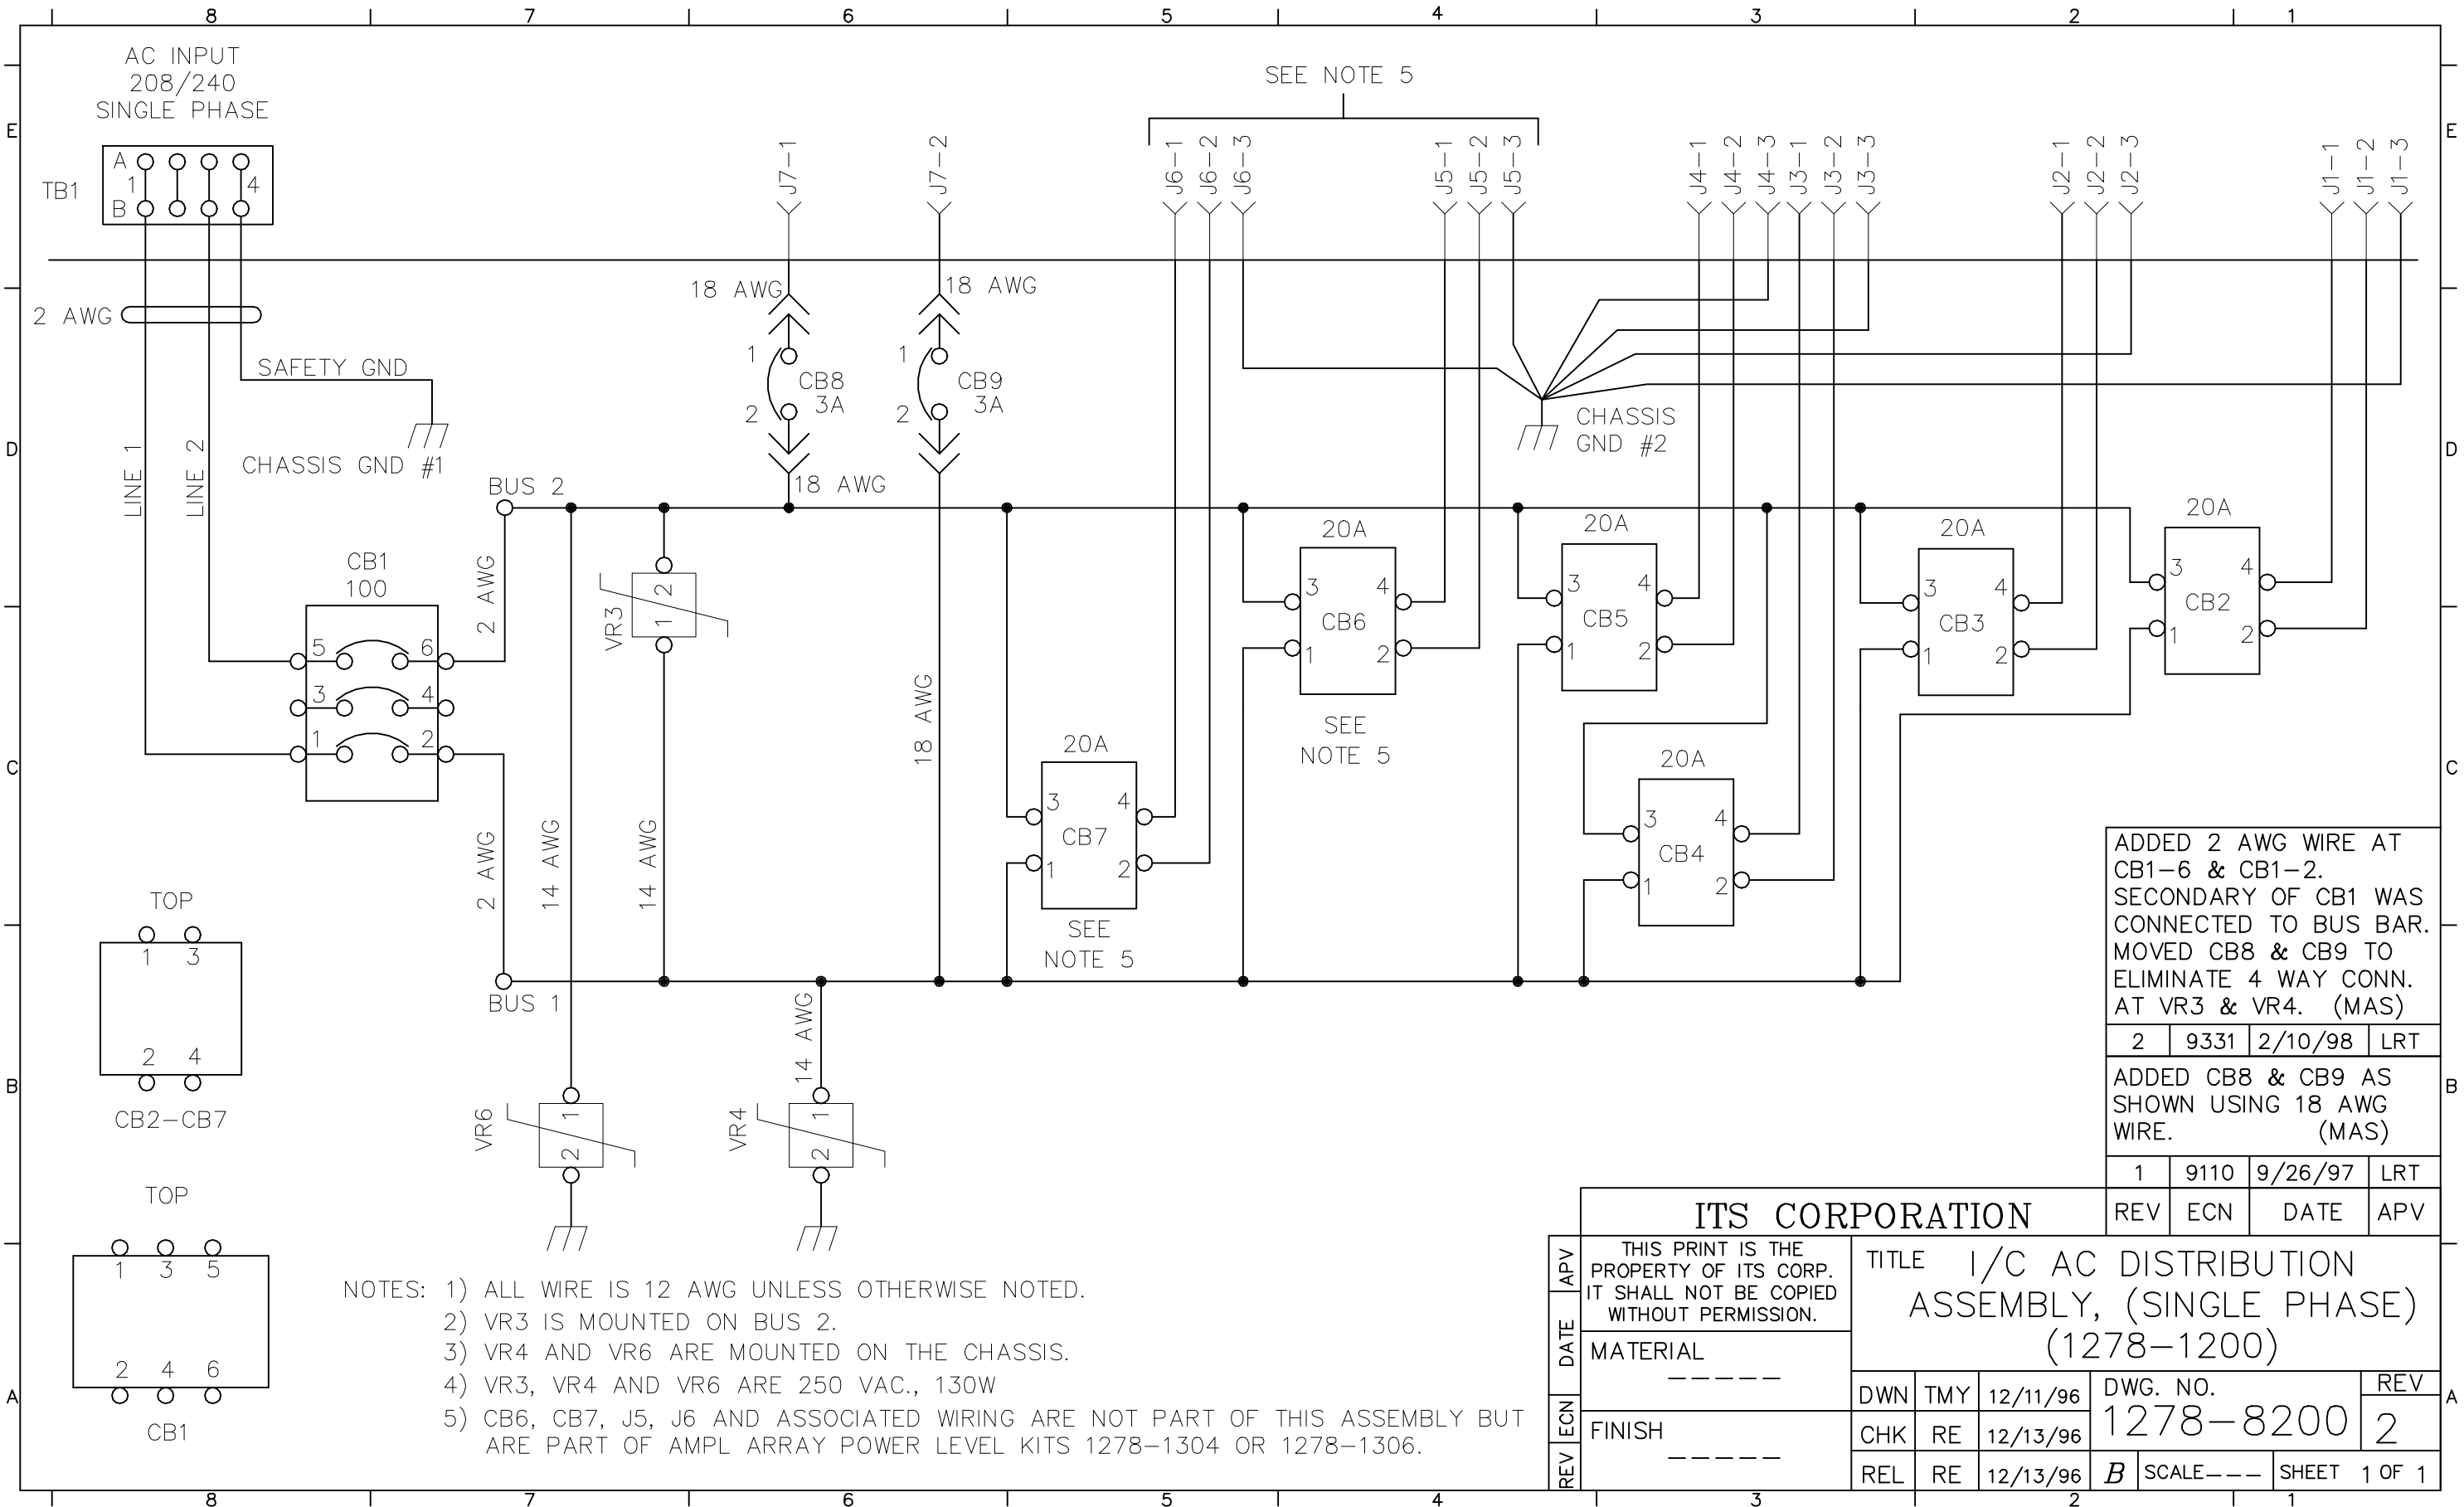

ADDED 2 AWG WIRE AT
CB1-6 & CB1-2.
SECONDARY OF CB1 WAS
CONNECTED TO BUS BAR.
MOVED CB8 & CB9 TO
ELIMINATE 4 WAY CONN.
AT VR3 & VR4. (MAS)

2	9331	2/10/98	LRT
---	------	---------	-----

ADDED CB8 & CB9 AS
SHOWN USING 18 AWG
WIRE. (MAS)

1	9110	9/26/97	LRT
---	------	---------	-----

REV	ECN	DATE	APV
-----	-----	------	-----

ITS CORPORATION

THIS PRINT IS THE
PROPERTY OF ITS CORP.
IT SHALL NOT BE COPIED
WITHOUT PERMISSION.

TITLE I/C AC DISTRIBUTION
ASSEMBLY, (SINGLE PHASE)
(1278-1200)

MATERIAL

FINISH

DWN	TMY	12/11/96	DWG. NO.	REV
CHK	RE	12/13/96	1278-8200	2
REL	RE	12/13/96	B	SCALE---

SHEET 1 OF 1