

4B. TEST REPORT – LU3000BTD w/AXCITER DIGITAL MODULATOR

4B.1 RF Power Measurements

Figure 4B-1 shows the test equipment setup for the RF power measurements.

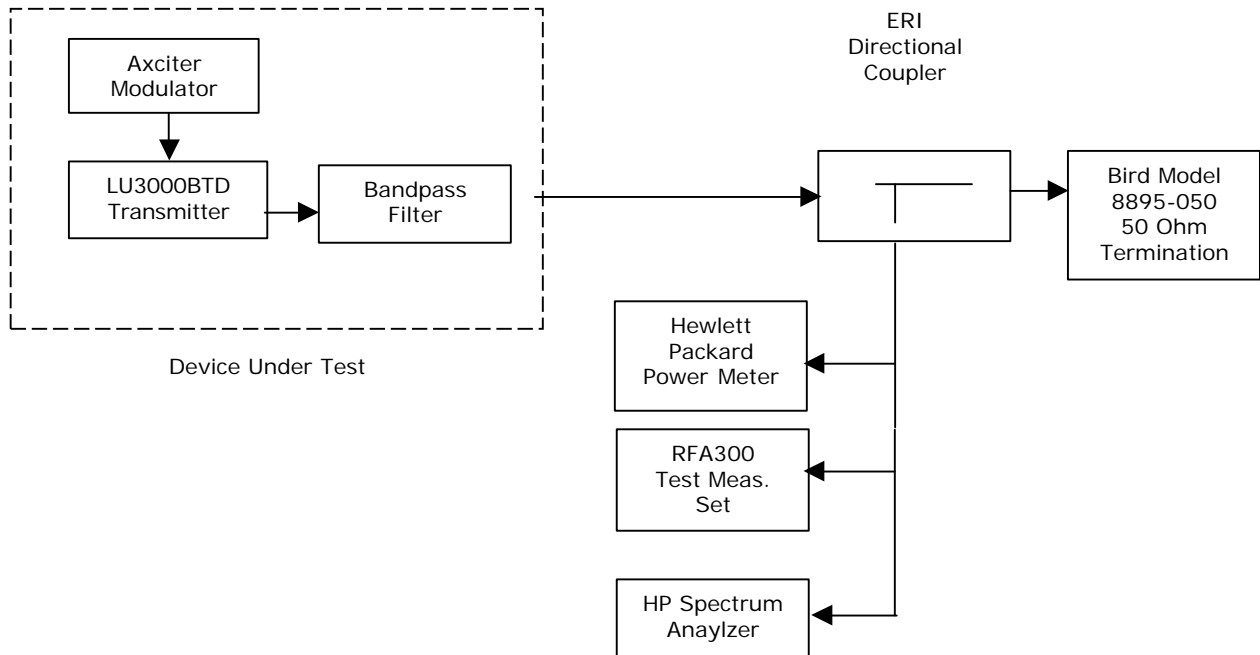


Figure 4B-1. Test Equipment Setup for RF Power Measurements

The output power of the LU3000BTD was adjusted to obtain 3000 watts average RF output as observed on the power meter.

Measured Power: +24.8 dBm
Coupling Loss: -40.0 dB
Power: +64.8.0 dBm
Power = 3000 Watts

With the power level properly set to 3000 watts average, all required tests were performed and recorded in the following sections.

4B. 2 Modulation Characteristics

The modulator module incorporates a modulation technique known as 8-Level Vestigial Side-band (8-VSB), which uses a layered digital architecture and a single carrier frequency. A pilot tone is provided, to allow rapid acquisition of the signal by receivers. The 8-VSB system transmits a serial data bit stream at a rate of 19.4 Mbps in a 6 MHz television channel. This type of transmission is far less susceptible to propagation impairments such as multi-path, noise and interference as compared to analog transmissions.

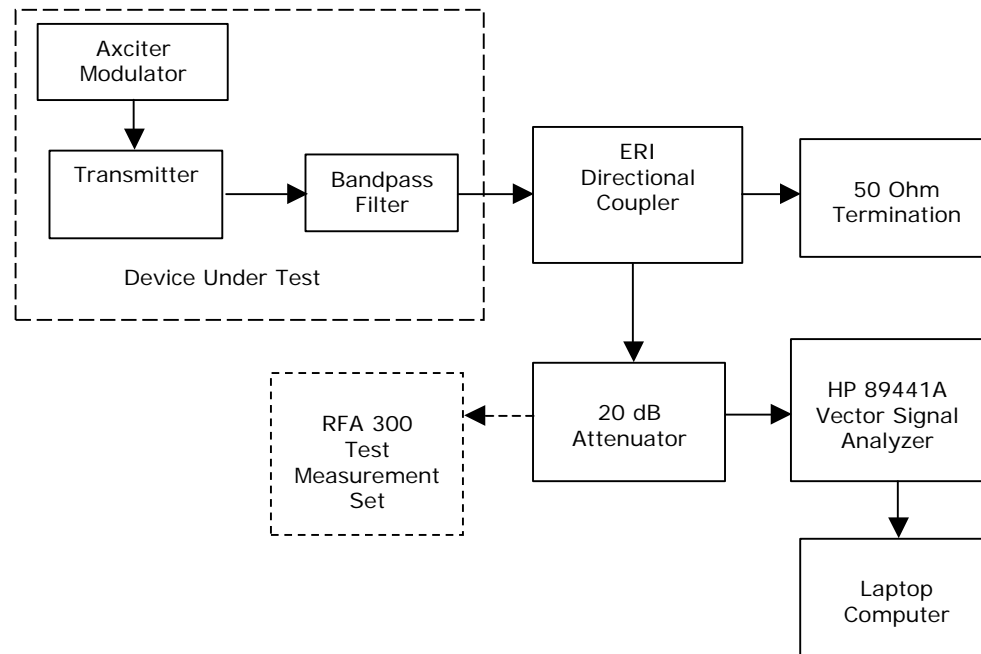


Figure 4B-2. Typical Demodulation Test Setup

4B. 3 Error Vector Magnitude (EVM) and Signal to Noise Ratio (SNR)

The Hewlett Packard Vector Signal Analyzer was used to measure that the un-equalized patterns are within the ATSC/FCC EVM limit of 4% and SNR limit of 27db.

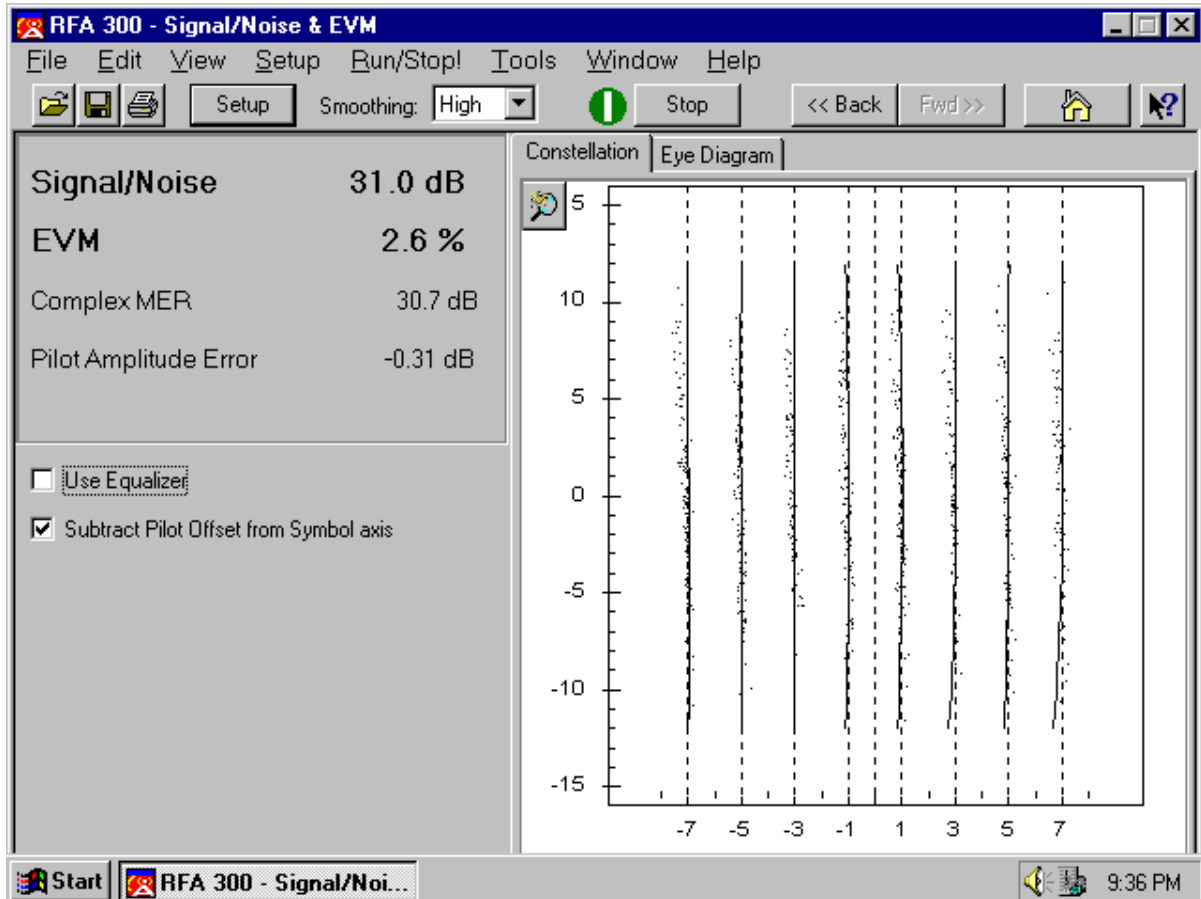


Figure 4B-3. EVM and SNR Measurement

4B. 4 Frequency Response and Group Delay

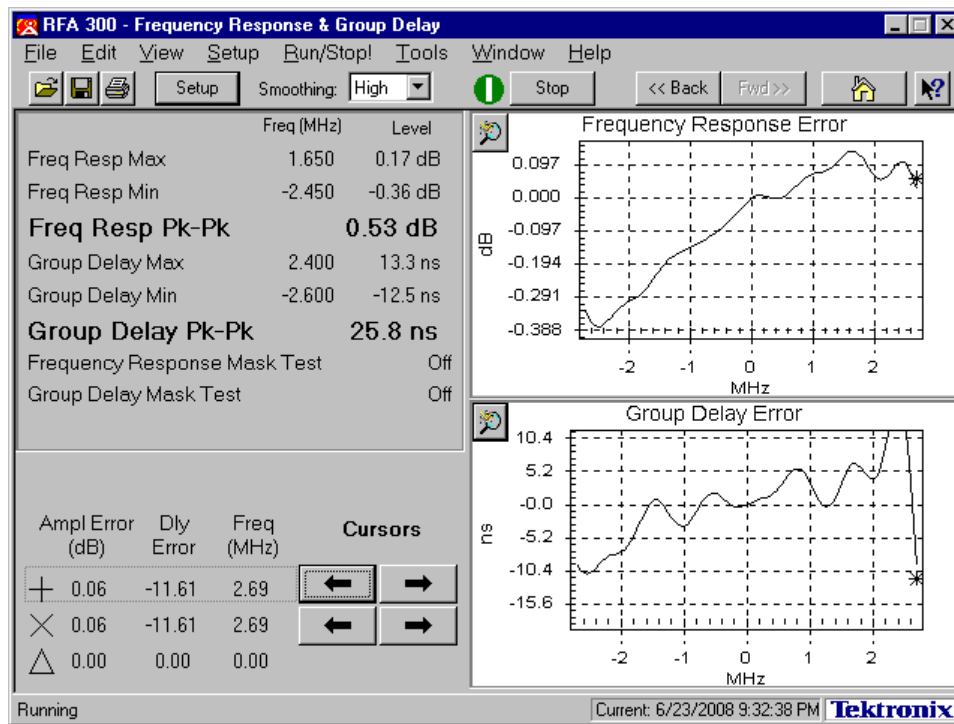


Figure 4B-4. Frequency Response and Group Delay Plots

4B. 5 Peak to Average

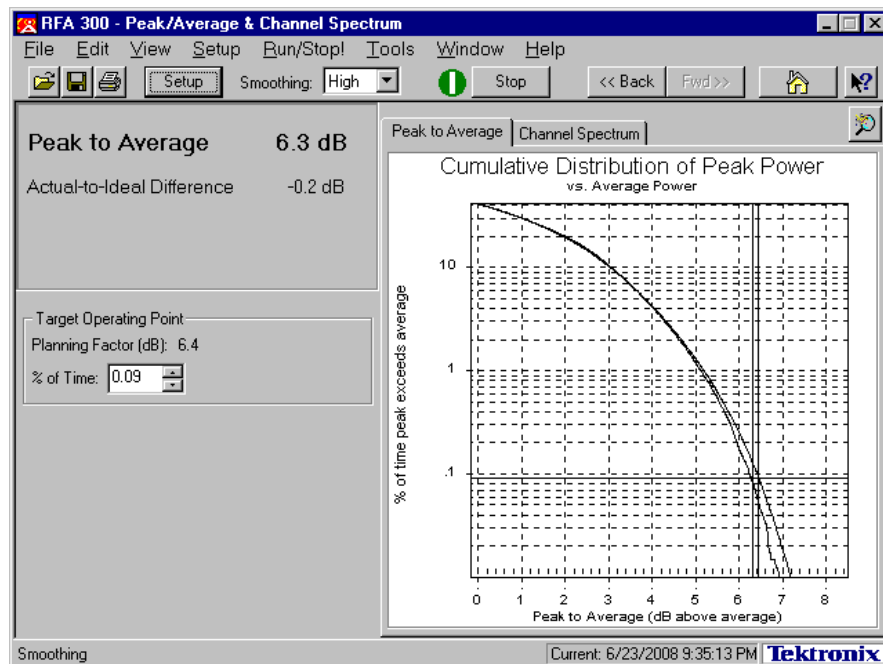


Figure 4B-5. Peak to Average Plot

4B. 6 Phase Noise

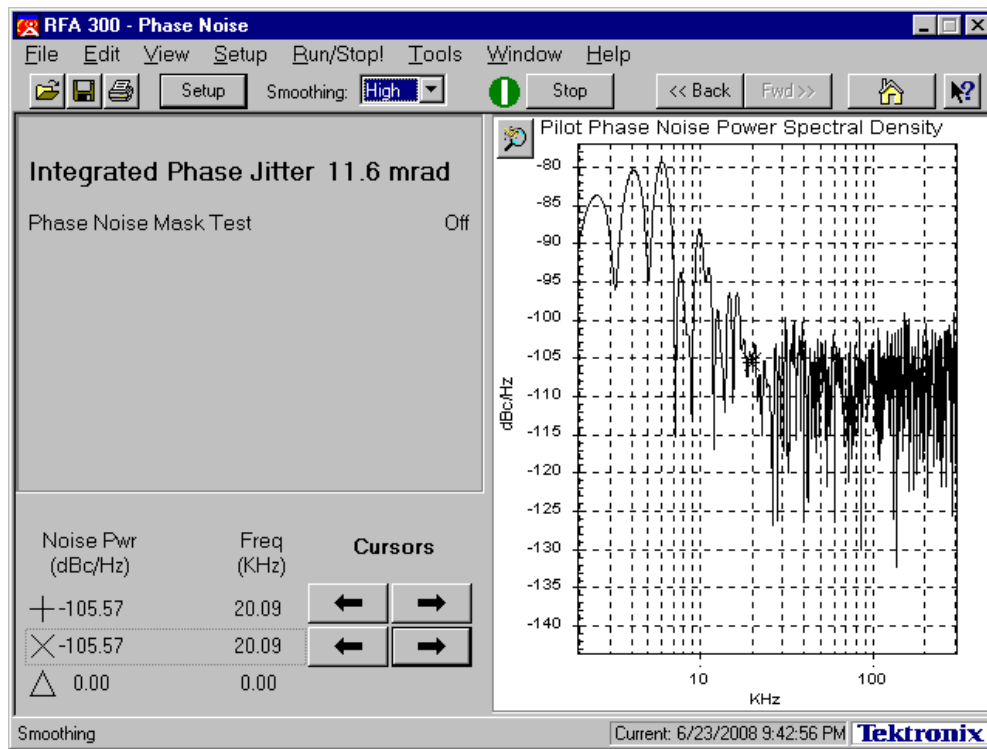


Figure 4B-6. Phase Noise Plot

4B.7 Occupied Bandwidth

Using the test setup in Figure 4B-2, with the transmitter operating at maximum power, a photograph of the transmitter occupied bandwidth spectrum was taken and is shown in Figure 4B-7.

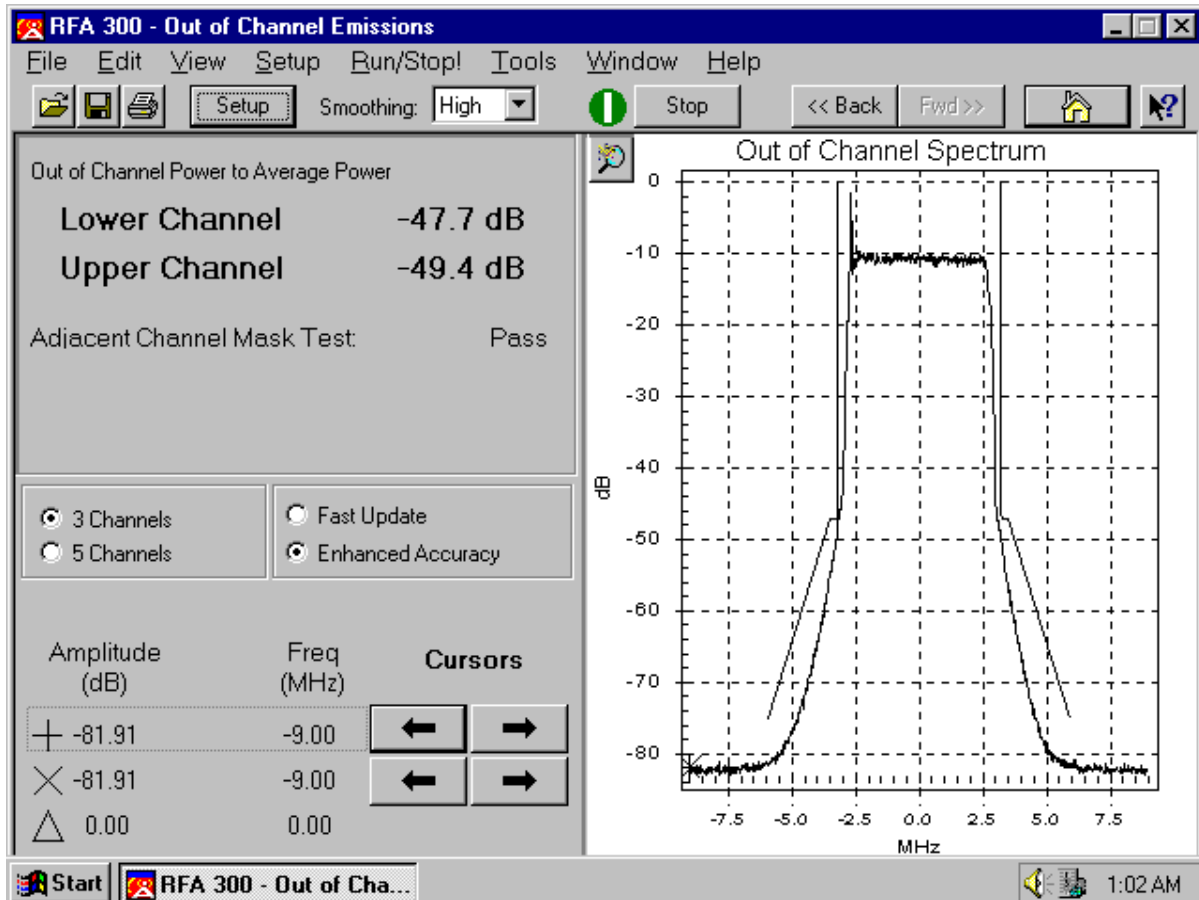


Figure 4B-7. Channel Occupied Bandwidth (Post-Filter)

4B.8 Conducted Spurious Emissions

The Hewlett Packard Spectrum Analyzer was used to measure harmonics before the low pass and mask filter. The levels were then added to the filter attenuation at the 2nd and 3rd harmonics for a reading of less than -110dB at output of the mask filter.

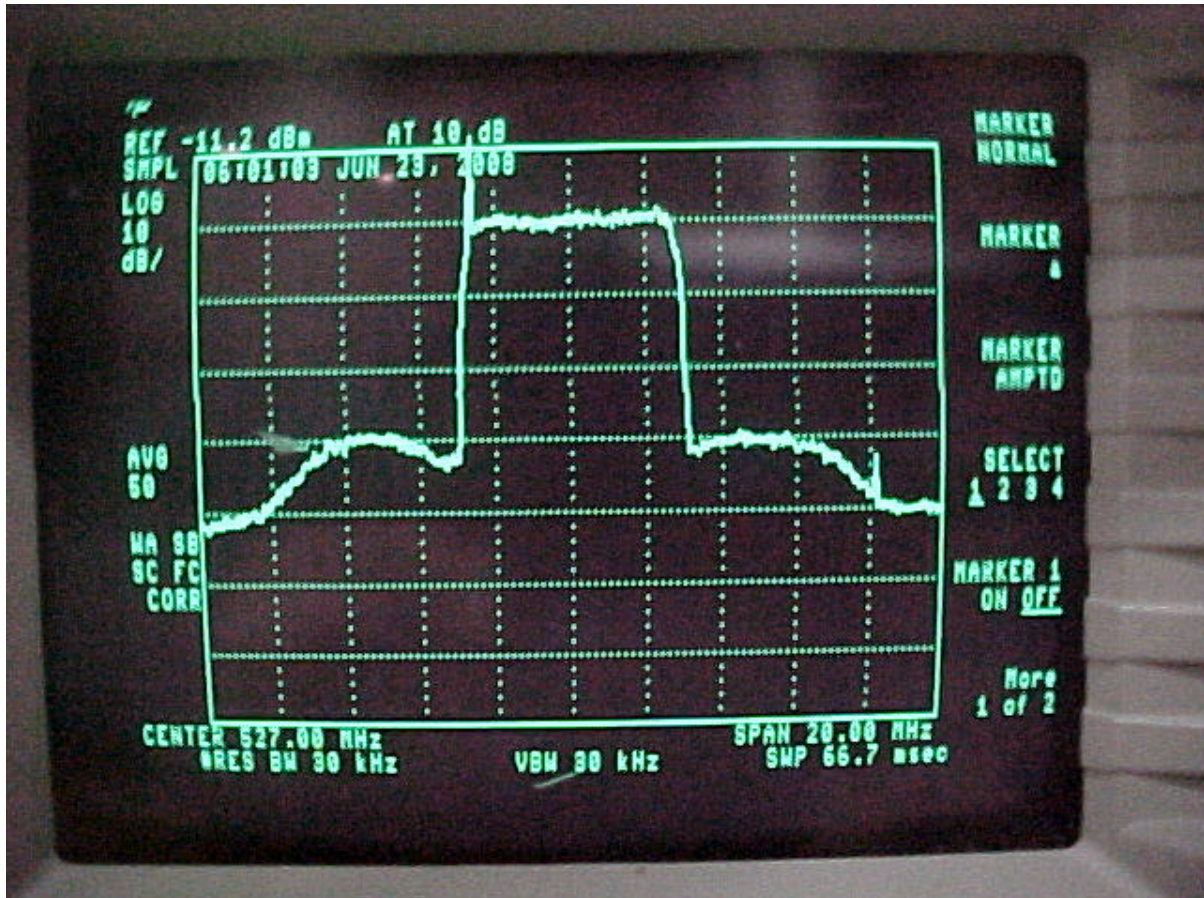


Figure 4B-8A. Reference (527 MHz) = 0 dBm (Pre-Filter)

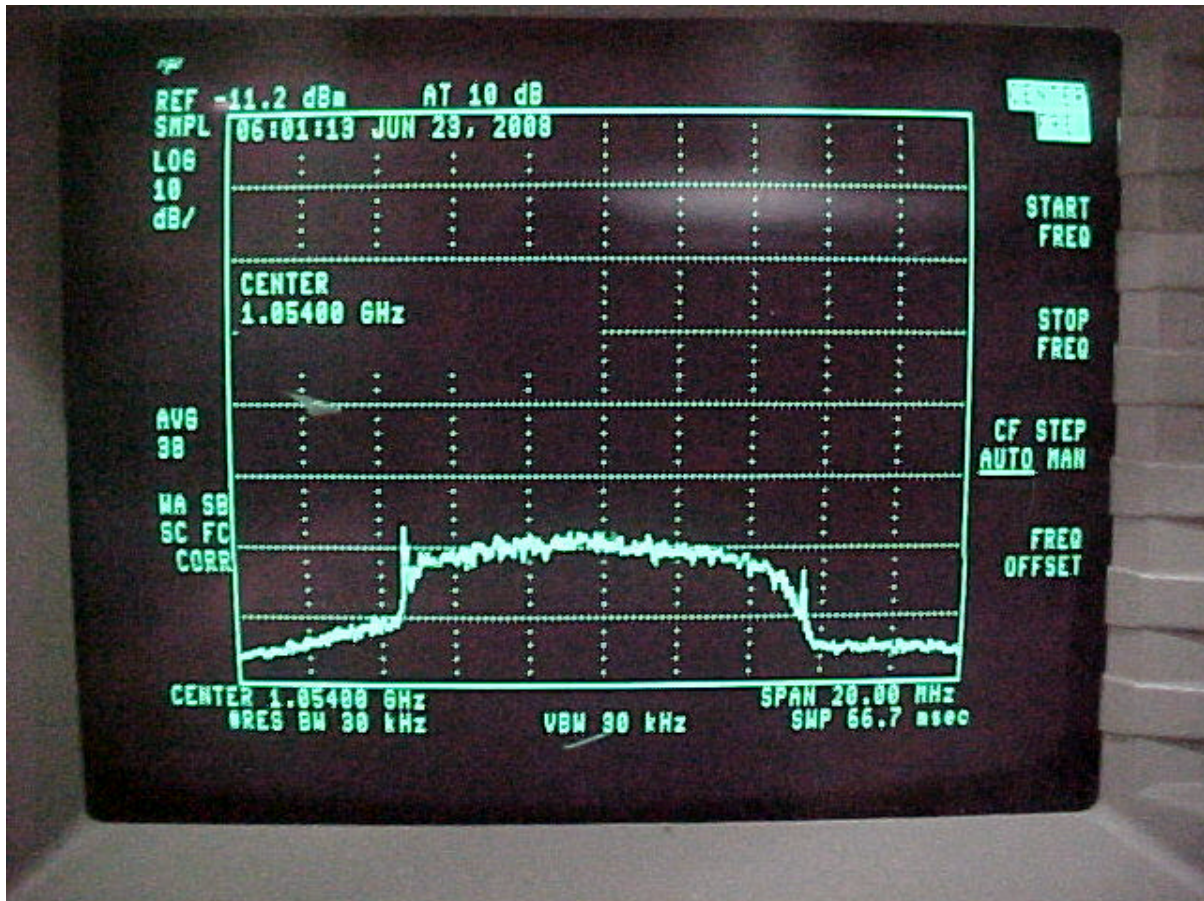


Figure 4B-8B. Second Harmonic 1054 MHz) = -58 dBm (Pre-Filter)

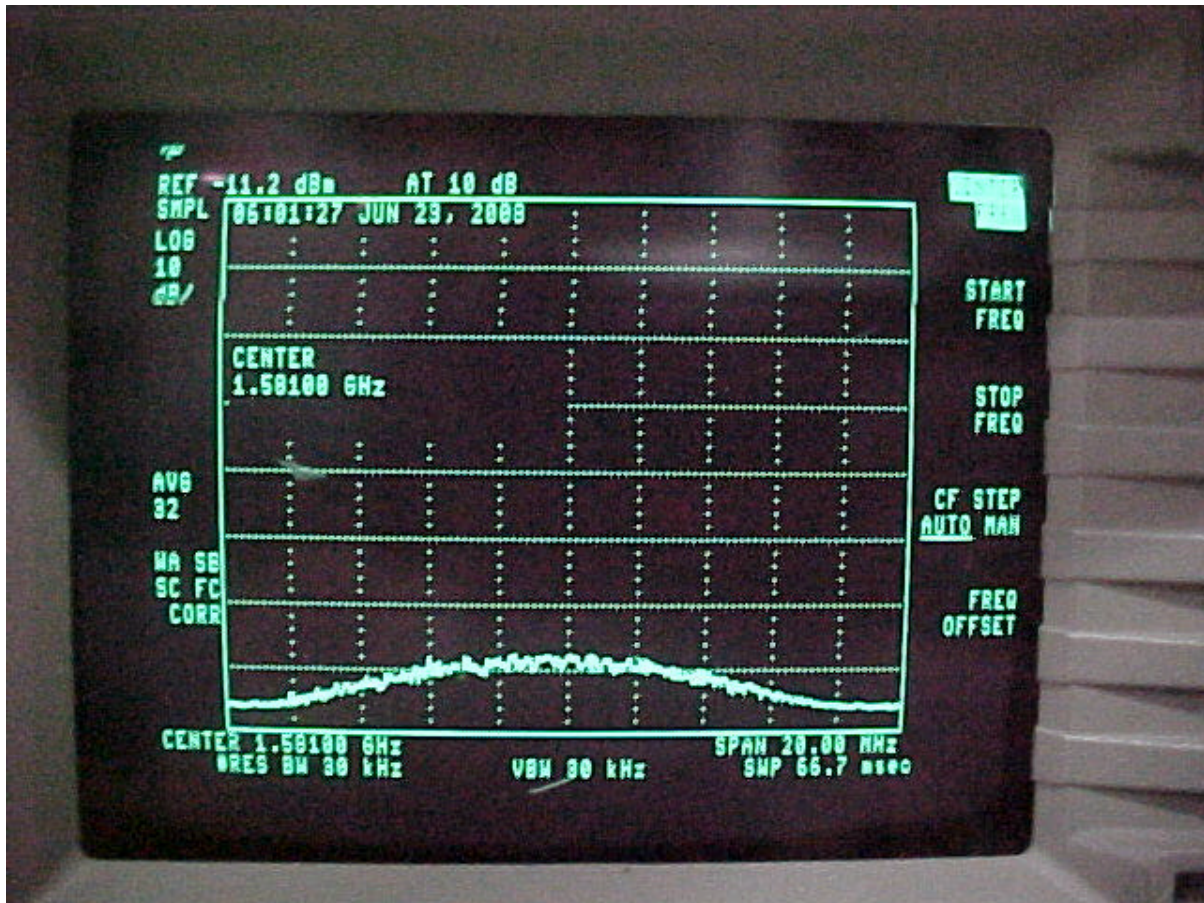


Figure 4B-8C. Third Harmonic (1581 MHz) = -68 dBm (Pre-Filter)

ERI. ELECTRONICS RESEARCH, INC.
 67 Shafter Rd., PO Box 1176 | Grose, Maine 04038 USA
 Tel: +1 (207) 657-2500 | Fax: +1 (207) 657-2532
TEST DATA

LOW PASS FILTER 3KW DTV 14-26
 CHANNEL 23
 AXCERA LLC P/N 1308528-23
 ERI P/N CF293-401 SO 02173
 Serial No. 02173-051508-3
 Date: Wed 21-May-2008

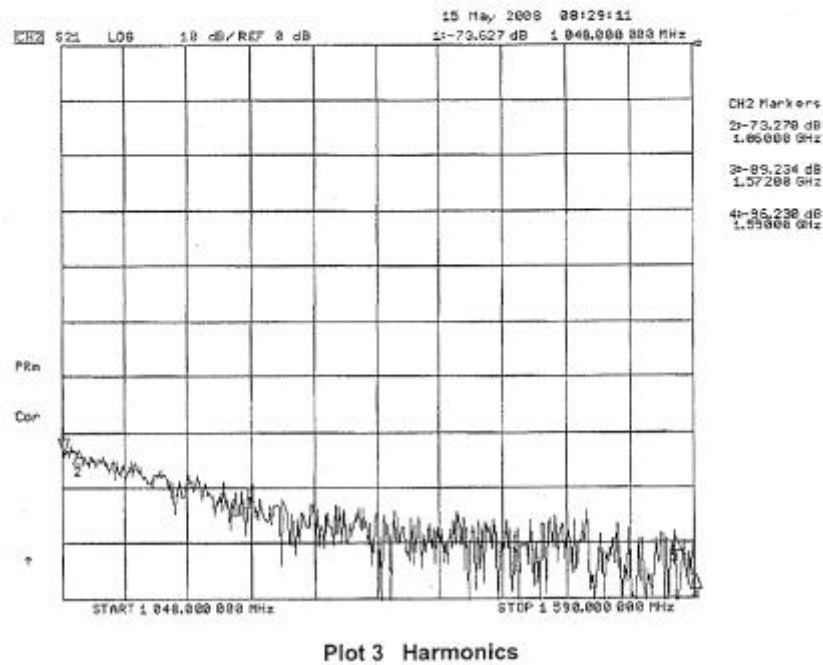


Figure 4B-8D. Harmonics

Harmonic (MHz)	Pre Filter Level (dBm)	Filter Rejection (dB)	Post Filter Level (dBm)
Second (1054)	-58	-73	-128
Third (1581)	-68	-93	-161

Table 4B-1. Post Filter Harmonic Levels

Part 74.794 of the Rules states:


(ii) *Stringent mask. In the first 500 kHz from the channel edges, emissions must be attenuated no less than 47 dB. More than 3 MHz from the channel edges, emissions must be attenuated no less than 76 dB. At any frequency between 0.5 and 3 MHz from the channel edges, emissions must be attenuated no less than the value determined by the following formula: $A(\text{dB}) = 47 + 11.5 (Df - 0.5)$.*

ERI. ELECTRONICS RESEARCH, INC.

Gray Facility
87 Shaker Rd., P.O. Box 1176 | Gray, Maine 04038 USA
Tel: +1 (207) 657-2600 | Fax: +1 (207) 667-8632

TEST DATA

FILTER, 8 SECT. EVA 1.62 PORTS, 3KW CH. 14-25
CH. 23
ERI P/N CF285-401 SO 02173
Serial No. 02173-052308-4
Date: Fri 23-May-2008

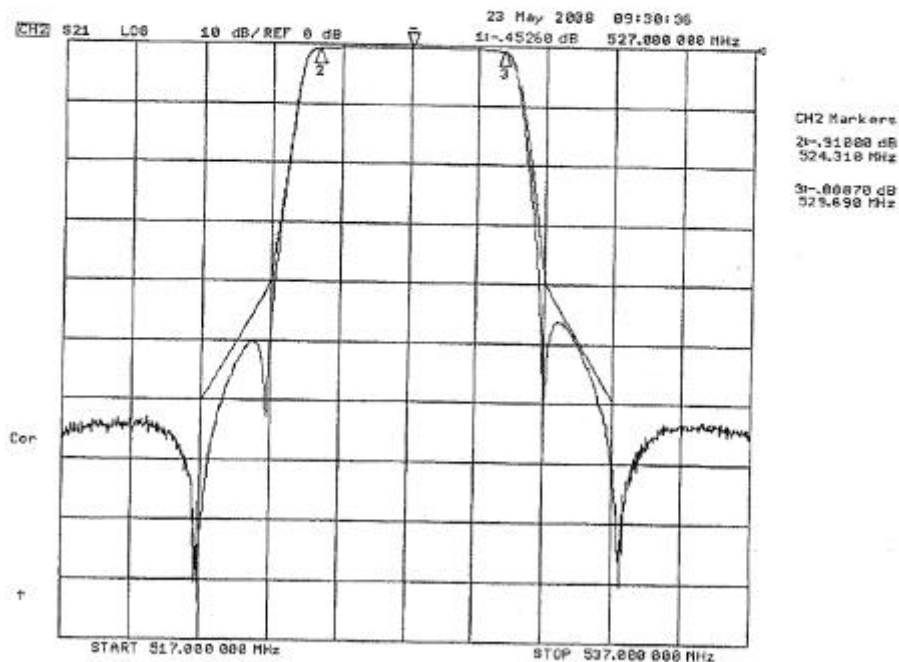

Plot 4 Group Delay

Figure 4B-8E. Bandpass Filter Response

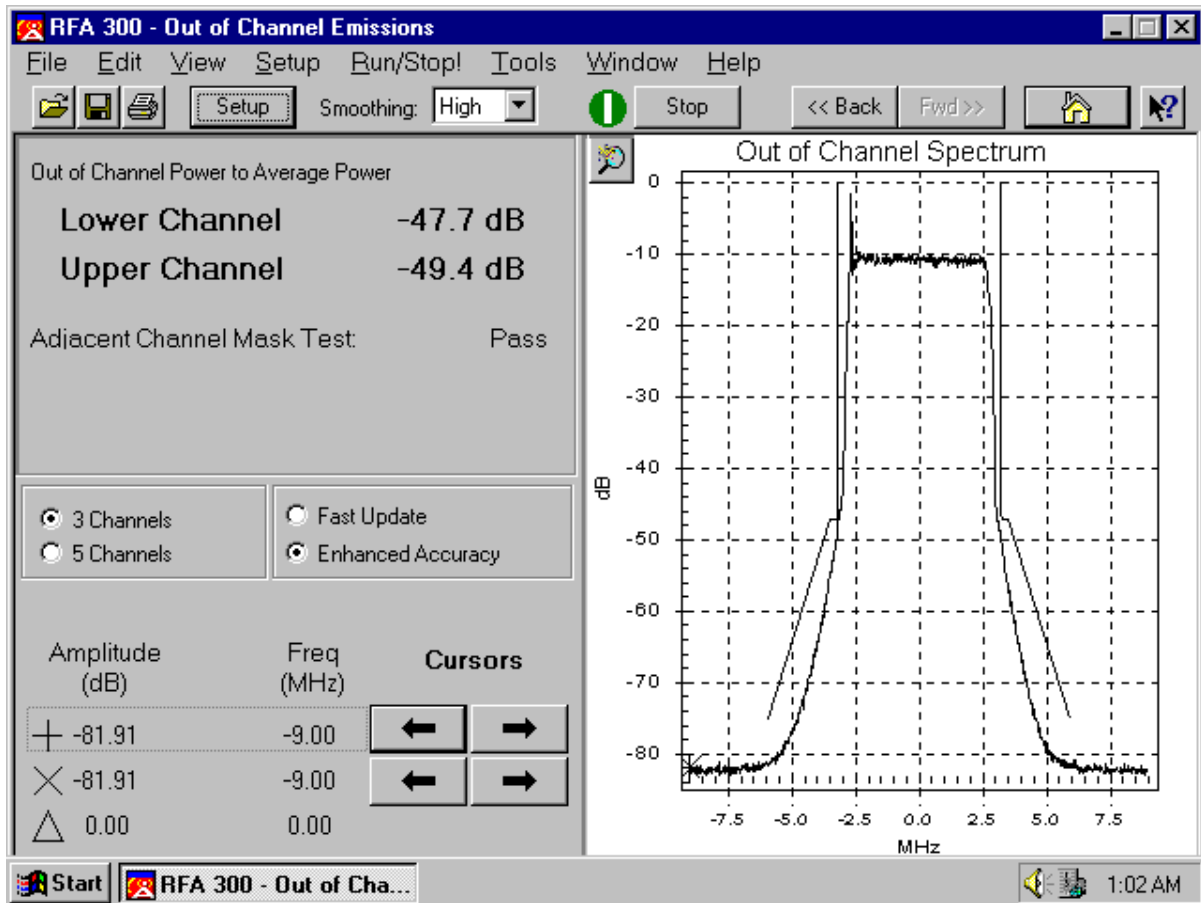


Figure 4B-8F. Out of Band Emissions Plot (Post-Filter)

4B.9 Radiated Emissions

Using the test setup shown in Figure 4B-1, with the transmitter operating at full power, the spectrum analyzer was moved 20 meters from the transmitter and connected to a dipole antenna cut to the 527 MHz. This antenna was oriented to maximize the received level and the data was recorded. The antenna was then cut to the local oscillator frequency and the second and third through harmonic frequencies of the transmitter, and all of the signals received, were maximized by antenna orientation and their absolute levels were recorded.

With these various antennas, the only measurable level observed was at 527 MHz. This level is shown below in Table 4B-2 and an analysis of the relative field and strength is provided in the following paragraphs.

Table 4B-2. Measurable Levels Observed in Frequency Spectrum

FREQUENCY	MEASURED LEVEL (INTO 50 W)
527.00	-35 dBm

The spectrum analyzer had a maximum sensitivity of -110 dBm during these tests.

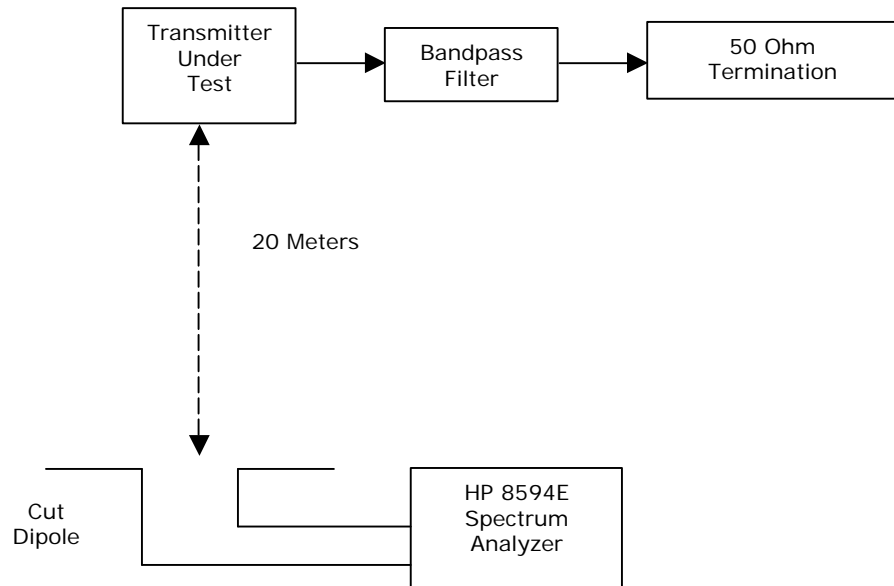


Figure 4B-9. Test Setup for Measuring Radiated Emissions

One level was compared to the following reference level.

If all of the power of the transmitter was radiated by an isotropic radiator, the power density at 20 meters would be:

$$P = P_t / 4\pi R^2 = 3000 / 4\pi \cdot (20)^2 = .6 \text{ w/m}^2$$

Using a dipole-transmitting antenna increases this by 1.64 to:

$$1.64 \times .6 = 1 \text{ w/m}^2$$

If a dipole-receive antenna of area $1.64 \times \lambda^2 / 4\pi$ is used to receive the signal, the received level would be:

$$1 \text{ w} = +30 \text{ dBm}$$

The receive level at -35 dBm was therefore at -65 dB relative to this level.

The receive levels were therefore at the relative levels shown in Table 4B-3.

Table 4B-3. Receive Levels

FREQUENCY	(REF = +30 dBm) RELATIVE MEASURED LEVEL
527.00	-65 dB

The cabinet radiation was also checked with the receive dipole antenna cut to 527.00 MHz, within very close proximity to the trays of the transmitters, and the received level that was recorded at no time exceeded a power density in excess of +10 dBm:

$$Pr/A = 10 \text{ mw/cm}^2$$

This level is far less than the current or proposed standard for safe radiation levels.

4B.10 Frequency Stability

The LU3000BTD is designed to operate using either an internal or external 10 MHz precise reference oscillator. The frequency stability of this reference determines the frequency stability of the transmitter.

The frequency determining variables of the transmitter may be defined as follows:

F_{LO1} = Desired local oscillator 1 frequency

F_{LO2} = Desired local oscillator 2 frequency

F_{IF} = Desired IF oscillator frequency

F_R = Desired external reference oscillator frequency

F_{RF} = Desired RF output frequency

E_{LO1} = Local oscillator 1 frequency offset error

E_{LO2} = Local oscillator 2 frequency offset error

E_{IF} = IF oscillator frequency offset error

E_R = External reference oscillator frequency offset error

E_{RF} = RF output frequency error

The PLL circuitry maintains a constant ratio between the external reference frequency and the output frequency of the oscillator. This ratio is defined below for both the LO and IF oscillators.

$$G_{LO1} = F_{LO1} / F_R$$

$$G_{LO2} = F_{LO2} / F_R$$

$$G_{IF} = F_{IF} / F_R$$

Any change in the external 10 MHz reference will effect a corresponding change in the output frequency such that the above ratios are maintained.

$$G_{LO1} = (F_{LO1} + E_{LO1}) / (F_R + E_R) = F_{LO1} / F_R$$

$$G_{LO2} = (F_{LO2} + E_{LO2}) / (F_R + E_R) = F_{LO2} / F_R$$

$$G_{IF} = (F_{IF} + E_{IF}) / (F_R + E_R) = F_{IF} / F_R$$

Solving for the change in output frequency yields:

$$E_{LO1} = E_R * (F_{LO1} / F_R) = E_R * G_{LO1}$$

$$E_{LO2} = E_R * (F_{LO2} / F_R) = E_R * G_{LO2}$$

$$E_{IF} = E_R * (F_{IF} / F_R) = E_R * G_{IF}$$

The desired RF carrier frequency is equal to the LO2 frequency minus the LO1 Frequency and the IF frequency:

$$F_{RF} = F_{LO2} - F_{IF} - F_{LO1}$$

The actual RF frequency, including any error introduced by the external reference, may

be defined as follows:

$$\begin{aligned} F_{RF} + E_{RF} &= (F_{LO2} + E_{LO2}) - (F_{IF} + E_{IF}) - (F_{LO1} + E_{LO1}) \\ F_{RF} + E_{RF} &= (F_{LO2} - F_{LO1} - F_{IF}) - (E_{LO2} - E_{LO1} - E_{IF}) \\ F_{RF} + E_{RF} &= F_{RF} + (E_{LO2} - E_{LO1} - E_{IF}) \end{aligned}$$

Calculating for the error of the carrier yields:

$$\begin{aligned} E_{RF} &= (E_{LO2} - E_{LO1} - E_{IF}) \\ E_{RF} &= E_R (G_{LO2} - G_{LO1} - G_{IF}) \\ E_{RF} &= E_R / F_R * (F_{LO2} - F_{LO1} - F_{IF}) \\ E_{RF} &= E_R / F_R * F_{RF} \end{aligned}$$

Therefore, the error of the RF carrier is a function of the external 10 MHz reference error.

The maximum RF frequency error for this service is +/- 1.0 KHz. The highest channel frequency for this service (CH. 69 = 801.25 MHz) represents the worst case condition. With these values, the maximum allowable reference error ($E_{R(max)}$) can be calculated.

$$E_{R(max)} = 12.48 \text{ Hz}$$

The required reference oscillator stability may be calculated as follows:

$$\begin{aligned} \text{Stability} &= E_{R(max)} / F_R \\ \text{Stability} &= 12.48 \text{ Hz} / 10 \times 10^6 \text{ Hz} = 1.248 \times 10^{-6} \end{aligned}$$

Therefore, the RF frequency error of the LU3000BTD will not exceed +/- 1.0 KHz when operated with a precise reference oscillator with a stability equal to or better than 1.248×10^{-6} .

The internal 10 MHz reference oscillator used in the LU3000BTD has a stability of 1.000×10^{-6} (See included Crystek Crystals Corporation Datasheet, Part Number CXOH-APY-10.00) which insures a frequency stability within tolerance specified in the Rules and Regulations for this service.

Commercially available GPS precise reference oscillators, such as the TRAK Systems 8821, which has a frequency stability of 1×10^{-9} over a temperature range of 0 to 50 degrees C and a line voltage/frequency range from 85 to 265 VRMS/48 to 440Hz (See included TRAK Systems 8821 Specifications), insures a frequency stability within tolerance specified in the Rules and Regulations for this service.

4B.10.1 Pilot Frequency Measurement

The Hewlett Packard Spectrum Analyzer was used to verify the pilot frequency met the frequency stability of ± 1000 Hz.



Figure 4B-12. Pilot Frequency Plot

4B.11 Test Equipment

The test equipment that was used to analyze the Axcera LU3000BTD system is listed in Table 4B-4.

Table 4B-4. Test Equipment

MODEL	MANUFACTURER	DESCRIPTION	SERIAL #
435B	Hewlett Packard	Power Meter	2445A10994
8482B	Hewlett Packard	Power Sensor	N/A
8895-050	Bird	50 Ω Termination	20024
8594E	Hewlett-Packard	Spectrum Analyzer	10118
N/A	ERI	Directional Coupler	891P
RFA300	Tektronix	Test Measurement Set	B010226
89441A	Hewlett-Packard	Vector Signal Analyzer	3416A01547