


A.M.A.C. TRANSMITTER

WATERPROOF TRANSMITTER

Operation the transmitter is a fixed code designed transmitter, each time is preessed, it will randomly transmit a differemt code, this prevent disarming the alarm system by coping the code and retransmitting the same code.

Noticeable features

1. press channel buton of transmitter-Painc
2. L.E.D.-Indicates that the button is baing depressed.(Refer flg1)
3. Receiver board received the panic signal, system will alarm, alarm LED will turn ON.

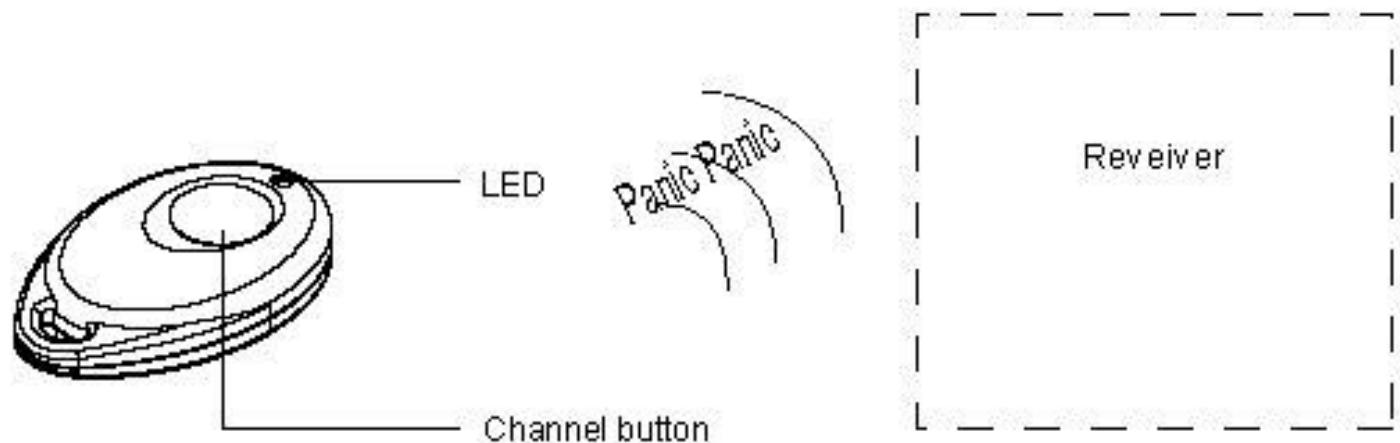

flg.1

NOTE: To replace batteries in the transmitter, use a small flat blade screwdriver remove the back cover in an upward movment take out old batteries and replace with new one ensuring correct polarity.

SPEC.:

Working voltage: 6 Volt

Working temperature:-20~+60

Frequency: 433.92Mhz

Remote range:50 meter

ASK transmittion

Federal Communications Commission (FCC) statement

This equipment has tested to FCC requirements and has been tund acceptable for use. It has been type tested and found to comply with limits for a Class B computing device in accordance with specification in Part 15 of FCC Rules, which are designed to provide reasonable protection against such interference in a residential installation.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions.

- 1) This device may not cause harmful interference, and
- 2) This device must accept any interference received, including interference that may cause undesired operation.

Per FCC 15.21, you are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.