

Federal Communications Commission  
Authorization and Evaluation division  
Equipment Authorization Branch  
7435 Oakland Mills Road  
Columbia, MD 21046  
U.S.A.

Kamstrup A/S  
Industrivej 28, Stilling  
DK-8660 Skanderborg  
TEL: +45 89 93 10 00  
FAX: +45 89 93 10 01  
E-MAIL: kamstrup@kamstrup.dk  
WEB: www.kamstrup.com

2017.08.23

**Subject:** Declaration concerning Antenna Specifiacion for flowIQ 2250 and flowIQ 3250, fccid OUY-FLOWX250

To Whom It May Concern:

The device specified above confirms to the FCC recommendations for a wall mounted antenna type described below:  
There exists two different model numbers. The antenna and connector are the same, only difference is cable length. One is delivered with a fixed length of 2 meters. The other with up to 20-meter cable.

- **Manufacturer and model No. of antenna:** Kamstrup Wall antenna, 6699490 with fixed cable length of 2 meters, 6699491 with cable length up to 20 meters .
- **Type of antenna:** Dual band inverted F antenna attached to the meter RF part through a unique Kamstrup designed connector.
- **Frequency range:**


Low band: 450 – 470 MHz.  
High band 902 – 928 MHz.

- **Antenna gain:** Antenna gain listed below with 2 meter cable. A longer antenna cable will effectively reduce the antenna gain with up to 3 dB at low band and 5 dB at high band.


Band	Low			High		
Frequency	450 MHz	460 MHz	470 MHz	902 MHz	915 MHz	928 MHz
Gain	-0.68 dBi	-0.23 dBi	0.45 dBi	-2 dBi	-2.48 dBi	-1.58 dBi



Wall antenna with unique Kamstrup connector.

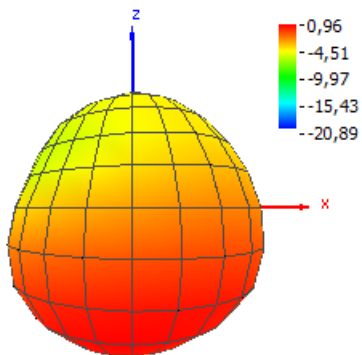

Antenna pattern, low band.

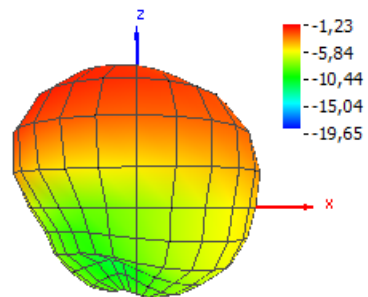

Antenna pattern, high band.

Please contact me if there is any information you may need.

Sincerely,

Kamstrup A/S

Kris Kaagaard  
Product Specialist  
Meter Division, Water  
Direct phone: +45 89 93 14 35  
E-mail: [krk@kamstrup.com](mailto:krk@kamstrup.com)

A handwritten signature in blue ink, appearing to read 'Kris Kaagaard', is positioned below the typed contact information.