



EMC TEST REPORT FCC 47 CFR Part 15B Industry Canada ICES-003 Electromagnetic compatibility - Unintentional radiators	
Report Reference No.	G0M-1701-6190-EF0115B-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	<div style="text-align: center;">   </div> <p>A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Filed Test Laboratory, Reg.-No.: 96970 IC OATS Filing assigned code: 3470A</p>
Applicant's name	Kamstrup A/S
Address	Industrivej 28 8660 Skanderborg DENMARK
Test specification:	
Standard.....	47 CFR Part 15 Subpart B ICES-003, Issue 6:2016 ANSI C63.4:2014
Equipment under test (EUT):	
Product description	READY Converter for US/Canada market
Model No.	READY Converter
Additional Models	None
Hardware version	55501455-D3
Firmware / Software version	50981365-B1 / 55141586-B1
Contains	FCC-ID: OUY-READYAMR3 ISED-ID: 22376-READYAMR3
Test result	Passed

Possible test case verdicts:

- not applicable to test object: N/A
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

Testing:

Date of receipt of test item: 2017-01-24

Date (s) of performance of tests: 2017-02-14


Compiled by: Matthias Handrik

Tested by (+ signature).....: Matthias Handrik / Andreas Pflug

Approved by (+ signature): Jens Marquardt
Deputy Head of Lab

Date of issue.....: 2017-02-21

Total number of pages.....: 65

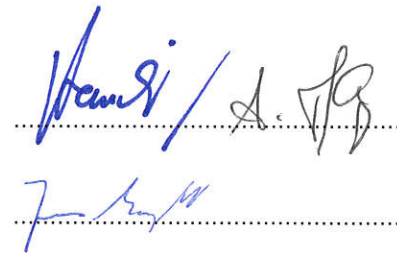
General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Version History

Version	Issue Date	Remarks	Revised by
V01	2017-02-21	Initial Release	

REPORT INDEX

1	EQUIPMENT (TEST ITEM) DESCRIPTION	5
1.1	Photos – Equipment external	6
1.2	Photos – Equipment internal	9
1.3	Photos – Test setup	11
1.4	Supporting Equipment Used During Testing	13
1.5	Input / Output Ports	13
1.6	Operating Modes and Configurations	14
1.7	Test Equipment Used During Testing	15
1.8	Sample emission level calculation	16
2	RESULT SUMMARY	17
3	TEST CONDITIONS AND RESULTS	18
3.1	Test Conditions and Results – Radiated emissions	18
3.2	Test Conditions and Results – AC power line conducted emissions	60

1 Equipment (Test item) Description

Description	READY Converter for US/Canada market	
Model	READY Converter	
Additional Models	None	
Serial number	None	
Hardware version	55501455-D3	
Software / Firmware version	50981365-B1 / 55141586-B1	
Contains FCC-ID	OUY-READYAMR3	
Contains IC	22376-READYAMR3	
Power supply	5 VDC (USB)	
AC/DC-Adaptor	None	
Radio module	Type	Bluetooth
	Model	PAN1322
	Manufacturer	Panasonic
	HW Version	02
	SW Version	3.1
	FCC-ID	T7VEBMU
	IC	216QEBMU
Manufacturer	Kamstrup A/S Industrivej 28 8660 Skanderborg DENMARK	
Highest emission frequency	4xRF_SRD_RX/TX=3674	
Device classification	Class B	
Equipment type	Tabletop	
Number of tested samples	1	

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments (e.g. serial no.)
AE	Laptop	Dell	Latitude E6420	Ser.: CXJ43R1
SIM	Communication tester	Rohde & Schwarz	CBT	Signaling
AE	flowIQ 2100	Kamstrup	S/N 65508360/E7/16	Companion 900MHz
AE	Smartphone	Motorola	Nexus6	ZX1G42B4WN

***Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or

SIM : Simulator (Not Subjected to Test)

CABL : Connecting cables

1.5 Input / Output Ports

Port #	Name	Type*	Max. Cable Length	Cable Shielded	Comments (e.g. Cat. of Cable)
1	RF connector	I/O	3m	Yes	
2	USB	DC	1m	No	Charging

***Note:** Use the following abbreviations:

AC : AC power port

DC : DC power port

N/E : Non electrical

I/O : Signal input or output port

TP : Telecommunication port

1.6 Operating Modes and Configurations

Mode #	Description
1	Active transmit 915 MHz; BT DUT mode: DH5, 2441MHz.
2	Charging via USB from Laptop; Active transmit 915MHz; BT DUT mode: DH5, 2441MHz.

Configuration #	EUT Configuration
Stand-alone	EUT set for Bluetooth in BT DUT mode, BT RF connection to CBT on frequency 2441 MHz, DH5. 915 MHz DTS is active transmit.
Charging	EUT set for Bluetooth in BT DUT mode, BT RF connection to CBT on frequency 2441 MHz, DH5. 915 MHz DTS is active transmit. Charging via USB from Laptop.

1.7 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2014.1.15

Radiated emissions – 3m Chamber					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Biconical Antenna	R&S	HK 116	EF00012	2016-05	2019-05
LPD-Antenne	R&S	HL 223	EF00187	2016-05	2019-05
Horn antenna	Schwarzbeck	BBHA 9120D	EF00018	2016-09	2019-09
MXE EMI Receiver	Keysight Technologies	N9038A-526/WXP	EF01070	2016-08	2017-08
RF Cable			-	System Cal.	System Cal
RF Cable			-	System Cal.	System Cal

Conducted emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2017-01	2019-01
AMN	R&S	ESH3-Z5	EF00036	2017-01	2019-01
EMI Test Receiver	R&S	ESR7	EF00943	2016-10	2017-10
Cable	-	RG58/U	-	System Cal.	System Cal.

1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB μ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB μ V/m). The FCC limits are given in units of μ V/m. The following formula is used to convert the units of μ V/m to dB μ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{rclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

2 Result Summary

FCC 47 CFR Part 15B, Industry Canada ICES-003				
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks
47 CFR 15.109 ICES-003 Item 6.2	Radiated emissions	ANSI C 63.4	PASS	
47 CFR 15.107 ICES-003 Item 6.1	AC power line conducted emissions	ANSI C63.4	PASS	
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Radiated emissions

Radiated emissions acc. FCC 47 CFR 15.109 / ICES-003				Verdict: PASS		
Laboratory Parameters:		Required prior to the test		During the test		
Ambient Temperature		15 to 35 °C		21°C		
Relative Humidity		30 to 60 %		36%		
Test according referenced standards		Reference Method				
		ANSI C63.4				
Sample is tested with respect to the requirements of the equipment class		Equipment class				
		Class B				
Test frequency range determined from highest emission frequency		Highest emission frequency				
		4xRF_SRD_RX/TX=3674				
Fully configured sample scanned over the following frequency range		Frequency range				
		30 MHz to 19 GHz				
Operating mode		1/2				
Configuration		Stand-alone / Charging				
Limits and results Class B						
Frequency [MHz]	Quasi-Peak [dBµV/m]	Result	Average [dBµV/m]	Result	Peak [dBµV/m]	Result
30 – 88	40	PASS	-		-	-
88 – 216	43.5	PASS	-		-	-
216 – 960	46	PASS	-		-	-
960 – 1000	54	PASS	-		-	-
> 1000	-	-	54	PASS	74	PASS
Comments:						

Test Procedure:

The test site is in accordance with ANSI C63-4:2014 requirements and is listed by FCC.
The measurement procedure is as follows:

Exploratory measurement:

- The EUT was placed on a non-conductive table at a height of 0.8m.
- The EUT and support equipment, if needed, were set up to simulate typical usage.
- Cables, of type and length specified by the manufacturer, were connected to at least one port of each type and were terminated by a device or simulating load of actual usage.
- The antenna was placed at a distance of 3 or 10 m.
- The received signal was monitored at the measurement receiver.
 - Cables not bundled were manipulated within the range of likely arrangements to produce the highest emission amplitude
 - To maximize the suspected emissions the EUT is rotated 360 degrees. If the signal exceeds the previous amplitude, go back to the corresponding azimuth and manipulate the cables again for maximizing the emissions if possible.
 - Move the antenna from 1 to 4m to maximize the suspected highest amplitude signal.
- This procedure has to be performed in both antenna polarizations, horizontal and vertical.
- The arrangement of the equipment with the maximum emission level is shown on the setup picture at item 1.3.

Final measurement:


- The EUT was placed on a 0.8 m non-conductive table at a 3 m distance from the receive antenna. The antenna output was connected to the measurement receiver
- A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast
- The EUT and cable arrangement were based on the exploratory measurement results
- Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.
- The test data of the worst-case conditions were recorded and shown on the next pages.

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 21°C, Unom: 5V DC
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3m
Mode:	Mode# 1
Test Date:	2017-02-14
Note:	Antenna: Smarteq

Index 4

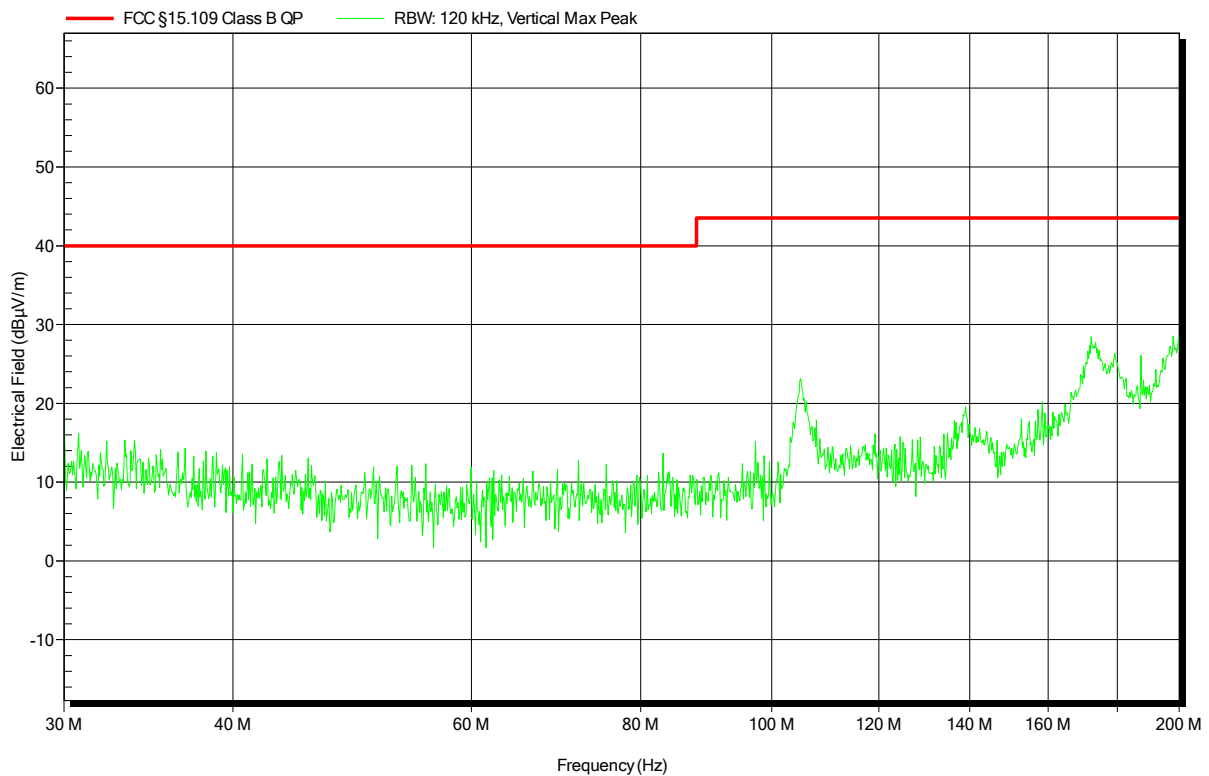


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 21°C, Unom: 5V DC
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3m
Mode:	Mode# 1
Test Date:	2017-02-14
Note:	Antenna: Smarteq

Index 3

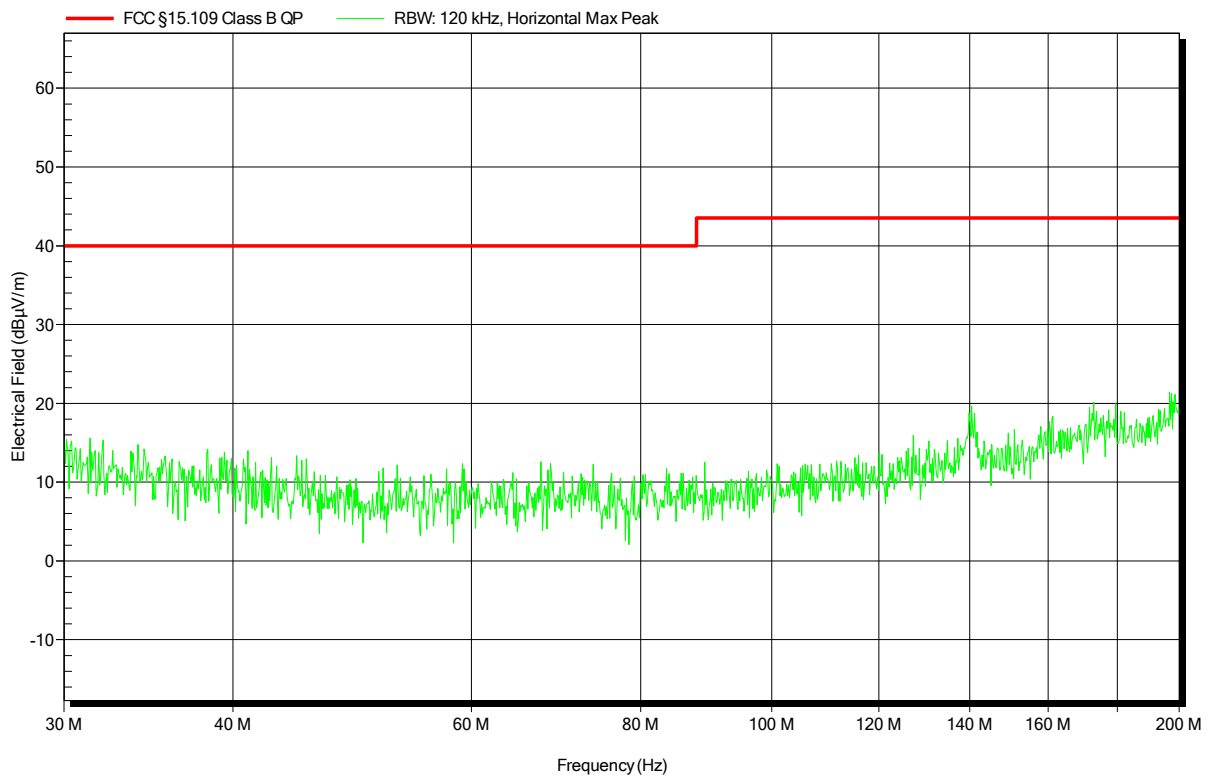


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 21°C, Unom: 5V DC USB charging
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3m
Mode:	Mode# 2
Test Date:	2017-02-14
Note:	Antenna: Smarteq

Index 1

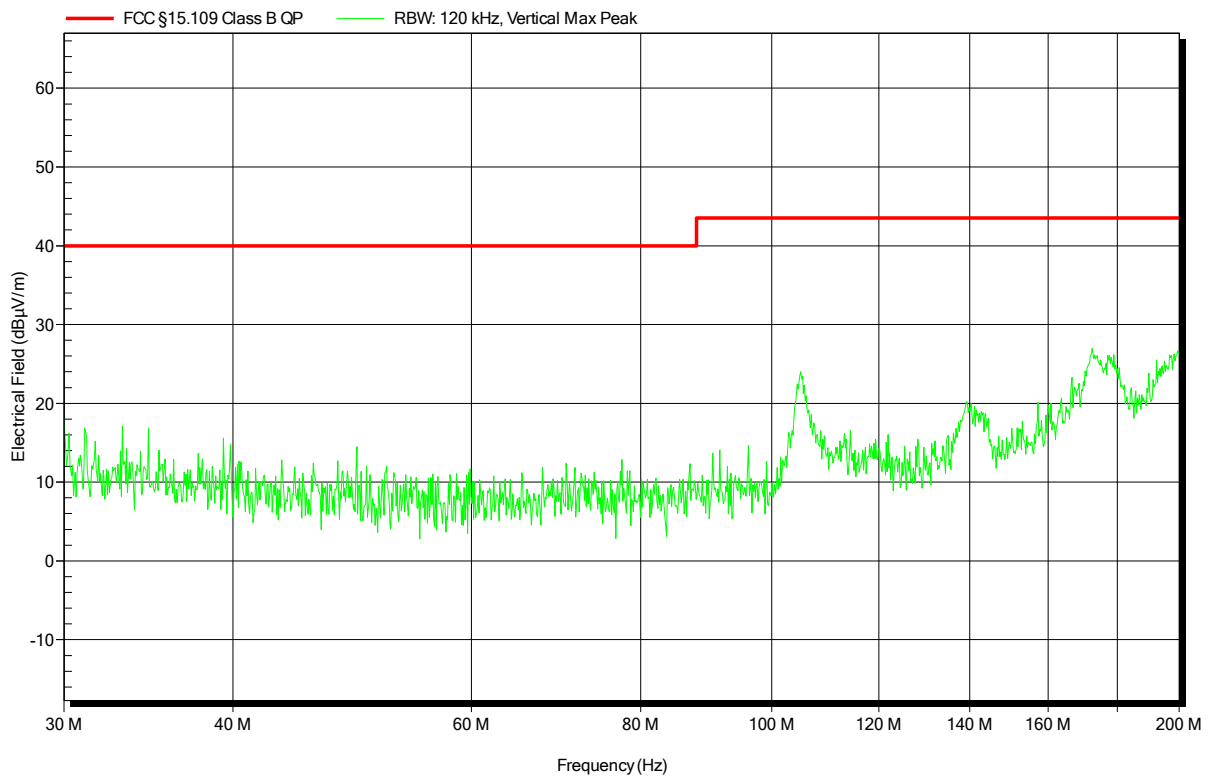


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 21°C, Unom: 5V DC USB charging
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3m
Mode:	Mode# 2
Test Date:	2017-02-14
Note:	Antenna: Smarteq

Index 2

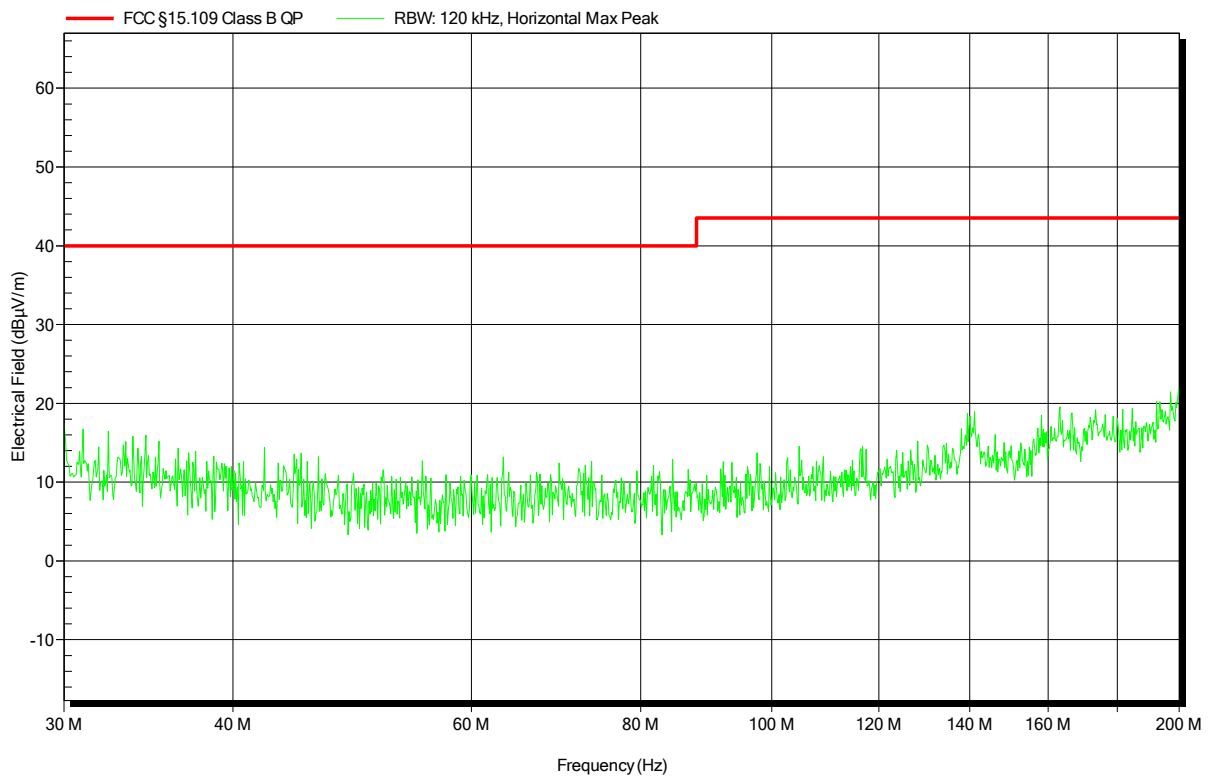


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 21°C, Unom: 5V DC
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3m
Mode:	Mode# 1
Test Date:	2017-02-14
Note:	Antenna: Smarteq

Index 13

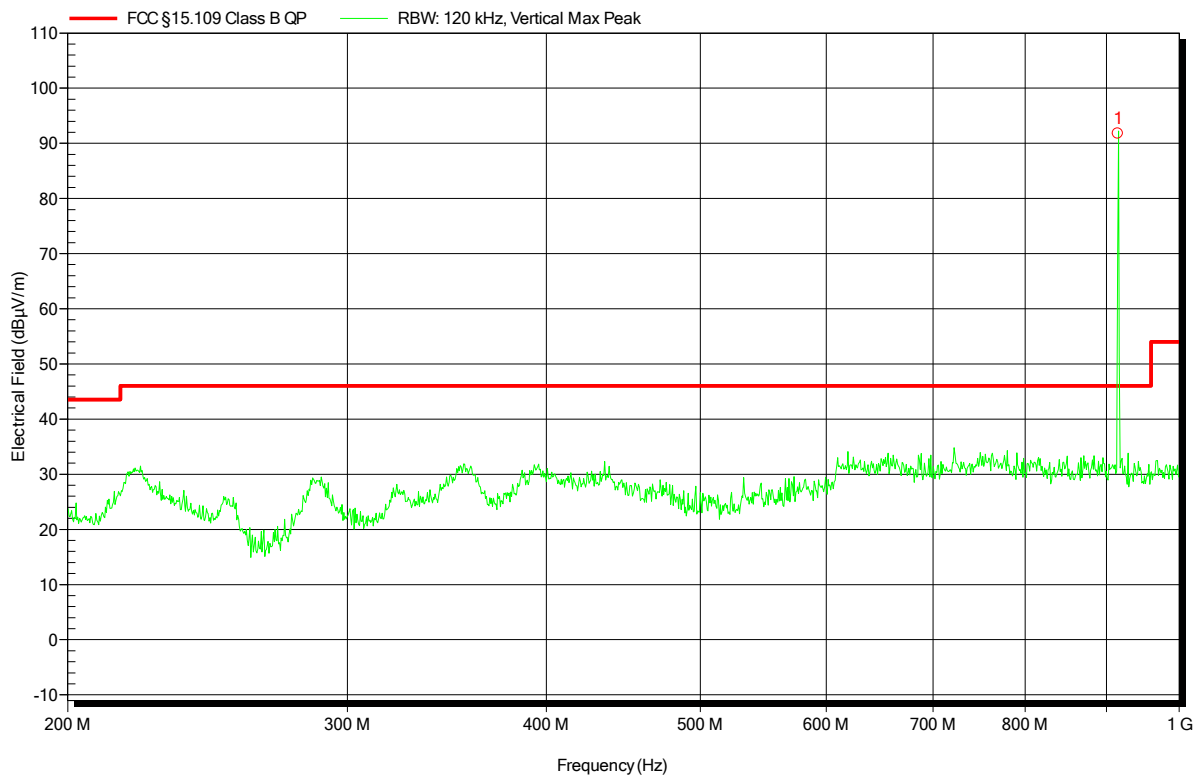


Peak Number	Frequency	carrier
1	915.161 MHz	carrier

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1701-6190

Applicant: Kamstrup A/S
 EUT Name: READY Converter for US/Canada market
 Model: READY Converter
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 21°C, Unom: 5V DC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3m
 Mode: Mode# 1
 Test Date: 2017-02-14
 Note: Antenna: Smarteq

Index 14

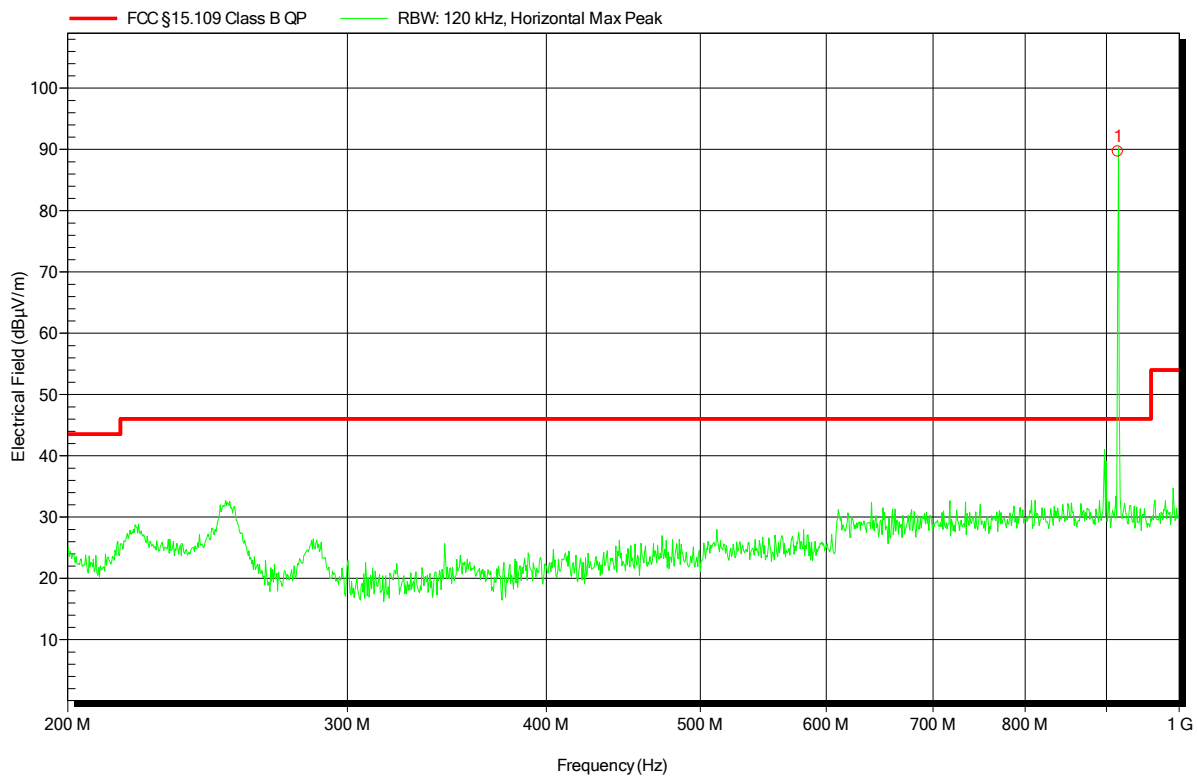


Peak Number	Frequency	carrier
1	915.16 MHz	carrier

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 21°C, Unom: 5V DC USB charging
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3m
Mode:	Mode# 2
Test Date:	2017-02-14
Note:	Antenna: Smarteq

Index 16

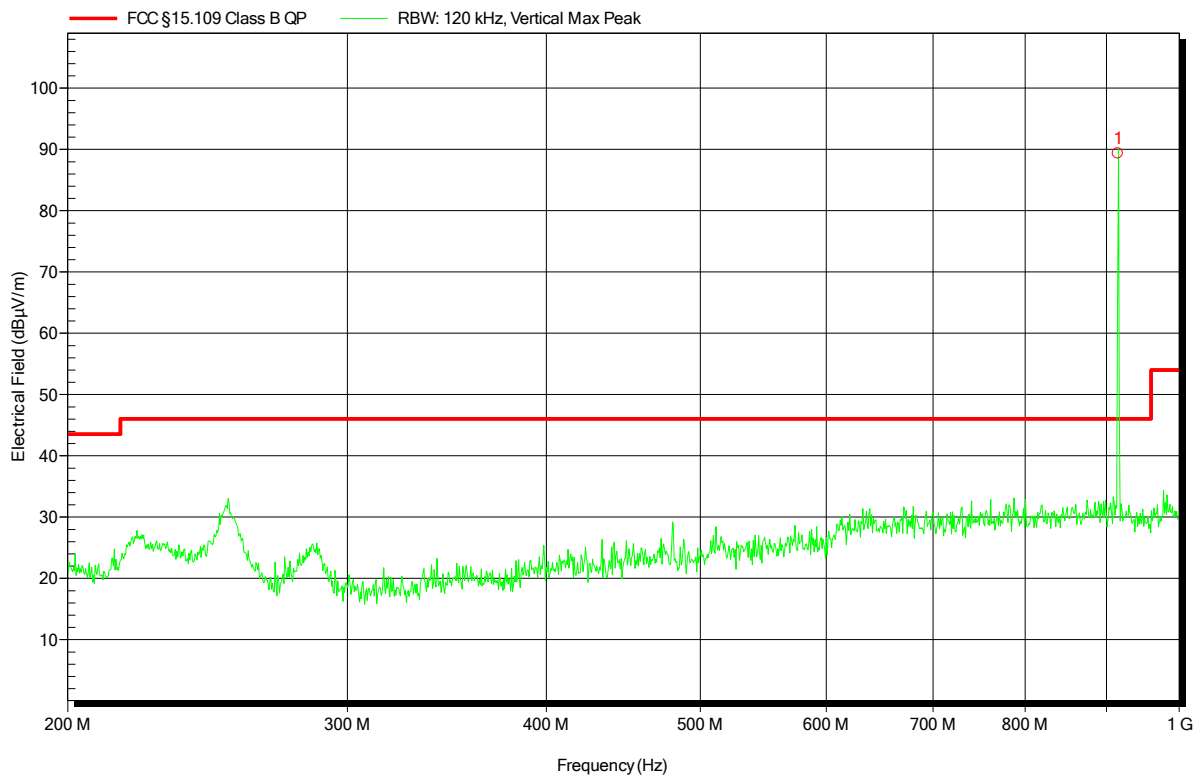


Peak Number	Frequency	carrier
1	915.16 MHz	carrier

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 21°C, Unom: 5V DC USB charging
Antenna:	Rohde & Schwarz HL 223, Horizontal
Measurement distance:	3m
Mode:	Mode# 2
Test Date:	2017-02-14
Note:	Antenna: Smarteq

Index 15

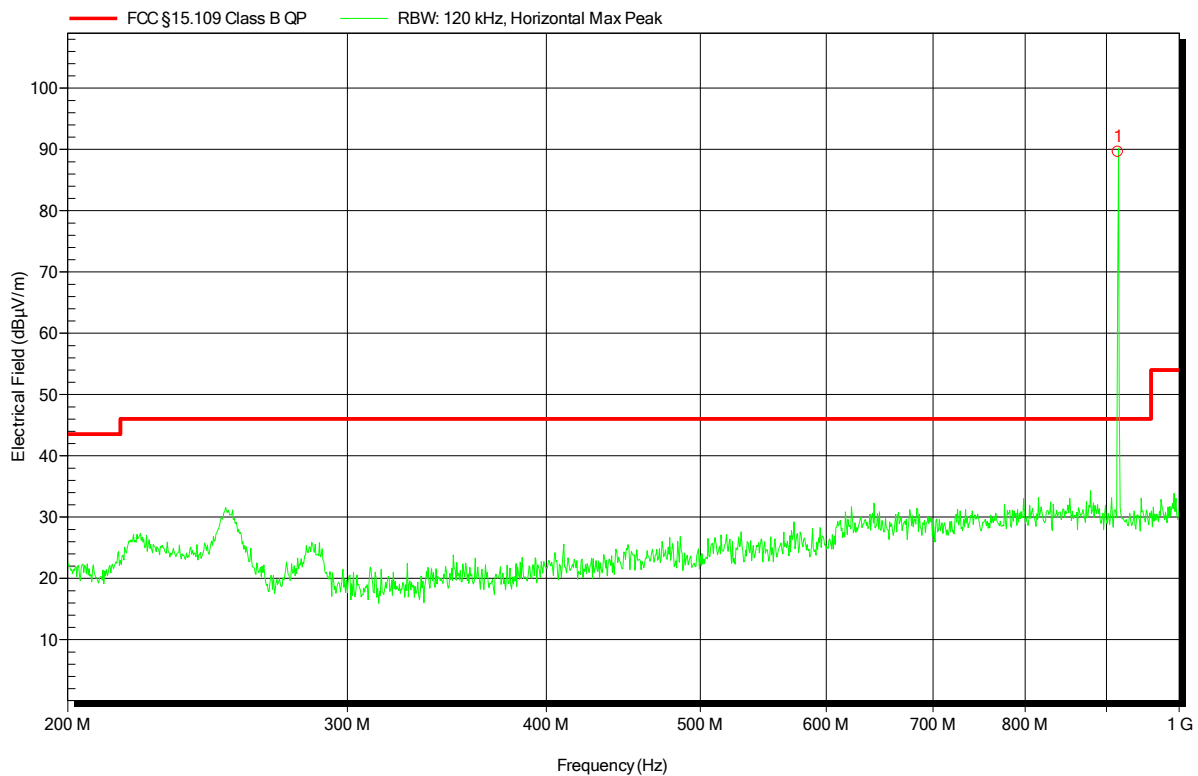


Peak Number	Frequency	carrier
1	915.16 MHz	carrier

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1701-6190

Applicant: Kamstrup A/S
 EUT Name: READy Converter for US/Canada market
 Model: READy Converter
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 21°C, Unom: 5V DC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3m
 Mode: Mode# 1
 Test Date: 2017-02-14
 Note: Antenna: Smarteq

Index 20

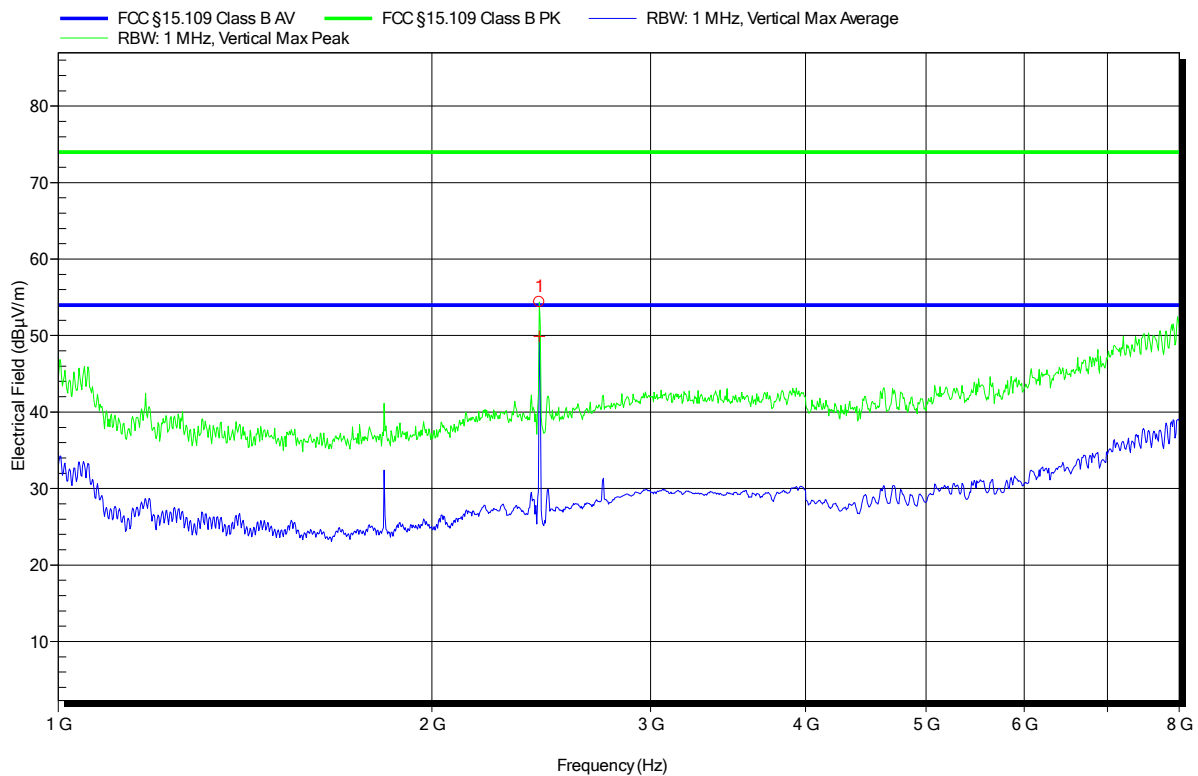


Peak Number	Frequency	carrier
1	2.441 GHz	carrier

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1701-6190

Applicant: Kamstrup A/S
 EUT Name: READY Converter for US/Canada market
 Model: READY Converter
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 21°C, Unom: 5V DC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3m
 Mode: Mode# 1
 Test Date: 2017-02-14
 Note: Antenna: Smarteq

Index 19

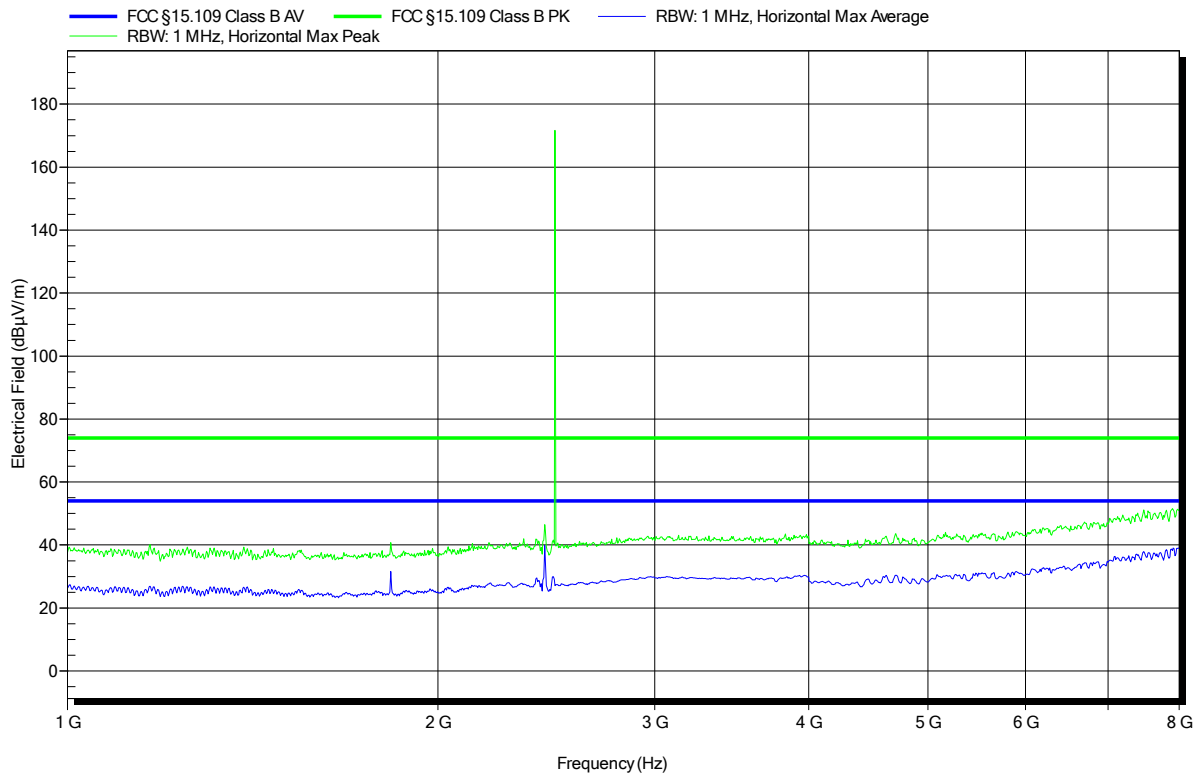


Peak Number	Frequency	carrier
1	2.441 GHz	carrier

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 21°C, Unom: 5V DC USB charging
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3m
Mode:	Mode# 2
Test Date:	2017-02-14
Note:	Antenna: Smarteq

Index 17

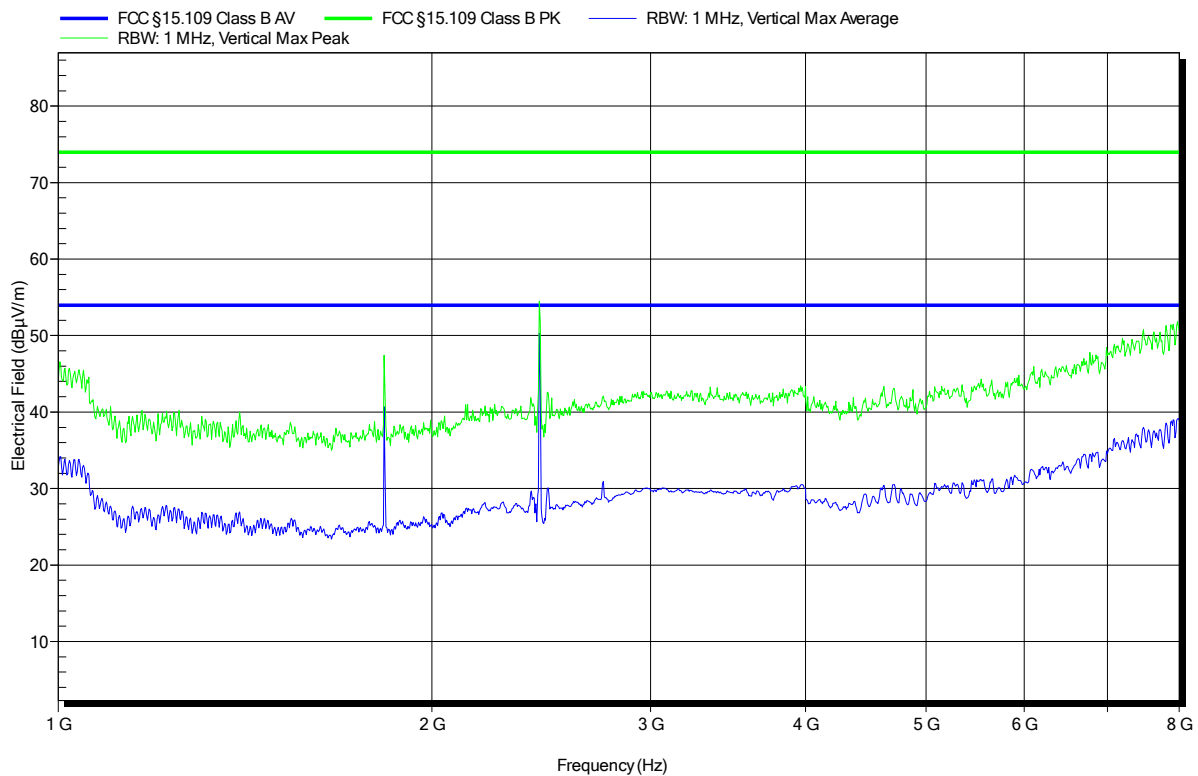


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 21°C, Unom: 5V DC USB charging
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3m
Mode:	Mode# 2
Test Date:	2017-02-14
Note:	Antenna: Smarteq

Index 18

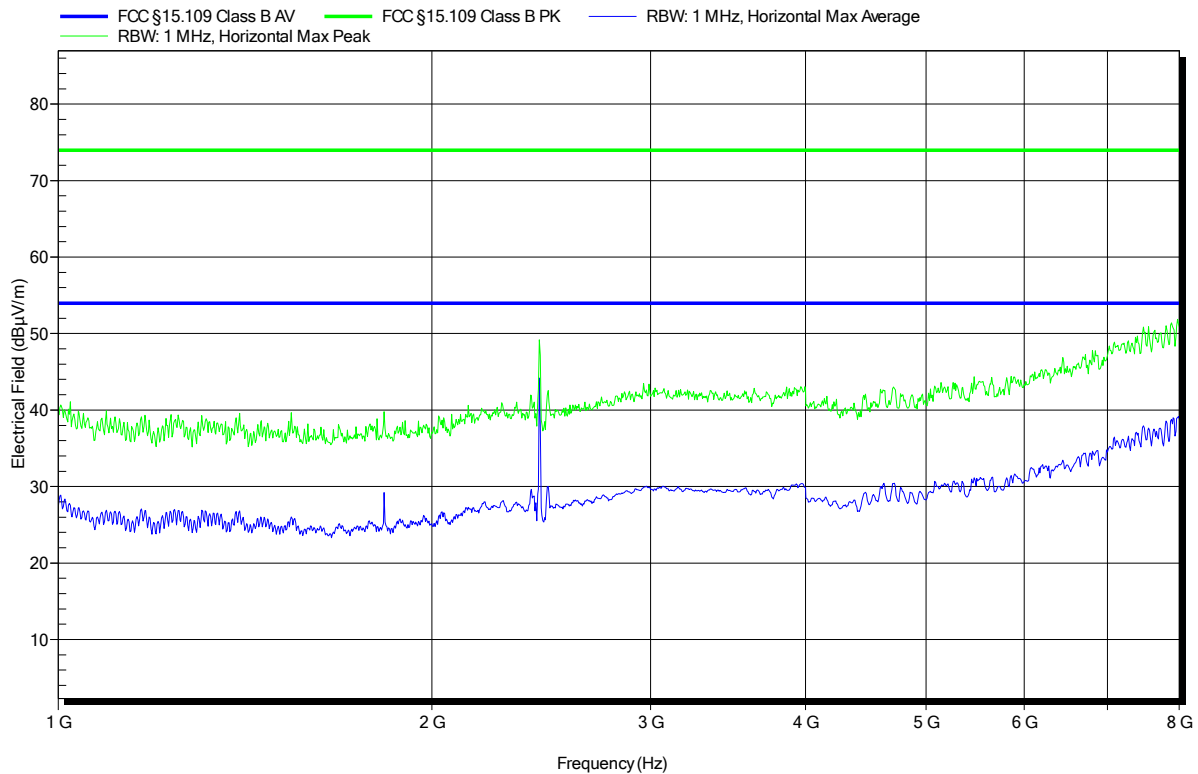


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 21°C, Unom: 5V DC
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3m
Mode:	Mode# 1
Test Date:	2017-02-14
Note:	Antenna: Laird Technology / Nearson

Index 5

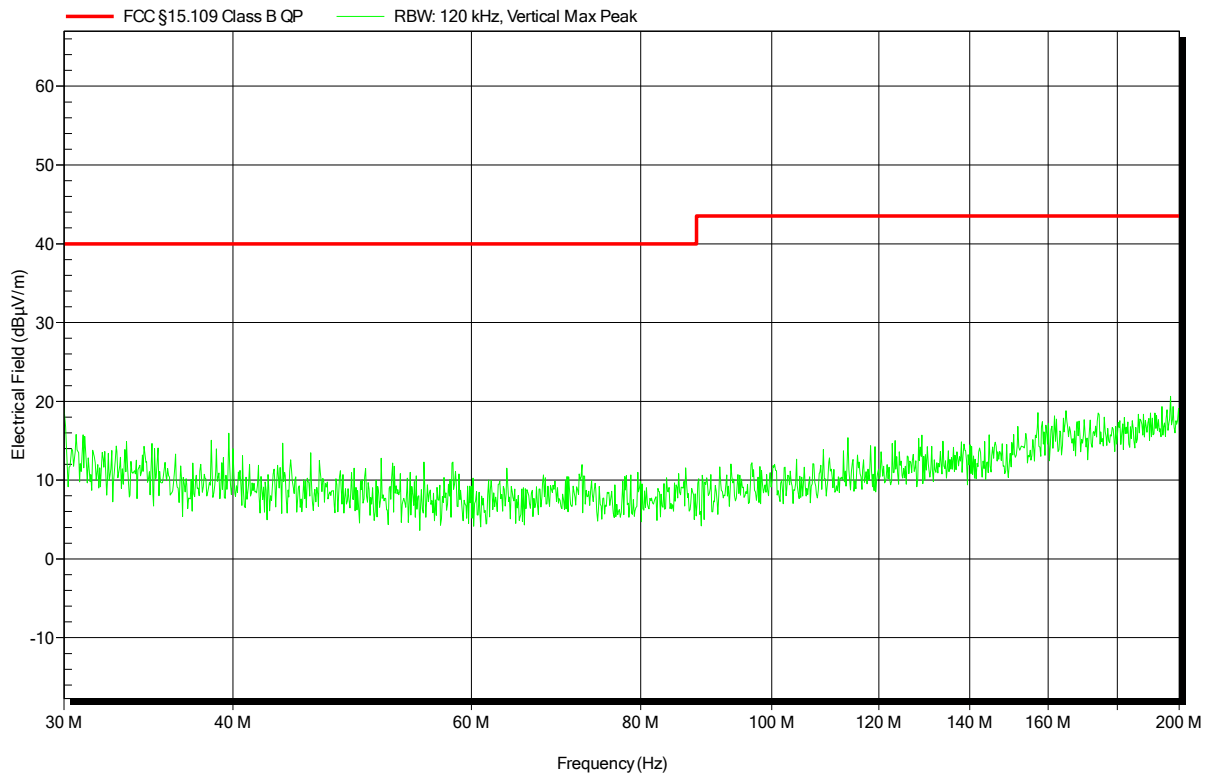


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 21°C, Unom: 5V DC
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3m
Mode:	Mode# 1
Test Date:	2017-02-14
Note:	Antenna: Laird Technology / Nearson

Index 6

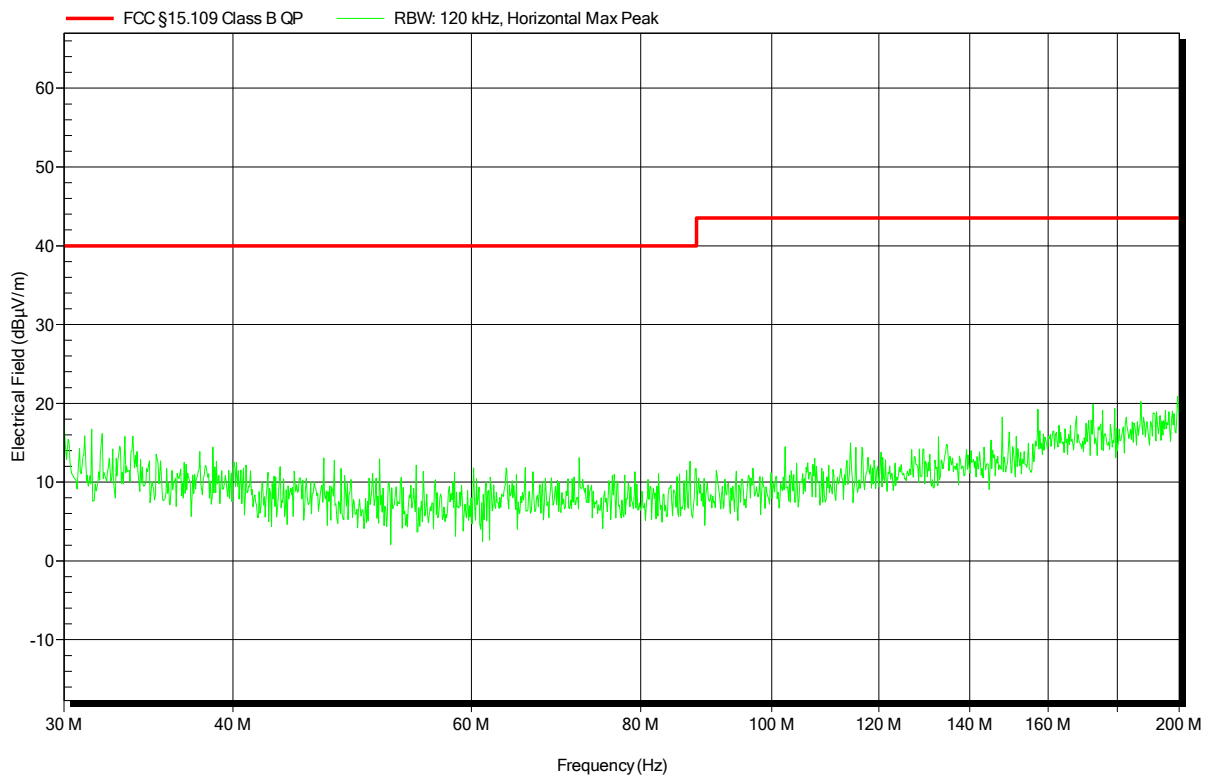


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 21°C, Unom: 5V DC USB charging
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3m
Mode:	Mode# 2
Test Date:	2017-02-14
Note:	Antenna: Laird Technology / Nearson

Index 8

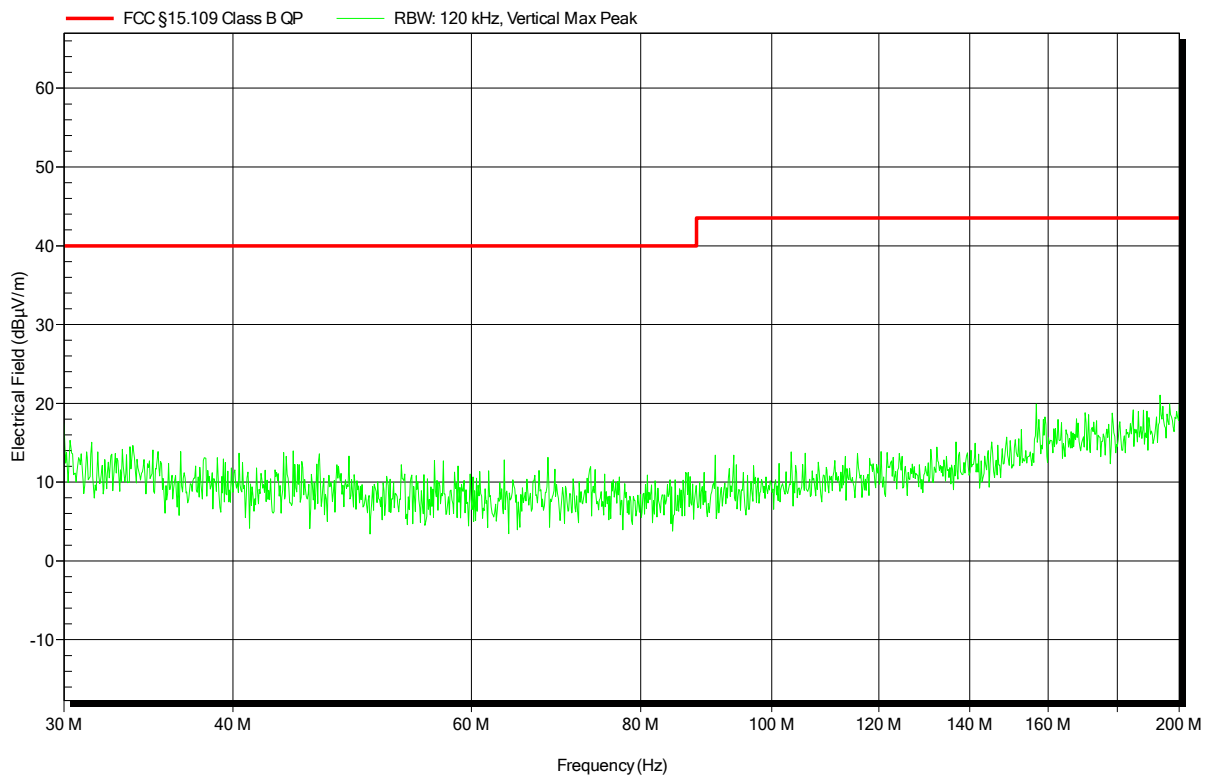


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 21°C, Unom: 5V DC USB charging
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3m
Mode:	Mode# 2
Test Date:	2017-02-14
Note:	Antenna: Laird Technology / Nearson

Index 7

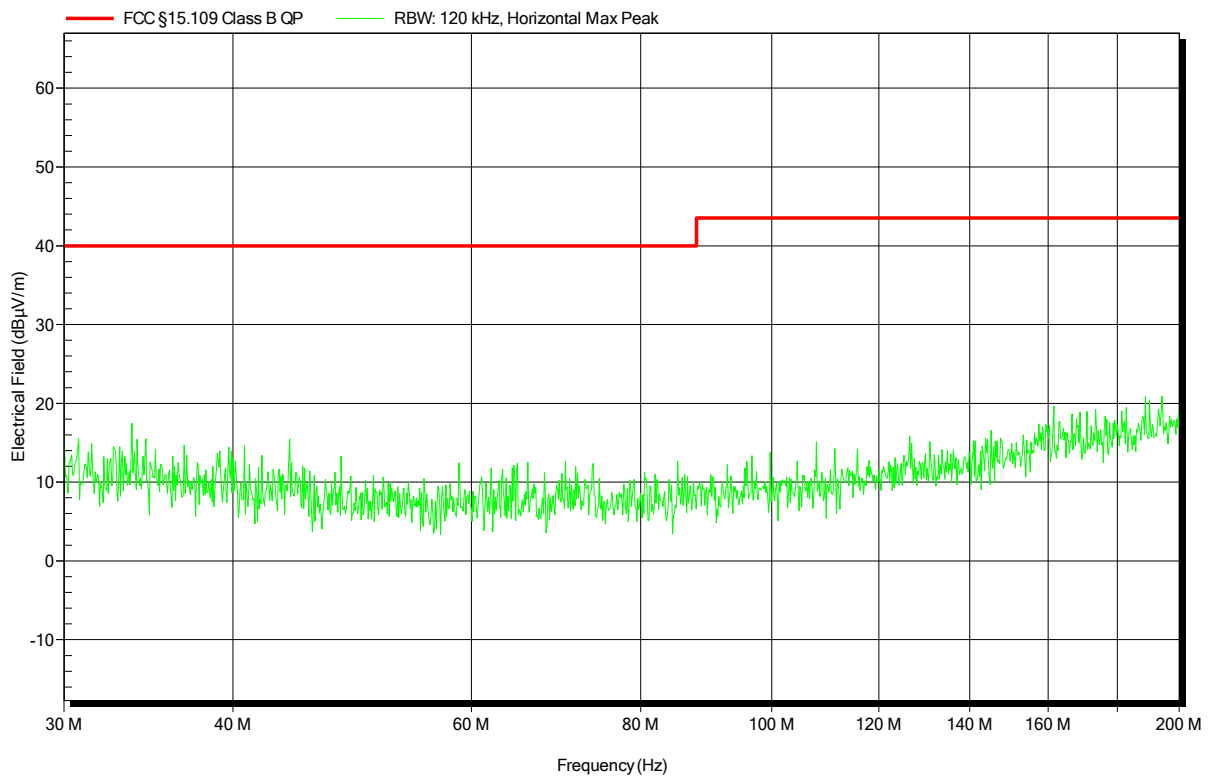


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1701-6190

Applicant: Kamstrup A/S
 EUT Name: READY Converter for US/Canada market
 Model: READY Converter
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 21°C, Unom: 5V DC
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3m
 Mode: Mode# 1
 Test Date: 2017-02-14
 Note: Antenna: Laird Technology / Nearson

Index 12

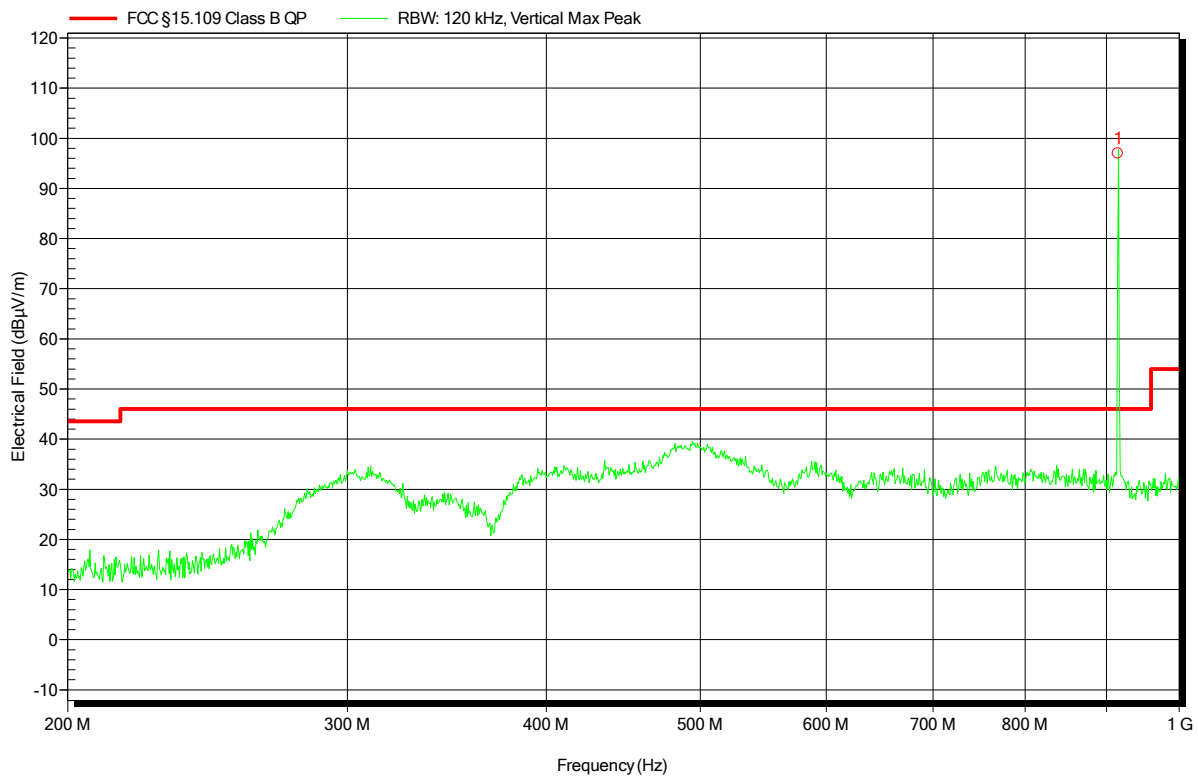


Peak Number	Frequency	carrier
1	915.161 MHz	carrier

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1701-6190

Applicant: Kamstrup A/S
 EUT Name: READY Converter for US/Canada market
 Model: READY Converter
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 21°C, Unom: 5V DC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3m
 Mode: Mode# 1
 Test Date: 2017-02-14
 Note: Antenna: Laird Technology / Nearson

Index 11

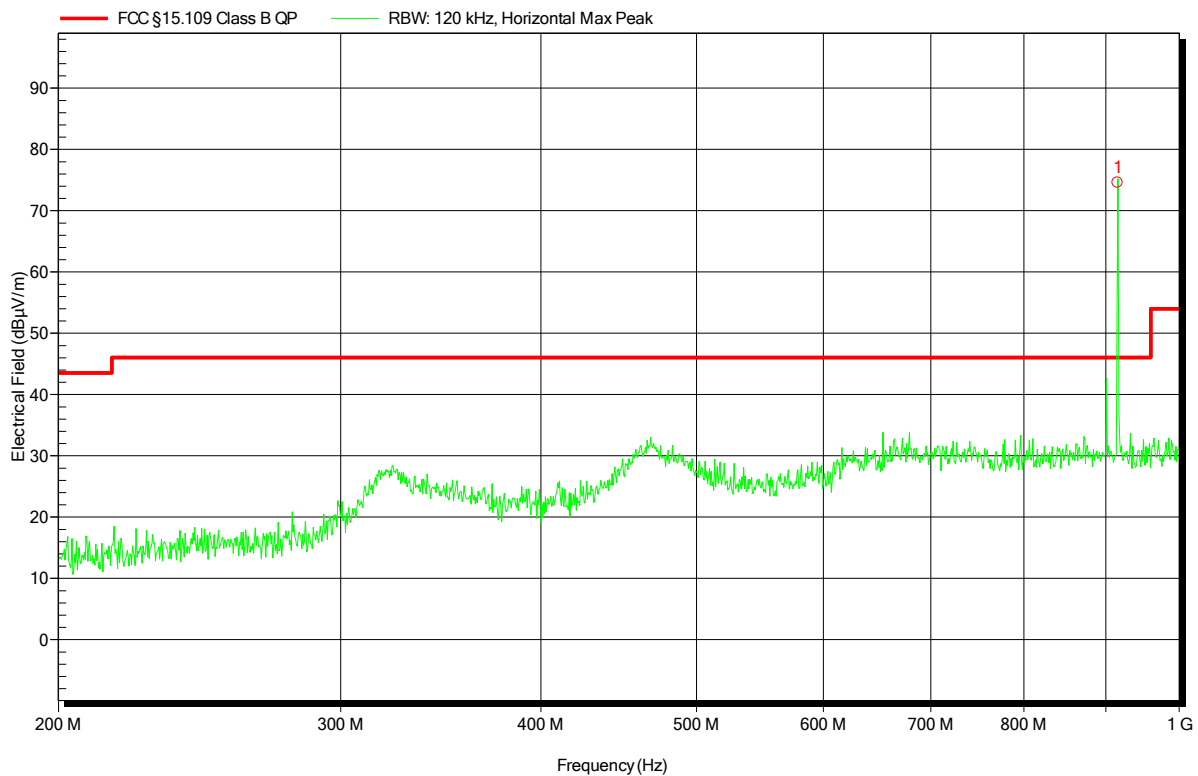


Peak Number	Frequency	carrier
1	915.16 MHz	carrier

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1701-6190

Applicant: Kamstrup A/S
 EUT Name: READy Converter for US/Canada market
 Model: READy Converter
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 21°C, Unom: 5V DC USB charging
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3m
 Mode: Mode# 2
 Test Date: 2017-02-14
 Note: Antenna: Laird Technology / Nearson

Index 9

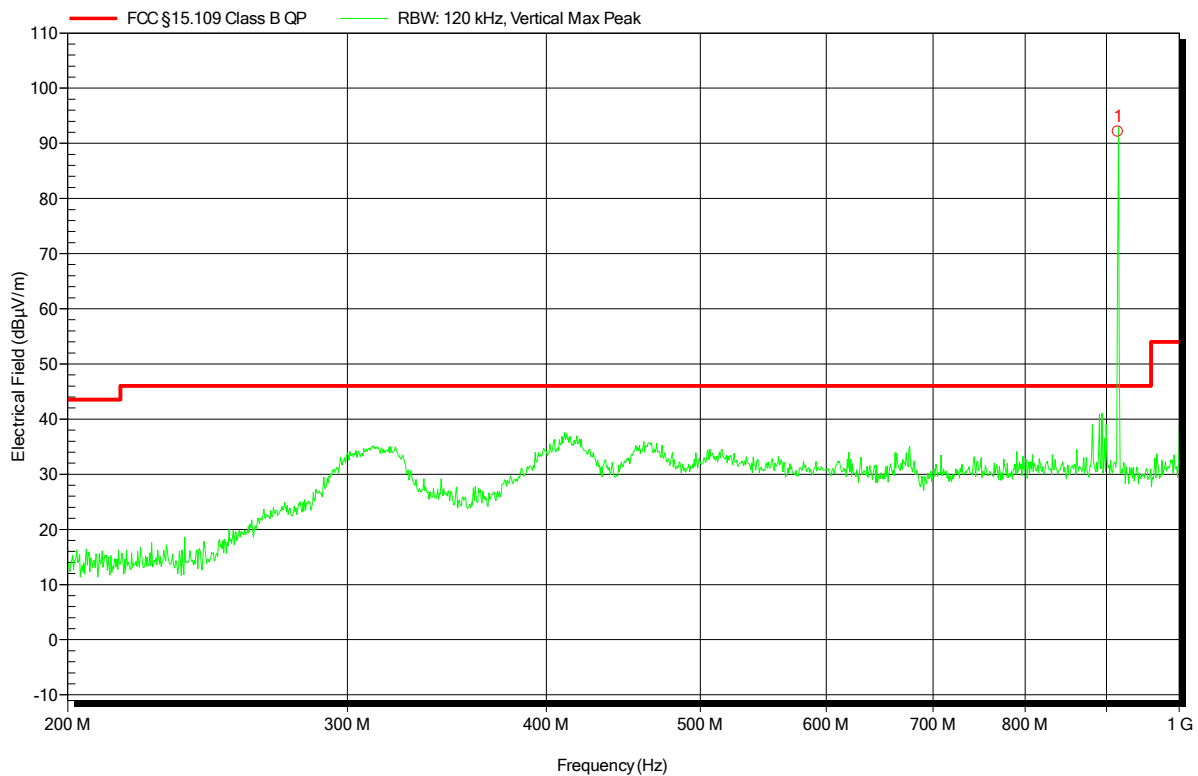


Peak Number	Frequency	carrier
1	915.16 MHz	carrier

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1701-6190

Applicant: Kamstrup A/S
 EUT Name: READY Converter for US/Canada market
 Model: READY Converter
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 21°C, Unom: 5V DC USB charging
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3m
 Mode: Mode# 2
 Test Date: 2017-02-14
 Note: Antenna: Laird Technology / Nearson

Index 10

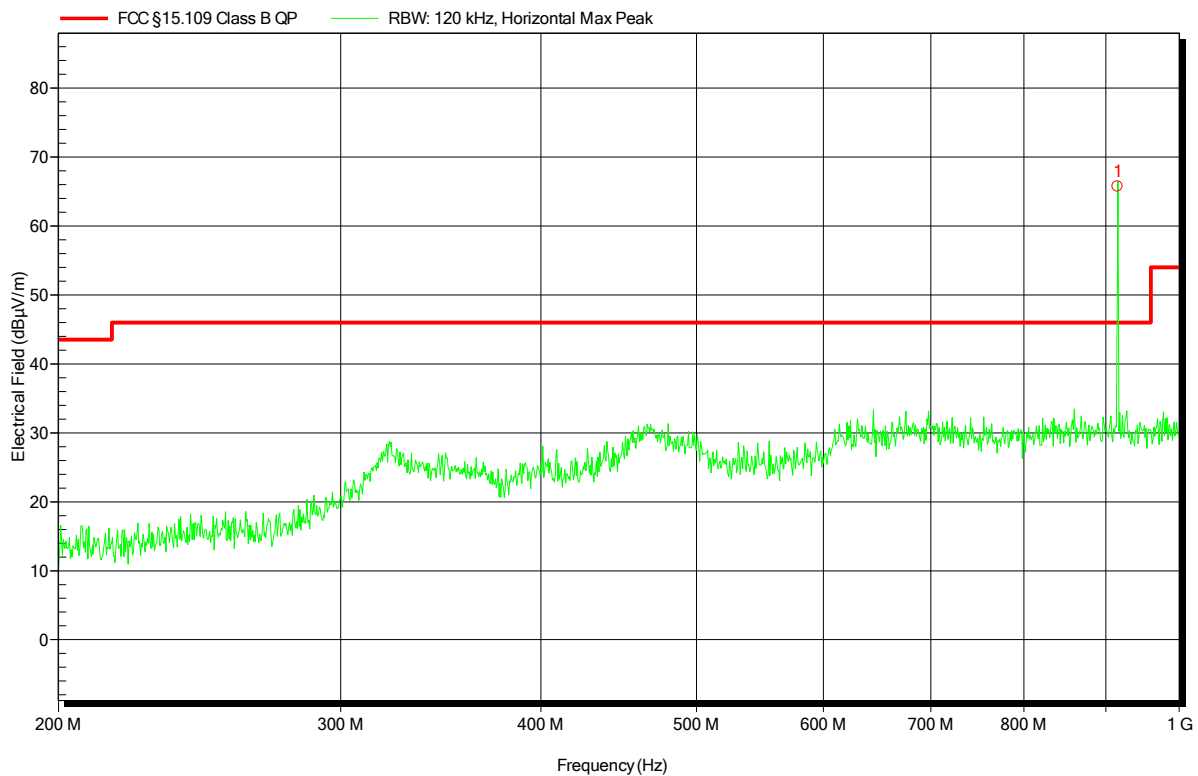


Peak Number	Frequency	carrier
1	915.16 MHz	carrier

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1701-6190

Applicant: Kamstrup A/S
 EUT Name: READY Converter for US/Canada market
 Model: READY Converter
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 21°C, Unom: 5V DC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3m
 Mode: Mode# 1
 Test Date: 2017-02-14
 Note: Antenna: Laird Technology / Nearson

Index 21

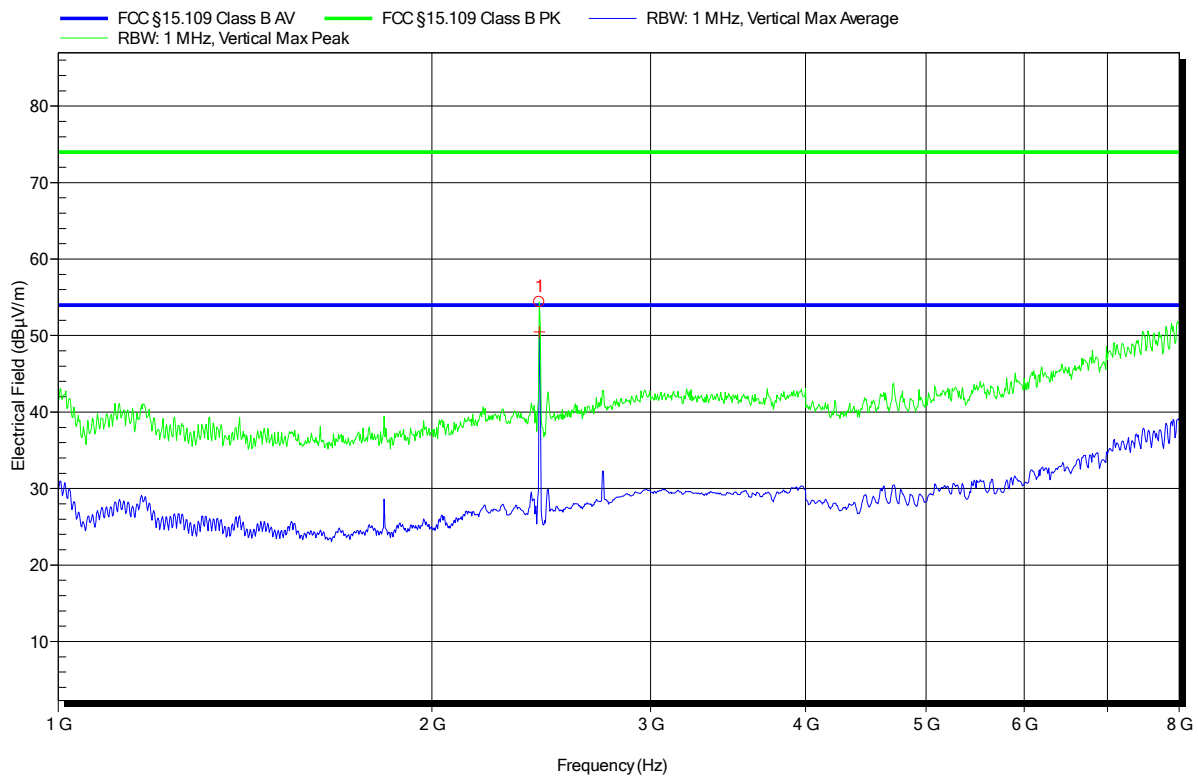


Peak Number	Frequency	carrier
1	2.441 GHz	carrier

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1701-6190

Applicant: Kamstrup A/S
 EUT Name: READy Converter for US/Canada market
 Model: READy Converter
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 21°C, Unom: 5V DC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3m
 Mode: Mode# 1
 Test Date: 2017-02-14
 Note: Antenna: Laird Technology / Nearson

Index 22

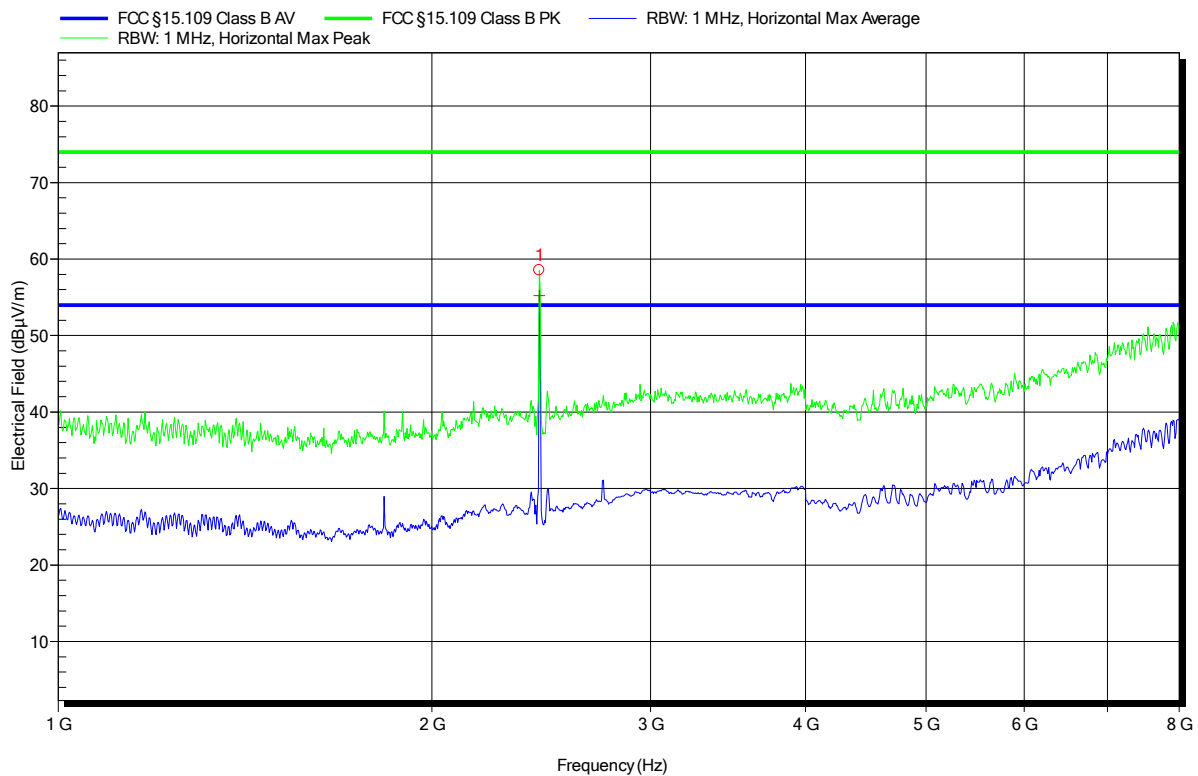


Peak Number	Frequency	carrier
1	2.441 GHz	carrier

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1701-6190

Applicant: Kamstrup A/S
 EUT Name: READy Converter for US/Canada market
 Model: READy Converter
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 21°C, Unom: 5V DC USB charging
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3m
 Mode: Mode# 2
 Test Date: 2017-02-14
 Note: Antenna: Laird Technology / Nearson

Index 24

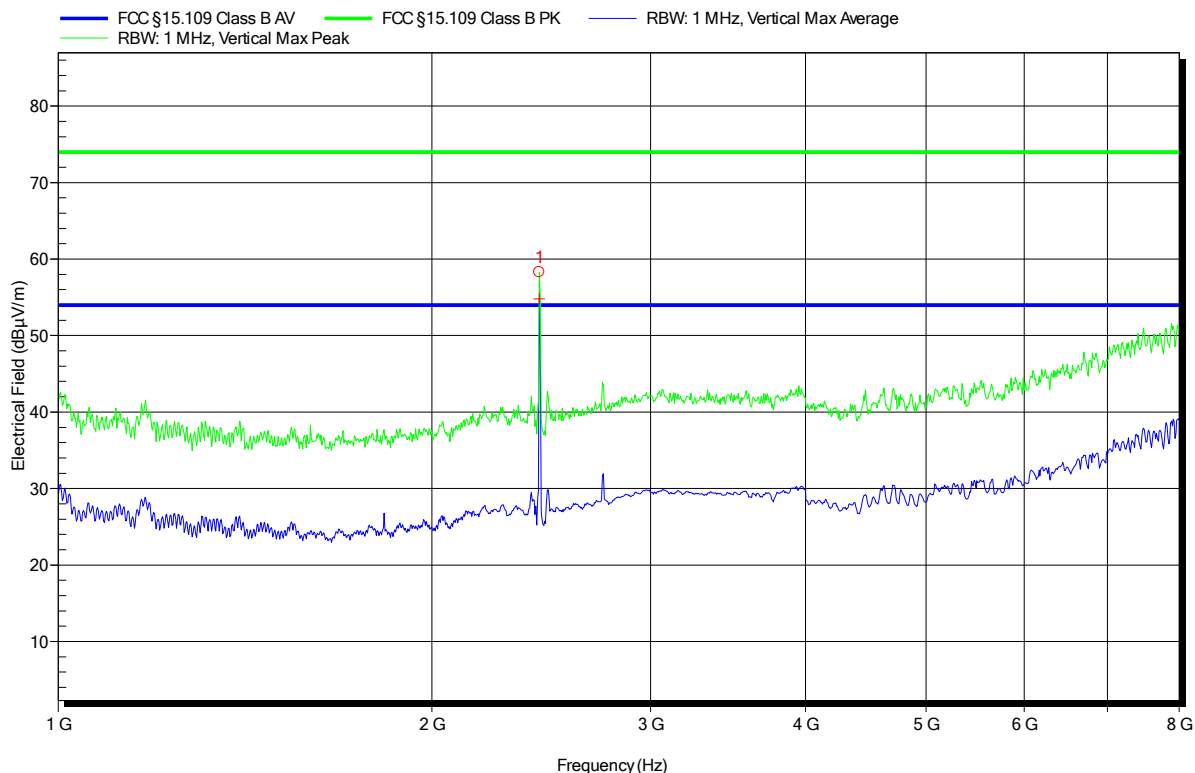


Peak Number	Frequency	carrier
1	2.441 GHz	carrier

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 21°C, Unom: 5V DC USB charging
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3m
Mode:	Mode# 2
Test Date:	2017-02-14
Note:	Antenna: Laird Technology / Nearson

Index 23

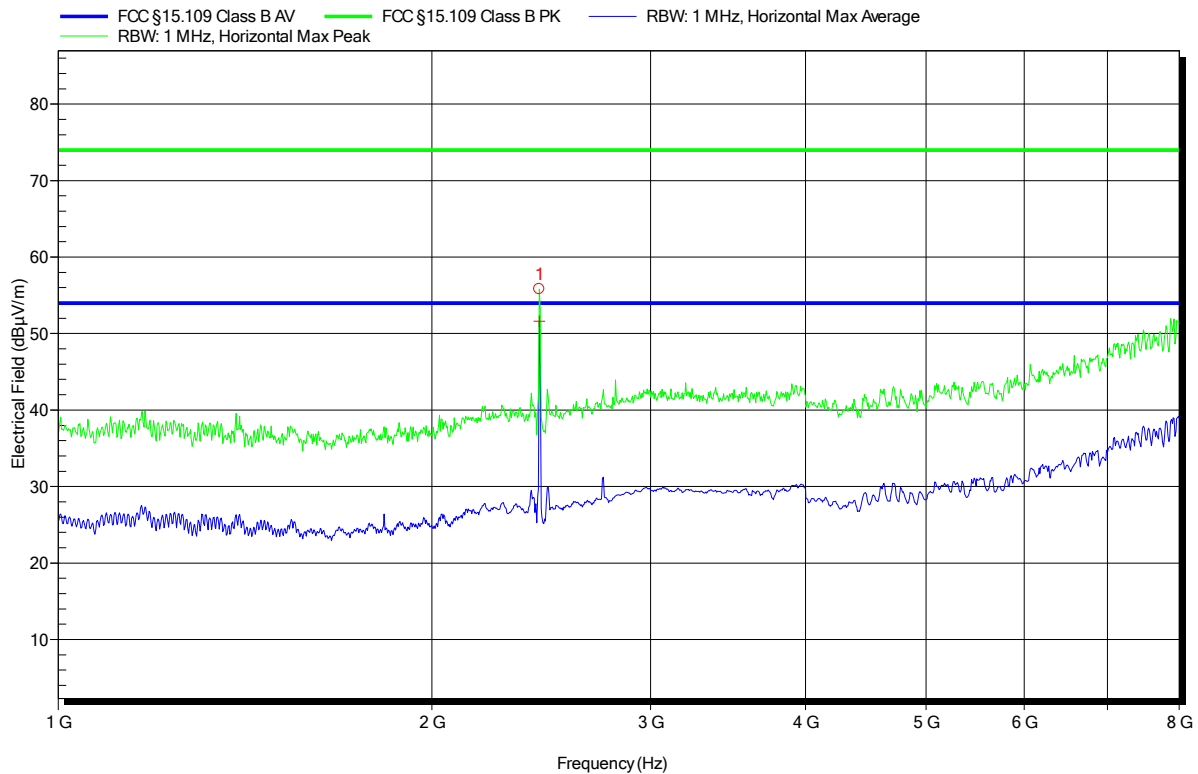


Peak Number	Frequency	carrier
1	2.441 GHz	

Spurious emissions according to FCC Part 15 B

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 21°C, Vnom: 5V DC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3m
Mode:	Mode# 1
Test Date:	2017-02-15
Note:	Antenna: Laird Technology / Nearson

Index 73

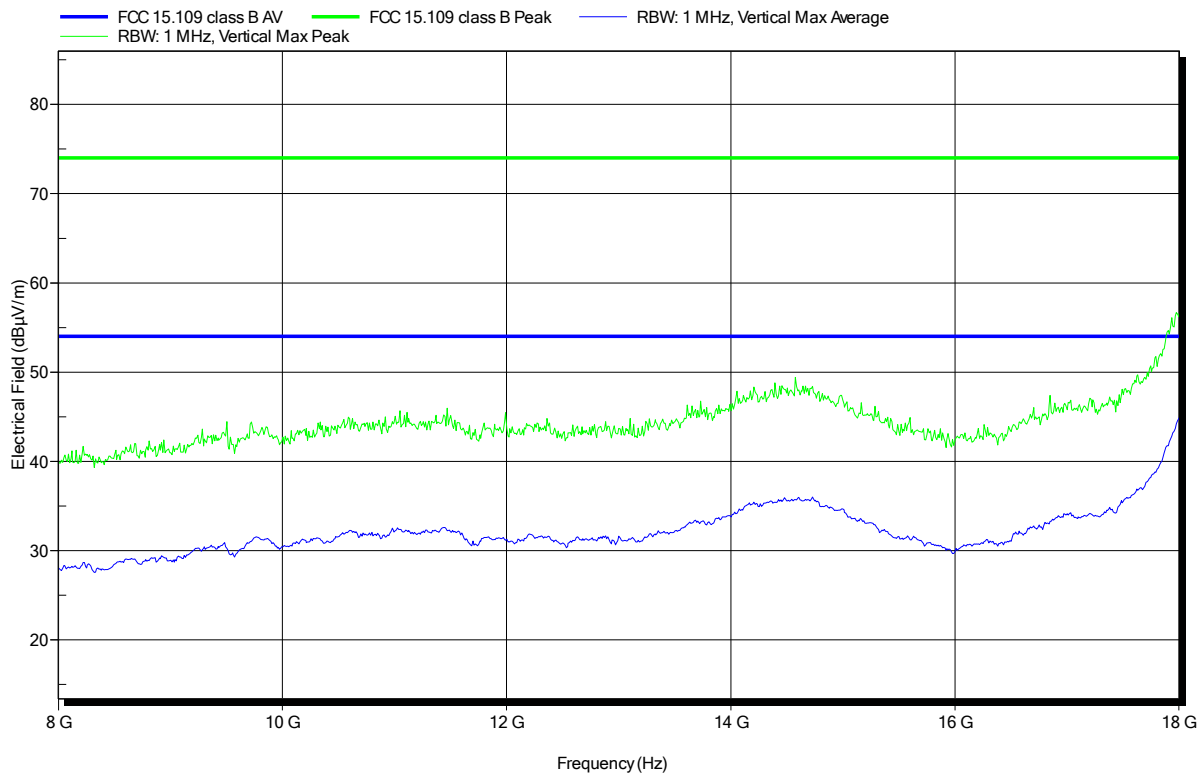


Spurious emissions according to FCC Part 15 B

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 21°C, Vnom: 5V DC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3m
Mode:	Mode# 1
Test Date:	2017-02-15
Note:	Antenna: Laird Technology / Nearson

Index 72

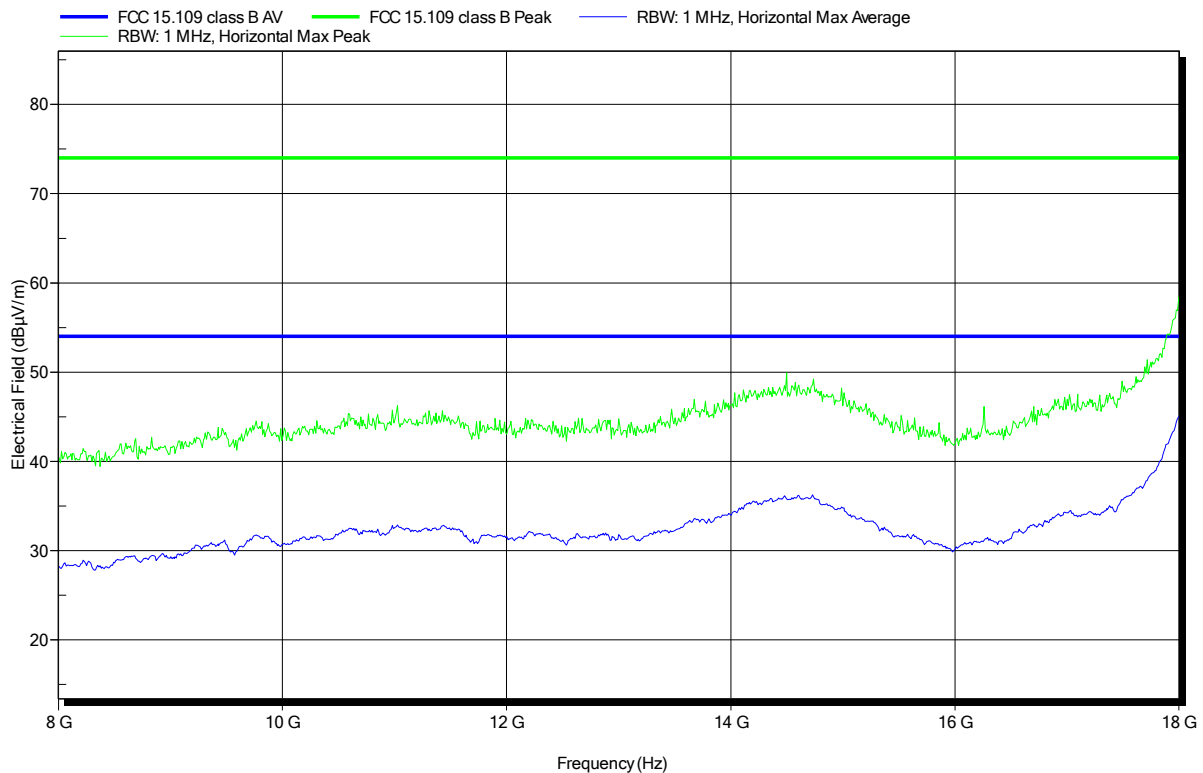


Spurious emissions according to FCC Part 15 B

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 21°C, Vnom: 5V DC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3m
Mode:	Mode# 1
Test Date:	2017-02-15
Note:	Antenna: Smarteq

Index 85

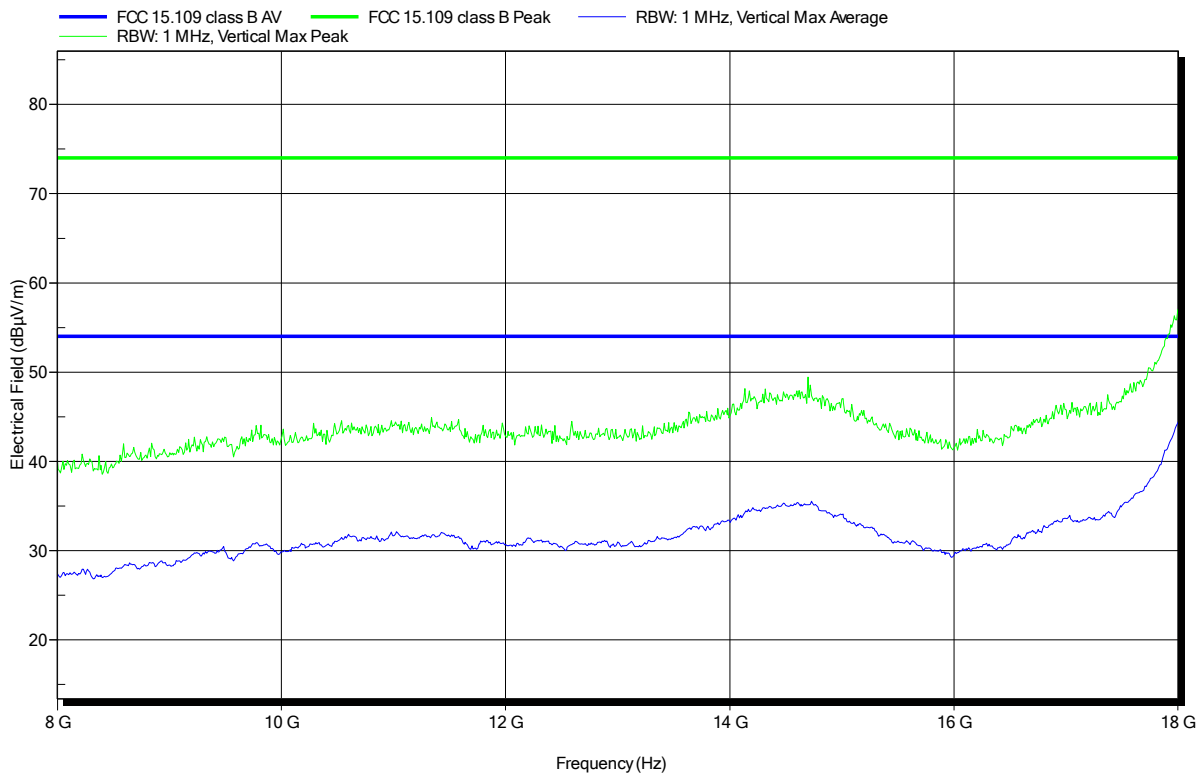


Spurious emissions according to FCC Part 15 B

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 21°C, Vnom: 5V DC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3m
Mode:	Mode# 1
Test Date:	2017-02-15
Note:	Antenna: Smarteq

Index 82

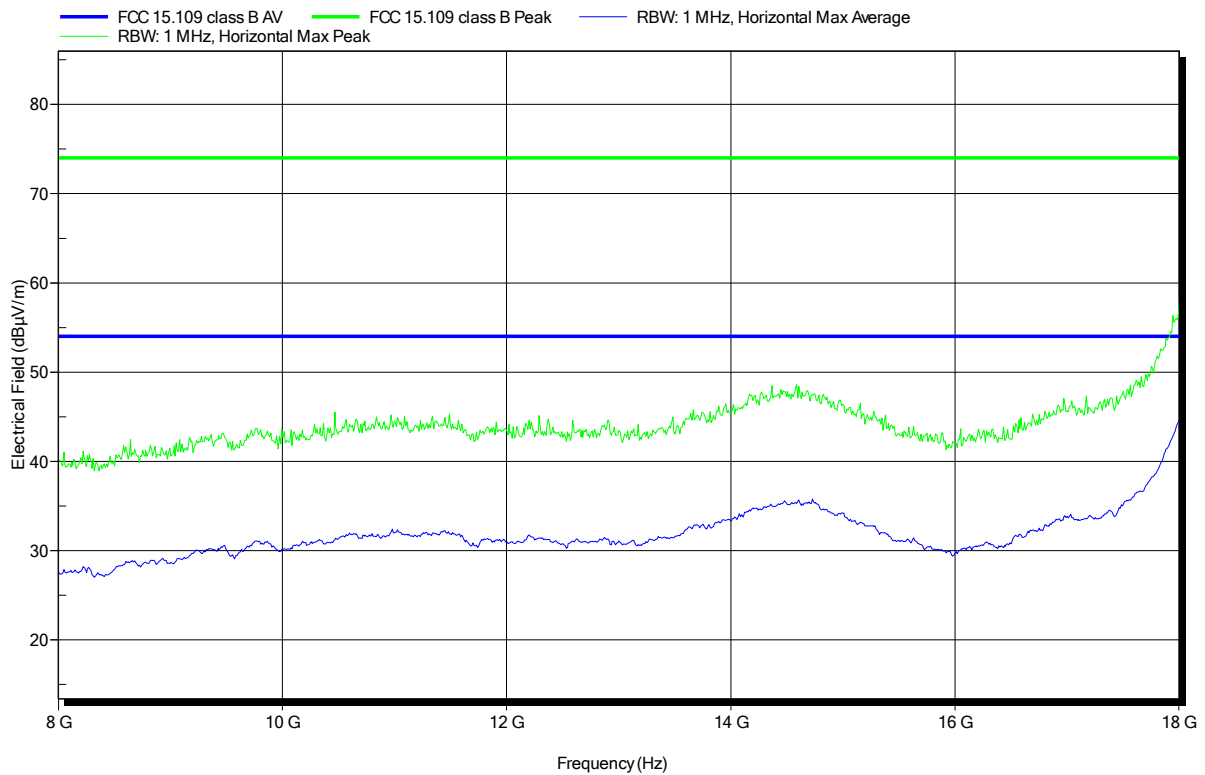


Spurious emissions according to FCC Part 15 B

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 21°C, Vnom: 5V DC USB charging
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3m
Mode:	Mode# 2
Test Date:	2017-02-15
Note:	Antenna: Laird Technology / Nearson

Index 74

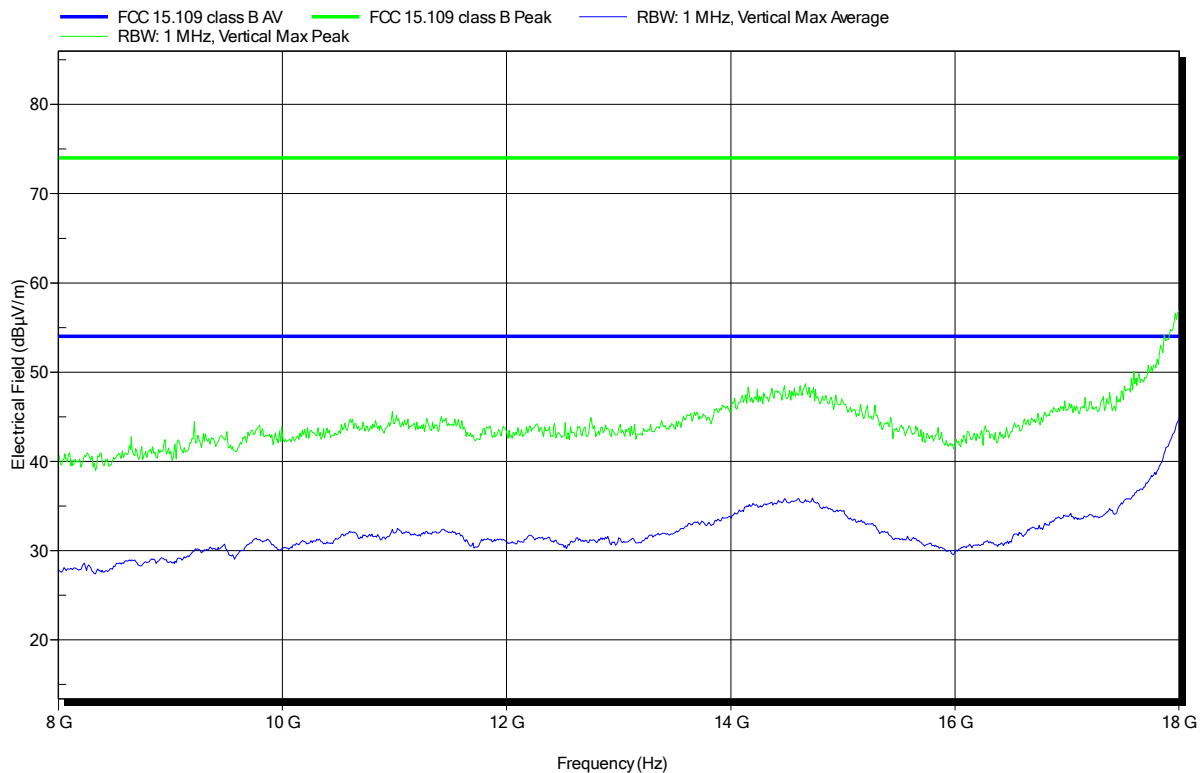


Spurious emissions according to FCC Part 15 B

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 21°C, Vnom: 5V DC USB charging
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3m
Mode:	Mode# 2
Test Date:	2017-02-15
Note:	Antenna: Laird Technology / Nearson

Index 75

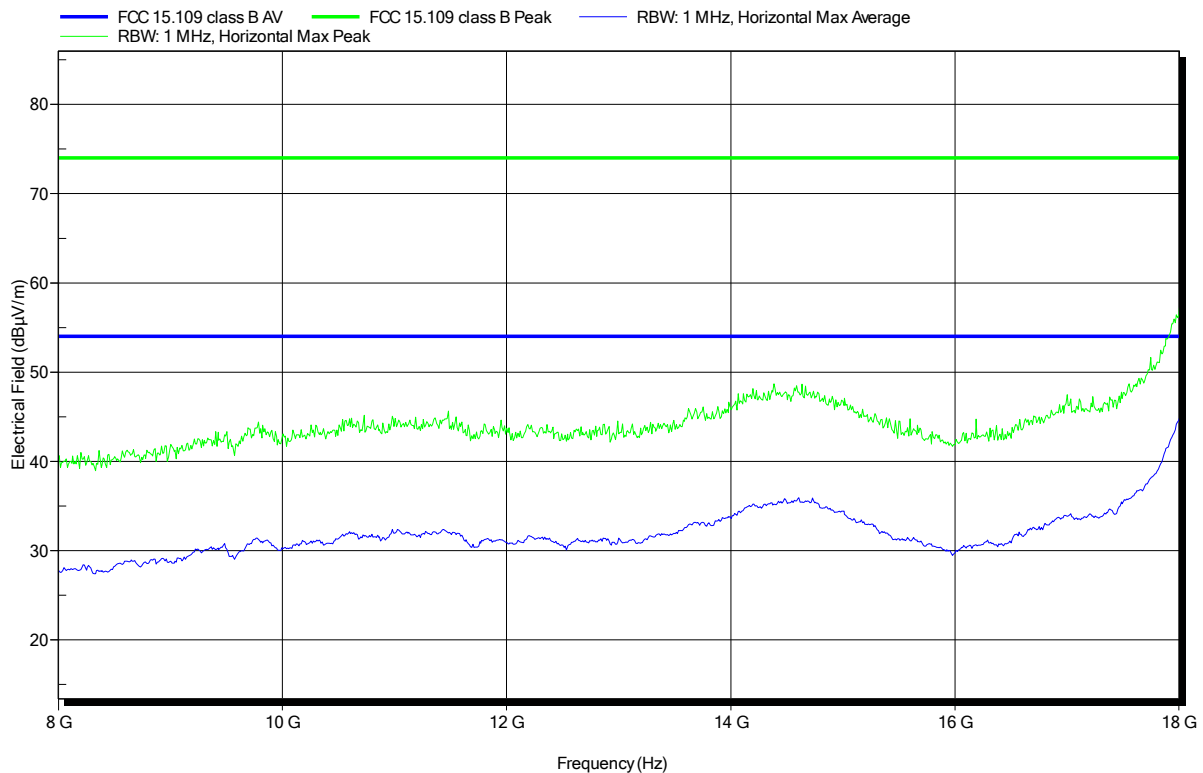


Spurious emissions according to FCC Part 15 B

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 21°C, Vnom: 5V DC USB charging
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3m
Mode:	Mode# 2
Test Date:	2017-02-15
Note:	Antenna: Smarteq

Index 84

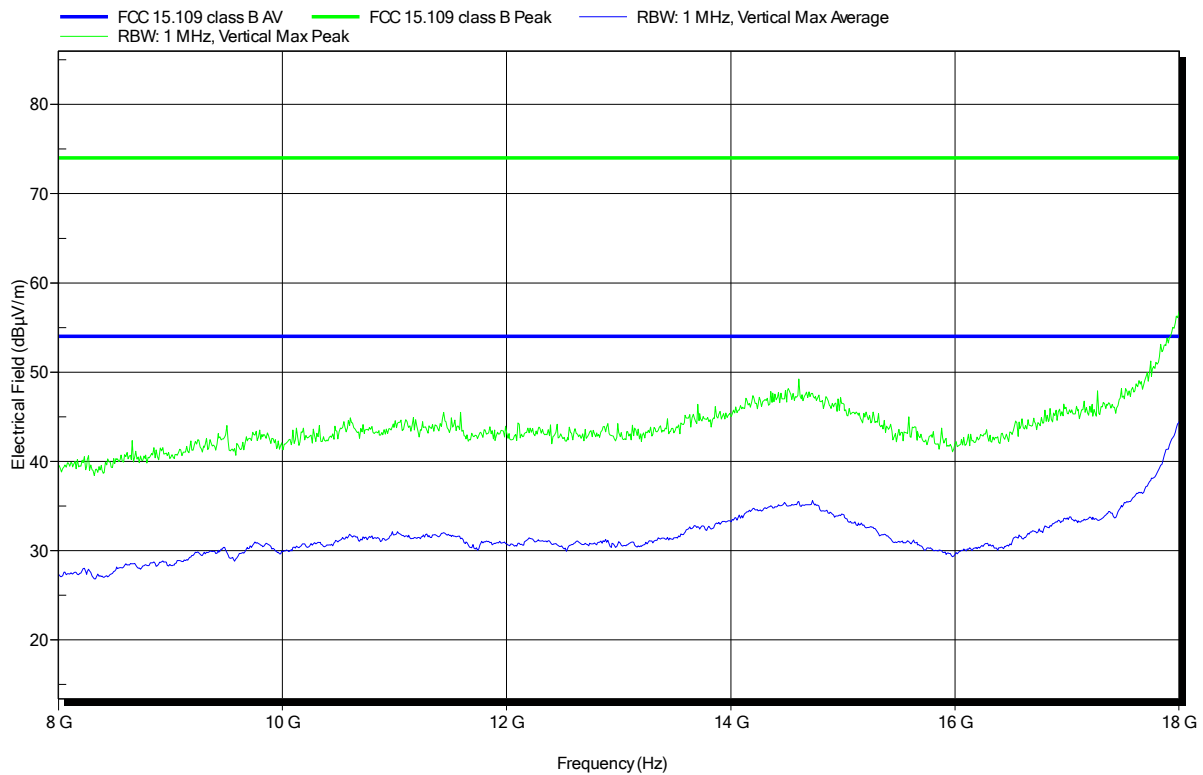


Spurious emissions according to FCC Part 15 B

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 21°C, Vnom: 5V DC USB charging
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3m
Mode:	Mode# 2
Test Date:	2017-02-15
Note:	Antenna: Smarteq

Index 83

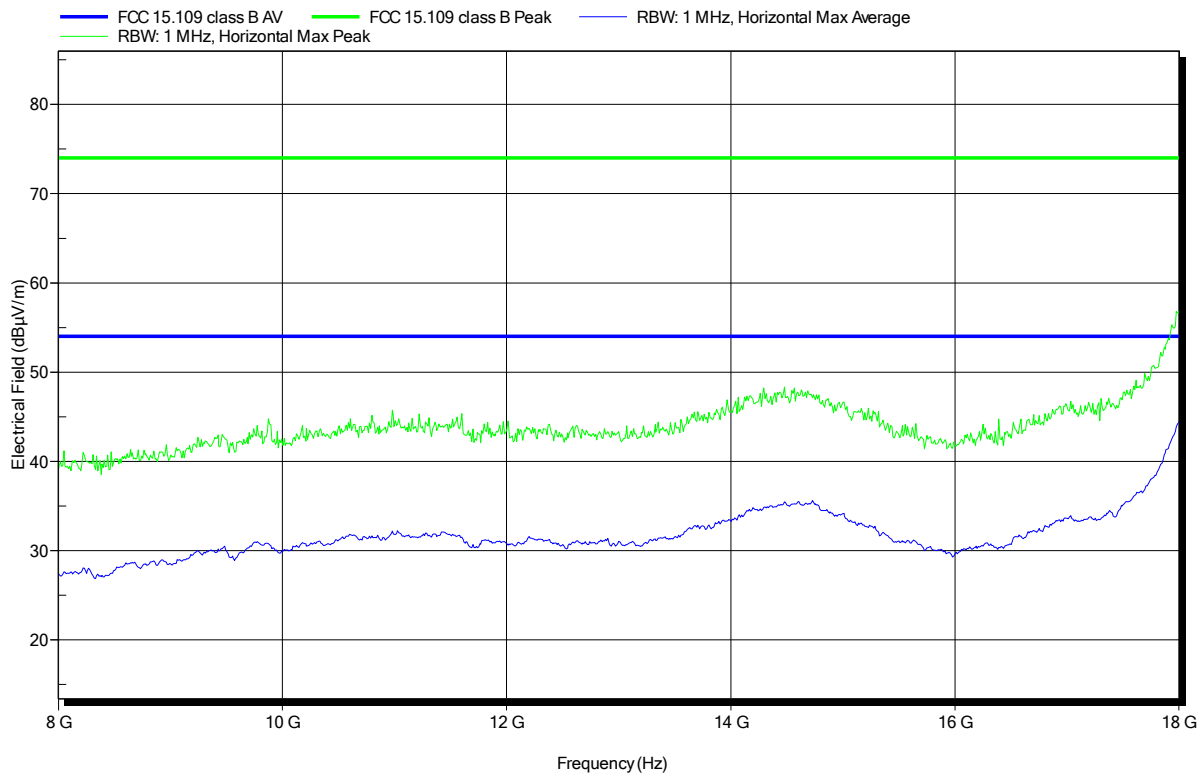


Spurious emissions according to FCC Part 15 B

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 21°C, Vnom: 5V DC
Antenna:	Amplifier Research ATH18G40, Vertical
Measurement distance:	3m
Mode:	Mode# 1
Test Date:	2017-02-15
Note:	Antenna: Laird Technology / Nearson

Index 70

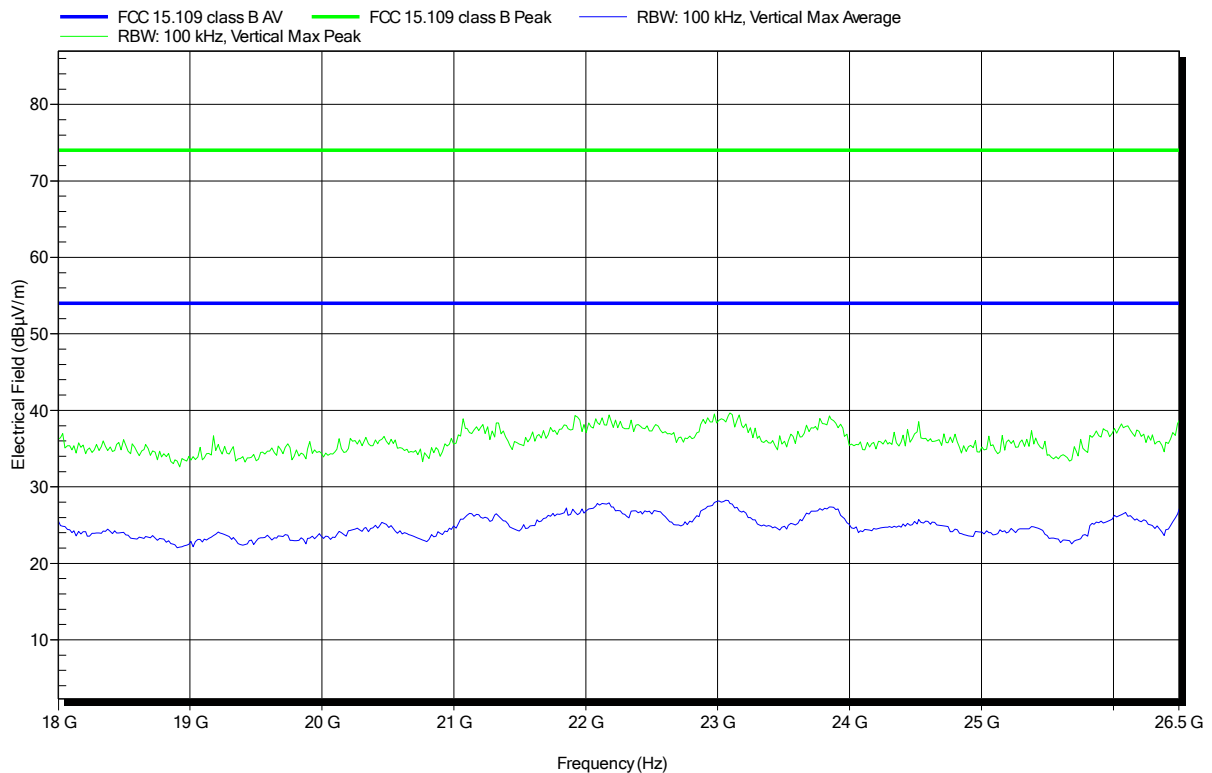


Spurious emissions according to FCC Part 15 B

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 21°C, Vnom: 5V DC
Antenna:	Amplifier Research ATH18G40, Horizontal
Measurement distance:	3m
Mode:	Mode# 1
Test Date:	2017-02-15
Note:	Antenna: Laird Technology / Nearson

Index 71

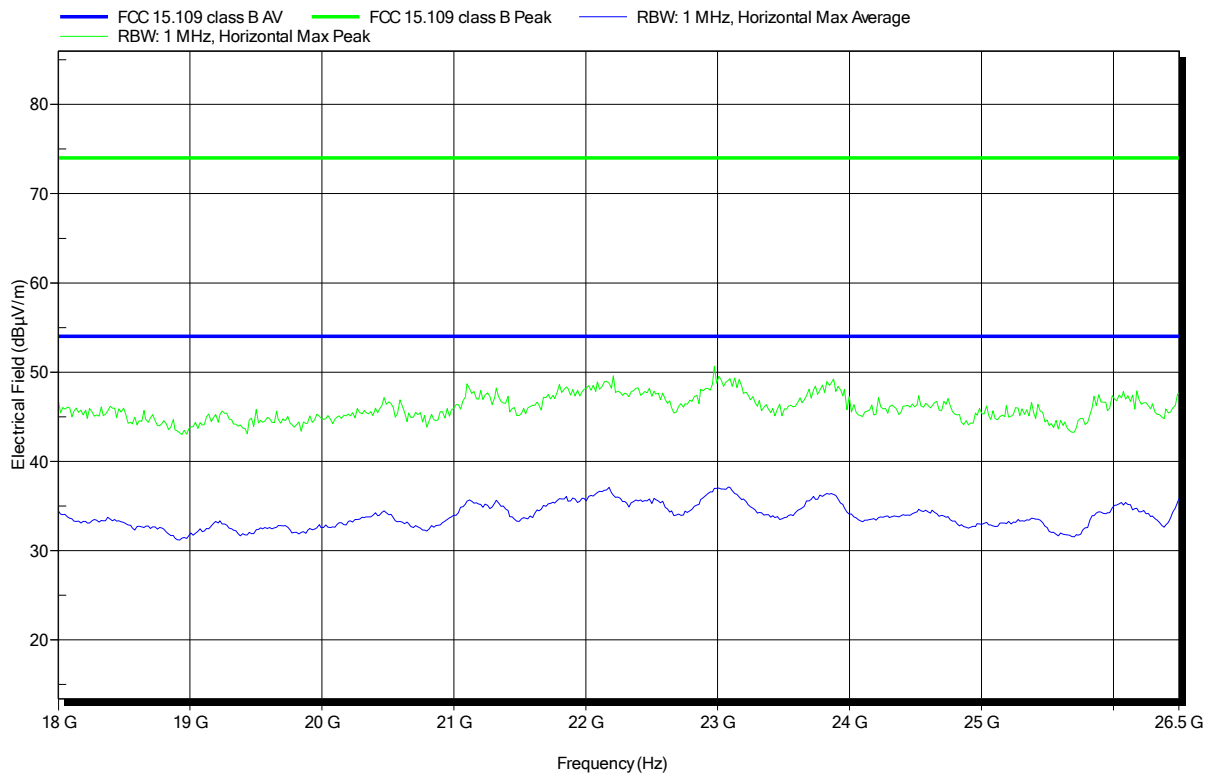


Spurious emissions according to FCC Part 15 B

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 21°C, Vnom: 5V DC
Antenna:	Amplifier Research ATH18G40, Vertical
Measurement distance:	3m
Mode:	Mode# 1
Test Date:	2017-02-15
Note:	Antenna: Smarteq

Index 81

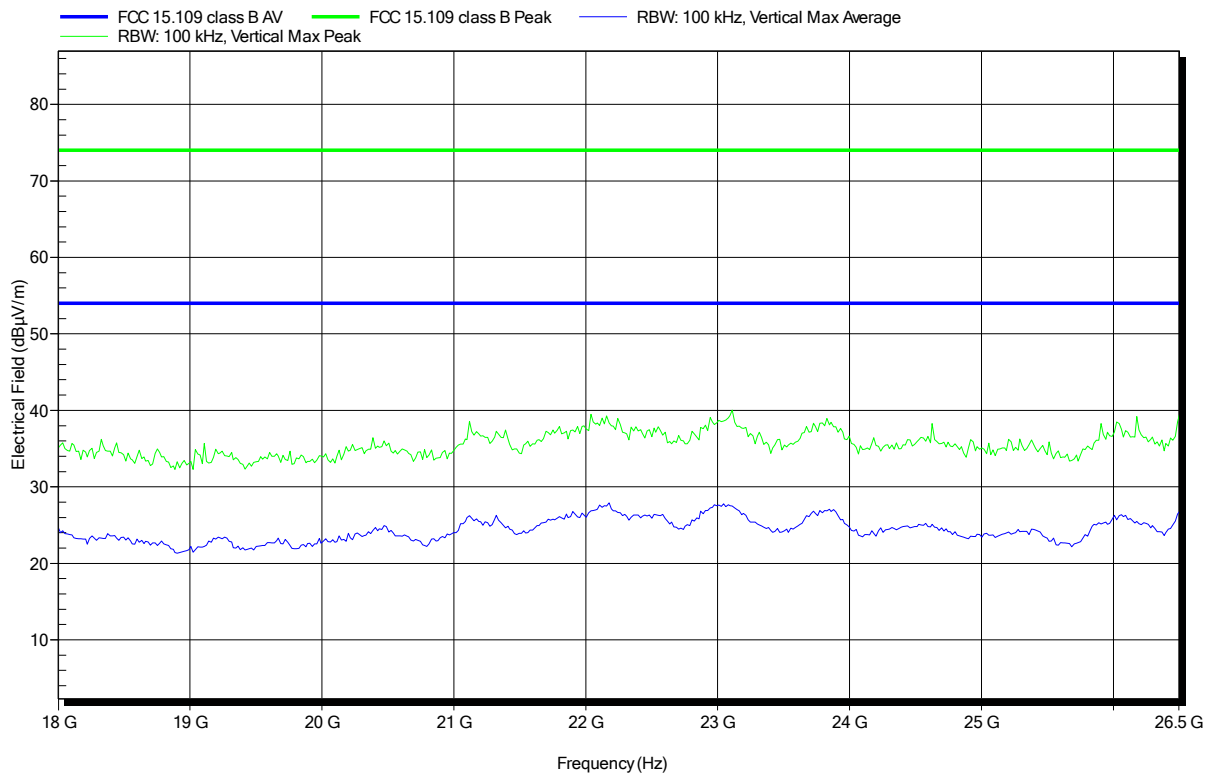


Spurious emissions according to FCC Part 15 B

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 21°C, Vnom: 5V DC
Antenna:	Amplifier Research ATH18G40, Horizontal
Measurement distance:	3m
Mode:	Mode# 1
Test Date:	2017-02-15
Note:	Antenna: Smarteq

Index 78

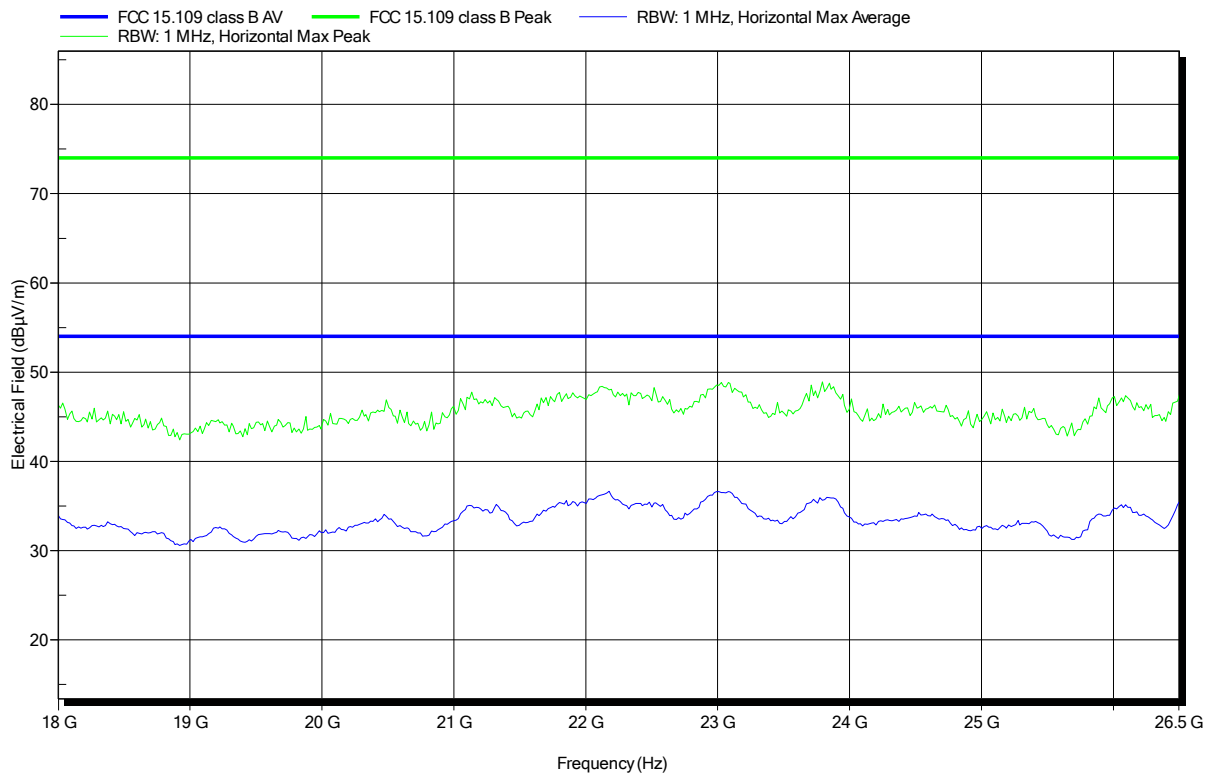


Spurious emissions according to FCC Part 15 B

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 21°C, Vnom: 5V DC USB charging
Antenna:	Amplifier Research ATH18G40, Vertical
Measurement distance:	3m
Mode:	Mode# 2
Test Date:	2017-02-15
Note:	Antenna: Laird Technology / Nearson

Index 76

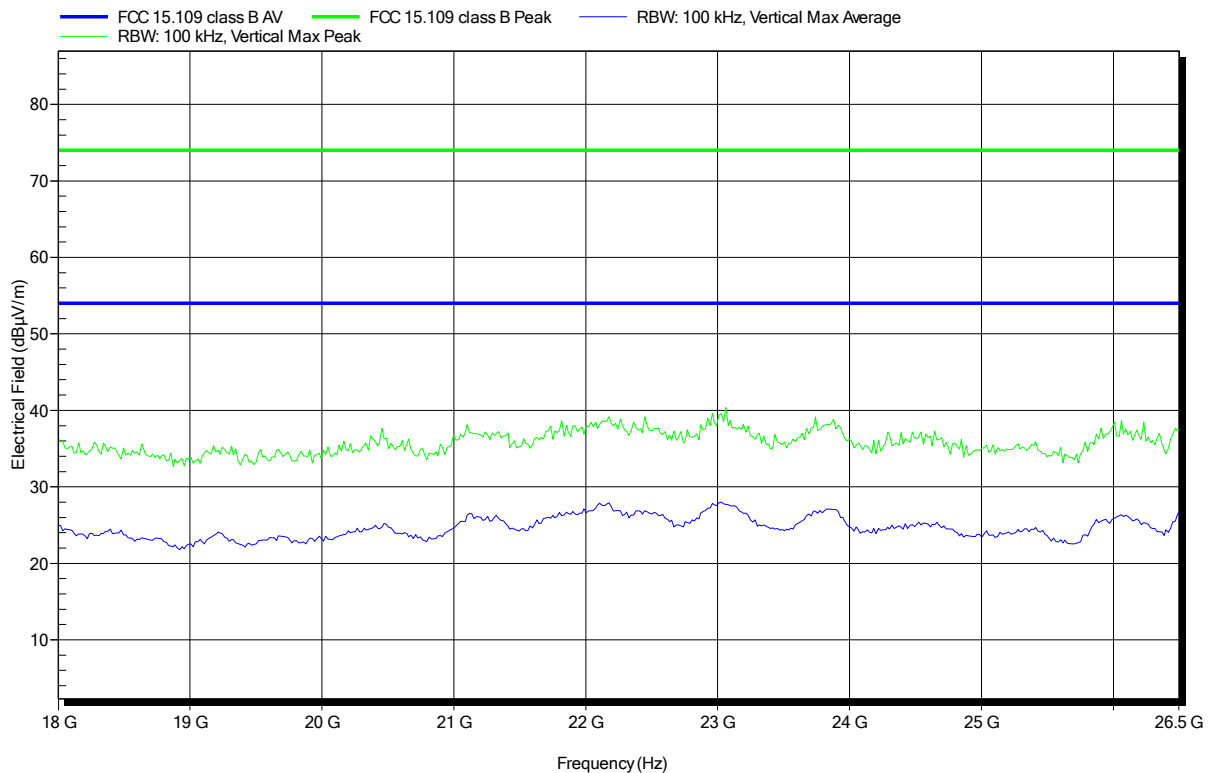


Spurious emissions according to FCC Part 15 B

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 21°C, Vnom: 5V DC USB charging
Antenna:	Amplifier Research ATH18G40 , Horizontal
Measurement distance:	3m
Mode:	Mode# 2
Test Date:	2017-02-15
Note:	Antenna: Laird Technology / Nearson

Index 77

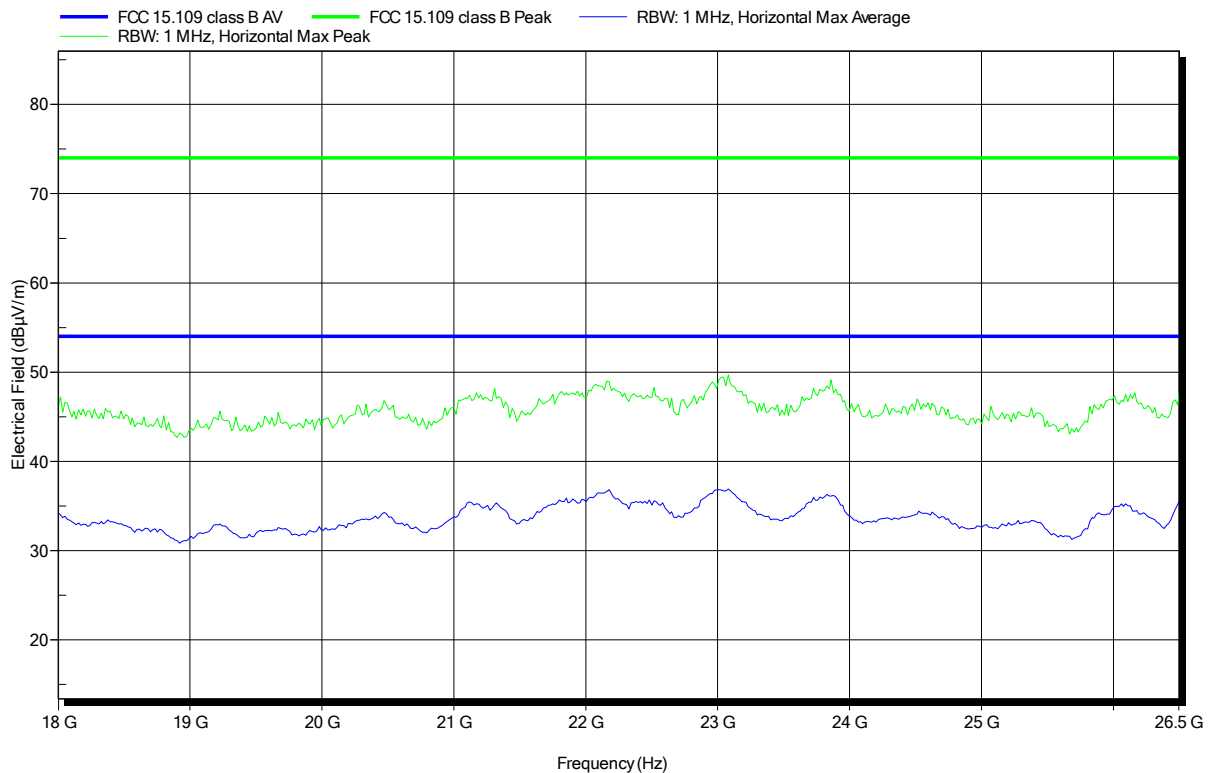


Spurious emissions according to FCC Part 15 B

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 21°C, Vnom: 5V DC USB charging
Antenna:	Amplifier Research ATH18G40, Horizontal
Measurement distance:	3m
Mode:	Mode# 2
Test Date:	2017-02-15
Note:	Antenna: Smarteq

Index 79

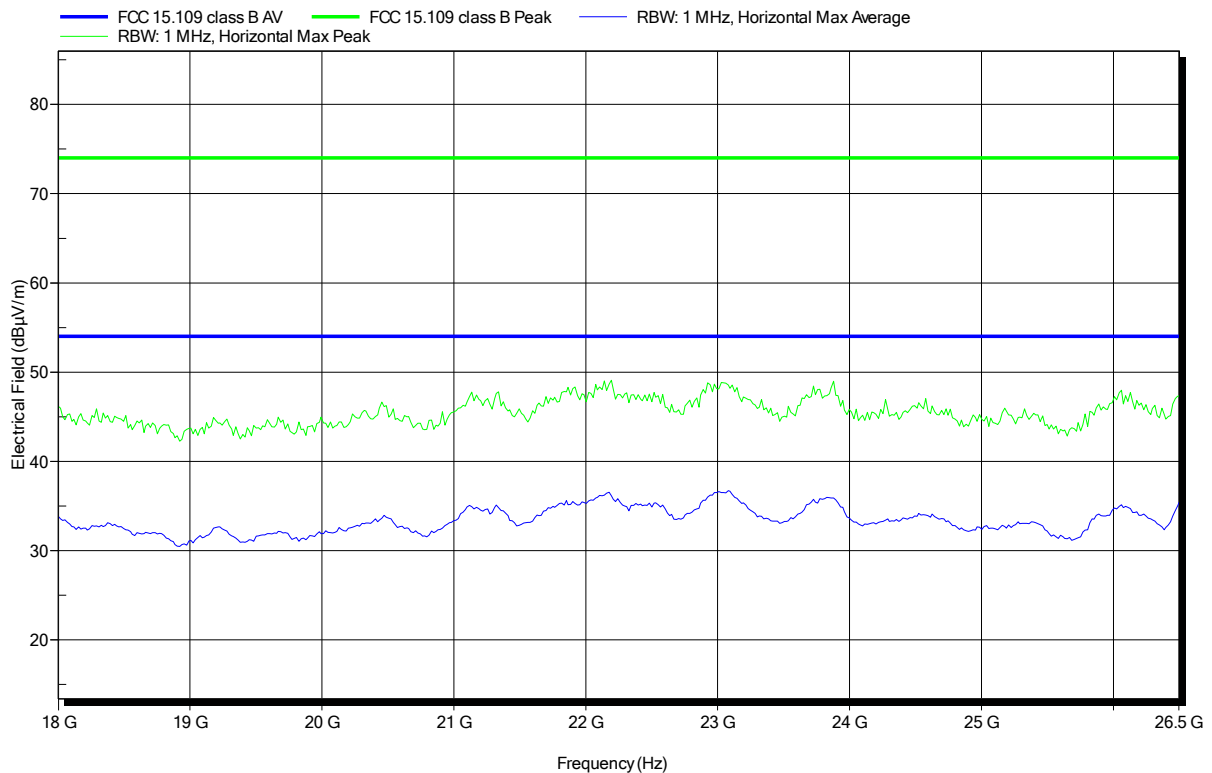


Spurious emissions according to FCC Part 15 B

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 21°C, Vnom: 5V DC USB charging
Antenna:	Amplifier Research ATH18G40, Vertical
Measurement distance:	3m
Mode:	Mode# 2
Test Date:	2017-02-15
Note:	Antenna: Smarteq

Index 80

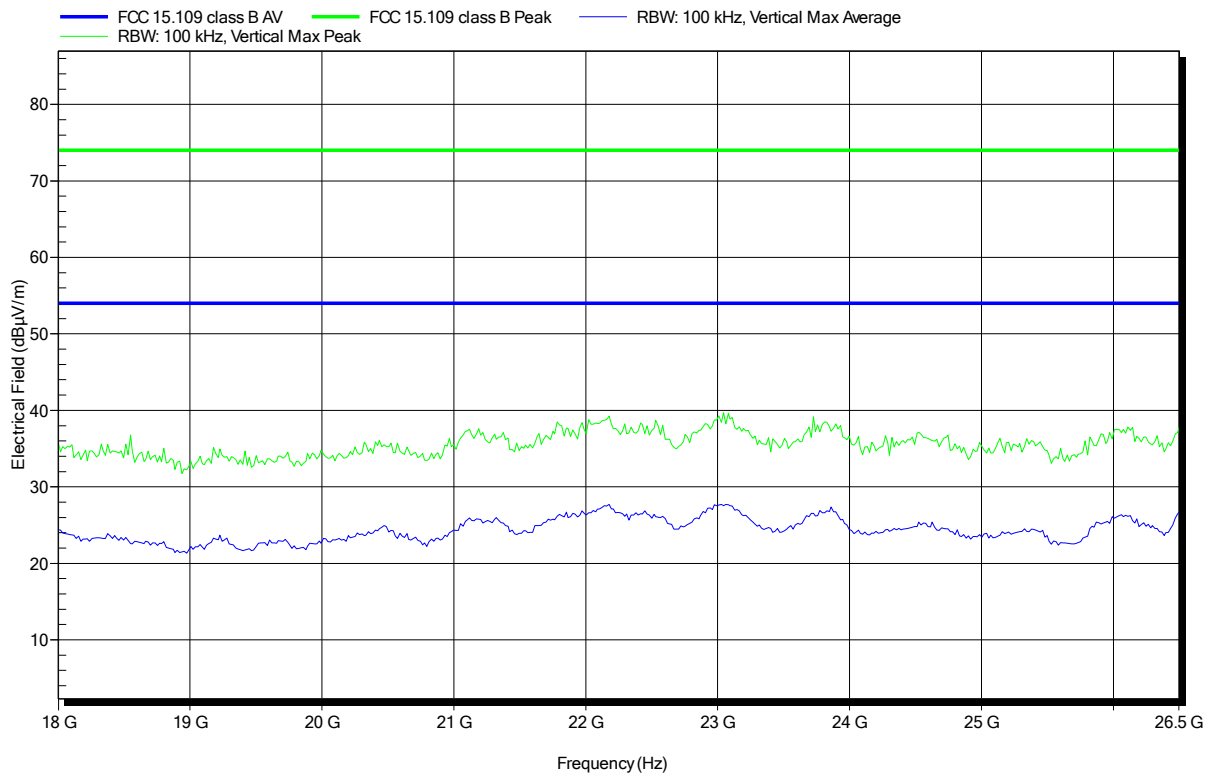

3.2 Test Conditions and Results – AC power line conducted emissions

Conducted emissions acc. FCC 47 CFR 15.107 / ICES-003			Verdict: PASS	
Laboratory Parameters:	Required prior to the test		During the test	
Ambient Temperature	15 to 35 °C		23°C	
Relative Humidity	30 to 60 %		36%	
Test according referenced standards	Reference Method			
	ANSI C63.4			
Fully configured sample scanned over the following frequency range	Frequency range			
	0.15 MHz to 30 MHz			
Sample is tested with respect to the requirements of the equipment class	Equipment class			
	Class B			
Points of Application	Application Interface			
AC Mains	LISN			
Operating mode	2			
Configuration	charging			
Limits and results Class B				
Frequency [MHz]	Quasi-Peak [dBµV]	Result	Average [dBµV]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments:				
* Limit decreases linearly with the logarithm of the frequency.				

Test Procedure:

The test site is in accordance with ANSI C63-4:2014 requirements and is listed by FCC.
The measurement procedure is as follows:

Exploratory measurement:

- The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1)
- The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
- The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
- The LISN measurement port was connected to a measurement receiver
- I/O cables were bundled not longer than 0.4 m
- Measurement was performed in the frequency range 0.15 – 30MHz on each current-carrying conductor
- To maximize the emissions the cable positions were manipulated
- The worst configuration of EUT and cables is shown on a test setup picture at item 1.3

Test Procedure:

Final measurement:


- The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1)
- The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
- The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
- The LISN measurement port was connected to a measurement receiver
- The EUT and cable arrangement were based on the exploratory measurement results
- The test data of the worst-case conditions were recorded and shown on the next pages.

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 21°C, Unom: 120V AC
LISN:	ESH2-Z5 N
Mode:	Mode# 2
Test Date:	2017-02-15
Note:	antenna: Laird Technology / Nearson

Index 78

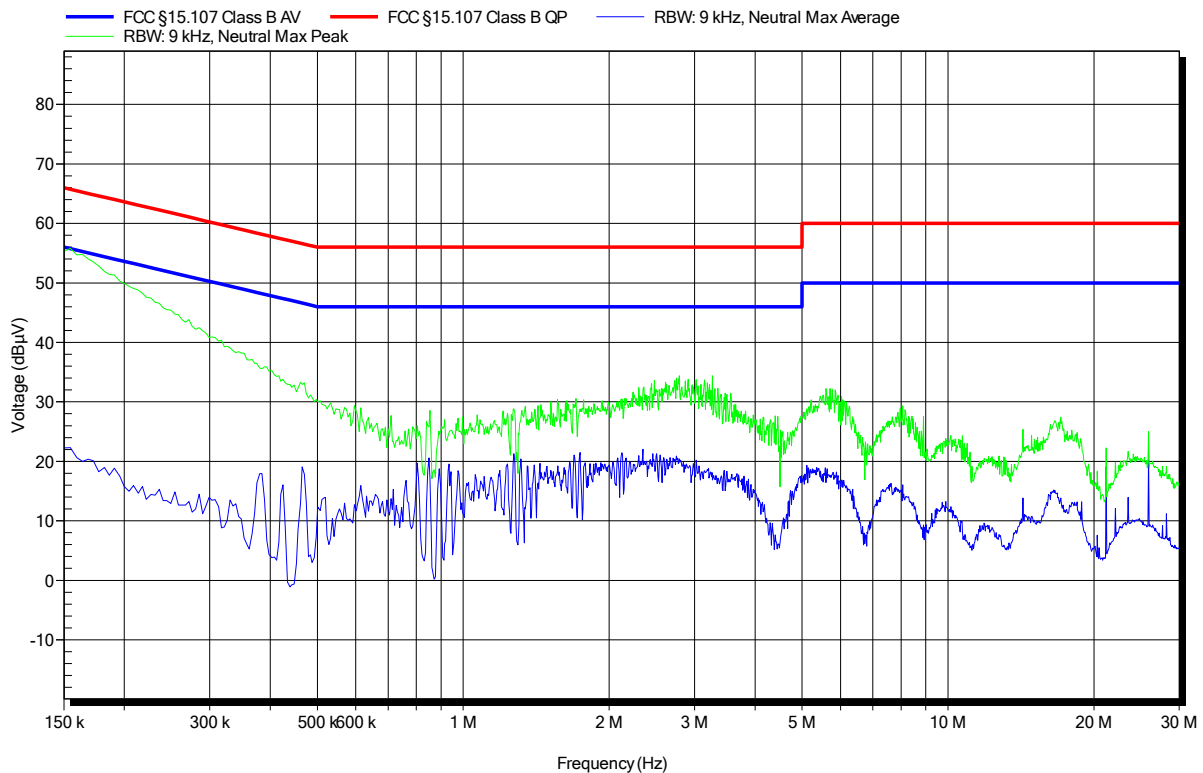


EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 21°C, Unom: 120V AC
LISN:	ESH2-Z5 L
Mode:	Mode# 2
Test Date:	2017-02-15
Note:	antenna: Laird Technology / Nearson

Index 79

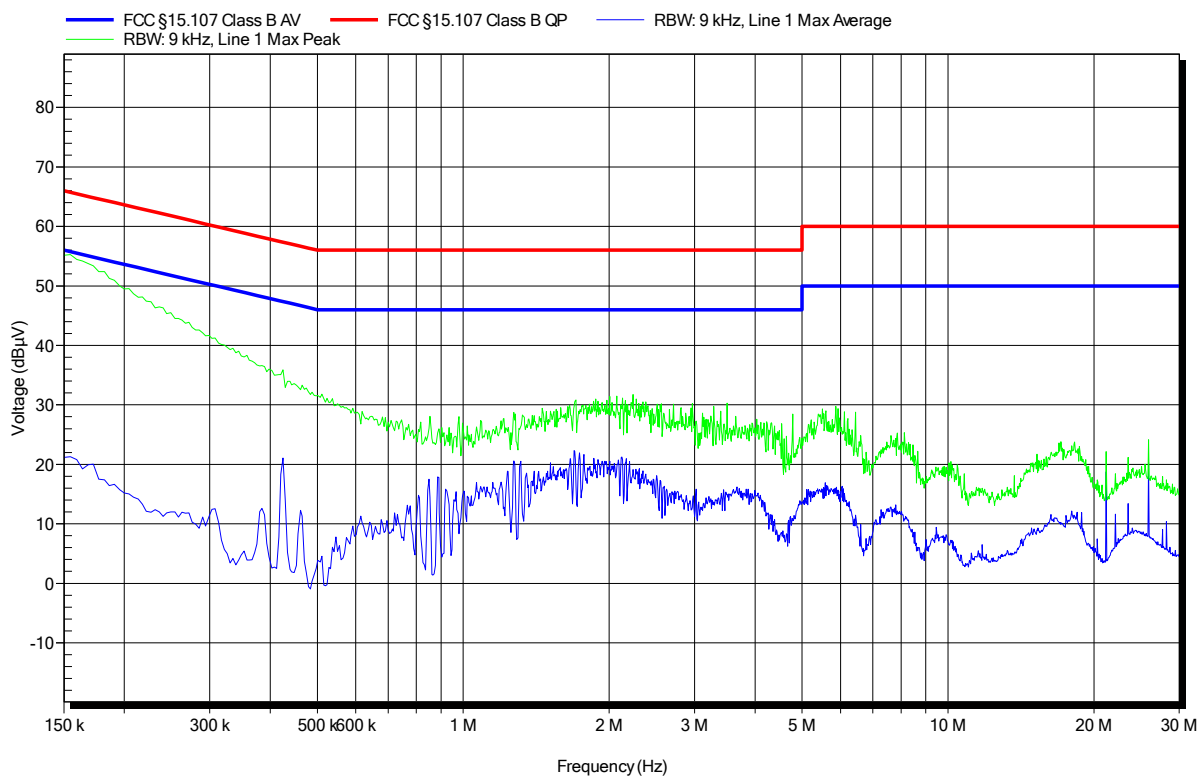


EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 21°C, Unom: 120V AC
LISN:	ESH2-Z5 N
Mode:	Mode# 2
Test Date:	2017-02-15
Note:	antenna Smarteq

Index 81

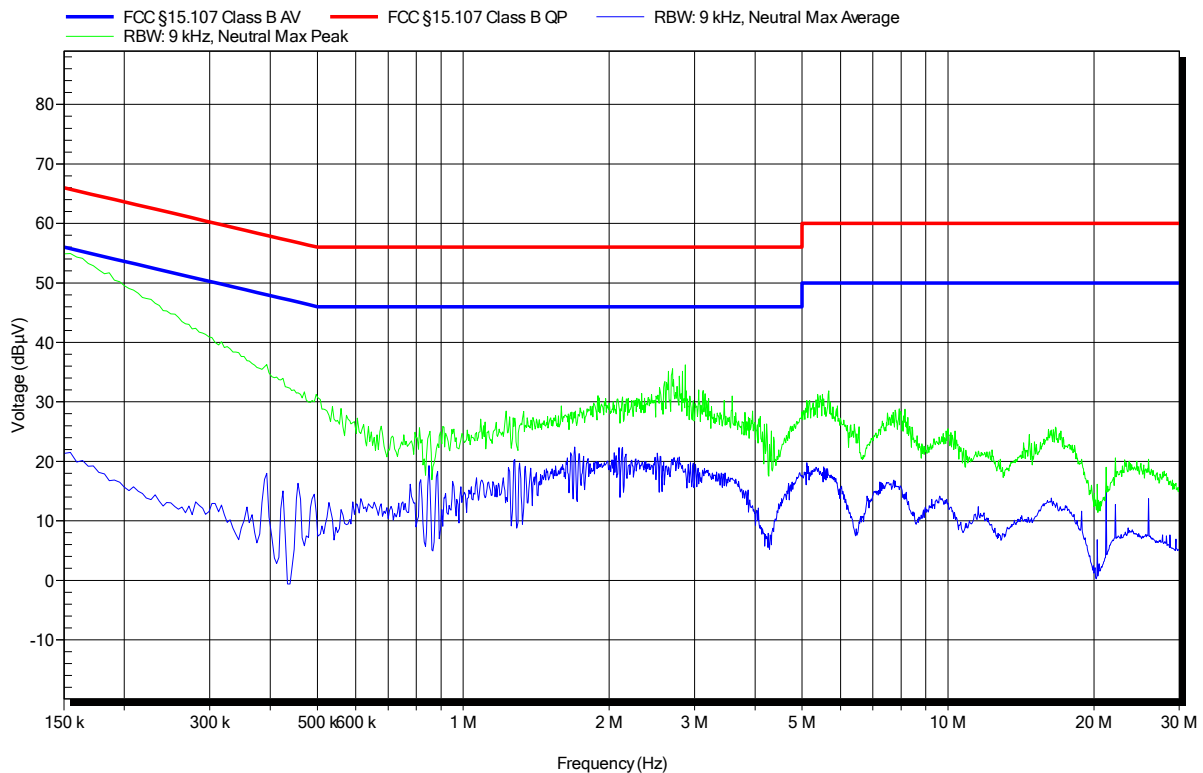

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1701-6190

Applicant:	Kamstrup A/S
EUT Name:	READY Converter for US/Canada market
Model:	READY Converter
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 21°C, Unom: 120V AC
LISN:	ESH2-Z5 L
Mode:	Mode# 2
Test Date:	2017-02-15
Note:	antenna Smarteq

Index 80

