




FCC TEST REPORT Co-Location	
Report Reference No	G0M-2012-9513-TFCCOLOC-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	 <p> DAKKS - Registration number : D-PL-12092-01-03 (ISED) ISED Testing Laboratory site: 3470A-2 DAKKS - Registration number : D-PL-12092-01-04 (FCC) FCC Filed Test Laboratory, Reg.-No.: 96970 </p>
Applicant	Kamstrup A/S
Address	Industrivej 28 8660 Skanderborg DENMARK
Test Specification	47 CFR Part 15C RSS-247, Issue 2, 2017-02
Non-Standard Test Method	None
Equipment under Test (EUT):	
Product Description	READY Converter for US/Canada market
Model(s)	READY Converter
Additional Model(s)	None
Brand Name(s)	None
Hardware Version(s)	55501913 B1
Software Version(s)	50981678 B1 / 55142208 A1
FCC ID	OUY-READYAMR4
IC	22376-READYAMR4
Test Result	PASSED

Possible test case verdicts:		
Required by standard but not tested	N/T	
Not required by standard	N/R	
Not applicable to EUT	N/A	
Test object does meet the requirement	P(PASS)	
Test object does not meet the requirement	F(FAIL)	
Testing:		
Test Lab Temperature	20 °C - 30 °C	
Test Lab Humidity	25 % - 55 %	
Date of receipt of test item	2021-01-11	
Report:		
Compiled by	Florian Voigt	
Tested by (+ signature) (Responsible for Test)	Florian Voigt	
Approved by (+ signature) (Deputy Head of Lab)	Toralf Jahn	
Date of Issue	2021-05-07	
Total number of pages	48	
General Remarks:		
<p>The test results presented in this report relate only to the object tested.</p> <p>The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.</p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p>		
Additional Comments:		

VERSION HISTORY

Version History			
Version	Issue Date	Remarks	Revised By
01	2021-05-07	Initial Release	

ABBREVIATIONS AND ACRONYMS

Acronyms	
Acronym	Description
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
RBW	Resolution bandwidth
RMS	Root mean square
VBW	Video bandwidth
V _{NOM}	Nominal supply voltage



REPORT INDEX

1	Equipment (Test Item) Under Test.....	6
1.1	Photos – Equipment External.....	7
1.2	Photos – Equipment Internal.....	11
1.3	Photos – Test Setup.....	14
1.4	Support Equipment.....	17
1.5	Test Modes	18
1.6	Test Frequencies.....	19
1.7	Sample emission level calculation.....	20
2	Result Summary.....	21
3	Test Conditions and Results.....	22
3.1	Test Conditions and Results - Transmitter radiated emissions	22
ANNEX A	Transmitter spurious emissions	25

1 Equipment (Test Item) Under Test



Description	READY Converter for US/Canada market	
Model	READY Converter	
Additional Model(s)	None	
Brand Name(s)	None	
Serial Number(s)	12345678	
Hardware Version(s)	55501913 B1	
Software Version(s)	50981678 B1 / 55142208 A1	
PMN	6696-40020	
HVIN	READY Converter	
FVIN	50981678 / 55142208	
HMN	n/a	
FCC ID	OUY-READYAMR4	
IC	22376-READYAMR4	
Equipment type	End Product	
Radio type	Transceiver	
Assigned frequency bands	SRD 915 MHz: 902 – 928 MHz Bluetooth: 2400.0 MHz - 2483.5 MHz	
Radio technologies	Bluetooth BR + SRD 915 MHz	
Operating modes	SRD: Continuous transmit at 912.5 and 918.5 MHz Bluetooth BR: Communication with tester at 2441 MHz	
Modulation	2-FSK, 2-GFSK	
Number of modules	1	
Radio Module	Type	Bluetooth and LE module
	Model	PAN10a
	Manufacturer	Panasonic
	HW Version	Not specified
	SW Version	Not specified
	FCC-ID	T7VPAN10
	IC	216Q-PAN10
Bluetooth Antenna	Type	Integrated
	Model	ANT2012
	Manufacturer	Yageo
	Gain	0.9 dBi
SRD Antenna (Walk by)	Type	External antenna
	Model	5005001 - S161AM-915
	Manufacturer	Laird technolog/Nearson
	Gain	2.5 dBi
Battery Supply Voltage	V _{NOM}	not specified
USB Supply Voltage	V _{NOM}	5 VDC
AC/DC-Adaptor	None	
Manufacturer	Kamstrup A/S Industrivej 28 8660 Skanderborg DENMARK	

1.1 Photos – Equipment External



EUT BOTTOM

EUT LEFT





Antennas, left: drive by antenna, right: walk by antenna


--

USB cable and EUT


--

1.2 Photos – Equipment Internal

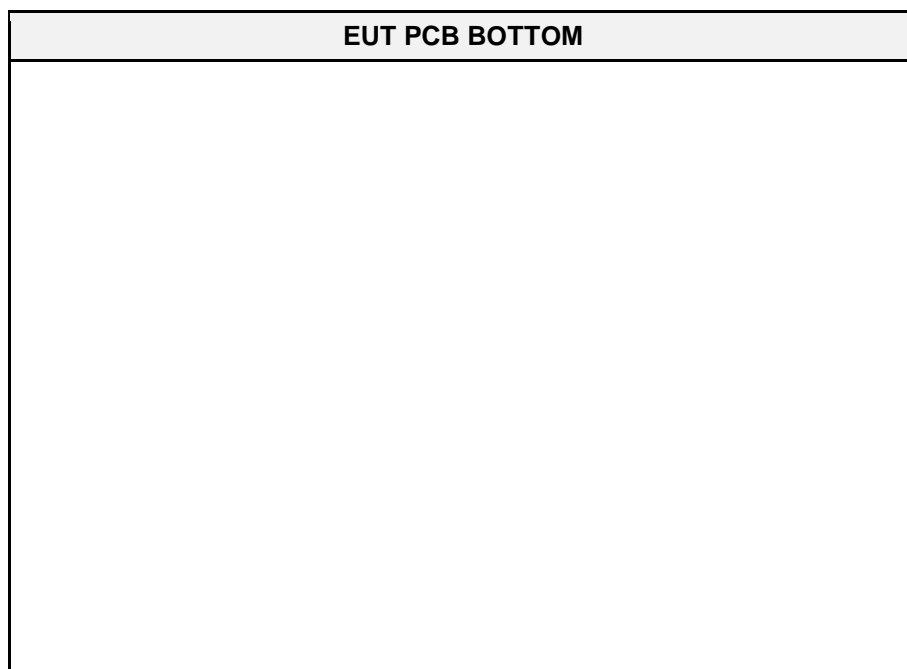


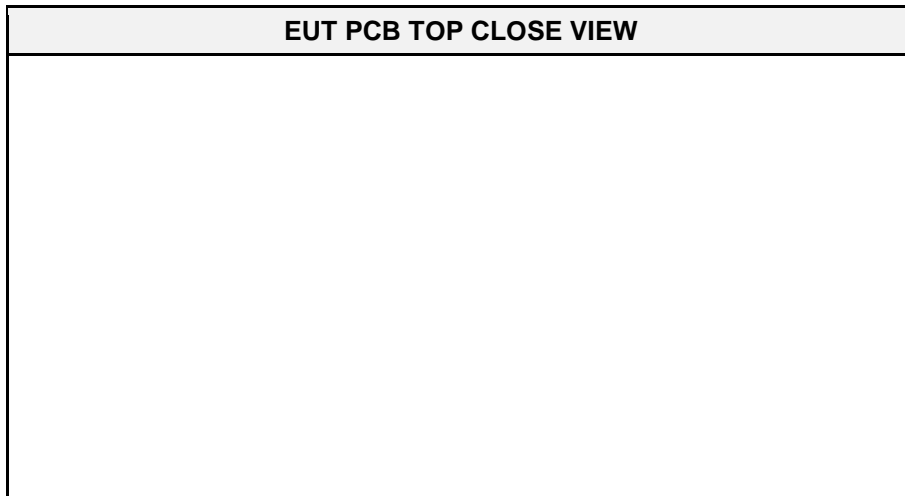



Comment: Picture is provided by the customer

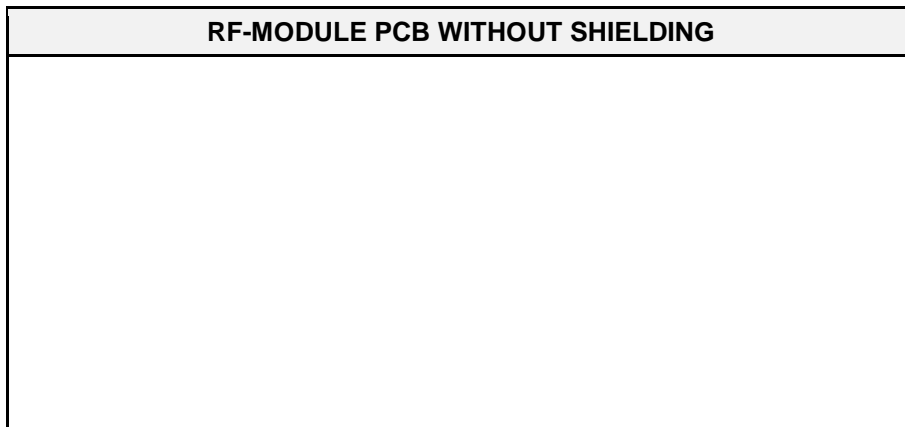

Comment: Picture is provided by the customer

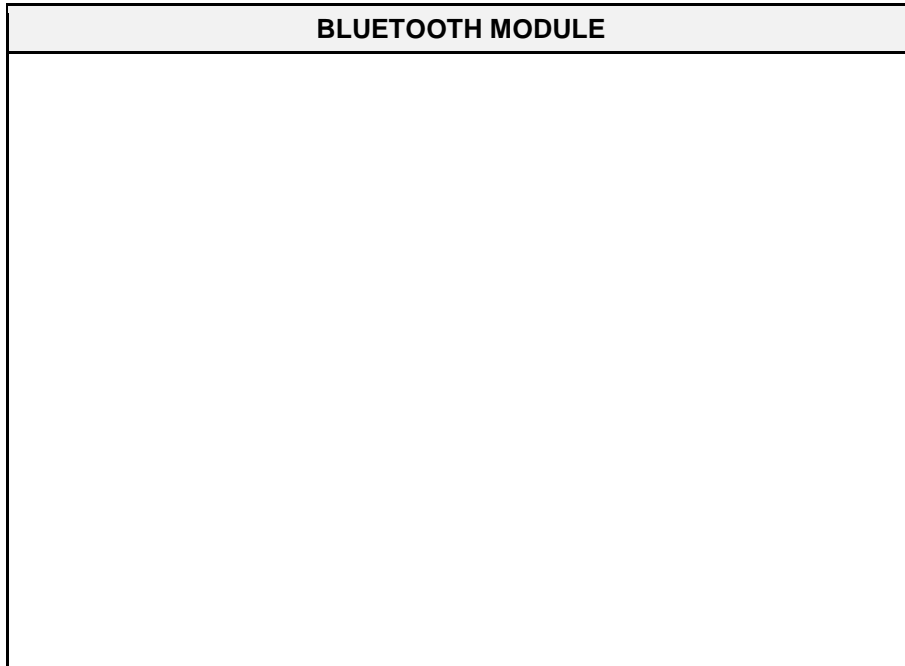

1.3 Photos – Test Setup

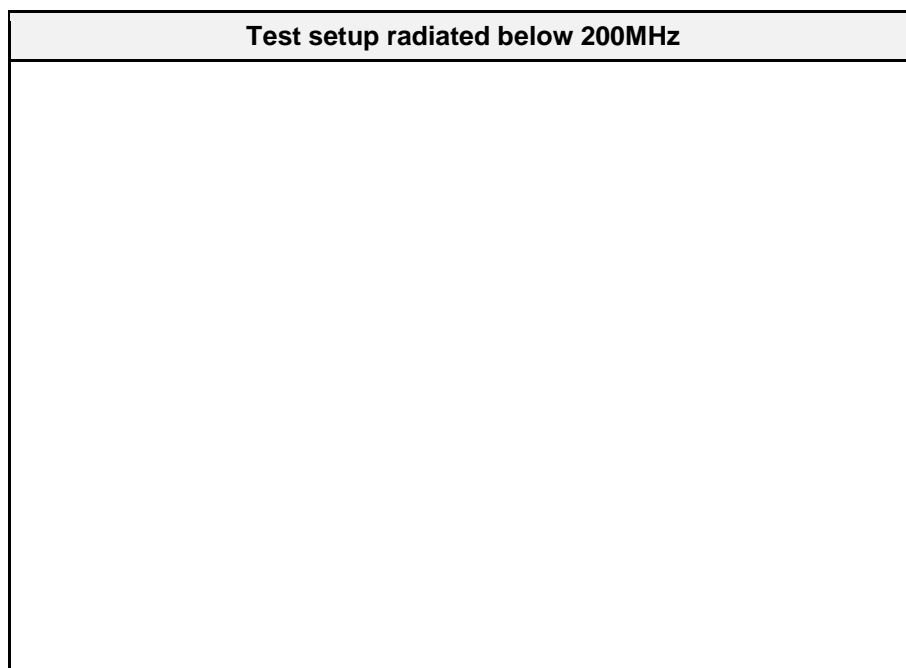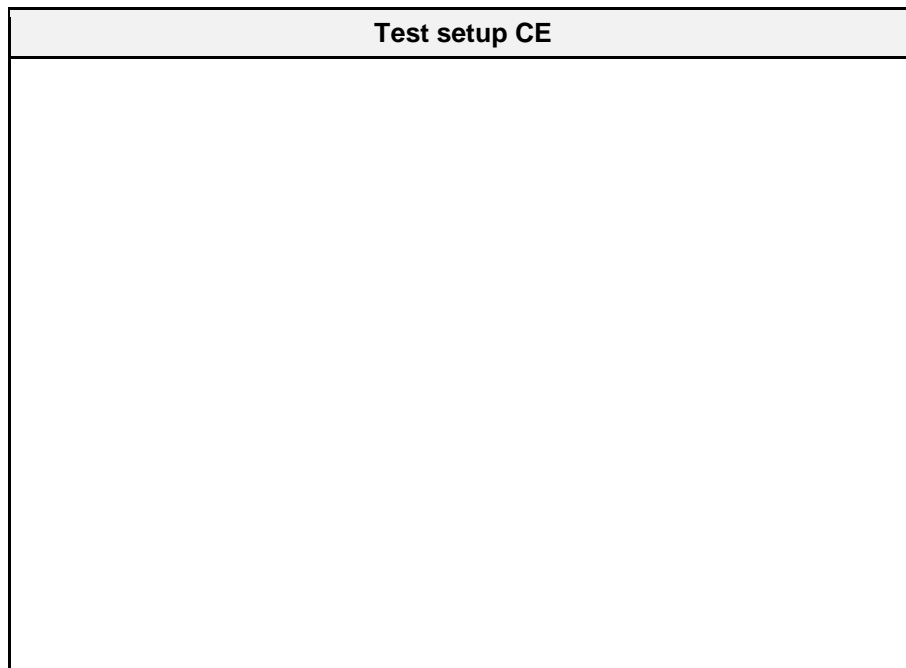

Test setup radiated 200 to 1000MHz**Test setup radiated 1 to 17GHz**

Test setup radiated above 17GHz

1.4 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
SIM	Communication Tester	R&S	CBT	Bluetooth-Tester
AE	USB - AC/DC adapter	Ktec	KSAS006050010D5IJ	Charging device during radiated and conducted mains measurements
Description:				
AE	Auxiliary Equipment			
SIM	Simulator			
CBL	Connecting Cable			
SFT	Software			
Comment:				

1.5 Test Modes

Mode	Description
Transmit Bluetooth	Mode = Transmit Modulation = GFSK Spreading = None Packet type = DH5 Duty cycle = 78%
Transmit SRD	Mode = Transmit Modulation = 2-FSK Duty cycle = 100 %
Comment: Modes Transmit Bluetooth and Transmit SRD are used concurrent	

1.6 Test Frequencies

Designator	Mode	Channel	Frequency [MHz]
F1	Tx	39	2441
F2	Tx	1	912.5
F3	Tx	3	918.5
Comment:	Used combinations are channel 39 + 1 and channel 39 + 3		

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBµV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB/m)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBµV/m). The FCC limits are given in units of µV/m. The following formula is used to convert the units of µV/m to dBµV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log(\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF	= Net Reading	:	Net reading - FCC limit	= Margin
+21.5 dBµV + 26 dB/m	= 47.5 dBµV/m	:	47.5 dBµV/m - 57.0 dBµV/m	= -9.5 dB

2 Result Summary

FCC 47 CFR Part 15C, ISED RSS-247				
Product Standard Reference	Requirement	Reference Method	Result	Remarks
FCC § 15.247(d) FCC § 15.209 ISED RSS-247 § 5.5 Issue 2	Transmitter radiated spurious emissions	ANSI C63.10-2013	PASS	
Comment:				

Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object

3 Test Conditions and Results

3.1 Test Conditions and Results - Transmitter radiated emissions


3.1.1 Information


Test Information	
Operator	Florian Voigt
Date	2021-03-17

3.1.2 Limits

Limits			
Frequency range [MHz]	Detector	Field strength [$\mu\text{V}/\text{m}$]	Measurement distance [m]
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.1.3 Setup

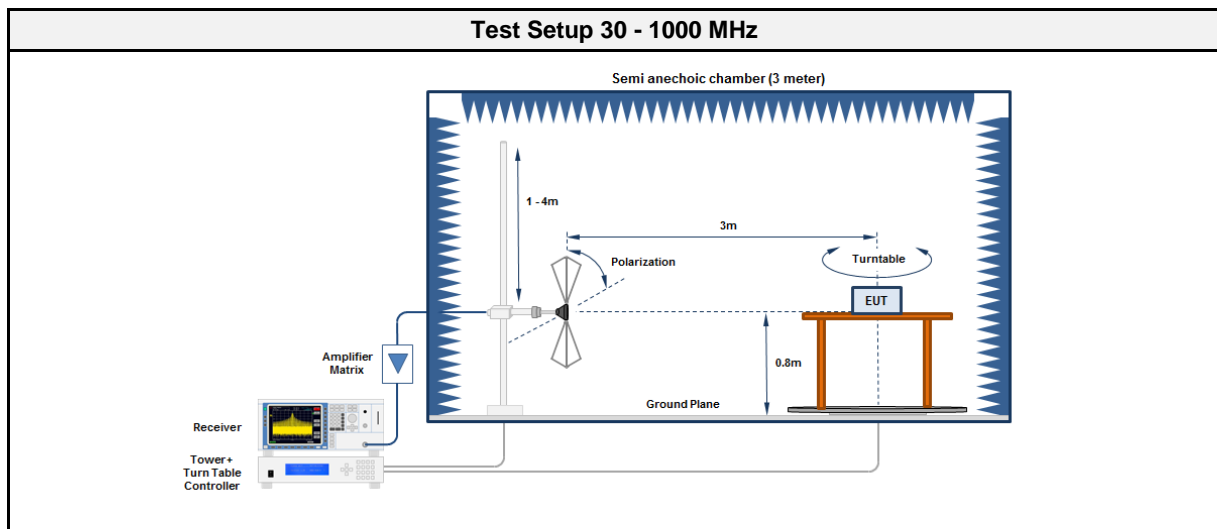

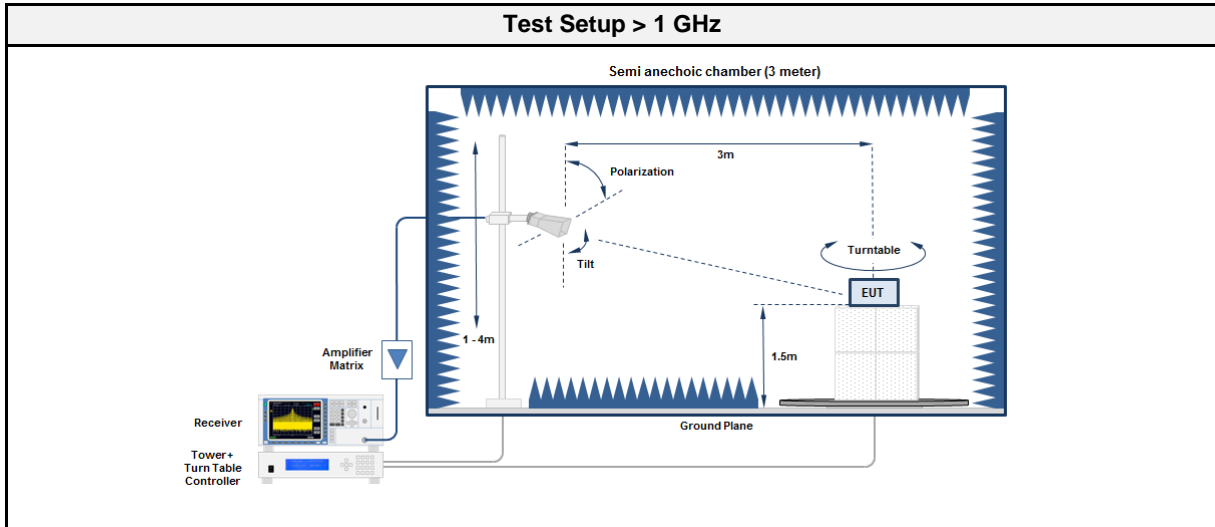

3.1.4 Equipment

Test Equipment 30 MHz - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2021-02	2024-02
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2020-06	2021-06
Antenna	R&S	HK 116	EF00030	2019-04	2022-04
Antenna	R&S	HL 223	EF00187	2019-05	2022-05

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2021-02	2024-02
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2020-06	2021-06
Antenna	Schwarzbeck	BBHA 9120D	EF01561	2020-10	2021-10
Antenna	Amplifier Research	AT4560	EF00302	2019-05	2021-05

3.1.5 Procedure

Test Procedure 30 - 1000 MHz
<ol style="list-style-type: none"> EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground EUT set to test mode The receiver is set to peak detection with max hold The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m All significant emissions are measured again using the corresponding final detector

Test Procedure > 1 GHz
<ol style="list-style-type: none"> EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground EUT set to test mode The receiver is set to peak detection with max hold The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m All significant emissions are measured again using the corresponding final detector

3.1.6 Results

Test Results - DH5						
Channel [MHz]	Emission [MHz]	Level [dB μ V/m]	Det.	Pol.	Limit [dB μ V/m]	Margin [dB]
912.5 2441	128.181	21.19	qpk	ver	43.52	-22.33


ANNEX A Transmitter spurious emissions

Radiated Spurious Emissions according to 47 CFR Part 15.247

Project Number: G0M-2012-9513
 Applicant: Kamstrup A/S
 Model Description: READy Converter for US/Canada market
 Model: READy Converter
 Test Sample ID: 32714
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 3.6V DC
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: Tx; SRD 912.5MHz, 2-FSK, BT 2441MHz, DH5, EUT ver, Walkby antenna
 Test Date: 2021-03-17
 Note:

Index 26

RadiMation

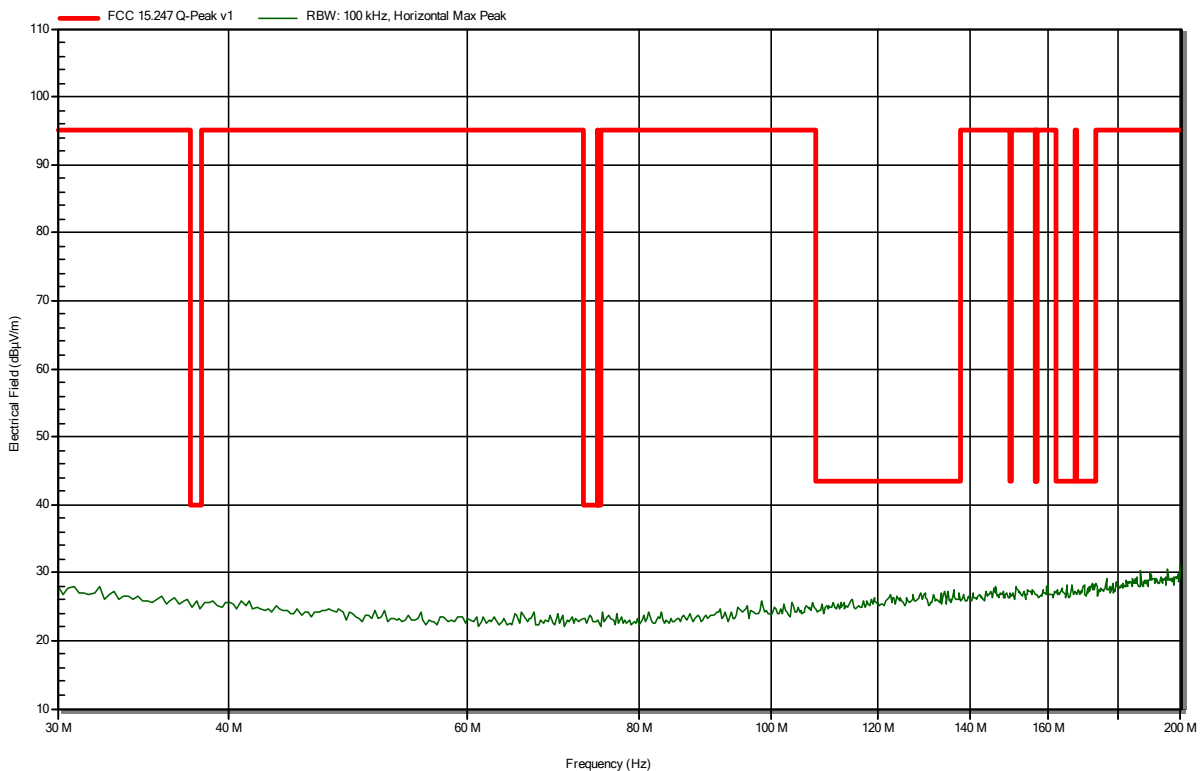


Radiated Spurious Emissions according to 47 CFR Part 15.247

Project Number: G0M-2012-9513
 Applicant: Kamstrup A/S
 Model Description: READy Converter for US/Canada market
 Model: READy Converter
 Test Sample ID: 32714
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 3.6V DC
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: Tx; SRD 912.5MHz, 2-FSK, BT 2441MHz, DH5, EUT ver, Walkby antenna
 Test Date: 2021-03-17
 Note:

Index 25

RadiMation

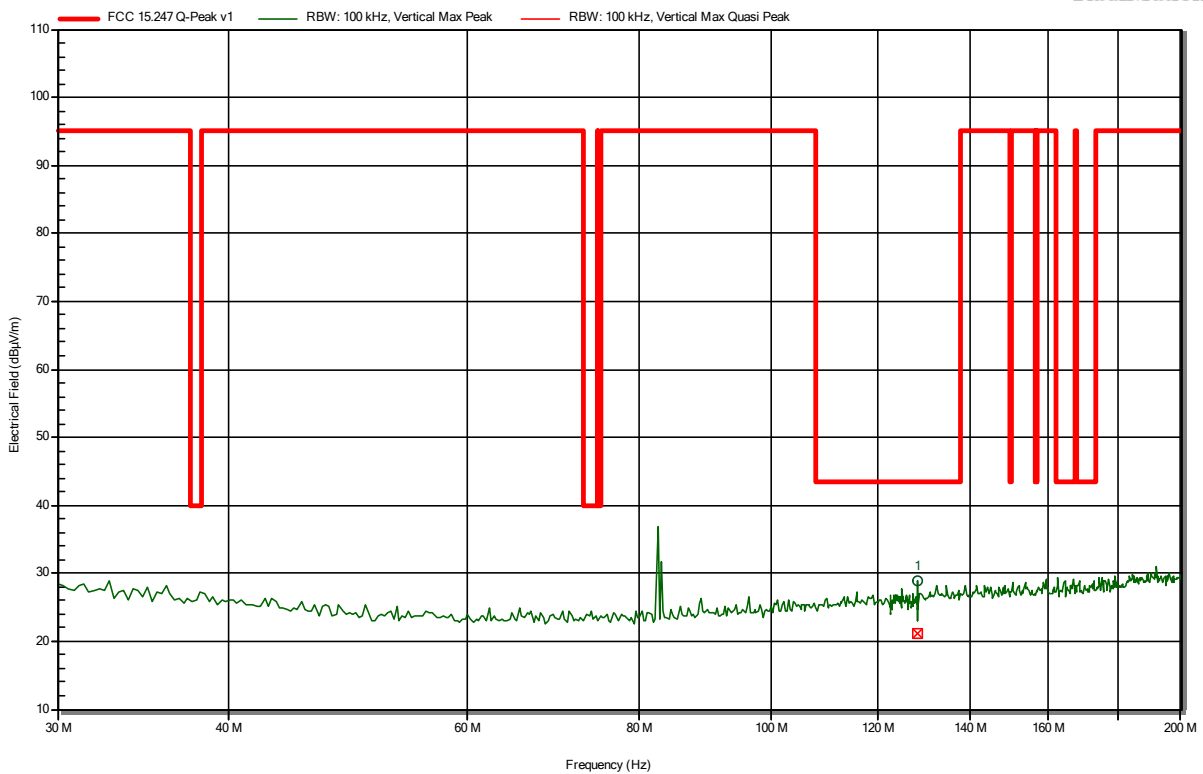


Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
128.181 MHz	21.19 dBµV/m	43.52 dBµV/m	-22.33 dB	Pass

Radiated Spurious Emissions according to 47 CFR Part 15.247

Project Number: G0M-2012-9513
 Applicant: Kamstrup A/S
 Model Description: READy Converter for US/Canada market
 Model: READy Converter
 Test Sample ID: 32714
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 3.6V DC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: Tx; SRD 912.5MHz, 2-FSK, BT 2441MHz, DH5, EUT ver, Walkby antenna
 Test Date: 2021-03-17
 Note: Marker1 is SRD carrier

Index 53

RadiMation

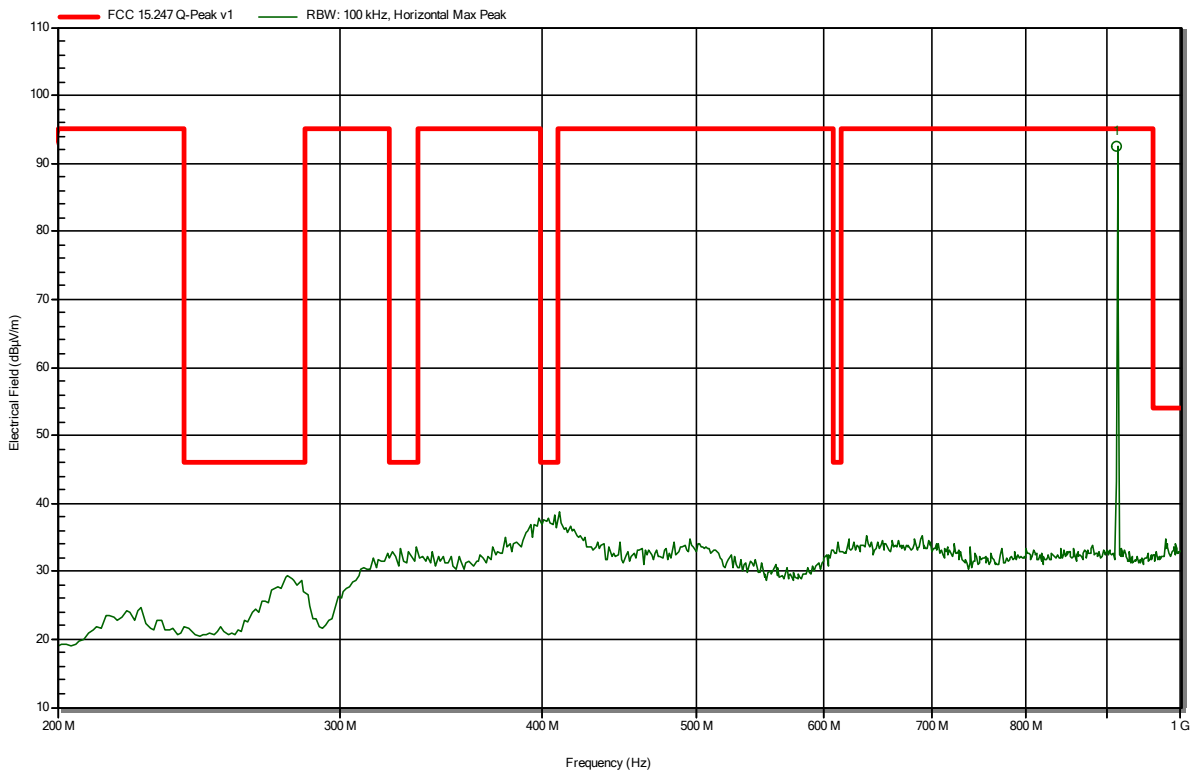


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
912.821 MHz	92.57 dBµV/m			SRD carrier

Radiated Spurious Emissions according to 47 CFR Part 15.247

Project Number: G0M-2012-9513
 Applicant: Kamstrup A/S
 Model Description: READy Converter for US/Canada market
 Model: READy Converter
 Test Sample ID: 32714
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 3.6V DC
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: Tx; SRD 912.5MHz, 2-FSK, BT 2441MHz, DH5, EUT ver, Walkby antenna
 Test Date: 2021-03-17
 Note: Marker1 is SRD carrier

Index 36

RadiMation

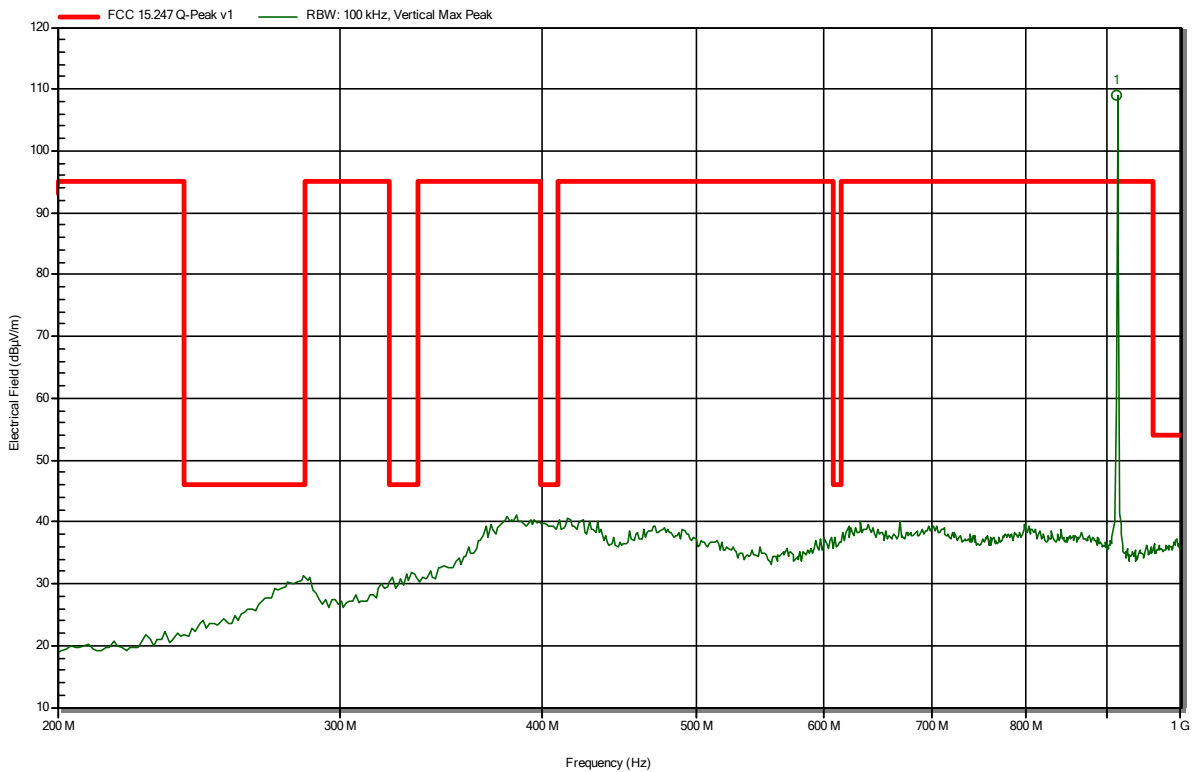


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
912.821 MHz	109.12 dBµV/m			SRD carrier

Radiated Spurious Emissions according to 47 CFR Part 15.247

Project Number: G0M-2012-9513
 Applicant: Kamstrup A/S
 Model Description: READy Converter for US/Canada market
 Model: READy Converter
 Test Sample ID: 32714
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 3.6V DC
 Antenna: Rohde & Schwarz BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: Tx; SRD 912.5MHz, 2-FSK, BT 2441MHz, DH5, EUT ver, Walkby antenna
 Test Date: 2021-03-17
 Note: Marker1 is Bluetooth carrier

Index 28

RadiMation

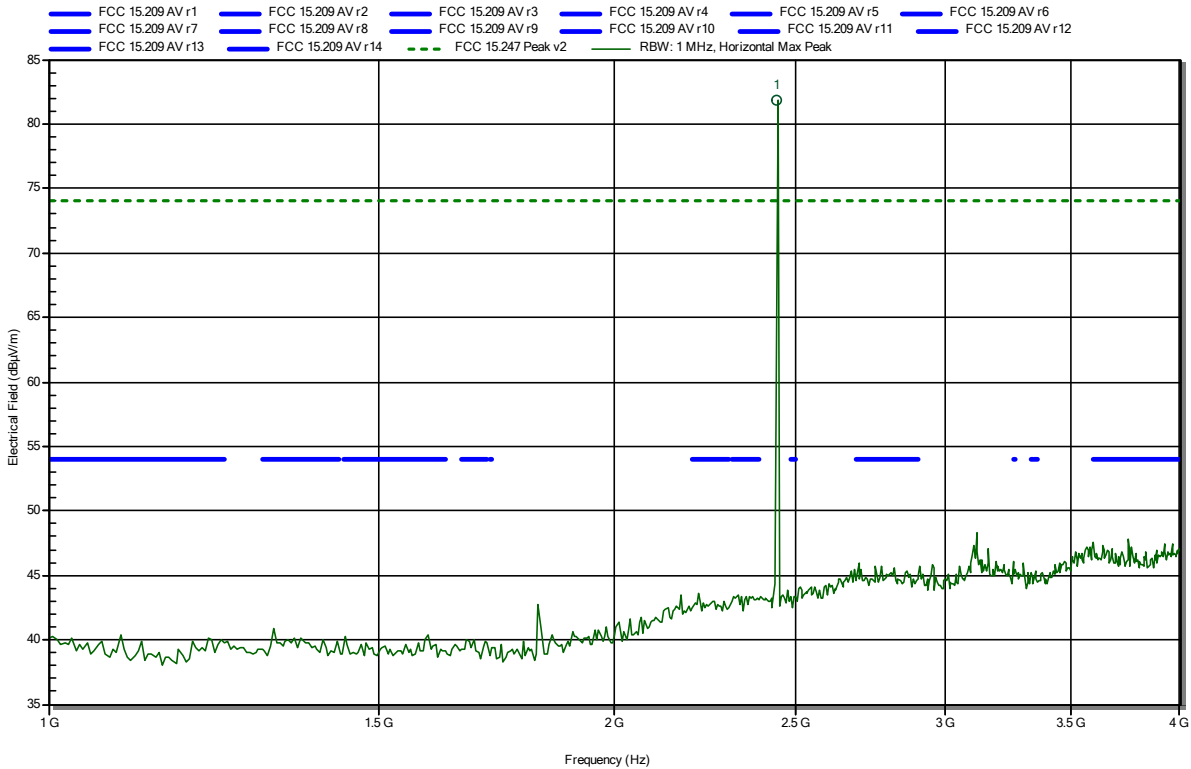


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.442 GHz	81.8 dBµV/m			Bluetooth carrier

Radiated Spurious Emissions according to 47 CFR Part 15.247

Project Number: G0M-2012-9513
 Applicant: Kamstrup A/S
 Model Description: READy Converter for US/Canada market
 Model: READy Converter
 Test Sample ID: 32714
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 3.6V DC
 Antenna: Rohde & Schwarz BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: Tx; SRD 912.5MHz, 2-FSK, BT 2441MHz, DH5, EUT ver, Walkby antenna
 Test Date: 2021-03-17
 Note: Marker1 is Bluetooth carrier

Index 27

RadiMation

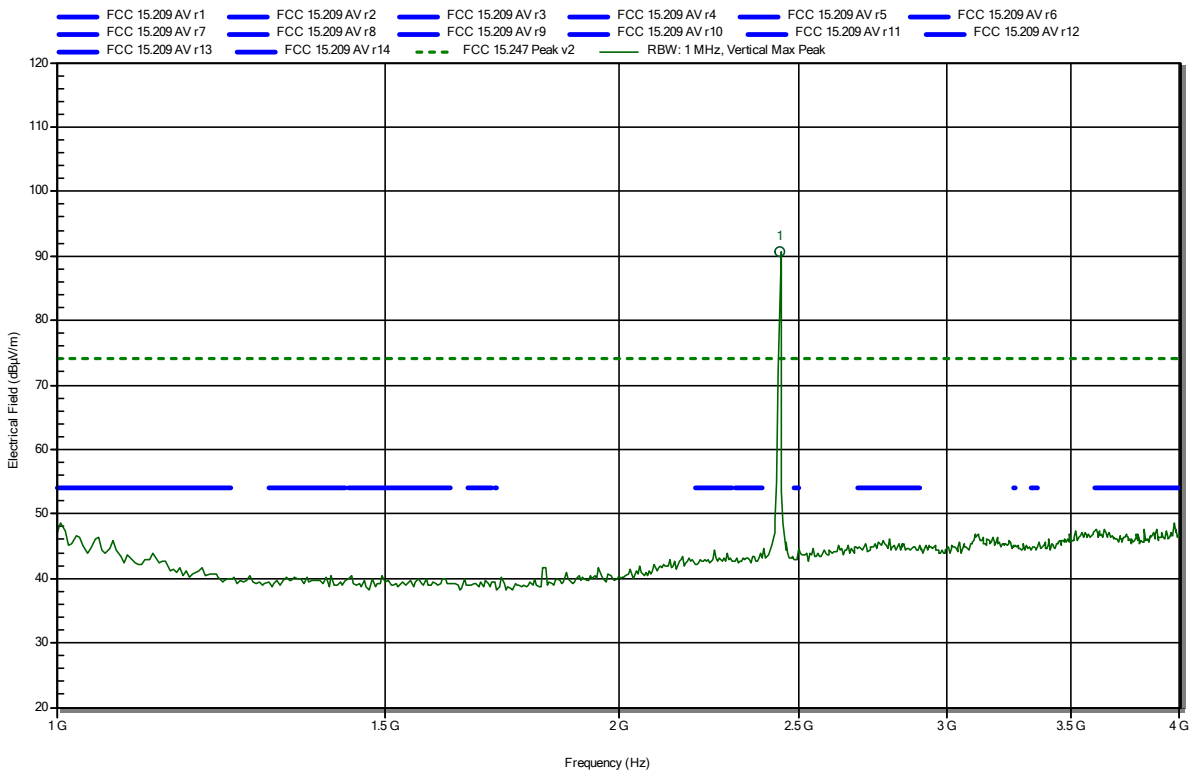


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.442 GHz	90.64 dBµV/m			Bluetooth carrier

Radiated Spurious Emissions according to 47 CFR Part 15.247

Project Number: G0M-2012-9513
 Applicant: Kamstrup A/S
 Model Description: READy Converter for US/Canada market
 Model: READy Converter
 Test Sample ID: 32714
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 3.6V DC
 Antenna: Rohde & Schwarz BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: Tx; SRD 912.5MHz, 2-FSK, BT 2441MHz, DH5, EUT ver, Walkby antenna
 Test Date: 2021-03-17
 Note:

Index 30

RadiMation

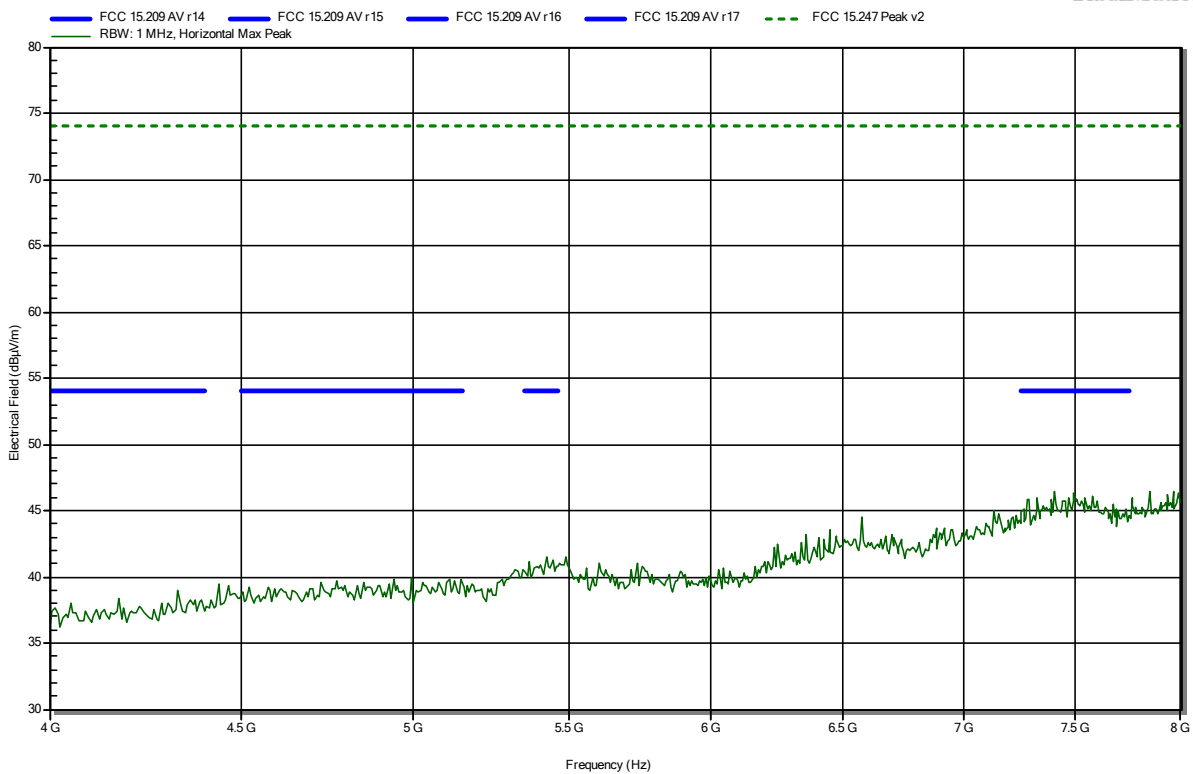


Radiated Spurious Emissions according to 47 CFR Part 15.247

Project Number: G0M-2012-9513
 Applicant: Kamstrup A/S
 Model Description: READy Converter for US/Canada market
 Model: READy Converter
 Test Sample ID: 32714
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 3.6V DC
 Antenna: Rohde & Schwarz BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: Tx; SRD 912.5MHz, 2-FSK, BT 2441MHz, DH5, EUT ver, Walkby antenna
 Test Date: 2021-03-17
 Note:

Index 29

RadiMation

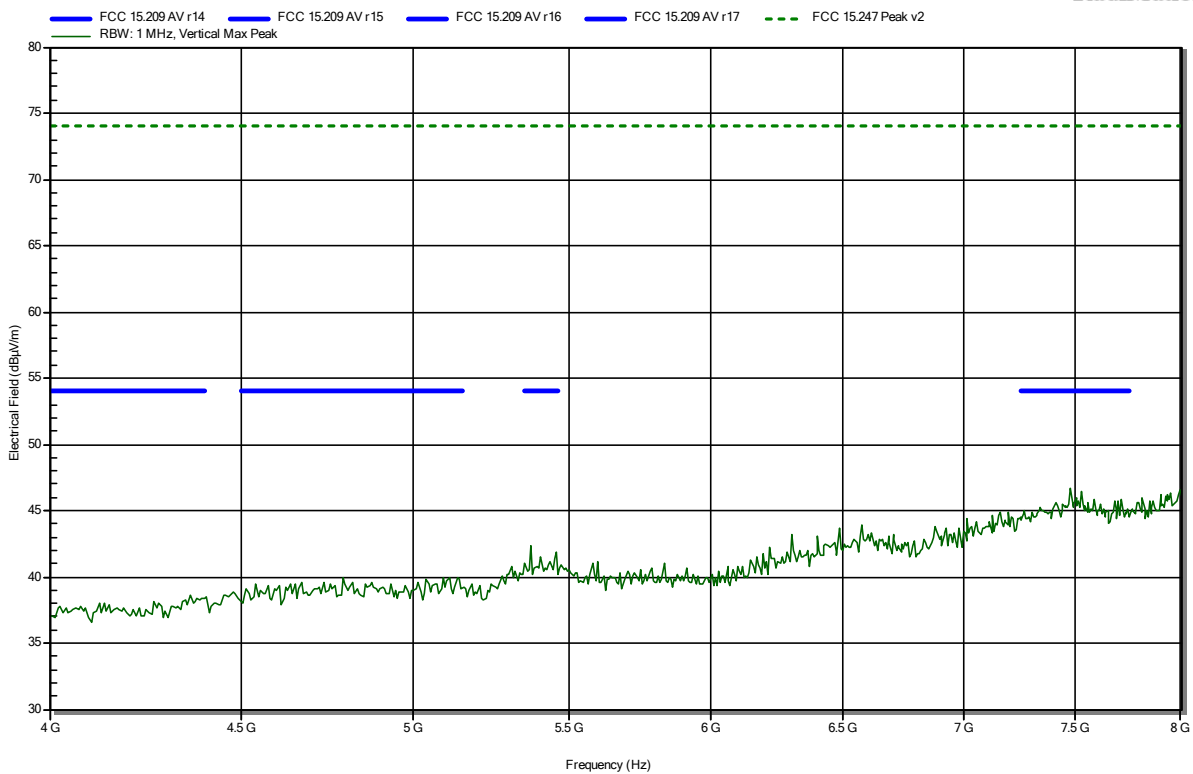


Radiated Spurious Emissions according to 47 CFR Part 15.247

Project Number: G0M-2012-9513
 Applicant: Kamstrup A/S
 Model Description: READy Converter for US/Canada market
 Model: READy Converter
 Test Sample ID: 32714
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 3.6V DC
 Antenna: Rohde & Schwarz BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: Tx; SRD 912.5MHz, 2-FSK, BT 2441MHz, DH5, EUT ver, Walkby antenna
 Test Date: 2021-03-17
 Note:

Index 31

RadiMation

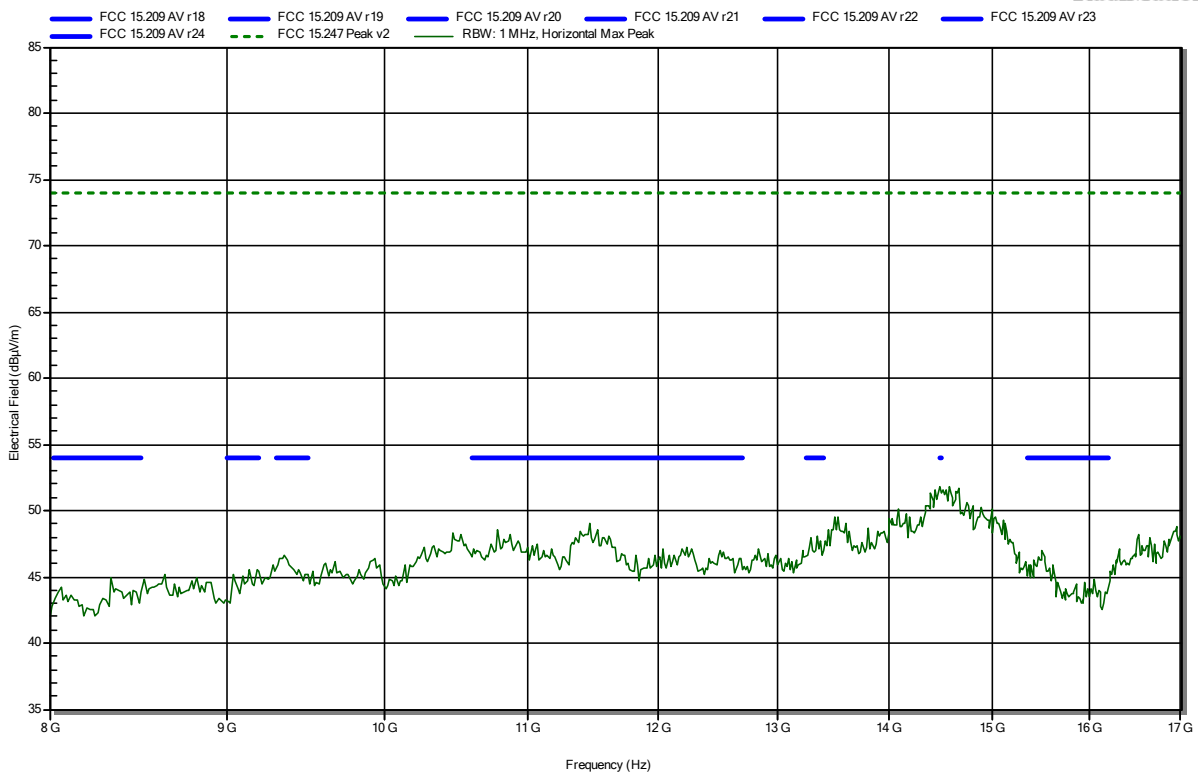


Radiated Spurious Emissions according to 47 CFR Part 15.247

Project Number: G0M-2012-9513
 Applicant: Kamstrup A/S
 Model Description: READy Converter for US/Canada market
 Model: READy Converter
 Test Sample ID: 32714
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 3.6V DC
 Antenna: Rohde & Schwarz BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: Tx; SRD 912.5MHz, 2-FSK, BT 2441MHz, DH5, EUT ver, Walkby antenna
 Test Date: 2021-03-17
 Note:

Index 32

RadiMation

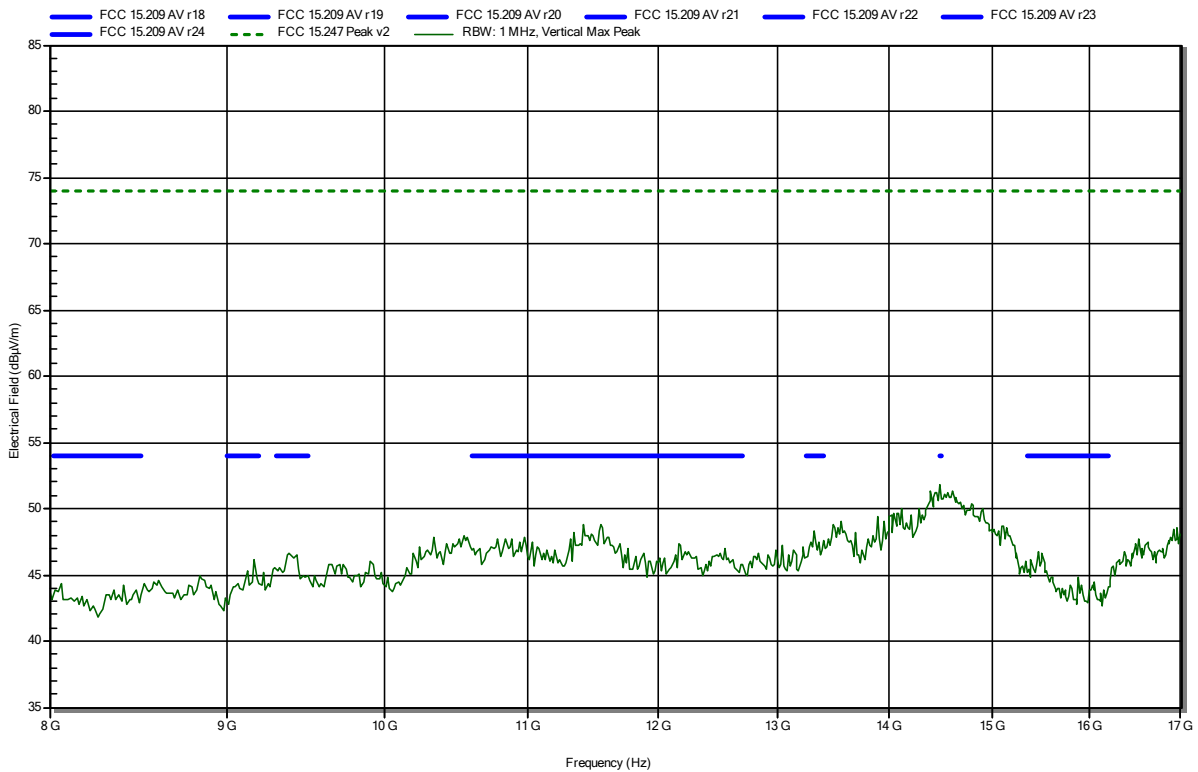


Radiated Spurious Emissions according to 47 CFR Part 15.247

Project Number: G0M-2012-9513
 Applicant: Kamstrup A/S
 Model Description: READy Converter for US/Canada market
 Model: READy Converter
 Test Sample ID: 32714
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 3.6V DC
 Antenna: Amplifier Research AT4560, Horizontal
 Measurement distance: 3 m
 Mode: Tx; SRD 912.5MHz, 2-FSK, BT 2441MHz, DH5, EUT ver, Walkby antenna
 Test Date: 2021-03-17
 Note:

Index 34

RadiMation

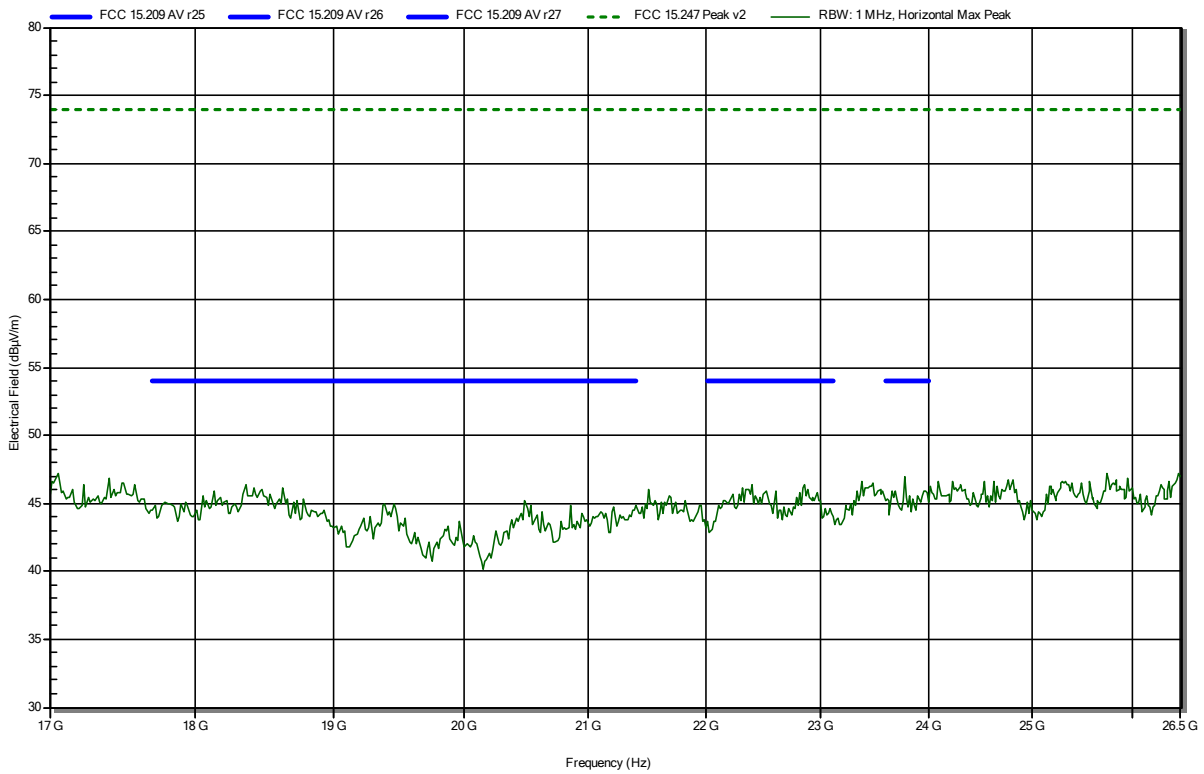


Radiated Spurious Emissions according to 47 CFR Part 15.247

Project Number: G0M-2012-9513
 Applicant: Kamstrup A/S
 Model Description: READy Converter for US/Canada market
 Model: READy Converter
 Test Sample ID: 32714
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 3.6V DC
 Antenna: Amplifier Research AT4560, Vertical
 Measurement distance: 3 m
 Mode: Tx; SRD 912.5MHz, 2-FSK, BT 2441MHz, DH5, EUT ver, Walkby antenna
 Test Date: 2021-03-17
 Note:

Index 33

RadiMation

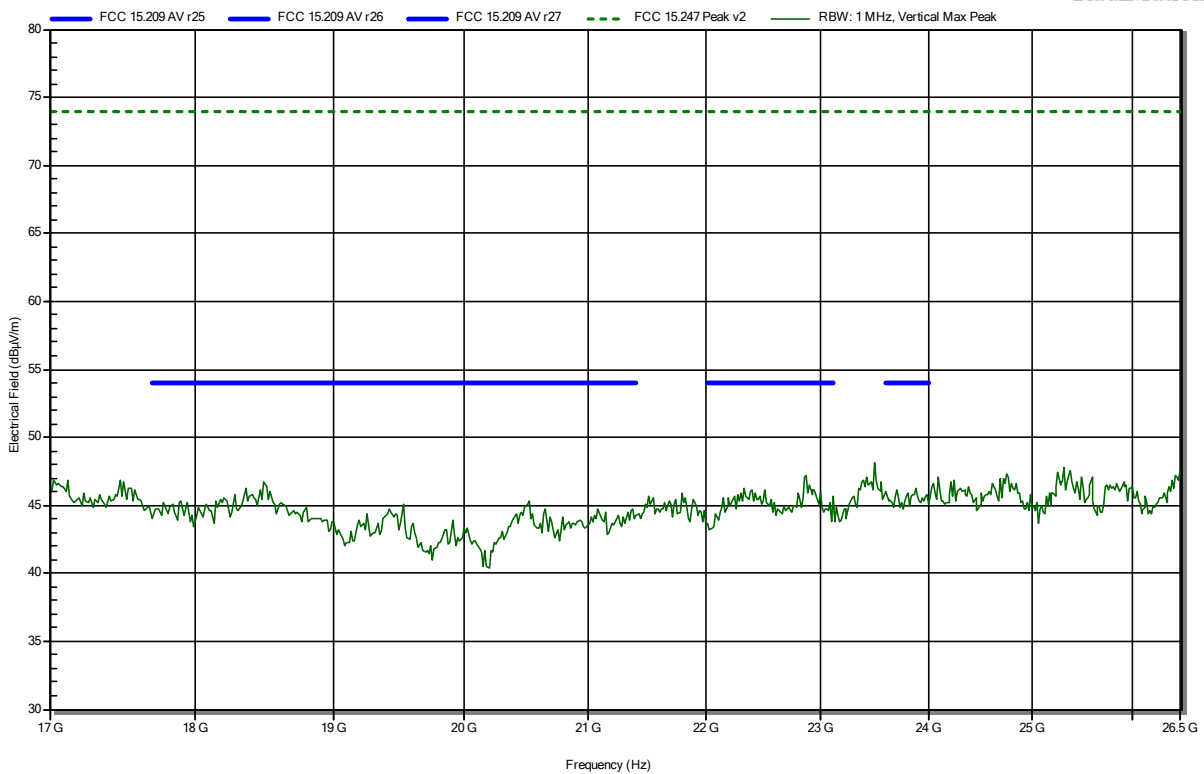


Radiated Spurious Emissions according to 47 CFR Part 15.247

Project Number: G0M-2012-9513
 Applicant: Kamstrup A/S
 Model Description: READy Converter for US/Canada market
 Model: READy Converter
 Test Sample ID: 32714
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 3.6V DC
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: Tx; SRD 918.5MHz, 2-FSK, BT 2441MHz, DH5, EUT ver, Walkby antenna
 Test Date: 2021-03-17
 Note:

Index 41

RadiMation

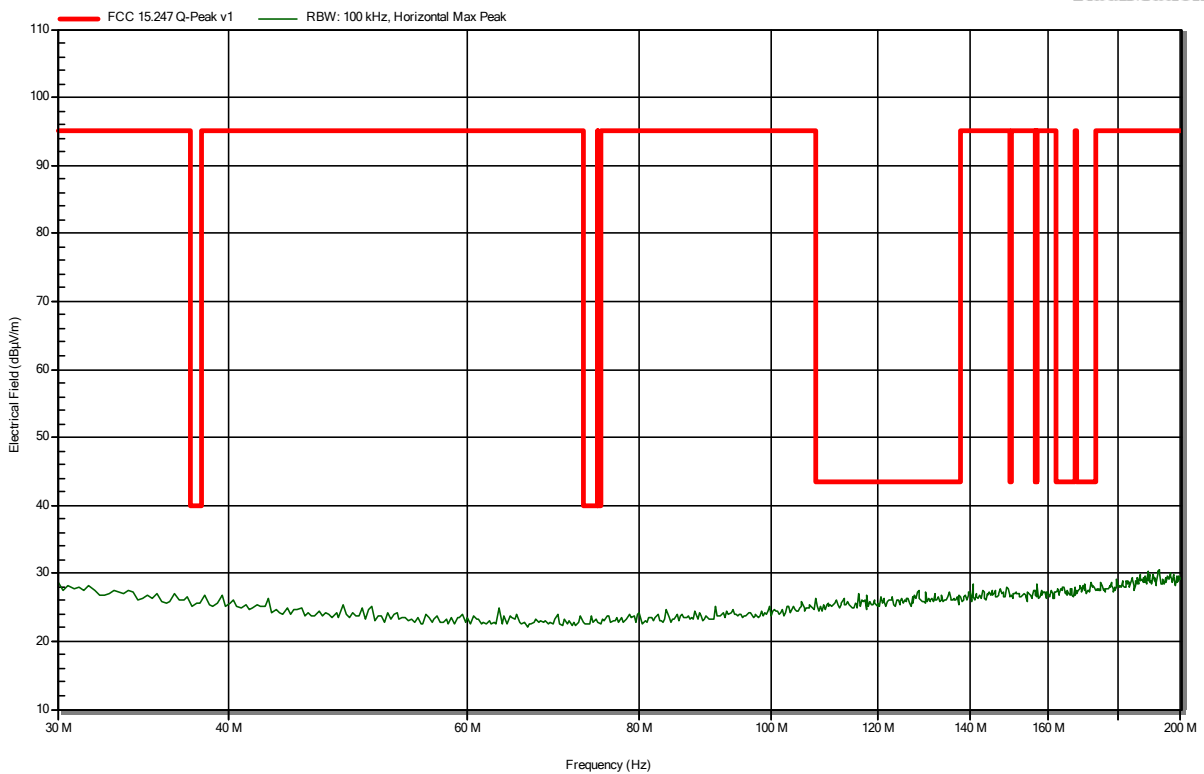


Radiated Spurious Emissions according to 47 CFR Part 15.247

Project Number: G0M-2012-9513
 Applicant: Kamstrup A/S
 Model Description: READy Converter for US/Canada market
 Model: READy Converter
 Test Sample ID: 32714
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 3.6V DC
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: Tx; SRD 918.5MHz, 2-FSK, BT 2441MHz, DH5, EUT ver, Walkby antenna
 Test Date: 2021-03-17
 Note:

Index 42

RadiMation

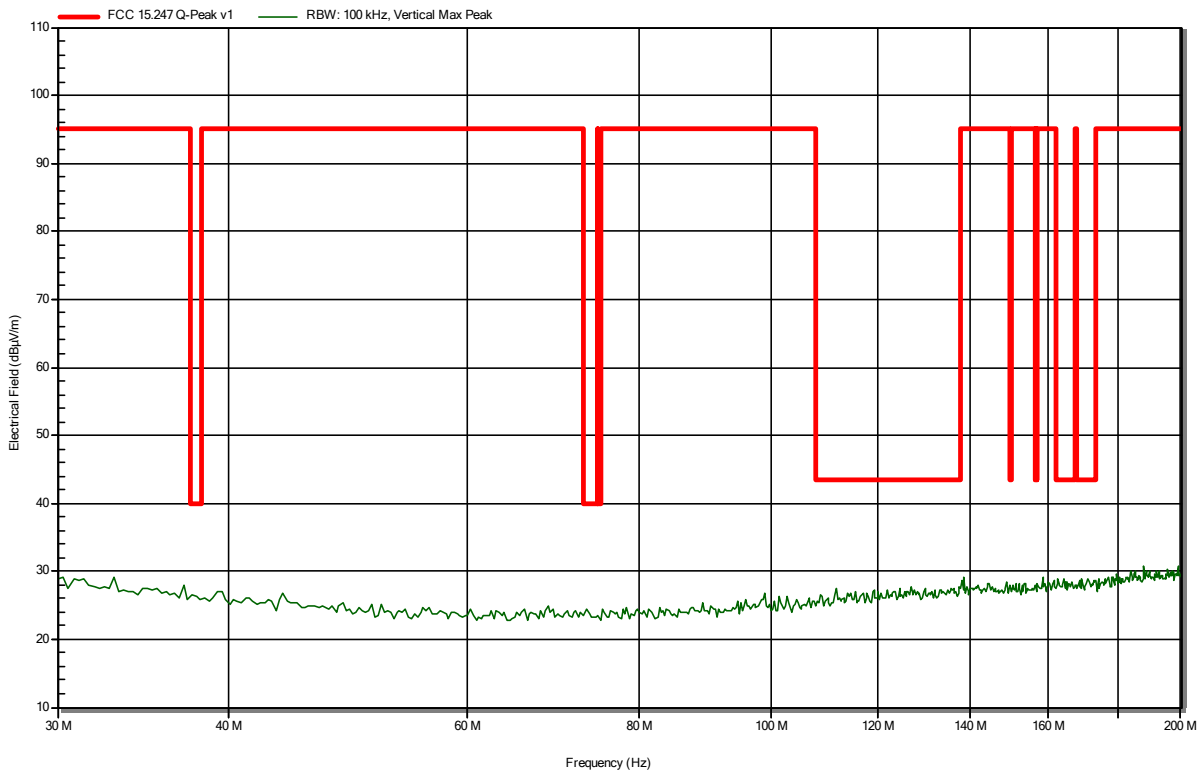


Radiated Spurious Emissions according to 47 CFR Part 15.247

Project Number: G0M-2012-9513
 Applicant: Kamstrup A/S
 Model Description: READy Converter for US/Canada market
 Model: READy Converter
 Test Sample ID: 32714
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 3.6V DC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: Tx; SRD 918.5MHz, 2-FSK, BT 2441MHz, DH5, EUT ver, Walkby antenna
 Test Date: 2021-03-17
 Note: Marker1 is SRD carrier

Index 40

RadiMation

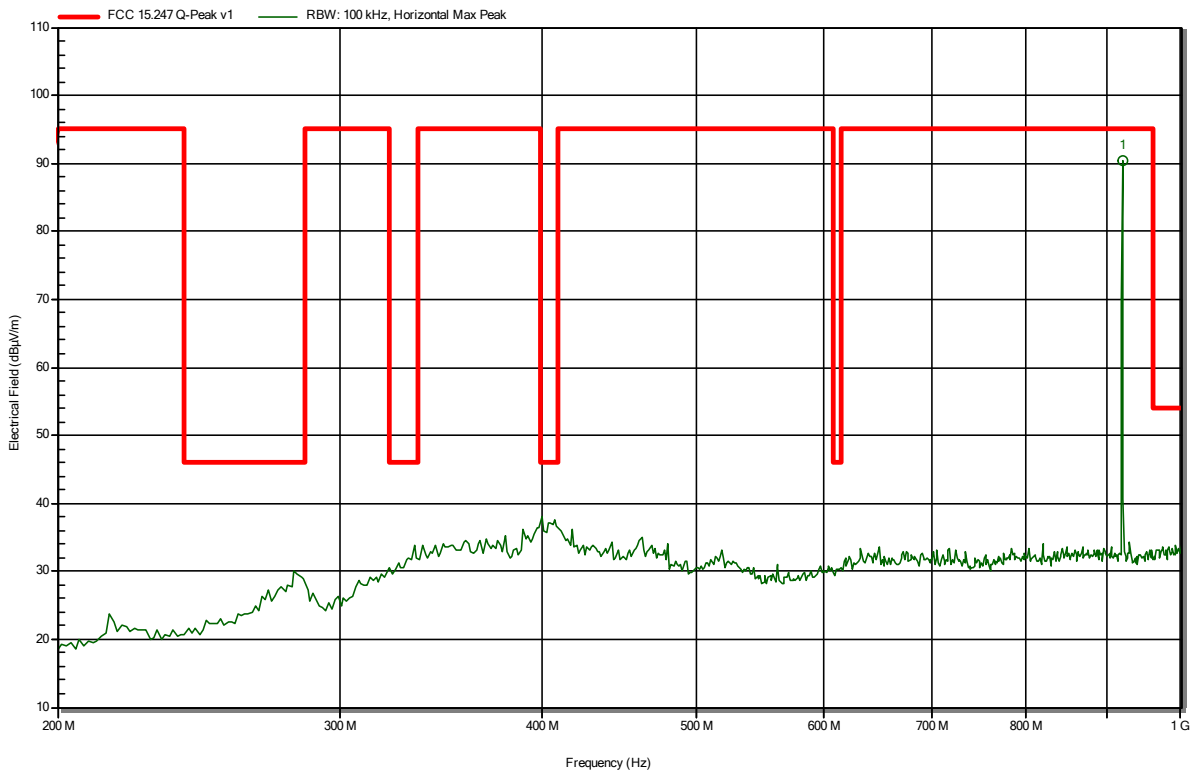


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
919.231 MHz	90.46 dBµV/m	95 dBµV/m	-4.54 dB	Pass

Radiated Spurious Emissions according to 47 CFR Part 15.247

Project Number: G0M-2012-9513
 Applicant: Kamstrup A/S
 Model Description: READy Converter for US/Canada market
 Model: READy Converter
 Test Sample ID: 32714
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 3.6V DC
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: Tx; SRD 918.5MHz, 2-FSK, BT 2441MHz, DH5, EUT ver, Walkby antenna
 Test Date: 2021-03-17
 Note: Marker1 is SRD carrier

Index 37

RadiMation

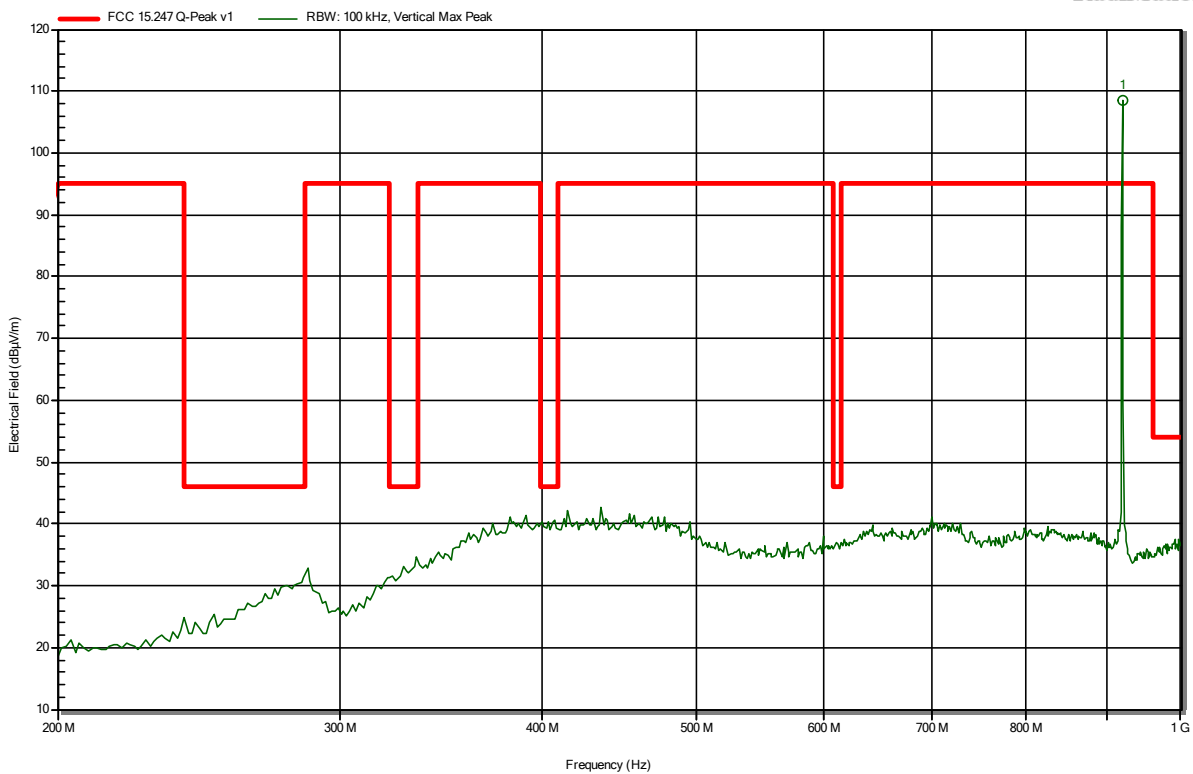


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
919.231 MHz	108.5 dBµV/m			SRD carrier

Radiated Spurious Emissions according to 47 CFR Part 15.247

Project Number: G0M-2012-9513
 Applicant: Kamstrup A/S
 Model Description: READy Converter for US/Canada market
 Model: READy Converter
 Test Sample ID: 32714
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 3.6V DC
 Antenna: Rohde & Schwarz BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: Tx; SRD 918.5MHz, 2-FSK, BT 2441MHz, DH5, EUT ver, Walkby antenna
 Test Date: 2021-03-17
 Note: Marker1 is Bluetooth carrier

Index 44

RadiMation

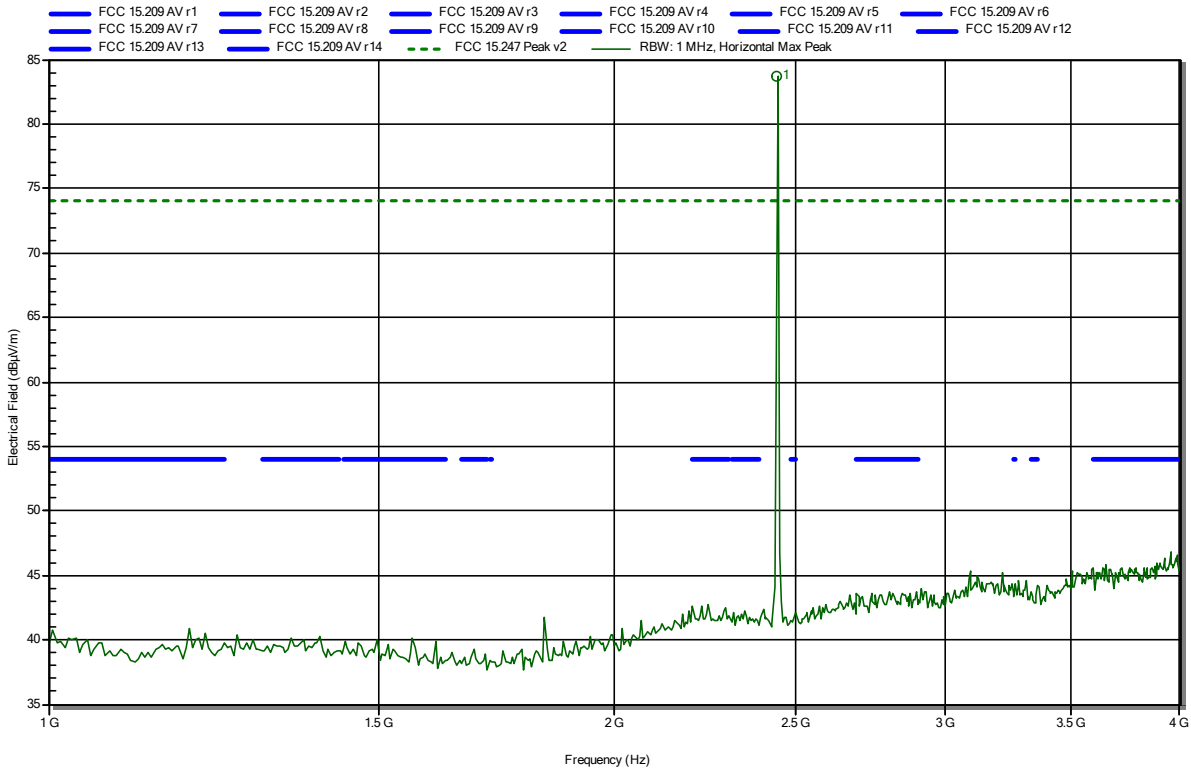


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.442 GHz	83.73 dBµV/m			Bluetooth carrier

Radiated Spurious Emissions according to 47 CFR Part 15.247

Project Number: G0M-2012-9513
 Applicant: Kamstrup A/S
 Model Description: READy Converter for US/Canada market
 Model: READy Converter
 Test Sample ID: 32714
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 3.6V DC
 Antenna: Rohde & Schwarz BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: Tx; SRD 918.5MHz, 2-FSK, BT 2441MHz, DH5, EUT ver, Walkby antenna
 Test Date: 2021-03-17
 Note: Marker1 is Bluetooth carrier

Index 43

RadiMation

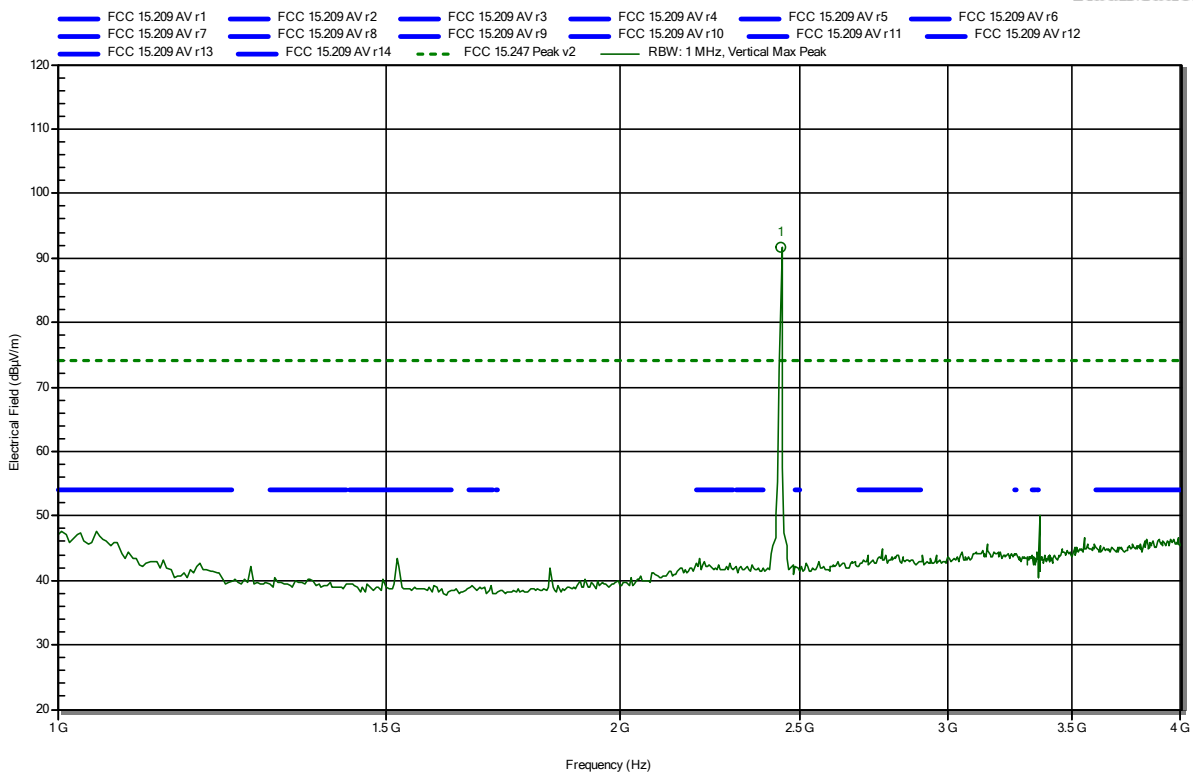


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.442 GHz	91.73 dBµV/m			Bluetooth carrier

Radiated Spurious Emissions according to 47 CFR Part 15.247

Project Number: G0M-2012-9513
 Applicant: Kamstrup A/S
 Model Description: READy Converter for US/Canada market
 Model: READy Converter
 Test Sample ID: 32714
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 3.6V DC
 Antenna: Rohde & Schwarz BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: Tx; SRD 918.5MHz, 2-FSK, BT 2441MHz, DH5, EUT ver, Walkby antenna
 Test Date: 2021-03-17
 Note:

Index 48

RadiMation

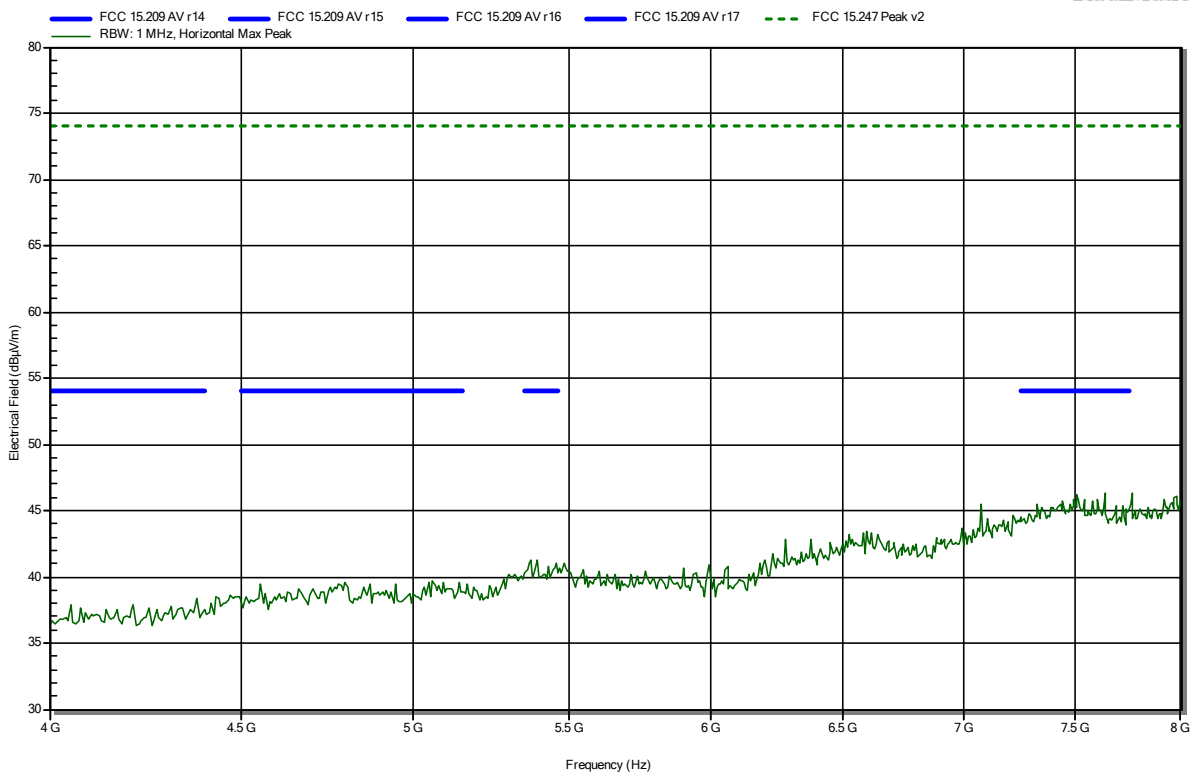


Radiated Spurious Emissions according to 47 CFR Part 15.247

Project Number: G0M-2012-9513
 Applicant: Kamstrup A/S
 Model Description: READy Converter for US/Canada market
 Model: READy Converter
 Test Sample ID: 32714
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 3.6V DC
 Antenna: Rohde & Schwarz BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: Tx; SRD 918.5MHz, 2-FSK, BT 2441MHz, DH5, EUT ver, Walkby antenna
 Test Date: 2021-03-17
 Note:

Index 47

RadiMation

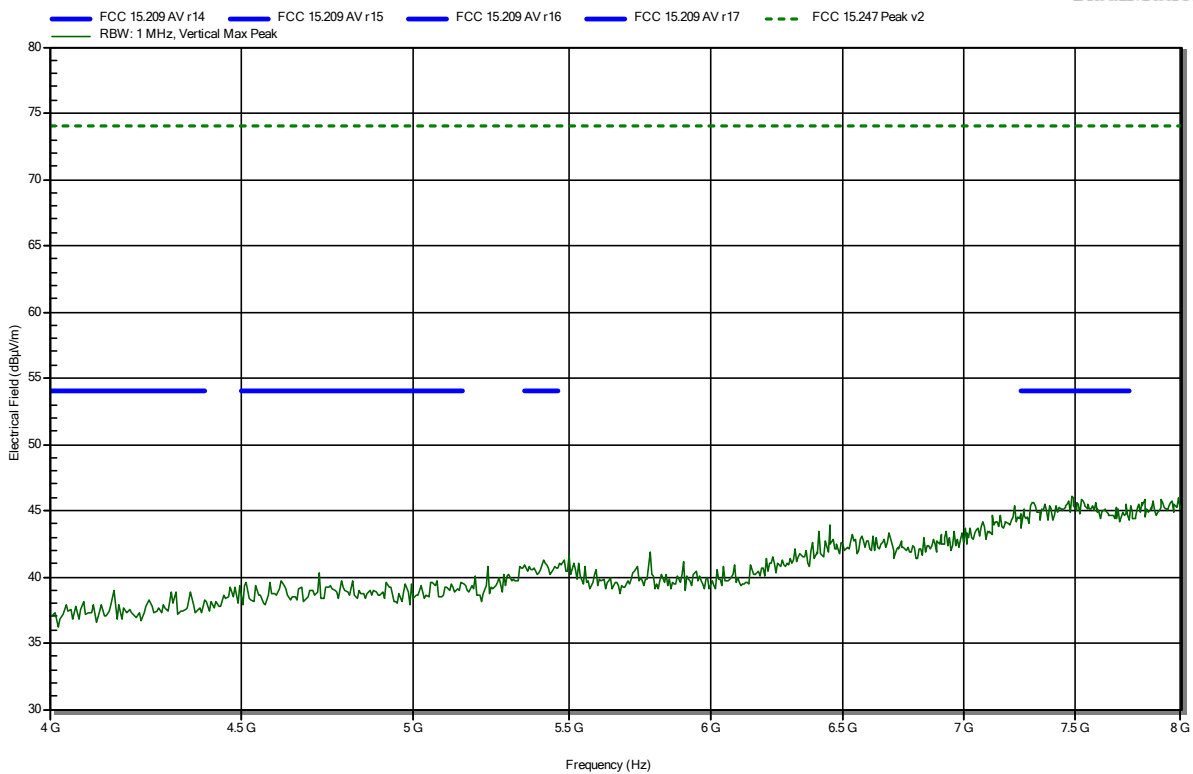


Radiated Spurious Emissions according to 47 CFR Part 15.247

Project Number: G0M-2012-9513
 Applicant: Kamstrup A/S
 Model Description: READy Converter for US/Canada market
 Model: READy Converter
 Test Sample ID: 32714
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 3.6V DC
 Antenna: Rohde & Schwarz BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: Tx; SRD 918.5MHz, 2-FSK, BT 2441MHz, DH5, EUT ver, Walkby antenna
 Test Date: 2021-03-17
 Note:

Index 49

RadiMation

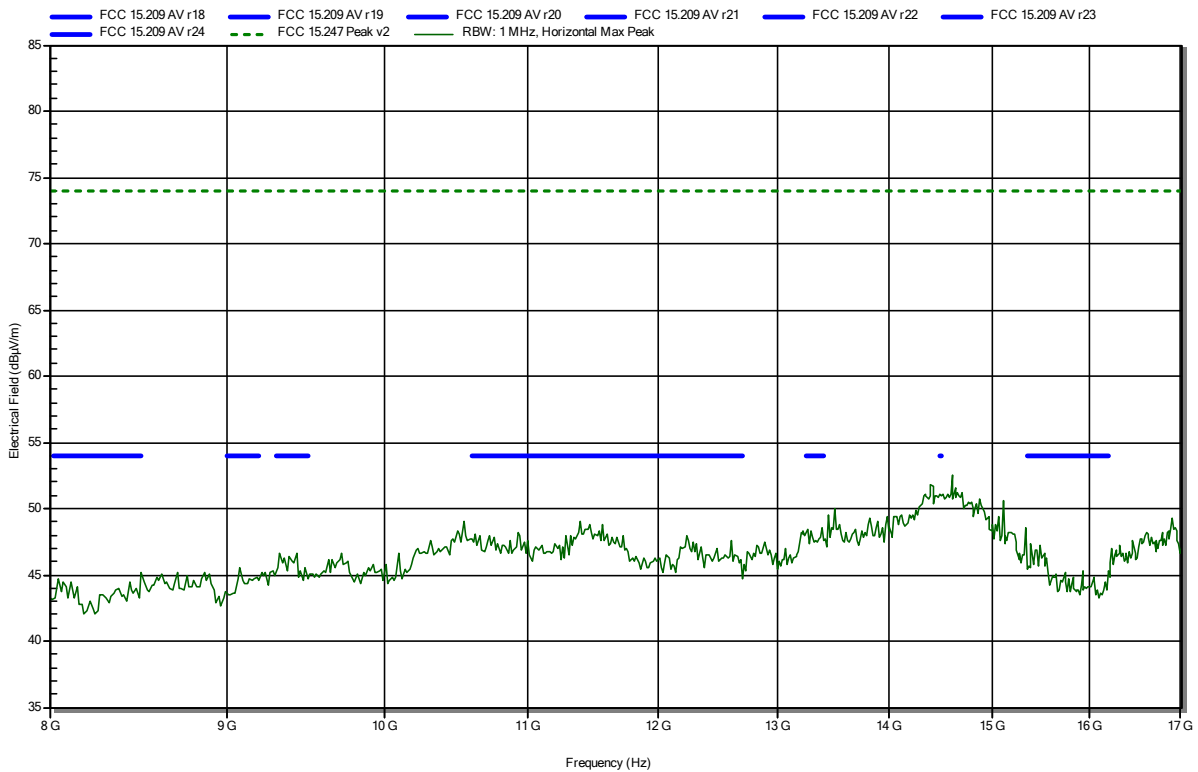


Radiated Spurious Emissions according to 47 CFR Part 15.247

Project Number: G0M-2012-9513
 Applicant: Kamstrup A/S
 Model Description: READy Converter for US/Canada market
 Model: READy Converter
 Test Sample ID: 32714
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 3.6V DC
 Antenna: Rohde & Schwarz BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: Tx; SRD 918.5MHz, 2-FSK, BT 2441MHz, DH5, EUT ver, Walkby antenna
 Test Date: 2021-03-17
 Note:

Index 50

RadiMation

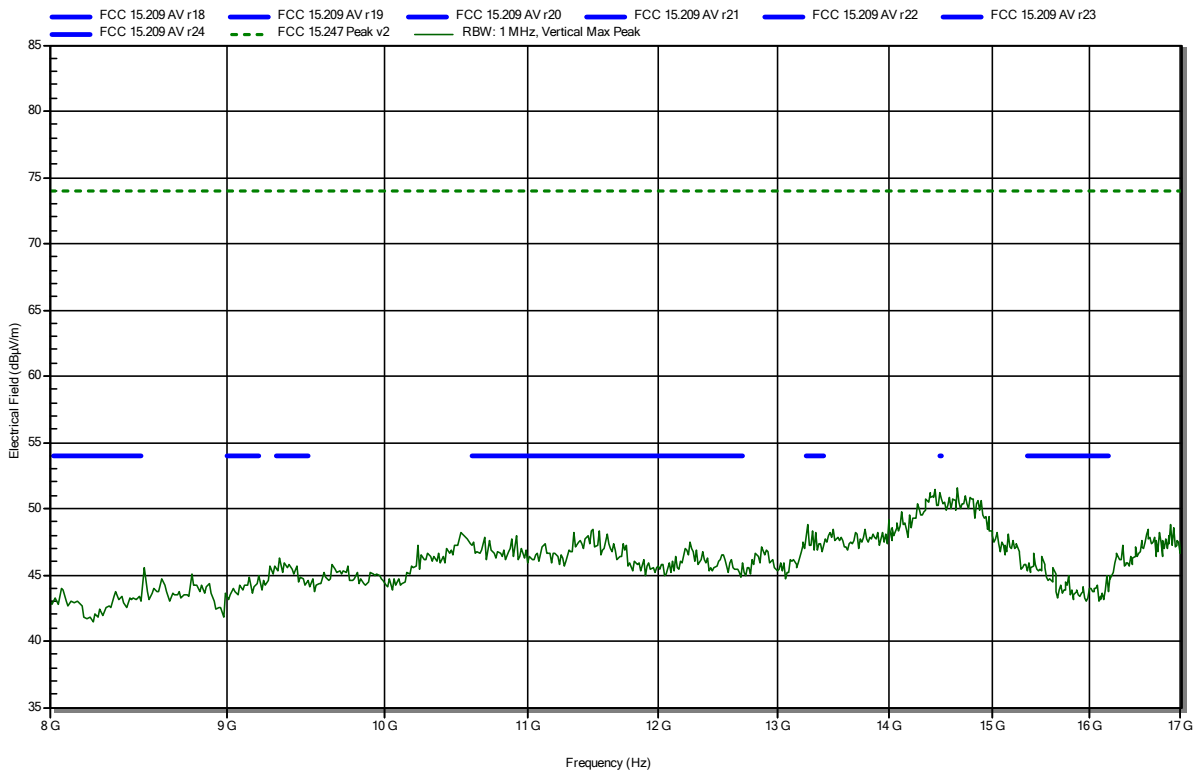


Radiated Spurious Emissions according to 47 CFR Part 15.247

Project Number: G0M-2012-9513
 Applicant: Kamstrup A/S
 Model Description: READy Converter for US/Canada market
 Model: READy Converter
 Test Sample ID: 32714
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 3.6V DC
 Antenna: Amplifier Research AT4560, Horizontal
 Measurement distance: 3 m
 Mode: Tx; SRD 918.5MHz, 2-FSK, BT 2441MHz, DH5, EUT ver, Walkby antenna
 Test Date: 2021-03-17
 Note:

Index 52

RadiMation

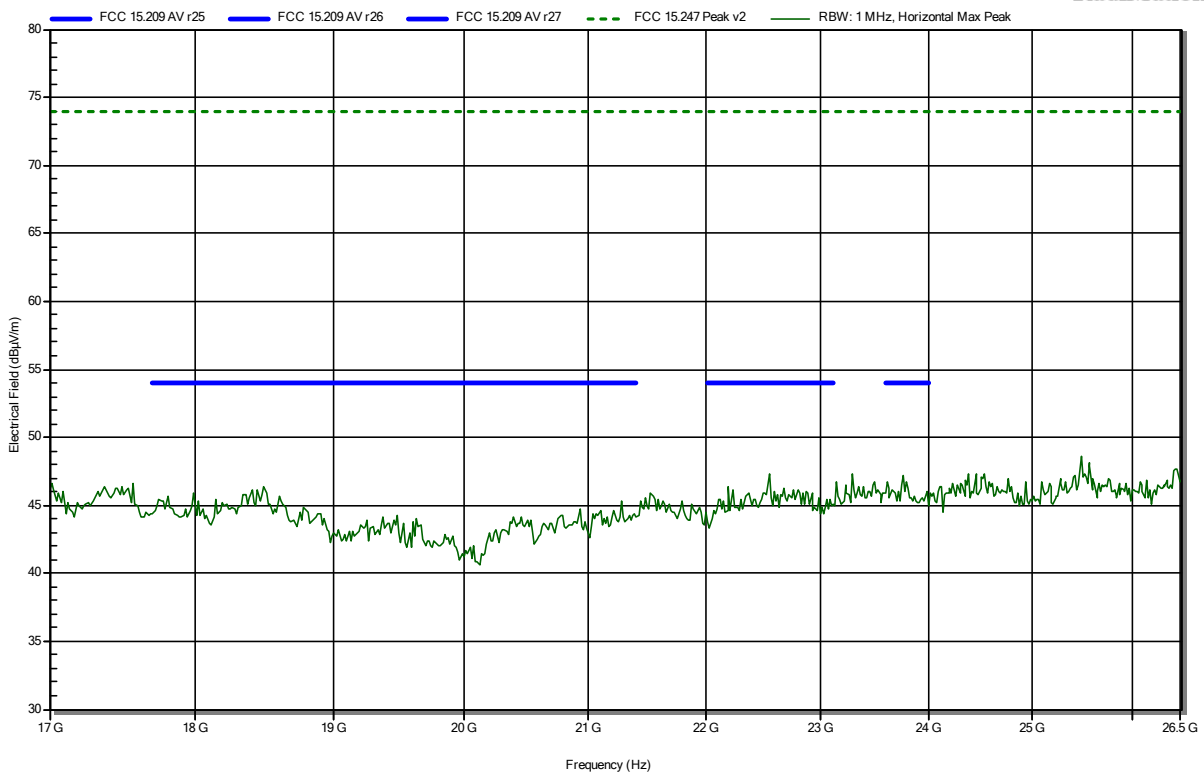


Radiated Spurious Emissions according to 47 CFR Part 15.247

Project Number: G0M-2012-9513
 Applicant: Kamstrup A/S
 Model Description: READy Converter for US/Canada market
 Model: READy Converter
 Test Sample ID: 32714
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 25 °Celsius, Vnom: 3.6V DC
 Antenna: Amplifier Research AT4560, Vertical
 Measurement distance: 3 m
 Mode: Tx; SRD 918.5MHz, 2-FSK, BT 2441MHz, DH5, EUT ver, Walkby antenna
 Test Date: 2021-03-17
 Note:

Index 51

RadiMation

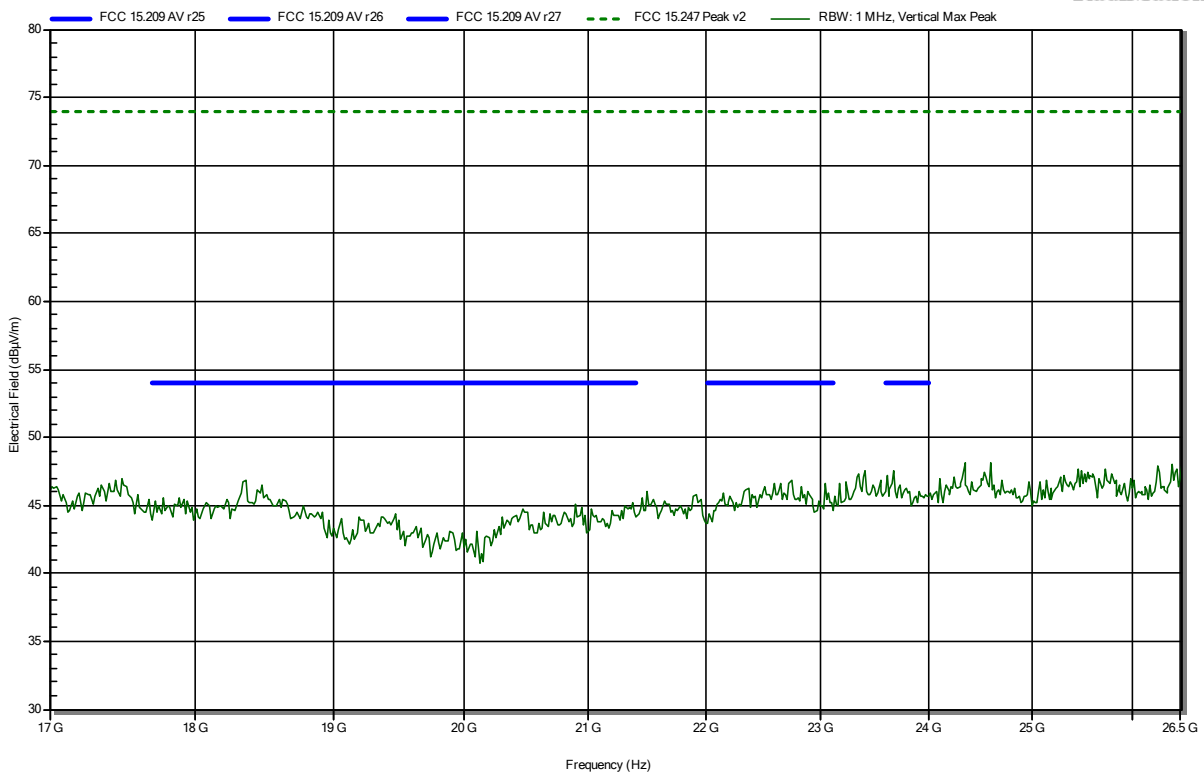

=== END OF TEST REPORT ===