

RF Test Report

Project Number: 5025746

Offer Number: SUW-202210003579

Report Number: 5025746EMC03

Report Revision: 2

Client: Deere & Company

Equipment Under Test: JDLINK™ R Modem - 4G with 18' LMR 240 UF Cable & MCR Whip Antenna

Model: MA4R

FCC ID: OV5-MA4R

IC ID: 11137A-MA4R

Applicable Standards: FCC Part 15 Subpart C, § 15.247

ANSI C63.10: 2013

RSS-247, Issue 2

RSS-GEN Issue 5

Report Revision on: 19 July 2023


Test Result: Compliant



FOR THE SCOPE OF ACCREDITATION UNDER CERTIFICATE NUMBER: 3212.01

Report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the Federal Government.

Prepared by:

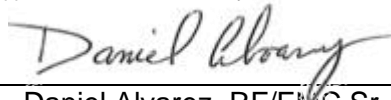

Daniel Alvarez, RF/EMC Sr. Staff Engineer

Reviewed by:



Martin Taylor, EMC/RF Project Engineer

Remarks: This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>. And for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/terms-e-document.aspx>.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for a maximum of 30 days only.

Table of Contents

| | | |
|----------|--|-----------|
| 1 | SUMMARY OF TEST RESULTS | 3 |
| 1.1 | MODIFICATIONS REQUIRED FOR COMPLIANCE | 3 |
| 2 | GENERAL INFORMATION | 4 |
| 2.1 | CLIENT INFORMATION | 4 |
| 2.2 | TEST LABORATORY | 4 |
| 2.3 | GENERAL INFORMATION OF EUT | 4 |
| 2.4 | OPERATING MODES AND CONDITIONS | 4 |
| 2.5 | EUT CONNECTION BLOCK DIAGRAM – CONDUCTED MEASUREMENTS..... | 5 |
| 2.1 | EUT CONNECTION BLOCK DIAGRAM – RADIATED MEASUREMENTS | 5 |
| 2.2 | SYSTEM CONFIGURATIONS | 6 |
| 3 | (BTC) PEAK OUTPUT POWER | 7 |
| 3.1 | TEST RESULT..... | 7 |
| 3.2 | TEST METHOD..... | 7 |
| 3.3 | TEST SITE..... | 7 |
| 3.4 | TEST EQUIPMENT | 7 |
| 3.5 | DATA..... | 8 |
| 4 | (BLE) PEAK OUTPUT POWER | 9 |
| 4.1 | TEST RESULT..... | 9 |
| 4.2 | TEST METHOD..... | 9 |
| 4.3 | TEST SITE..... | 9 |
| 4.4 | TEST EQUIPMENT | 9 |
| 4.5 | TEST DATA..... | 9 |
| 5 | (WLAN) PEAK OUTPUT POWER | 11 |
| 5.1 | TEST RESULT..... | 11 |
| 5.2 | TEST METHOD..... | 11 |
| 5.3 | TEST SITE..... | 11 |
| 5.4 | TEST EQUIPMENT | 11 |
| 5.5 | TEST DATA..... | 11 |
| 6 | FIELD STRENGTH OF SPURIOUS RADIATION | 13 |
| 6.1 | TEST RESULT..... | 13 |
| 6.2 | TEST METHOD..... | 13 |
| 6.3 | TEST SITE..... | 13 |
| 6.4 | TEST EQUIPMENT | 14 |
| 6.5 | TEST DATA – PEAK PLOTS..... | 14 |
| 7 | ANTENNA REQUIREMENT | 92 |
| 7.1 | RESULT..... | 92 |
| 7.2 | REQUIREMENT..... | 92 |
| 7.3 | CONCLUSION | 92 |
| 8 | MEASUREMENT UNCERTAINTY | 93 |
| 9 | REVISION HISTORY | 94 |

1 Summary of Test Results

| Test Description | Test Specification | | Test Result |
|---|----------------------|-------------------------------|-----------------|
| Bandwidth | 15.247(a)(2) | RSS-247 5.2(a) RSS-GEN 6.7 | NA ¹ |
| (BTC) Peak Output Power | 15.247(a)(1), (b)(1) | RSS-247 5.4(b), 5.1(b) | Compliant |
| (BLE) Peak Output Power | 15.247(b)(3) | RSS-247 5.4 (d) | Compliant |
| (WLAN) Transmitter Output Power | 15.247(b)(3) | RSS-247 5.4 (d) | Compliant |
| Power Spectral Density | 15.247(e) | RSS-247 5.2 (b) | NA ¹ |
| Conducted Spurious Emissions / Band Edge | 15.247(d) | RSS-247 5.5 | NA ¹ |
| Emissions in Restricted Frequency Bands | 15.205, 15.209 | RSS-GEN 8.9, 8.10 | Compliant |
| Pseudo-Random Hop Sequence | 15.247(a)(1) | RSS-247 5.1(a) | NA ¹ |
| Channel Separation | 15.247(a)(1) | RSS-247 5.1(b) | NA ¹ |
| Number of Hopping Channels | 15.247(a)(1)(iii) | RSS-247 5.1(d) | NA ¹ |
| Dwell Time | 15.247(a)(1)(iii) | RSS-247 5.1(d) | NA ¹ |
| Antenna Requirement | 15.203 | RSS-GEN 6.8 | Compliant |
| AC Powerline Conducted Emissions | 15.107, 15.207 | RSS-GEN 8.8 | NA ² |

- 1) Testing to address antenna change with use of 18'LMR Cable. The test requirements were not affected by the modification and test requirements were covered in previous test reports: 4724254EMC09 Rev: 1 & 4724254EMC10 Rev: 1, and 4724254EMC11 Rev: 2.
- 2) The device has no facility for connection to the AC mains.

1.1 Modifications Required for Compliance

None

2 General Information

2.1 Client Information

Name: Deere & Company dba John Deere Intelligent Solutions Group
 Address: 9505 Northpark Dr.
 City, State, Zip, Country: Urbandale, IA 50131 USA

2.2 Test Laboratory

Name: SGS North America, Inc.
 Address: 620 Old Peachtree Road NW, Suite 100
 City, State, Zip, Country: Suwanee, GA 30024, USA

Accrediting Body: A2LA
 Type of lab: Testing Laboratory
 Certificate Number: 3212.01
 CAB Identifier: US0186

2.3 General Information of EUT

Manufacturer Name: Deere & Company
 Address: One John Deere Place
 City, State, Zip, Country: Moline, IL 61265

Product Marketing Name (PMN): JLink™R Modem - 4G
 Model Number (HVIN): MA4R
 Serial Number: PCMA4RA200091
 FCC ID: OV5-MA4R
 IC ID: 11137A-MA4R

Frequency Range: BTC/BLE: 2402 – 2480 MHz / WLAN: 2412-2462

Data Mode / Modulation: WLAN 802.11 b/g/nHT20/nHT40
 Bluetooth Classic (BTC) GFSK/ Pi/4-DQPSK/8DPSK
 Bluetooth Low Energy (BLE) 1M

Antenna Type: MCR Whip Antenna
 Antenna Gain: 5 dBi


Rated Voltage: 9 – 32Vdc
 Test Voltage: 12 VDC

Sample Received Date: 23 March 2023
 Dates of testing: 27 March 2023 – 13 June 2023


2.4 Operating Modes and Conditions

The EUT was programmed by the manufacturer to transmit on low, mid, and high channels in all necessary modulation and modes of operation.

2.5 EUT Connection Block Diagram – Conducted Measurements

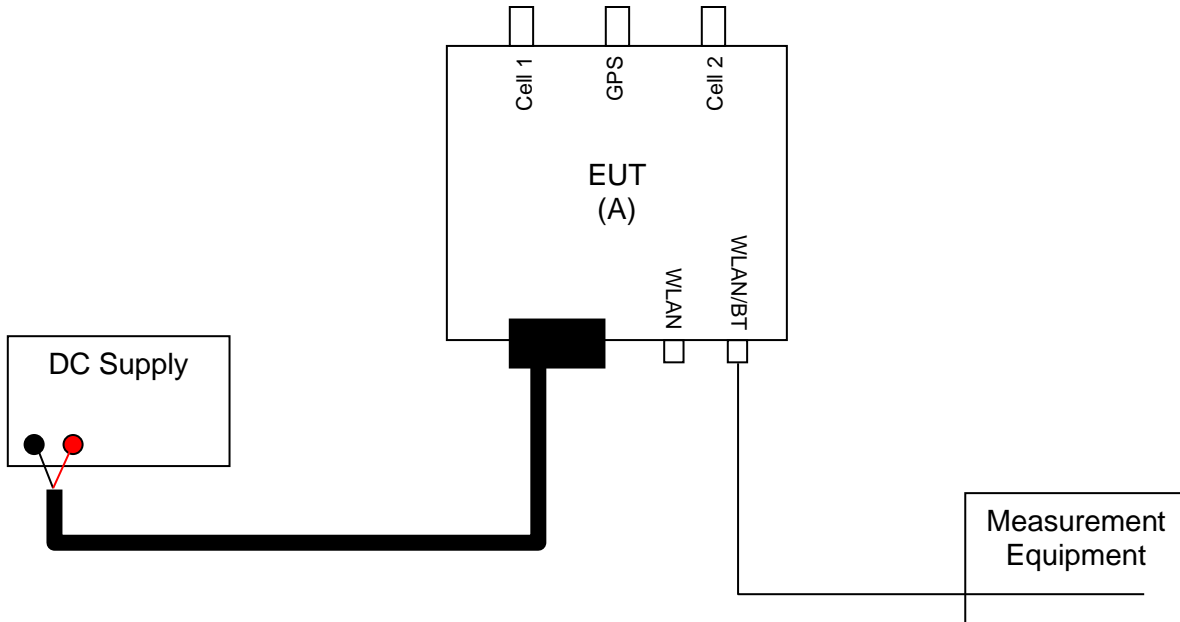

2.1 EUT Connection Block Diagram – Radiated Measurements

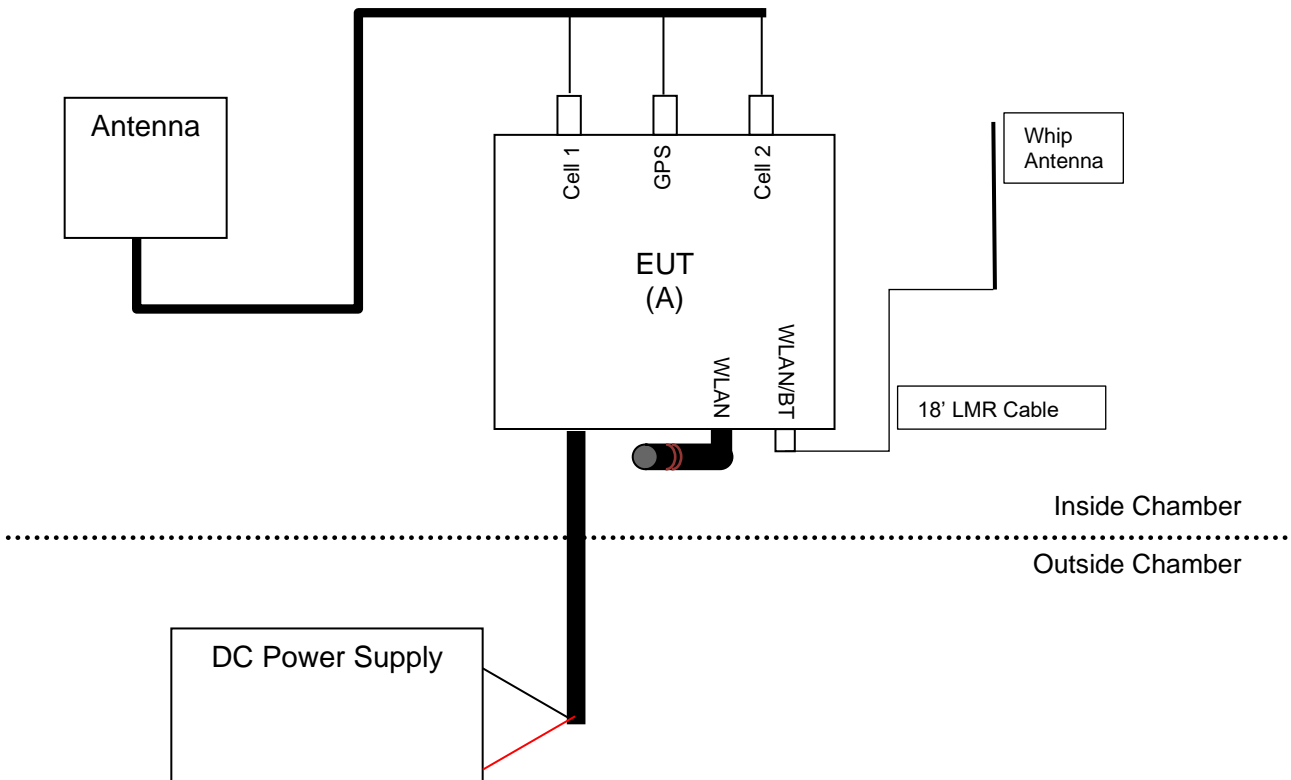

2.2 System Configurations

| Device reference | Manufacturer | Description | Model Number | Serial Number |
|------------------|-----------------|---------------------|--------------|---------------|
| A | Deere & Company | JDLink™R Modem - 4G | MA4R | PCMA4RA200091 |

The EUT was configured using the harness and antenna connections from the previous submittal with the exception that we are now utilizing the MCR whip antenna to replace the PCTEL Antenna for WLAN primary port (5 dBi). This configuration will include a LMR 240 UF 18' cable. The 18' cable will be the shortest & only RF cable configuration available. Measurements were performed on the output of the 18' LMR cable.

3 (BTC) Peak Output Power

3.1 Test Result

| Test Description | Test Specification | Test Result |
|-------------------|--|-------------|
| Peak Output Power | ANSI C63.10:2013 15.247(a)(1), (b)(1) RSS-247 5.4(b), 5.1(b) | Compliant |

3.2 Test Method

Output power measurements were taken using the methods defined in ANSI C63.10, Clause 7.8.5.

Limit

§15.247(b)(1): For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels...: 1 watt (30 dBm).

§15.247(a)(1): Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW (21 dBm).

3.3 Test Site

SGS EMC Laboratory, Suwanee, GA

Environmental Conditions

Temperature: 23.31 °C

Relative Humidity: 31.4 %

Atmospheric Pressure: 98.1 kPa

3.4 Test Equipment

Test End Date: 5-May-2023

Tester: DA

| Equipment | Model | Manufacturer | Asset | Cal Date | Cal Due Date |
|---------------------------------|--------------|--------------------------|---------|-------------|--------------|
| SIGNAL ANALYZER (TS8997) | FSV30 | ROHDE & SCHWARZ | B085749 | 7-Dec-2022 | 7-Dec-2023 |
| RF CABLE SMA TO SMA, 0.01-40GHZ | 084-0505-059 | TELEDYNE STORM MICROWAVE | 20108 | 13-Mar-2023 | 13-Mar-2024 |
| TSTPASS SWITCHBOX | SB2 | TSTPASS | 23009 | CNR | CNR |


Test Software Profile:

TSTPASS Version: 2.0, build 2023

3.5 Data

| Test Mode | Frequency (MHz) | Tx Type | Measured Peak Output Power (dBm) | Limits (dBm) | Verdict |
|-----------|-----------------|---------|----------------------------------|--------------|---------|
| | | | Ant 1 | | |
| GFSK | 2402 | SISO | 6.37 | <=30 | Pass |
| | 2441 | SISO | 6.42 | <=30 | Pass |
| | 2480 | SISO | 6.44 | <=30 | PASS |
| Pi/4DQPSK | 2402 | SISO | 3.47 | 20.97 | PASS |
| | 2441 | SISO | 3.75 | 20.97 | PASS |
| | 2480 | SISO | 4.37 | 20.97 | PASS |
| 8DPSK | 2402 | SISO | 4.19 | 20.97 | PASS |
| | 2441 | SISO | 4.17 | 20.97 | PASS |
| | 2480 | SISO | 4.82 | 20.97 | PASS |

Representative Plot

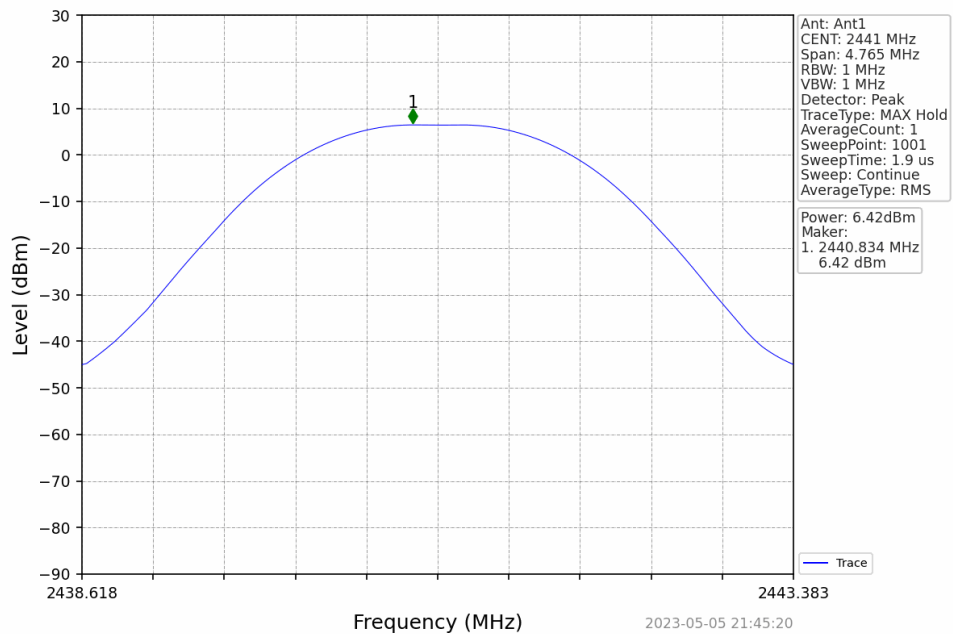

4 (BLE) Peak Output Power

4.1 Test Result

| Test Description | Test Specification | | Test Result |
|-------------------|--------------------|-----------------|-------------|
| Peak Output Power | 15.247(b)(3) | RSS-247 5.4 (d) | Compliant |

4.2 Test Method

Fundamental peak power measurements were recorded using the procedures from ANSI C63.10: 2013 clause 11.9 and KDB 558074 D01 Measurement Guidance v05r2.

Limit

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. For using antennas with greater than 6dBi of gain, the limit is reduced in dB by the amount the gain exceeds 6dBi (e.g. for a 7.4dBi antenna, the limit is reduced from 30dBm to 28.6dBm)

4.3 Test Site

EMC Laboratory, Suwanee, GA

Environmental Conditions

Temperature: 24.11 °C

Relative Humidity: 32.6 %

Atmospheric Pressure: 98.2 kPa

4.4 Test Equipment

Test End Date: 12-Jun-2023

Tester: DA

| Equipment | Model | Manufacturer | Asset | Cal Date | Cal Due Date |
|---------------------------------|--------------|--------------------------|---------|-------------|--------------|
| SIGNAL ANALYZER (TS8997) | FSV30 | ROHDE & SCHWARZ | B085749 | 7-Dec-2022 | 7-Dec-2023 |
| RF CABLE SMA TO SMA, 0.01-40GHZ | 084-0505-059 | TELEDYNE STORM MICROWAVE | 20108 | 13-Mar-2023 | 13-Mar-2024 |
| TSTPASS SWITCHBOX | SB2 | TSTPASS | 23009 | CNR | CNR |

Software Profile:

TSTPASS Version: 2.0, build 2023


4.5 Test Data

| Mode | TX Type | Frequency (MHz) | Maximum Peak Conducted Output Power (dBm) | | Verdict |
|------|---------|-----------------|---|-------|---------|
| | | | ANT1 | Limit | |
| 1M | SISO | 2402 | 0.37 | <=30 | Pass |
| | | 2440 | 0.55 | <=30 | Pass |
| | | 2480 | 1.15 | <=30 | Pass |

Note1: Antenna Gain: Ant1: 5.00dBi;

Sample Plot

High Channel (2480MHz)

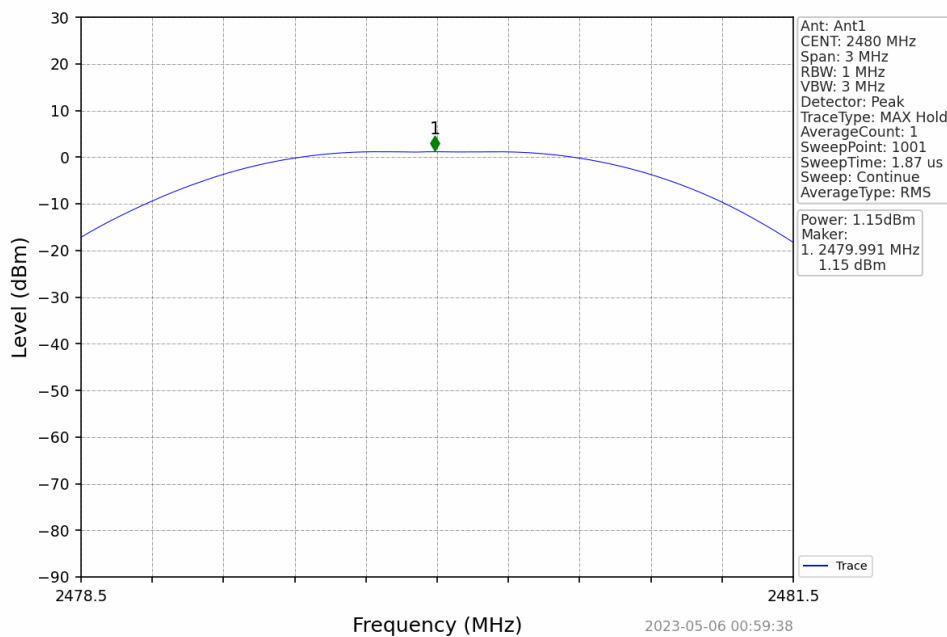

5 (WLAN) Peak Output Power

5.1 Test Result

| Test Description | Test Specification | | Test Result |
|-------------------|--------------------|-----------------|-------------|
| Peak Output Power | 15.247(b)(3) | RSS-247 5.4 (d) | Compliant |

5.2 Test Method

Fundamental peak power measurements were recorded using the procedures from ANSI C63.10: 2013 clause 11.9 and KDB 558074 D01 Measurement Guidance v05r2.

Limit

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. For using antennas with greater than 6dBi of gain, the limit is reduced in dB by the amount the gain exceeds 6dBi (e.g. for a 7.4dBi antenna, the limit is reduced from 30dBm to 28.6dBm)

5.3 Test Site

EMC Laboratory, Suwanee, GA

Environmental Conditions

Temperature: 24.11 °C

Relative Humidity: 32.6 %

Atmospheric Pressure: 98.2 kPa

5.4 Test Equipment

Test End Date: 5-May-2023

Tester: DA

| Equipment | Model | Manufacturer | Asset | Cal Date | Cal Due Date |
|---------------------------------|--------------|--------------------------|---------|-------------|--------------|
| SIGNAL ANALYZER (TS8997) | FSV30 | ROHDE & SCHWARZ | B085749 | 7-Dec-2022 | 7-Dec-2023 |
| RF CABLE SMA TO SMA, 0.01-40GHZ | 084-0505-059 | TELEDYNE STORM MICROWAVE | 20108 | 13-Mar-2023 | 13-Mar-2024 |
| TSTPASS SWITCHBOX | SB2 | TSTPASS | 23009 | CNR | CNR |


Test Software Profile: TSTPASS Version: 2.0, build 2023

5.5 Test Data

| Test Mode | Frequency (MHz) | Tx Type | Measured Peak Output Power (dBm) | Limits (dBm) | Verdict |
|---------------|-----------------|---------|----------------------------------|--------------|---------|
| | | | Ant 1 | | |
| 802.11b | 2412 | SISO | 11.74 | 30 | PASS |
| | 2437 | SISO | 12.20 | 30 | PASS |
| | 2462 | SISO | 12.31 | 30 | PASS |
| 802.11g | 2412 | SISO | 14.07 | 30 | PASS |
| | 2437 | SISO | 15.11 | 30 | PASS |
| | 2462 | SISO | 14.32 | 30 | PASS |
| 802.11n(HT20) | 2412 | SISO | 13.97 | 30 | PASS |
| | 2437 | SISO | 15.01 | 30 | PASS |
| | 2462 | SISO | 14.28 | 30 | PASS |
| 802.11n(HT40) | 2422 | SISO | 10.82 | 30 | PASS |
| | 2437 | SISO | 13.54 | 30 | PASS |
| | 2452 | SISO | 11.40 | 30 | PASS |

Sample Plot

Mid Channel – 802.11g, Ant1 (2437MHz)

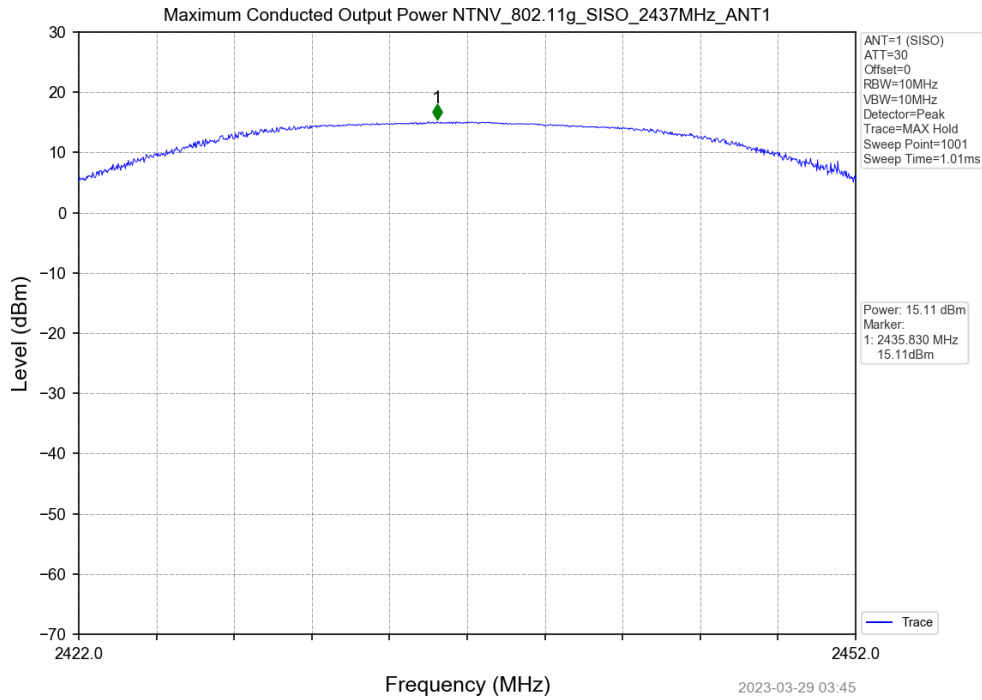

6 Field Strength of Spurious Radiation

6.1 Test Result

| Test Description | Test Specification | | Test Result |
|--------------------|--------------------|-------------------|-------------|
| Spurious Emissions | 15.205 and 15.209 | RSS-GEN 8.9, 8.10 | Compliant |

6.2 Test Method

The measurement methods defined in ANSI C63.10 method of clause 6.3, 6.5, and 6.6 were used. The integral antenna was connected during test.

Worst-case rates were tested.

Test distance:

9k to 30 MHz – Near field prescan to determine if there were any emissions.

30 to 1000 MHz - The EUT to measurement antenna distance was 3 meters

1 to 18 GHz - The EUT to measurement antenna distance was 3 meters

18 to 26 GHz - The EUT to measurement antenna distance was 3 meter

Limits within restricted bands of operation:

| Frequency | Limits ⁽¹⁾ | | Peak Limits dBuV/m |
|----------------|-----------------------|---------------------|-----------------------|
| | Microvolts/m | dBuV/m | |
| 30 - 88 MHz | 100 | 40 ⁽²⁾ | -- |
| 88 - 216 MHz | 150 | 43.5 ⁽²⁾ | -- |
| 216 - 960 MHz | 200 | 46 ⁽²⁾ | -- |
| 960 - 1000 MHz | 500 | 54 ⁽²⁾ | -- |
| 1 - 40 GHz | 500 | 54 ⁽³⁾ | 74 |

(1) These limits are applicable to emissions outside of the intentional transmit frequency band.

(2) Quasi-peak limit

(3) Average limit

6.3 Test Site

SGS EMC Laboratory, Suwanee, GA

| | | |
|--------------------------|------------|----------|
| Environmental Conditions | 30-1000MHz | 1-18GHz |
| Temperature: | 22.5 °C | 22.5 °C |
| Relative Humidity: | 48.2 % | 48.2 % |
| Atmospheric Pressure: | 97.4 kPa | 97.4 kPa |

6.4 Test Equipment

Test End Date: 2-May-2023

Tester: PL

| Equipment | Model | Manufacturer | Asset | Cal Date | Cal Due Date |
|---|---------------|------------------------------------|---------|-------------|--------------|
| ANTENNA, BILOG | JB6 | SUNOL | B079689 | 26-May-2022 | 26-May-2024 |
| N to N RF Cable | EM-B810NM-276 | ECHOLON | 23007 | 31-Mar-2023 | 31-Mar-2024 |
| RF CABLE NM TO NM, 0.01-12GHZ | 90-078-079 | TELEDYNE STORM MICROWAVE | 20115 | 15-Mar-2023 | 15-Mar-2024 |
| RF CABLE NM TO NM, 0.01-18GHZ | 90-195-079 | TELEDYNE STORM MICROWAVE | 20123 | 9-Feb-2023 | 9-Feb-2024 |
| RF CABLE RIGHT ANGLE NM TO NM, 0.01-18GHZ | 90-076-020 | TELEDYNE STORM MICROWAVE | 20132 | 13-Mar-2023 | 13-Mar-2024 |
| ROTARY NM TO NF CONNECTOR | 18-2120-0 | DIAMOND ANTENNA AND MICROWAVE CORP | 22008 | 13-Mar-2023 | 13-Mar-2024 |
| LOW NOISE AMPLIFIER | ZKL-2+ | MINI-CIRCUITS | B079800 | 14-Sep-2022 | 14-Sep-2023 |
| EMI TEST RECEIVER | ESW44 | ROHDE & SCHWARZ | 22032 | 24-Nov-2022 | 24-Nov-2023 |

Software:

"RSE 30-1000 MHz T7 220318" TILE! profile dated 20-Feb-2023

Test Start Date: 28-Apr-2023

Test End Date: 1-May-2023

Tester: PL, ZH

| Equipment | Model | Manufacturer | Asset | Cal Date | Cal Due Date |
|---|---------------|--------------------------|---------|-------------|--------------|
| ANTENNA, DRG HORN (MEDIUM) | 3117 | ETS LINDGREN | B079691 | 15-Aug-2022 | 15-Aug-2024 |
| N to N RF Cable | EM-B810NM-276 | ECHOLON | 23007 | 31-Mar-2023 | 31-Mar-2024 |
| RF CABLE RIGHT ANGLE NM TO NM, 0.01-18GHZ | 90-076-020 | TELEDYNE STORM MICROWAVE | 20131 | 13-Mar-2023 | 13-Mar-2024 |
| LOW NOISE AMPLIFIER | TS-PR18 | ROHDE & SCHWARZ | B094463 | 13-Jul-2022 | 13-Jul-2023 |
| EMI TEST RECEIVER | ESW44 | ROHDE & SCHWARZ | 22027 | 13-Sep-2022 | 13-Sep-2023 |
| FILTER, HIGH PASS, >2800MHZ | HPM50111 | MICRO-TRONICS | 22017 | 16-Jun-2023 | 16-Jun-2024 |


6.5 Test Data – Peak Plots

Notes:

- 1) No discernable emissions detected below 30 MHz
- 2) No discernable emissions detected above 18 GHz.

6.5.1 WLAN 802.11b


Vertical (30-1000MHz) (WLAN 802.11b - LCH)

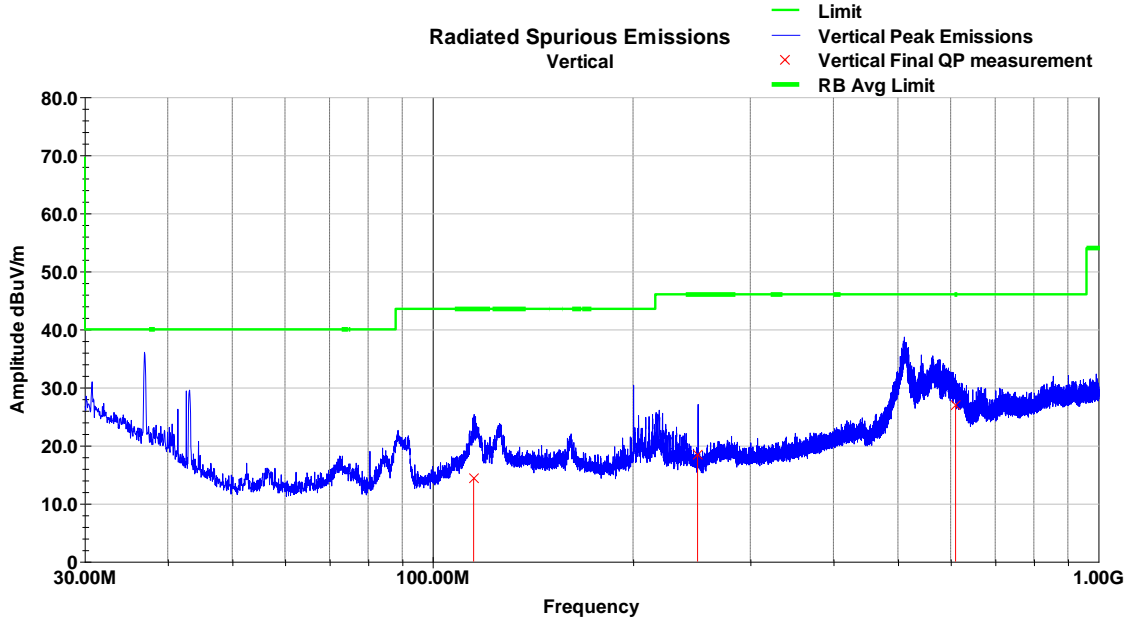

Vertical Data

| Frequency MHz | Raw QP (dBuV) | Polarity (V/H) | Azimuth (degrees) | Height (cm) | AF (dB/m) | Loss (dB) | Amp (dB) | QP Value (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-------------------------------------|------------------|-------------------|----------------------|----------------|--------------|--------------|-------------|----------------------|-------------------|----------------|
| 115.23 | 27.8 | V | 182.0 | 247.0 | 17.2 | 0.6 | 31.5 | 14.3 | 43.5 | -29.2 |
| 249.98 | 32.8 | V | 203.0 | 100.0 | 16.1 | 1.0 | 31.5 | 18.4 | 46.0 | -27.6 |
| 610.38 | 32.8 | V | 239.0 | 100.0 | 23.7 | 1.6 | 31.3 | 26.9 | 46.0 | -19.2 |
| QP Value = Raw QP + AF + Loss - Amp | | | | | | | | | | |
| Margin = QP Value - Limit | | | | | | | | | | |


Horizontal (30-1000MHz) (WLAN 802.11b - LCH)

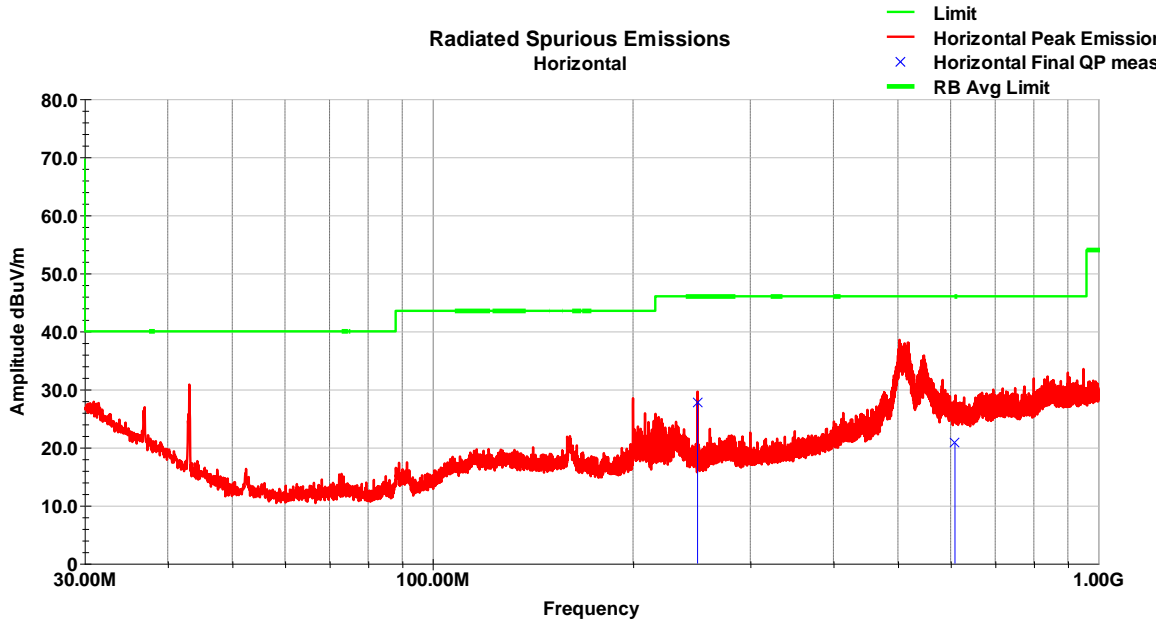


Horizontal Data

| Frequency MHz | Raw QP (dBuV) | Polarity (V/H) | Azimuth (degrees) | Height (cm) | AF (dB/m) | Loss (dB) | Amp (dB) | QP Value (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-------------------------------------|------------------|-------------------|----------------------|----------------|--------------|--------------|-------------|----------------------|-------------------|----------------|
| 249.99 | 42.0 | H | 158.0 | 170.0 | 16.1 | 1.0 | 31.5 | 27.7 | 46.0 | -18.4 |
| 609.04 | 26.7 | H | 257.0 | 297.0 | 23.7 | 1.6 | 31.3 | 20.8 | 46.0 | -25.3 |
| | | | | | | | | | | |
| QP Value = Raw QP + AF + Loss - Amp | | | | | | | | | | |
| Margin = QP Value - Limit | | | | | | | | | | |


Vertical (1-3GHz) (WLAN 802.11b - LCH)

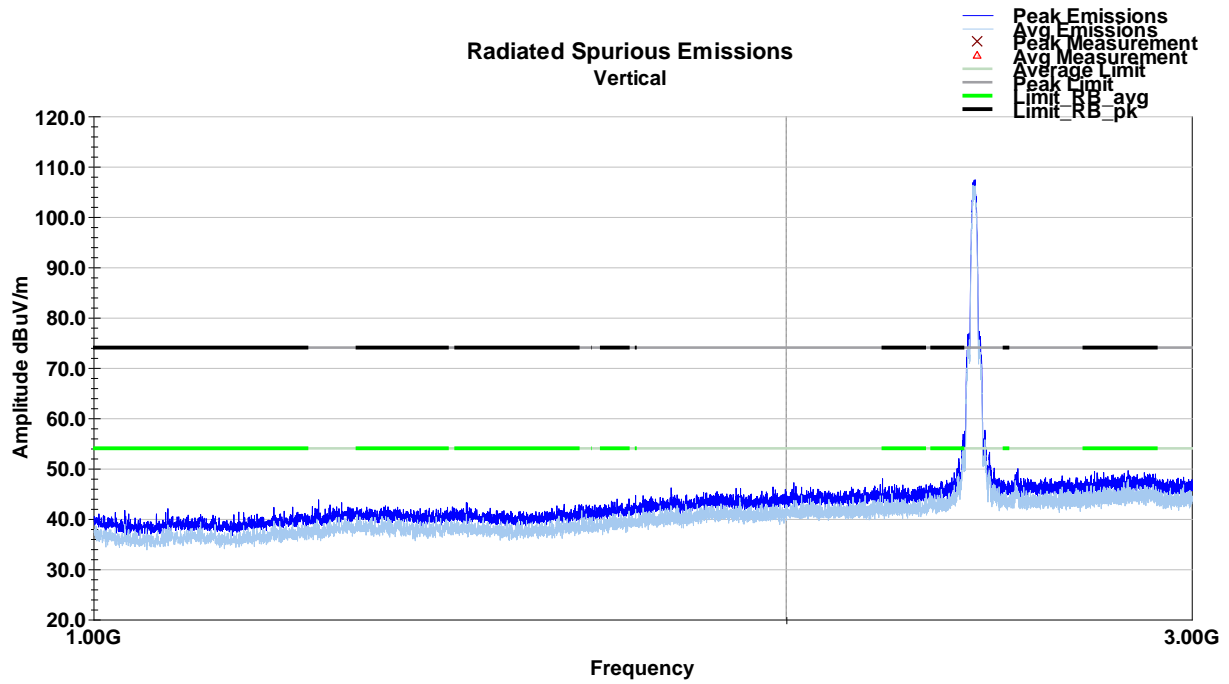

Horizontal (1-3GHz) (WLAN 802.11b - LCH)

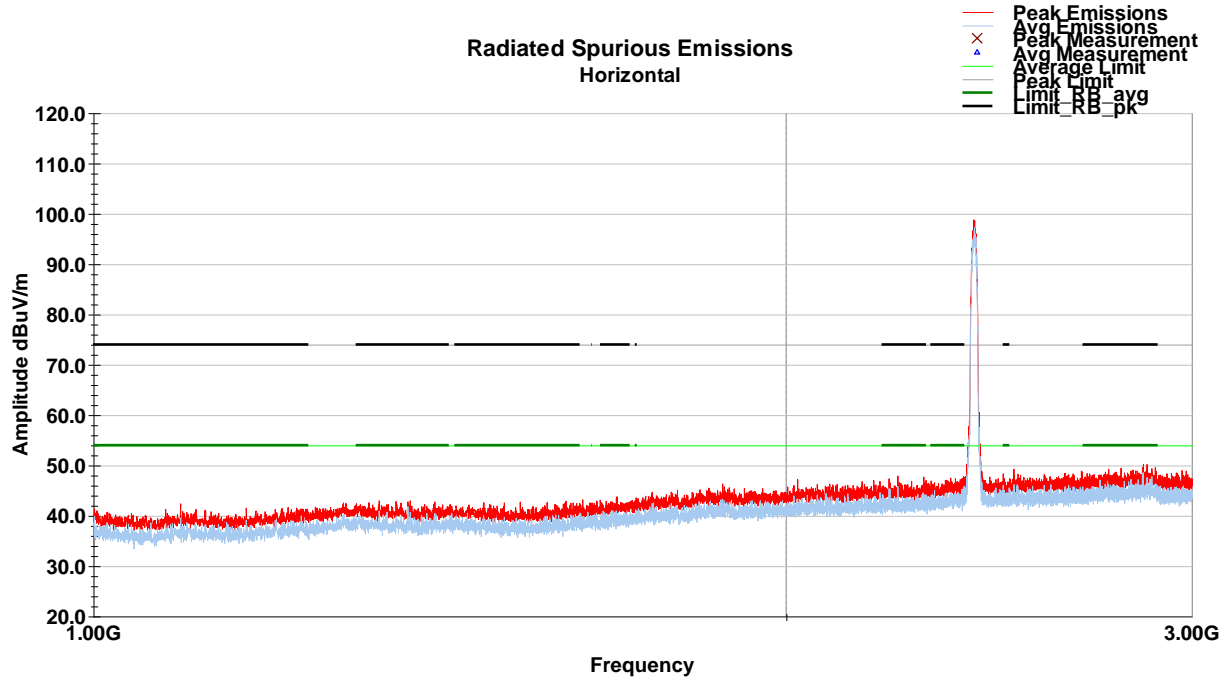

Vertical (3-18GHz) (WLAN 802.11b - LCH)

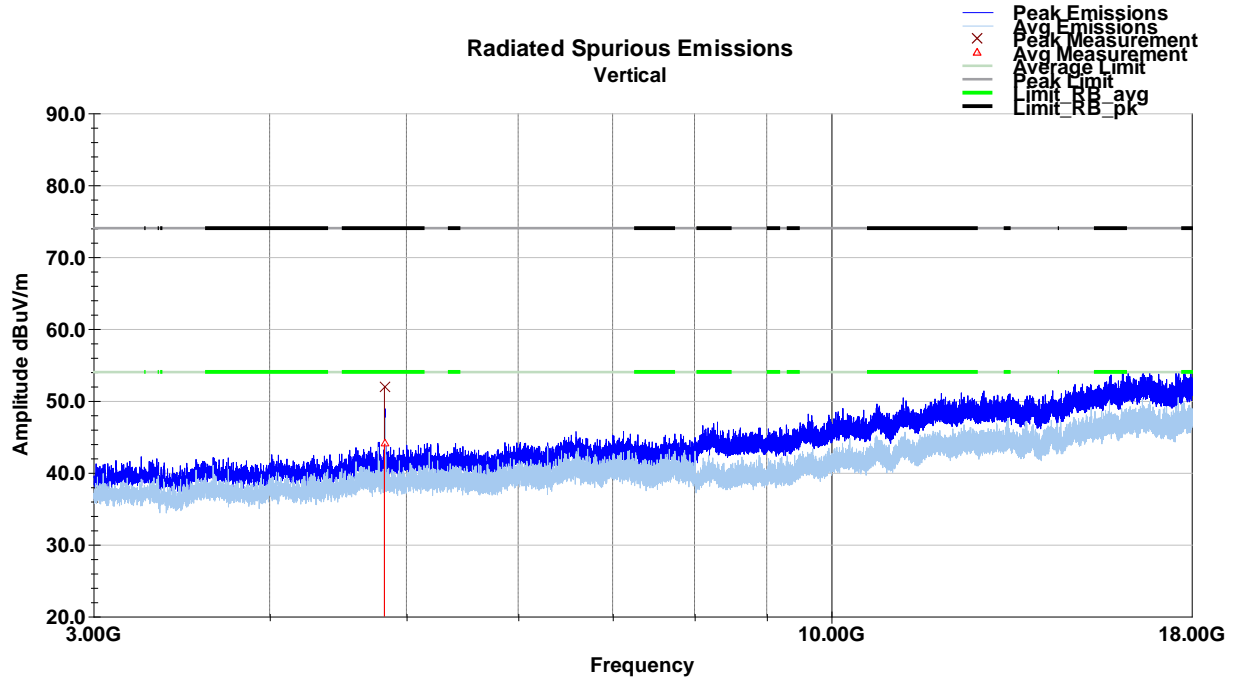


Vertical Data

| Frequency MHz | Raw Avg dBuV | Polarity (V/H) | Azimuth (degrees) | Height (cm) | AF (dB/m) | Loss (dB) | Amp (dB) | Final Avg dBuV/m | Limit (dBuV/m) | Margin (dB) |
|---------------------------------------|-----------------|-------------------|----------------------|----------------|--------------|--------------|-------------|---------------------|-------------------|----------------|
| 4823.92 | 48.8 | V | 212.0 | 250.0 | 34.6 | 2.8 | 42.1 | 44.0 | 54.0 | -10.0 |
| Final Avg = Raw Avg + AF + Loss - Amp | | | | | | | | | | |
| Margin = Final Avg - Limit | | | | | | | | | | |


| Frequency MHz | Raw Pk dBuV | Polarity (V/H) | Azimuth (degrees) | Height (cm) | AF (dB/m) | Loss (dB) | Amp (dB) | Final Pk dBuV/m | Limit dBuV/m | Margin dB |
|-------------------------------------|----------------|-------------------|----------------------|----------------|--------------|--------------|-------------|--------------------|-----------------|--------------|
| 4823.92 | 56.7 | V | 212.0 | 250.0 | 34.6 | 2.8 | 42.1 | 52.0 | 74.0 | -22.0 |
| Final Pk = Raw Pk + AF + Loss - Amp | | | | | | | | | | |
| Margin = Final Pk - Limit | | | | | | | | | | |

Horizontal (3-18GHz) (WLAN 802.11b - LCH)

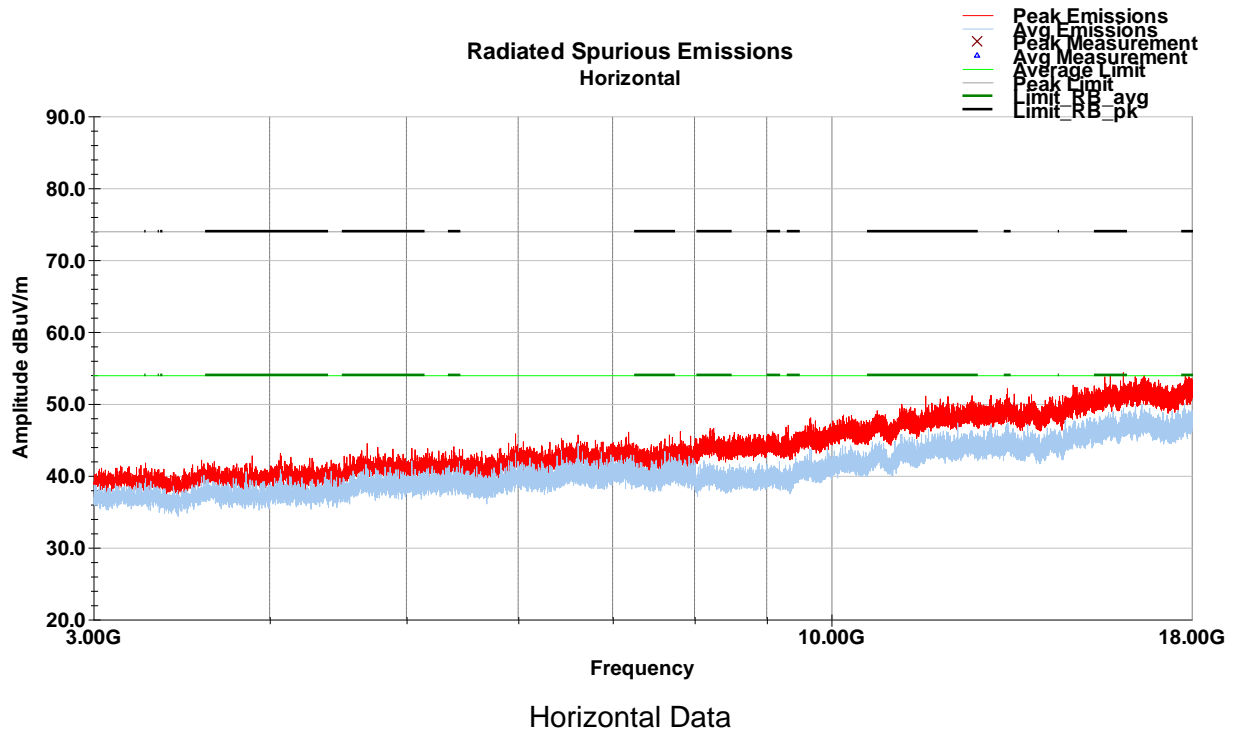

No emissions observed within 20dB of the limit.


Vertical (30-1000MHz) (WLAN 802.11b – MCH)

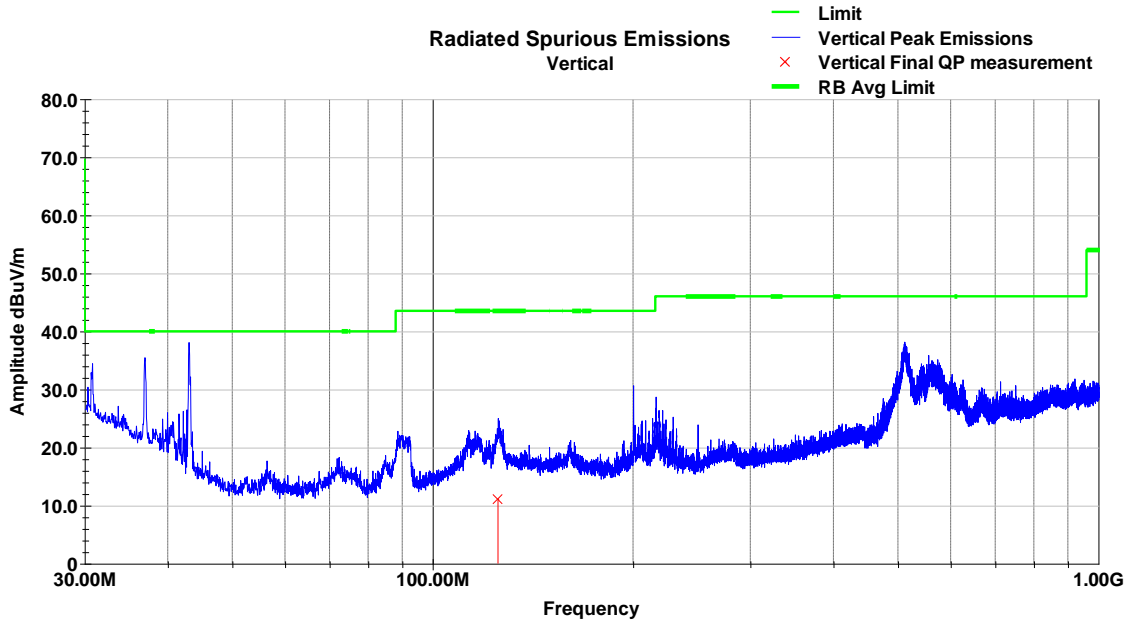

Vertical Data

| Frequency MHz | Raw QP (dBuV) | Polarity (V/H) | Azimuth (degrees) | Height (cm) | AF (dB/m) | Loss (dB) | Amp (dB) | QP Value (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-------------------------------------|------------------|-------------------|----------------------|----------------|--------------|--------------|-------------|----------------------|-------------------|----------------|
| 125.37 | 24.2 | V | 244.0 | 281.0 | 17.8 | 0.7 | 31.5 | 11.2 | 43.5 | -32.3 |
| | | | | | | | | | | |
| QP Value = Raw QP + AF + Loss - Amp | | | | | | | | | | |
| Margin = QP Value - Limit | | | | | | | | | | |


Horizontal (30-1000MHz) (WLAN 802.11b – MCH)

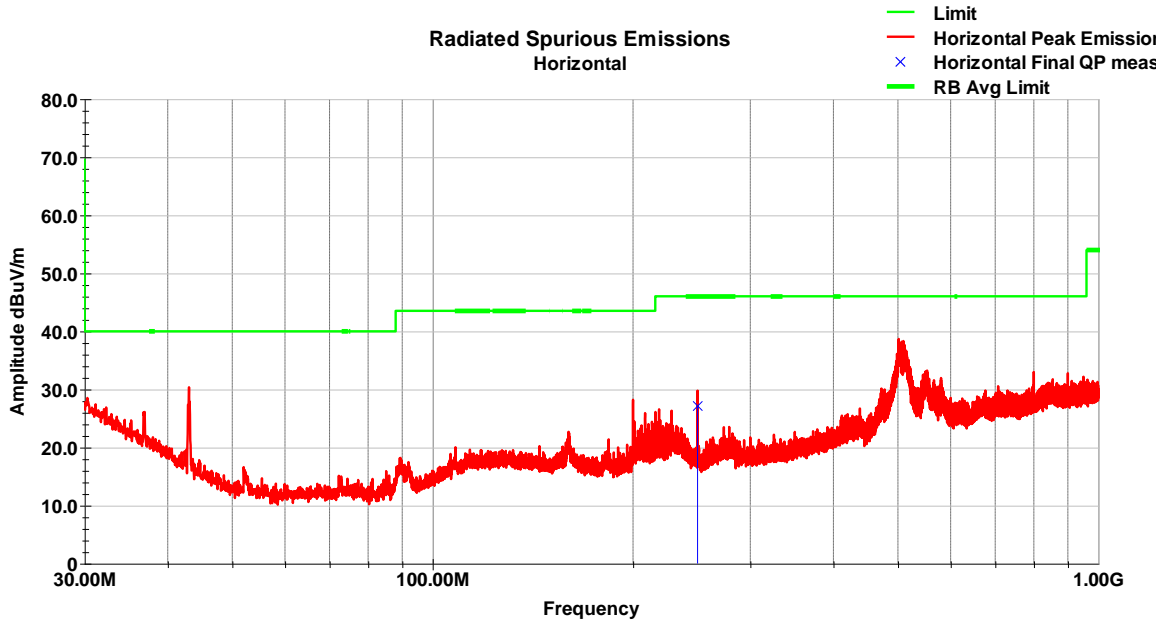


Horizontal Data

| Frequency MHz | Raw QP (dBuV) | Polarity (V/H) | Azimuth (degrees) | Height (cm) | AF (dB/m) | Loss (dB) | Amp (dB) | QP Value (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-------------------------------------|------------------|-------------------|----------------------|----------------|--------------|--------------|-------------|----------------------|-------------------|----------------|
| 250.00 | 41.5 | H | 163.0 | 169.0 | 16.1 | 1.0 | 31.5 | 27.1 | 46.0 | -18.9 |
| | | | | | | | | | | |
| QP Value = Raw QP + AF + Loss - Amp | | | | | | | | | | |
| Margin = QP Value - Limit | | | | | | | | | | |


Vertical (1-3GHz) (WLAN 802.11b – MCH)

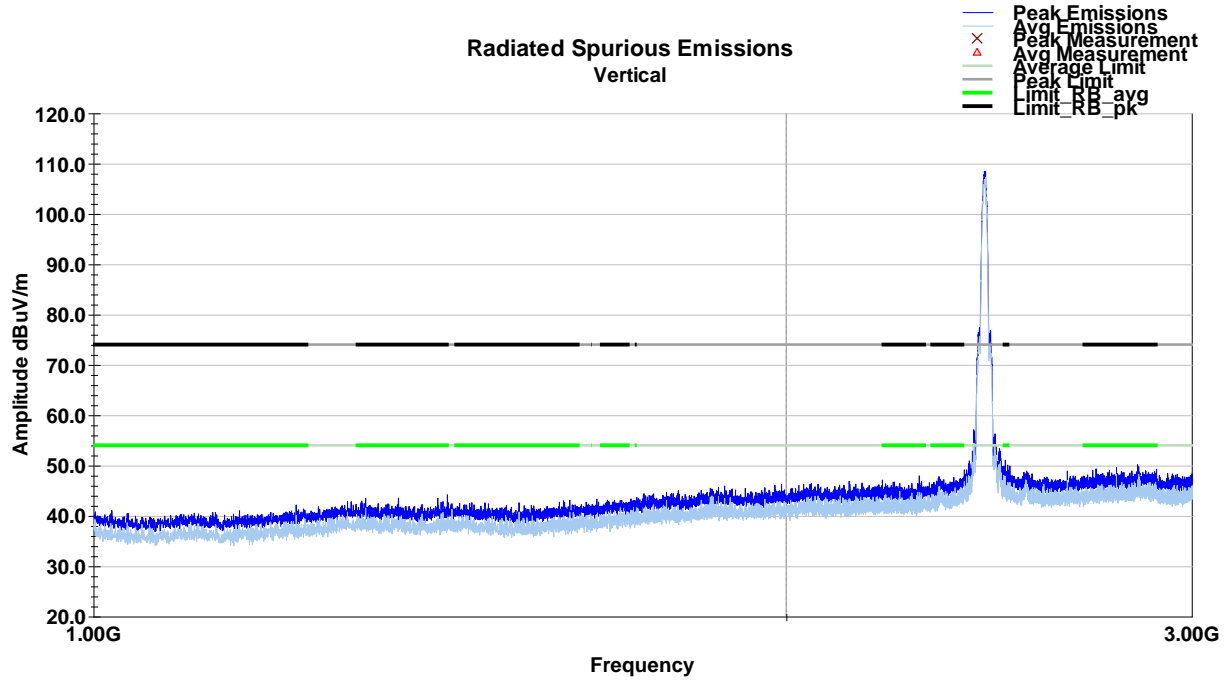

Horizontal (1-3GHz) (WLAN 802.11b – MCH)

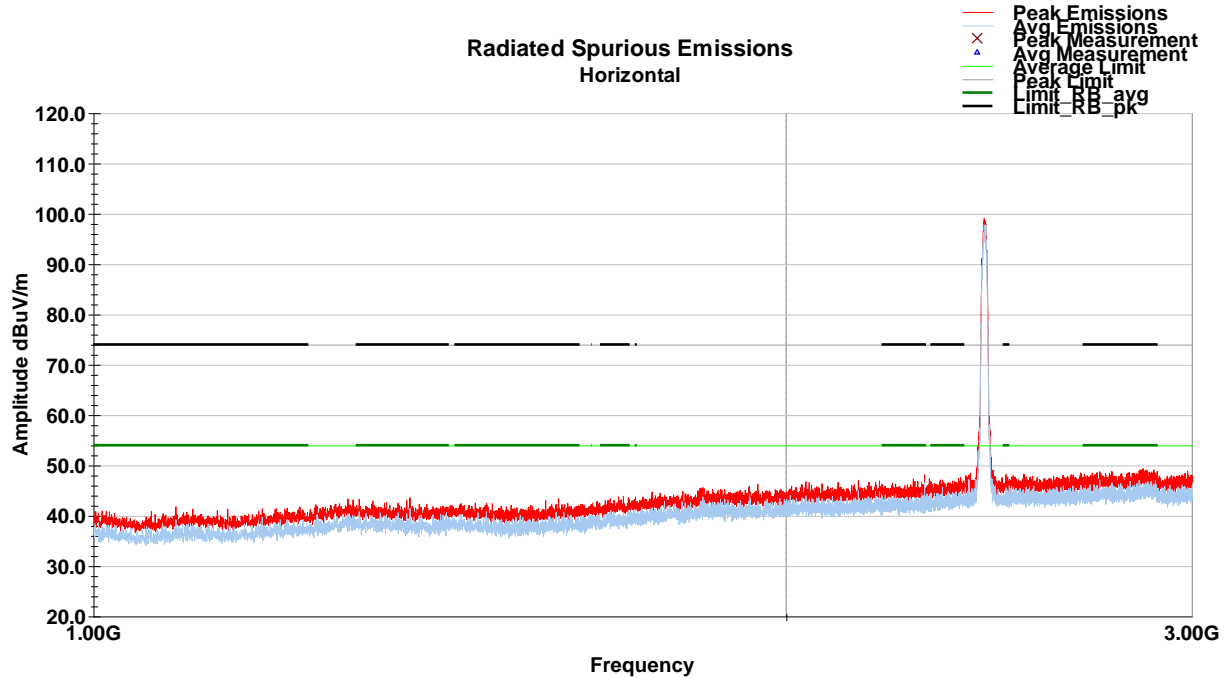

Vertical (3-18GHz) (WLAN 802.11b – MCH)

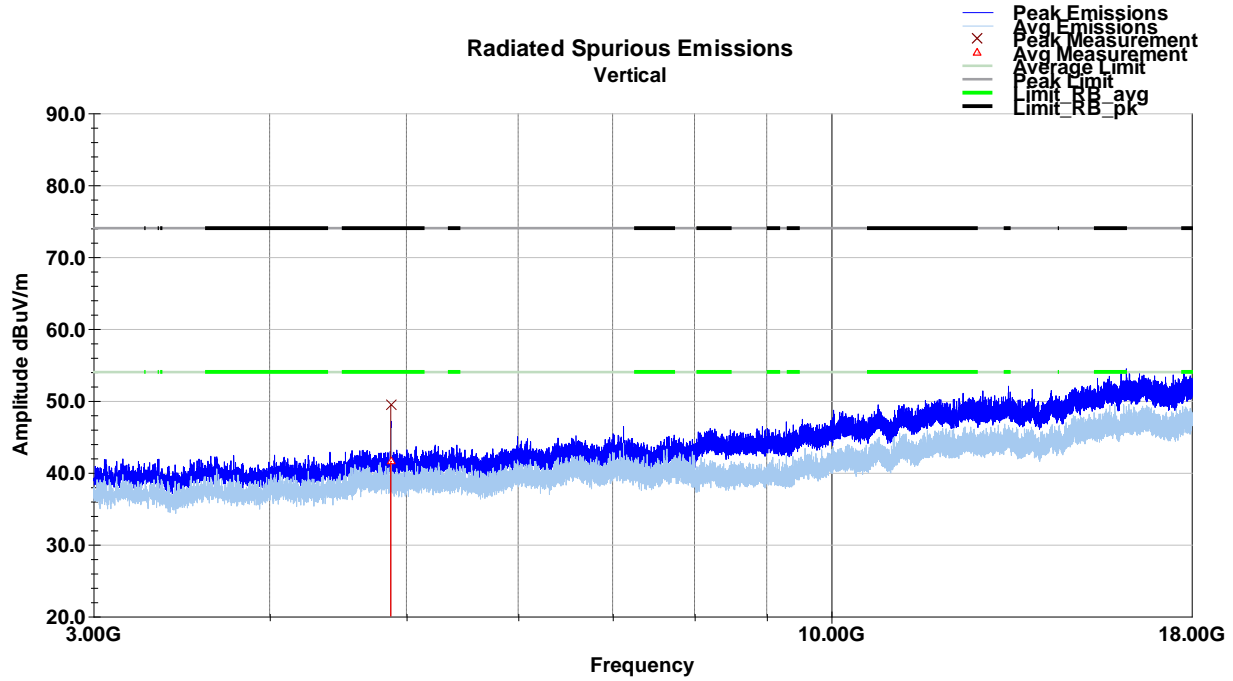


Vertical Data

| Frequency MHz | Raw Avg dBuV | Polarity (V/H) | Azimuth (degrees) | Height (cm) | AF (dB/m) | Loss (dB) | Amp (dB) | Final Avg dBuV/m | Limit (dBuV/m) | Margin (dB) |
|---------------------------------------|-----------------|-------------------|----------------------|----------------|--------------|--------------|-------------|---------------------|-------------------|----------------|
| 4874.04 | 46.4 | V | 24.0 | 180.0 | 34.5 | 2.8 | 42.1 | 41.6 | 54.0 | -12.4 |
| Final Avg = Raw Avg + AF + Loss - Amp | | | | | | | | | | |
| Margin = Final Avg - Limit | | | | | | | | | | |


| Frequency MHz | Raw Pk dBuV | Polarity (V/H) | Azimuth (degrees) | Height (cm) | AF (dB/m) | Loss (dB) | Amp (dB) | Final Pk dBuV/m | Limit dBuV/m | Margin dB |
|-------------------------------------|----------------|-------------------|----------------------|----------------|--------------|--------------|-------------|--------------------|-----------------|--------------|
| 4874.04 | 54.2 | V | 24.0 | 180.0 | 34.5 | 2.8 | 42.1 | 49.4 | 74.0 | -24.6 |
| Final Pk = Raw Pk + AF + Loss - Amp | | | | | | | | | | |
| Margin = Final Pk - Limit | | | | | | | | | | |

Horizontal (3-18GHz) (WLAN 802.11b – MCH)

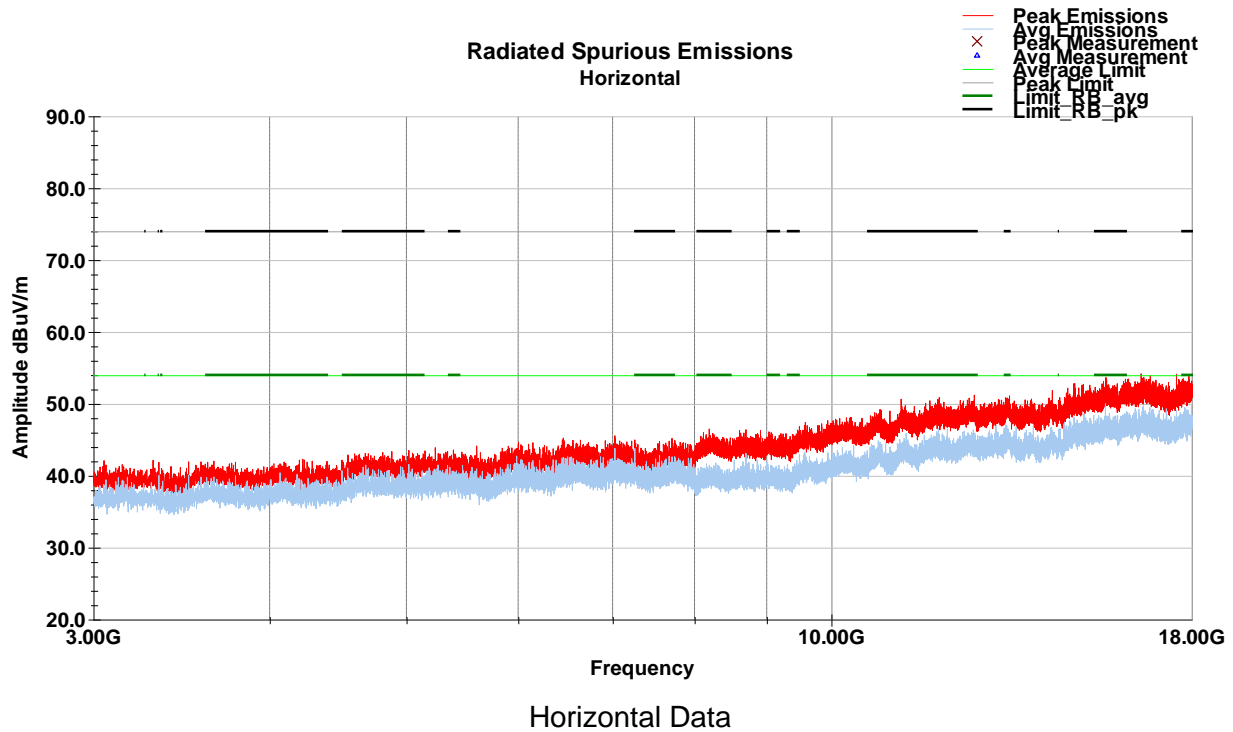

No emissions observed within 20dB of the limit.


Vertical (30-1000MHz) (WLAN 802.11b – HCH)

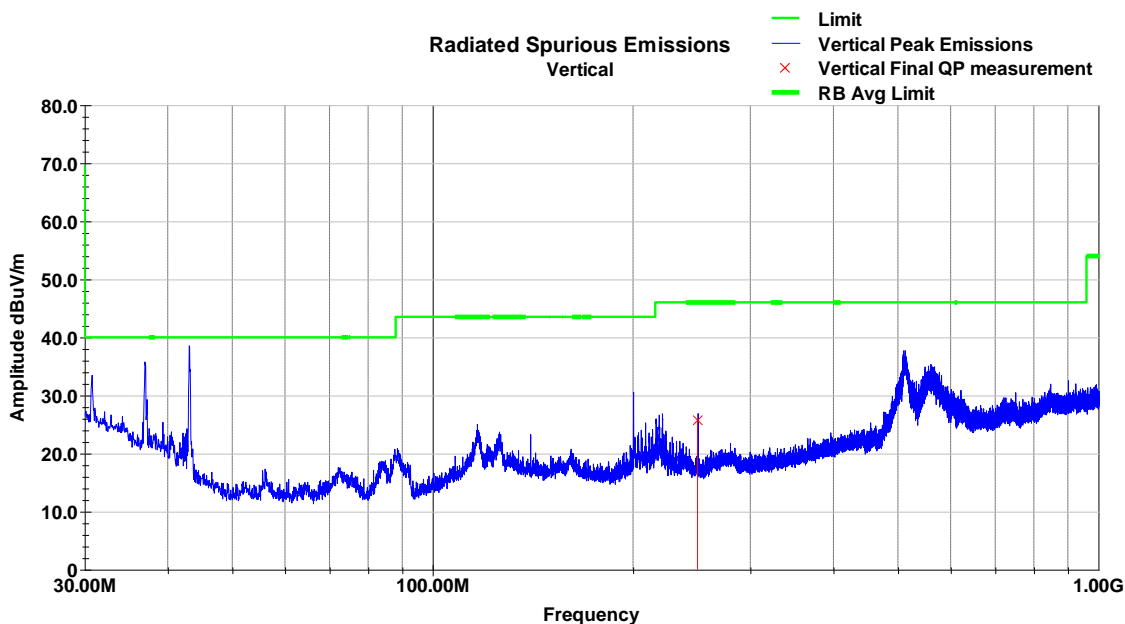

Vertical Data

| Frequency MHz | Raw QP (dBuV) | Polarity (V/H) | Azimuth (degrees) | Height (cm) | AF (dB/m) | Loss (dB) | Amp (dB) | QP Value (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-------------------------------------|------------------|-------------------|----------------------|----------------|--------------|--------------|-------------|----------------------|-------------------|----------------|
| 249.98 | 40.0 | V | 145.0 | 100.0 | 16.1 | 1.0 | 31.5 | 25.6 | 46.0 | -20.4 |
| QP Value = Raw QP + AF + Loss - Amp | | | | | | | | | | |
| Margin = QP Value - Limit | | | | | | | | | | |


Horizontal (30-1000MHz) (WLAN 802.11b – HCH)

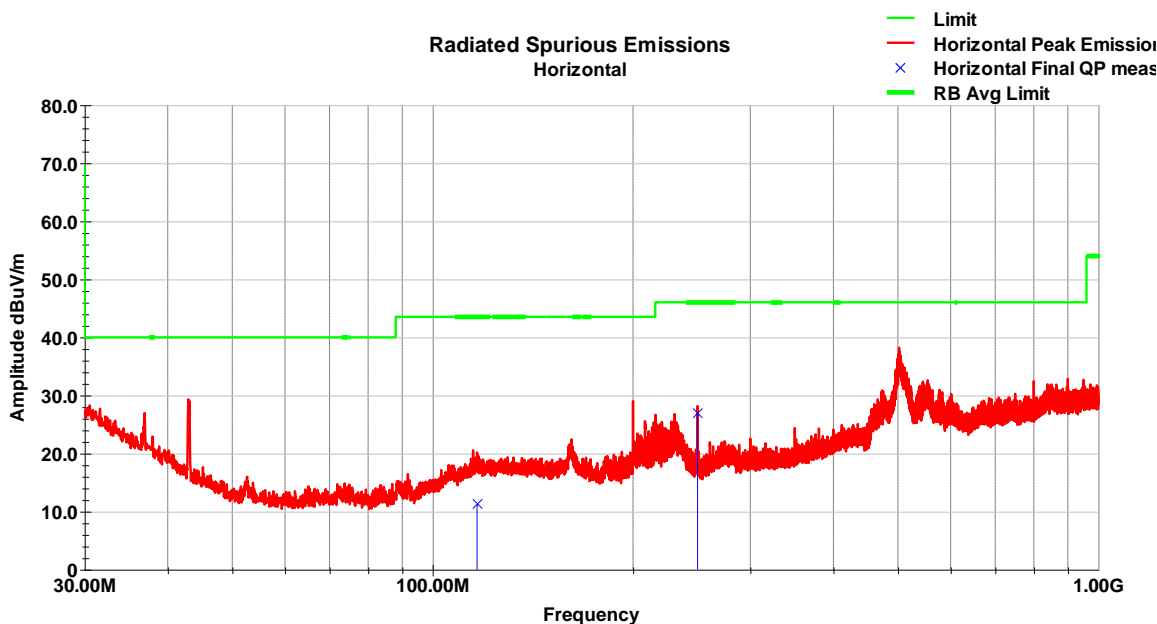


Horizontal Data

| Frequency MHz | Raw QP (dBuV) | Polarity (V/H) | Azimuth (degrees) | Height (cm) | AF (dB/m) | Loss (dB) | Amp (dB) | QP Value (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-------------------------------------|------------------|-------------------|----------------------|----------------|--------------|--------------|-------------|----------------------|-------------------|----------------|
| 116.63 | 24.7 | H | 102.0 | 142.0 | 17.4 | 0.7 | 31.5 | 11.3 | 43.5 | -32.3 |
| 250.00 | 41.3 | H | 109.0 | 129.0 | 16.1 | 1.0 | 31.5 | 26.9 | 46.0 | -19.1 |
| | | | | | | | | | | |
| QP Value = Raw QP + AF + Loss - Amp | | | | | | | | | | |
| Margin = QP Value - Limit | | | | | | | | | | |


Vertical (1-3GHz) (WLAN 802.11b – HCH)

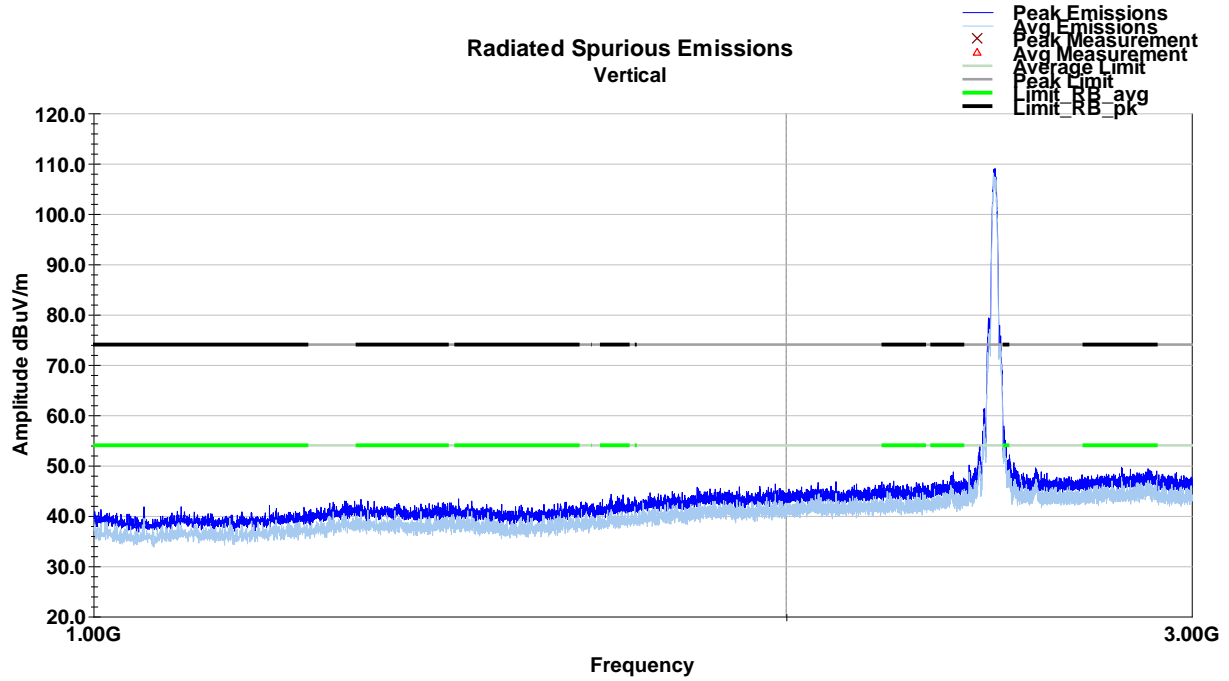

Horizontal (1-3GHz) (WLAN 802.11b – HCH)

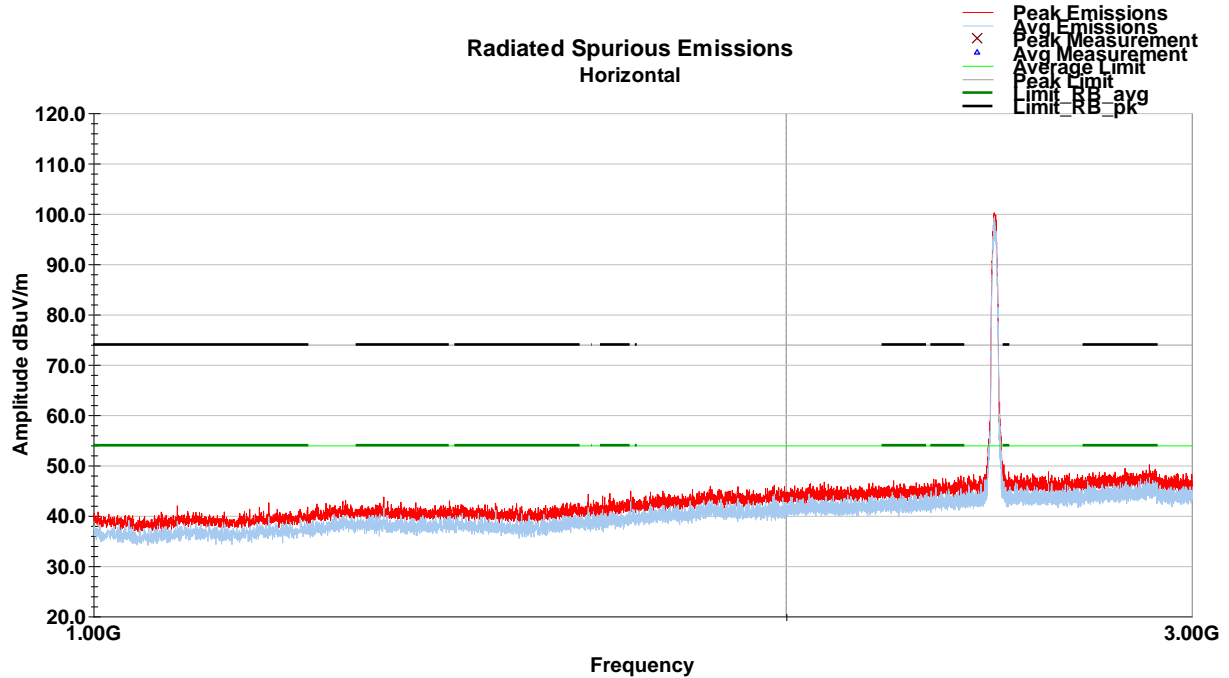

Vertical (3-18GHz) (WLAN 802.11b – HCH)

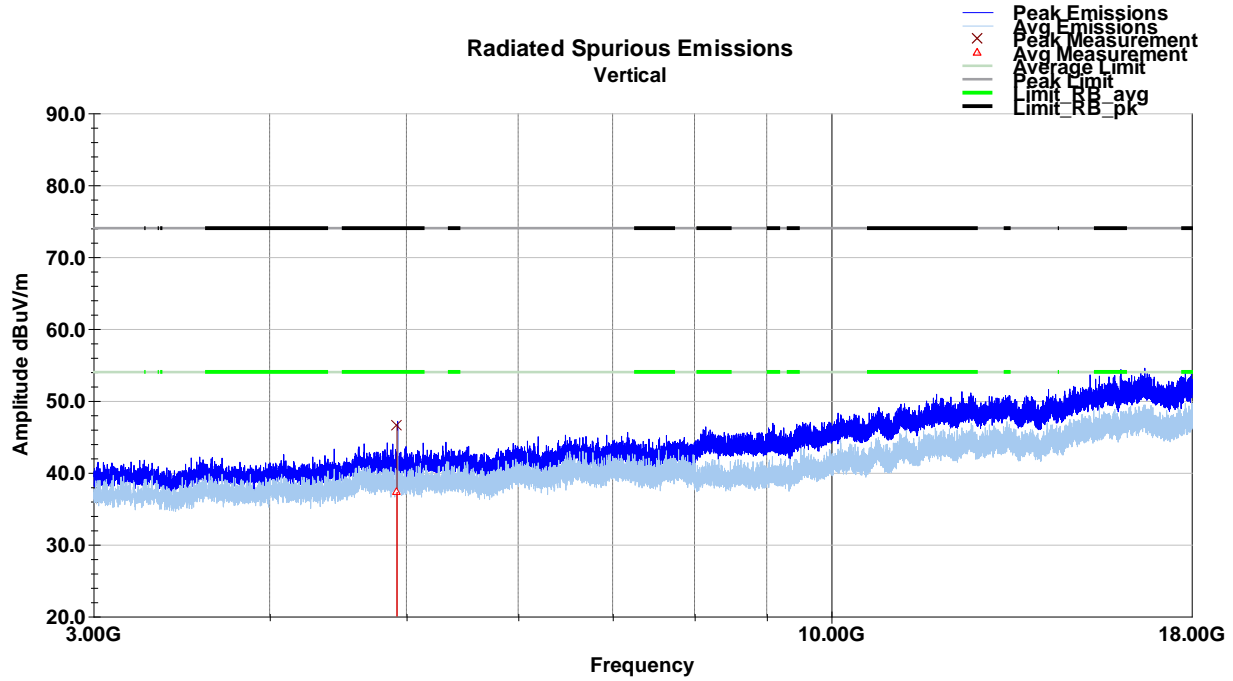


Vertical Data

| Frequency MHz | Raw Avg dBuV | Polarity (V/H) | Azimuth (degrees) | Height (cm) | AF (dB/m) | Loss (dB) | Amp (dB) | Final Avg dBuV/m | Limit (dBuV/m) | Margin (dB) |
|---------------------------------------|-----------------|-------------------|----------------------|----------------|--------------|--------------|-------------|---------------------|-------------------|----------------|
| 4924.12 | 42.0 | V | 146.0 | 175.0 | 34.4 | 2.9 | 42.1 | 37.3 | 54.0 | -16.7 |
| Final Avg = Raw Avg + AF + Loss - Amp | | | | | | | | | | |
| Margin = Final Avg - Limit | | | | | | | | | | |

| Frequency MHz | Raw Pk dBuV | Polarity (V/H) | Azimuth (degrees) | Height (cm) | AF (dB/m) | Loss (dB) | Amp (dB) | Final Pk dBuV/m | Limit dBuV/m | Margin dB |
|-------------------------------------|----------------|-------------------|----------------------|----------------|--------------|--------------|-------------|--------------------|-----------------|--------------|
| 4924.12 | 51.3 | V | 146.0 | 175.0 | 34.4 | 2.9 | 42.1 | 46.6 | 74.0 | -27.4 |
| Final Pk = Raw Pk + AF + Loss - Amp | | | | | | | | | | |
| Margin = Final Pk - Limit | | | | | | | | | | |


Horizontal (3-18GHz) (WLAN 802.11b – HCH)

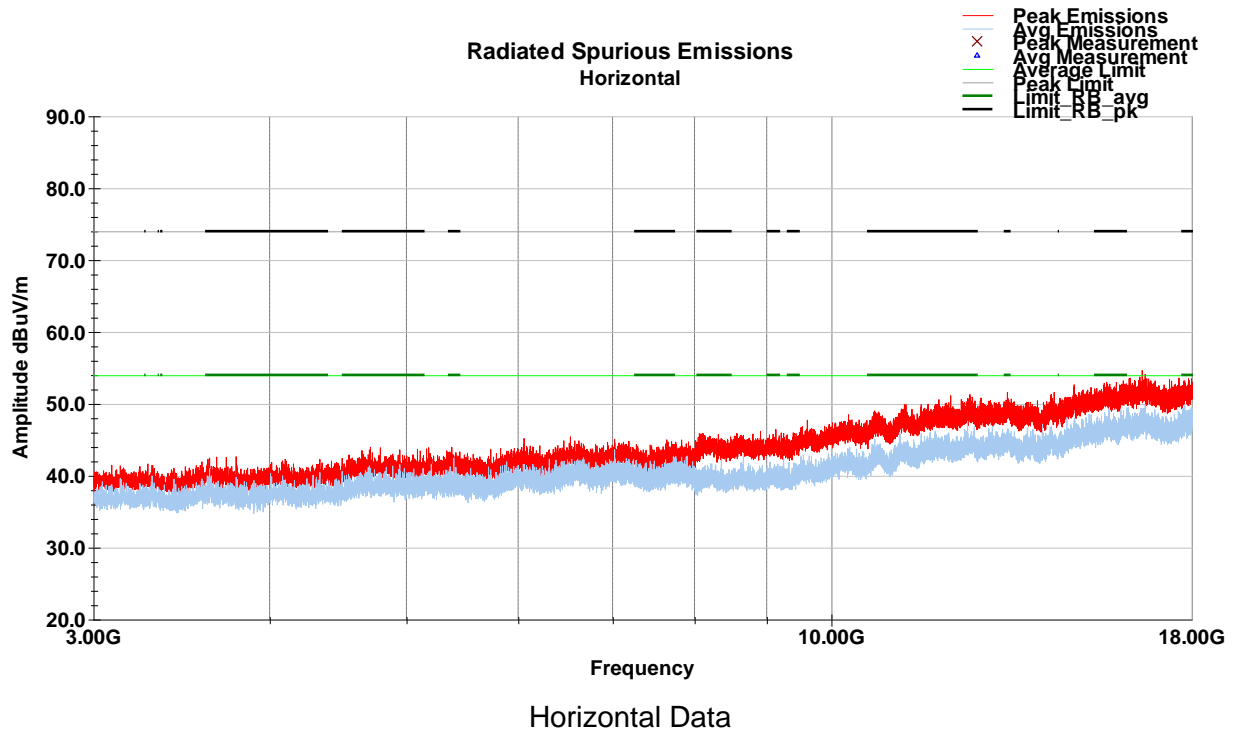


No emissions observed within 20dB of the limit.

6.5.2 WLAN 802.11g


Vertical (30-1000MHz) (WLAN 802.11g – LCH)

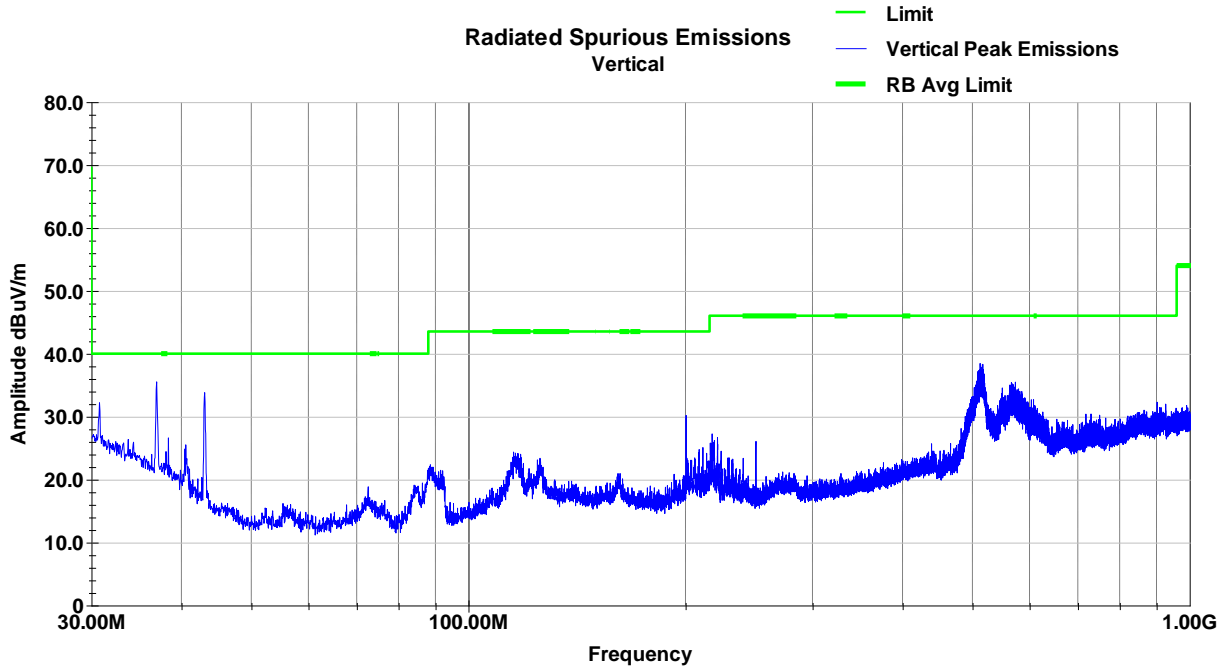


Horizontal (30-1000MHz) (WLAN 802.11g – LCH)

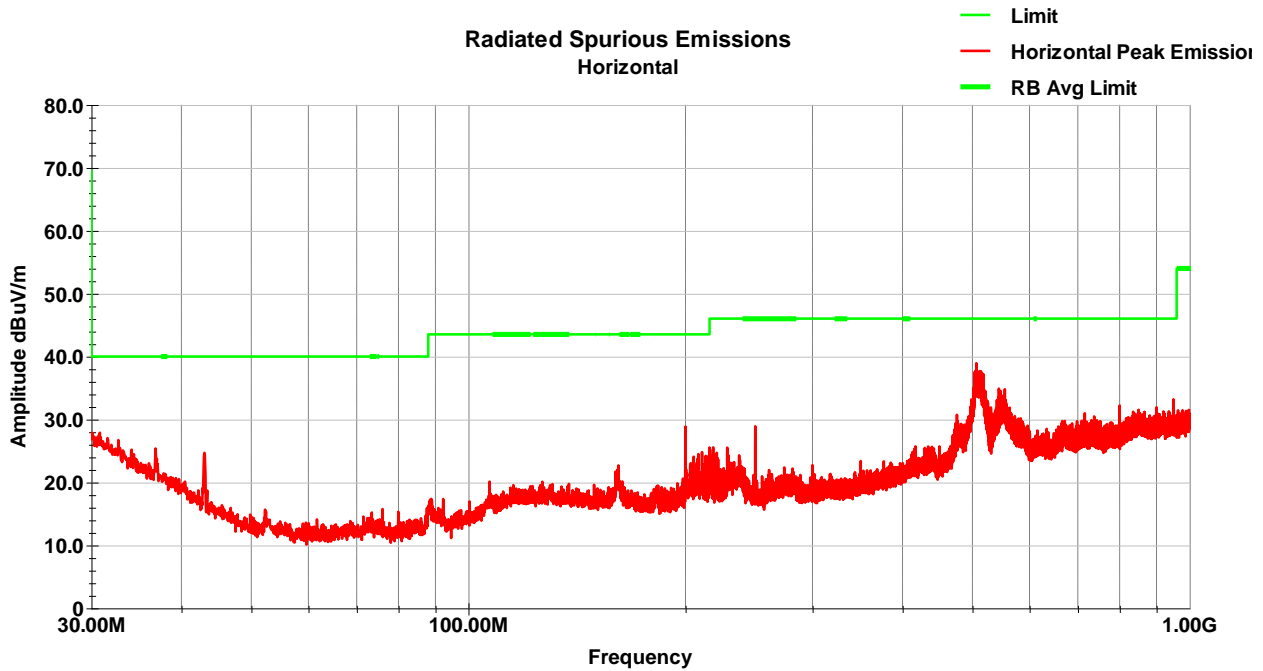


Vertical (1-3GHz) (WLAN 802.11g – LCH)

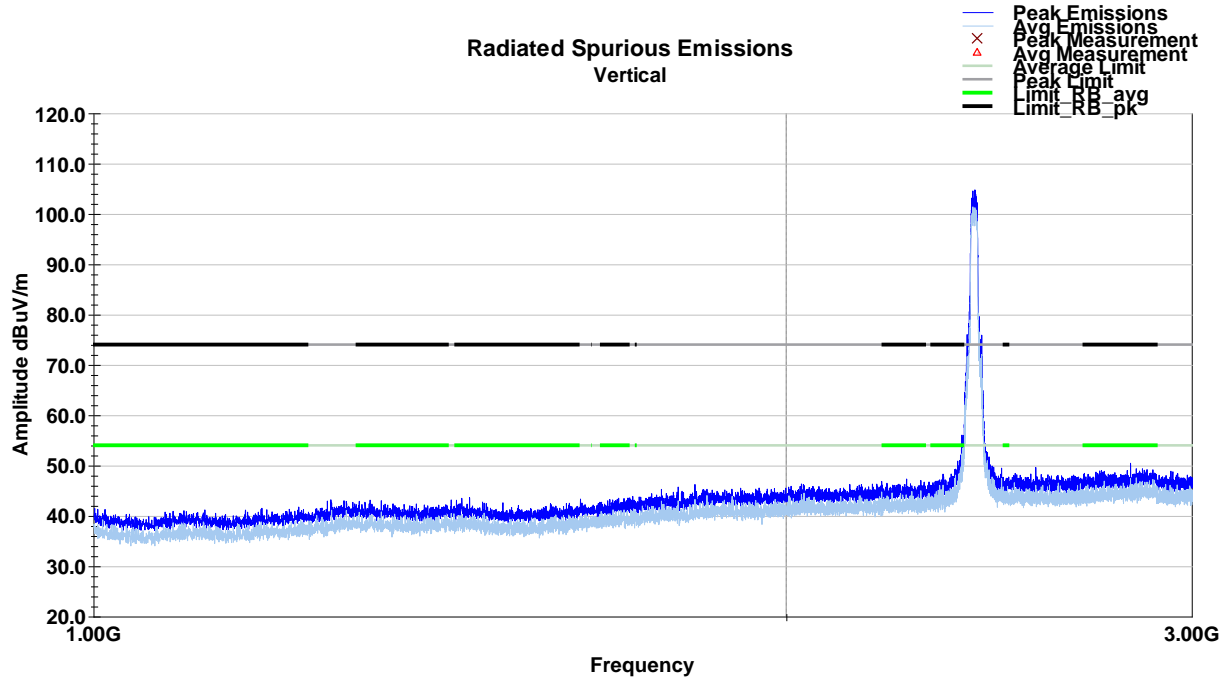

Horizontal (1-3GHz) (WLAN 802.11g – LCH)

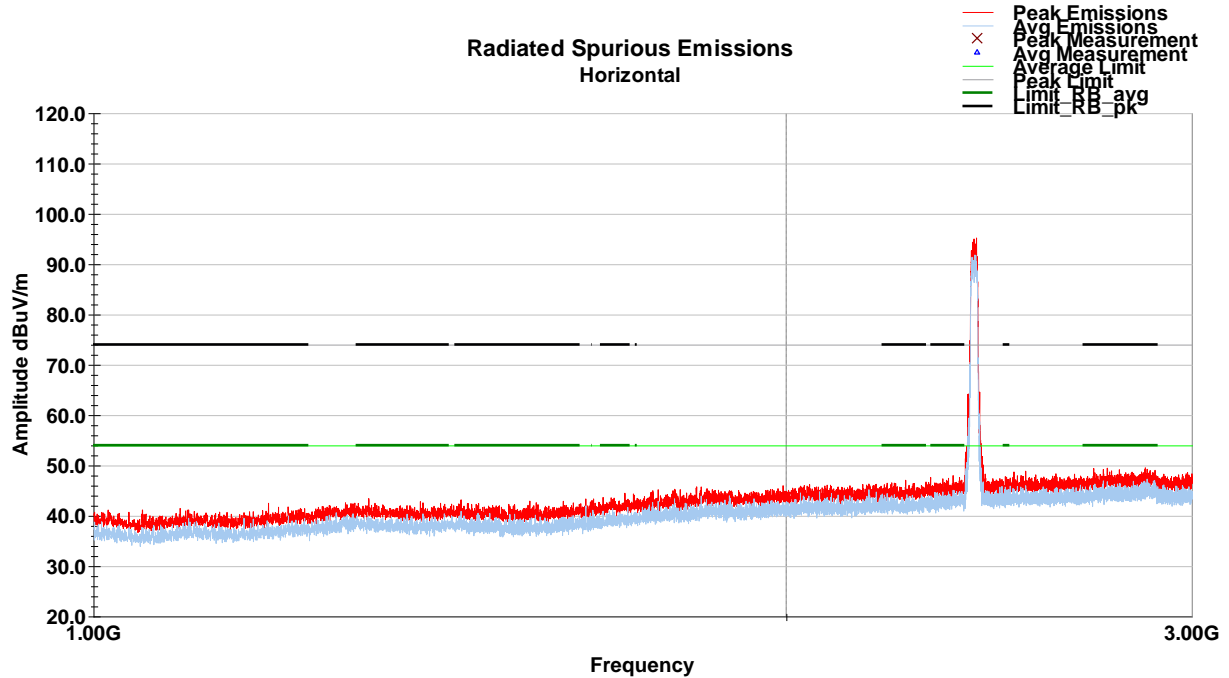

Vertical (3-18GHz) (WLAN 802.11g – LCH)

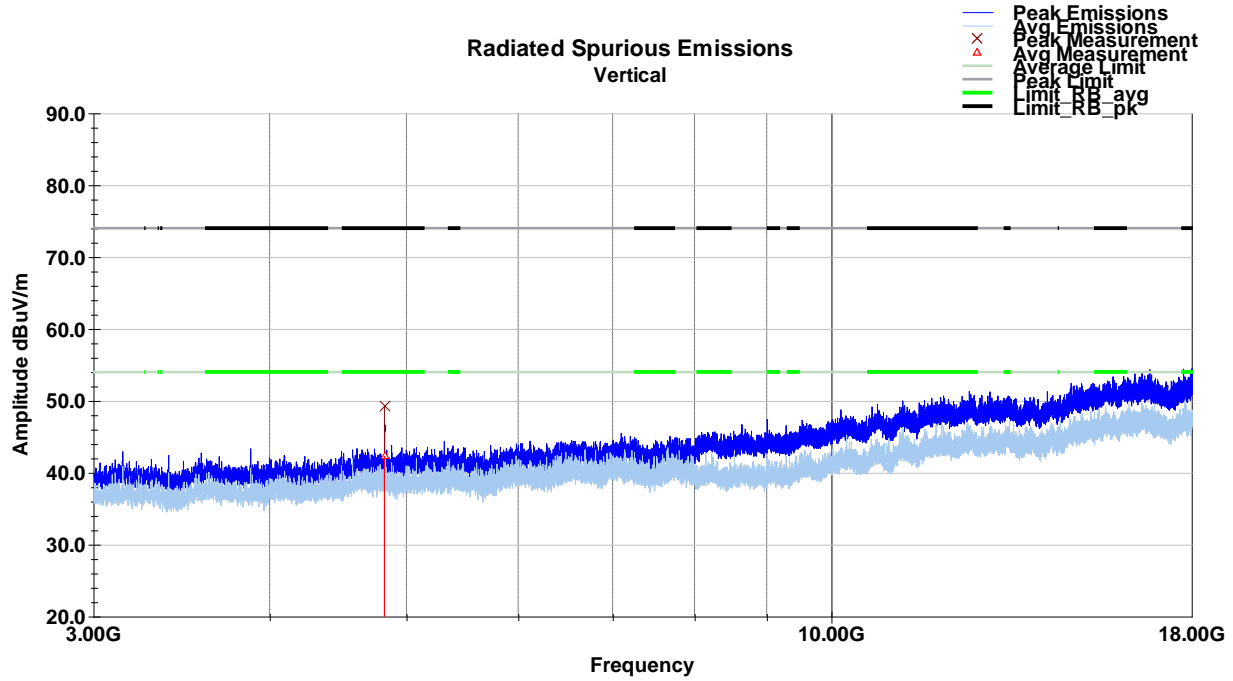


Vertical Data

| Frequency MHz | Raw Avg dBuV | Polarity (V/H) | Azimuth (degrees) | Height (cm) | AF (dB/m) | Loss (dB) | Amp (dB) | Final Avg dBuV/m | Limit (dBuV/m) | Margin (dB) |
|---------------------------------------|-----------------|-------------------|----------------------|----------------|--------------|--------------|-------------|---------------------|-------------------|----------------|
| 4823.92 | 47.0 | V | 334.0 | 247.0 | 34.6 | 2.8 | 42.1 | 42.3 | 54.0 | -11.7 |
| Final Avg = Raw Avg + AF + Loss - Amp | | | | | | | | | | |
| Margin = Final Avg - Limit | | | | | | | | | | |


| Frequency MHz | Raw Pk dBuV | Polarity (V/H) | Azimuth (degrees) | Height (cm) | AF (dB/m) | Loss (dB) | Amp (dB) | Final Pk dBuV/m | Limit dBuV/m | Margin dB |
|-------------------------------------|----------------|-------------------|----------------------|----------------|--------------|--------------|-------------|--------------------|-----------------|--------------|
| 4823.92 | 54.0 | V | 334.0 | 247.0 | 34.6 | 2.8 | 42.1 | 49.3 | 74.0 | -24.7 |
| Final Pk = Raw Pk + AF + Loss - Amp | | | | | | | | | | |
| Margin = Final Pk - Limit | | | | | | | | | | |

Horizontal (3-18GHz) (WLAN 802.11g – LCH)

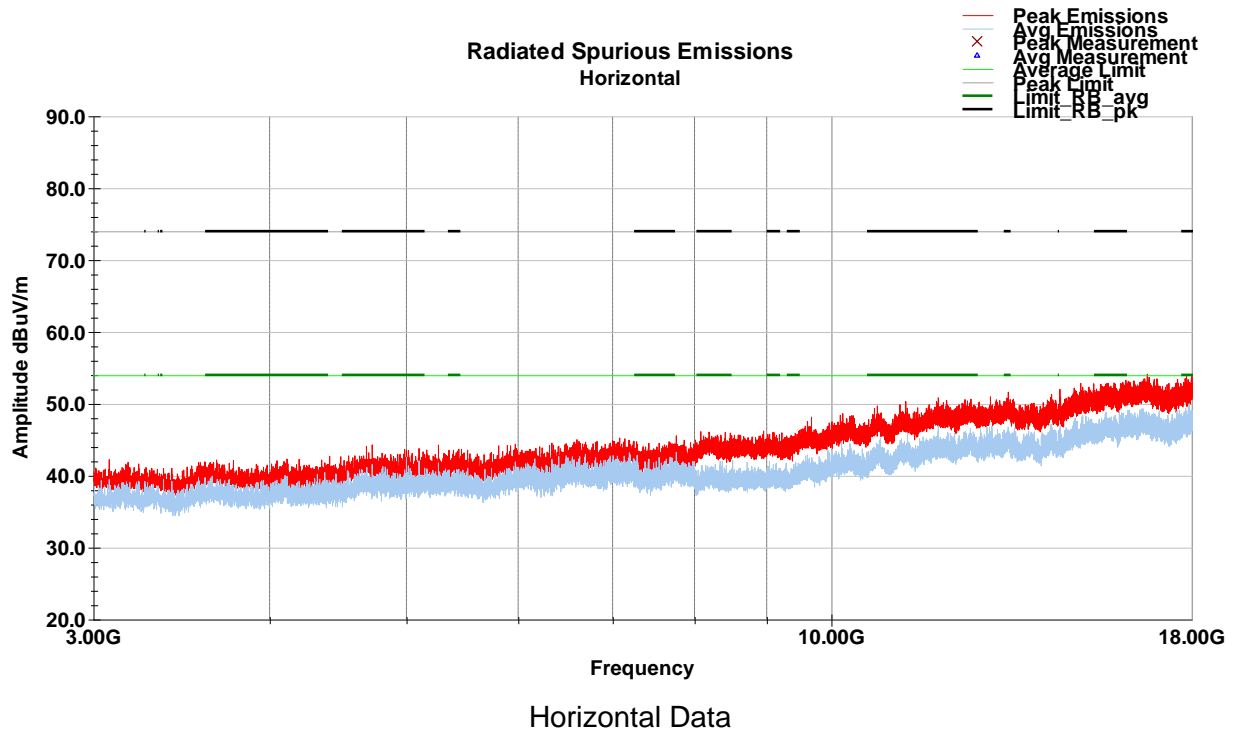


No emissions observed within 20dB of the limit.


Vertical (30-1000MHz) (WLAN 802.11g – MCH)

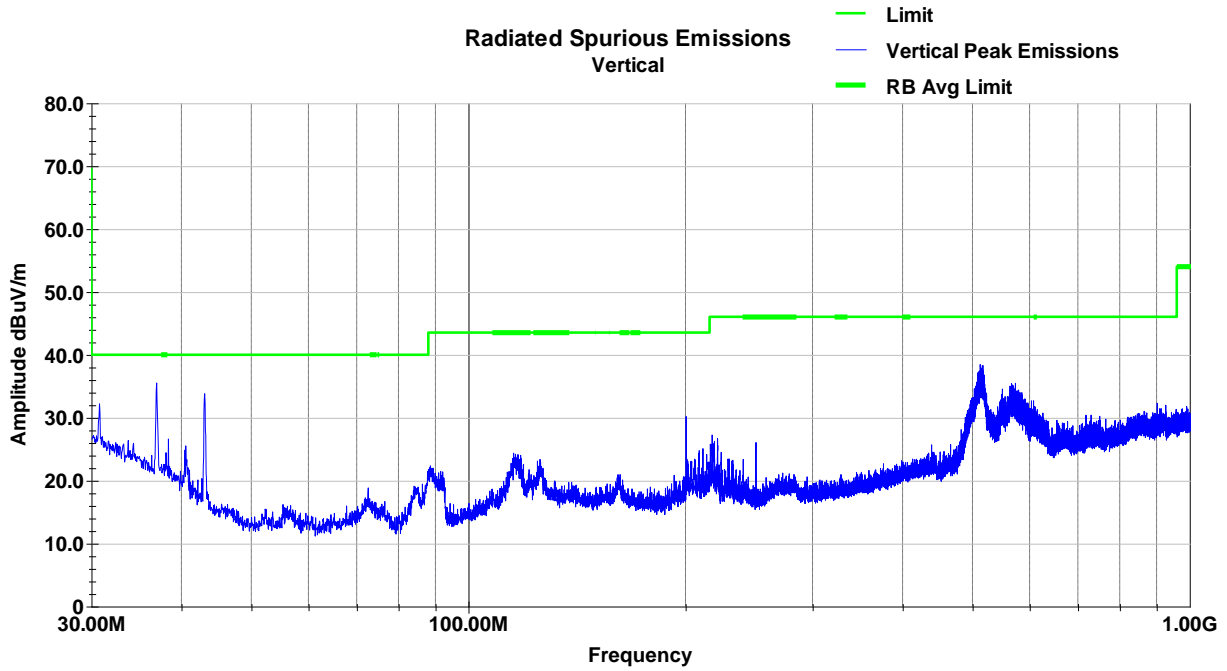


Horizontal (30-1000MHz) (WLAN 802.11g – MCH)

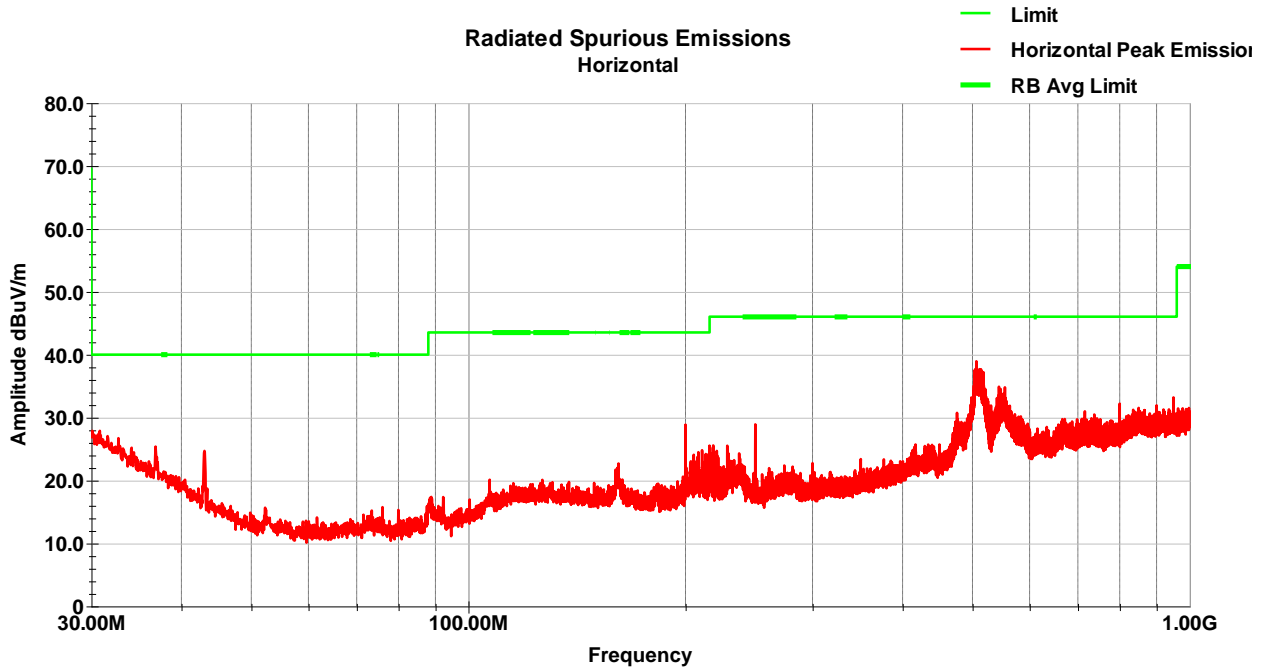


Vertical (1-3GHz) (WLAN 802.11g – MCH)

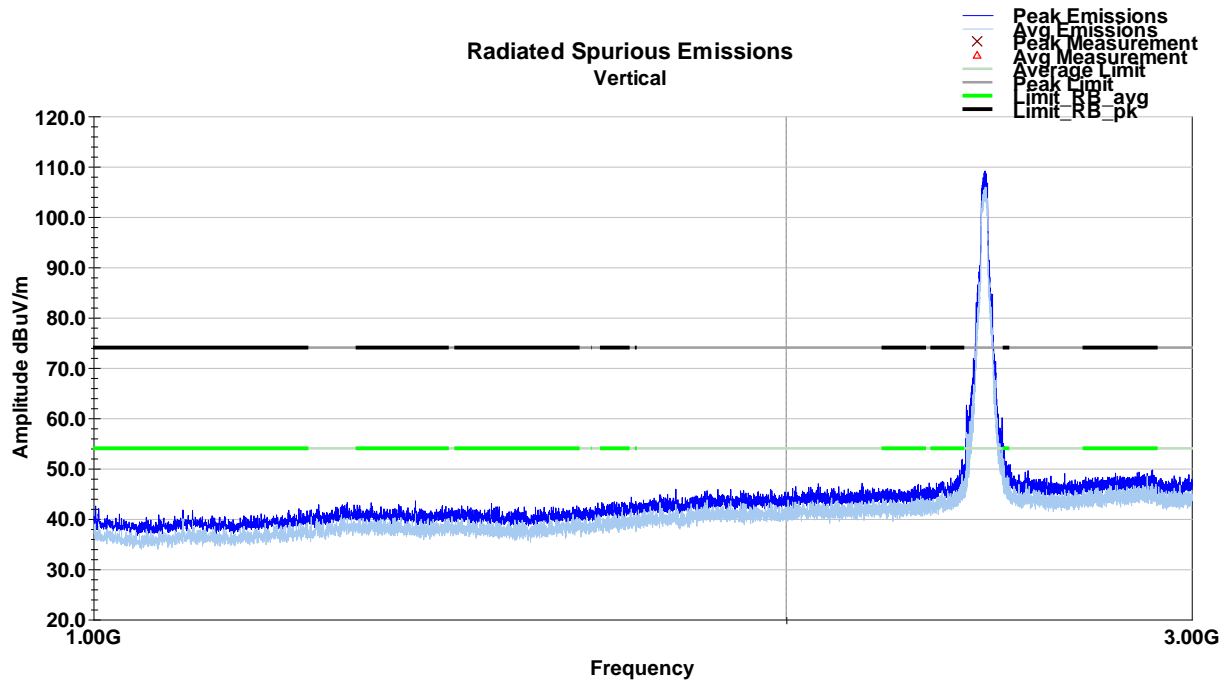

Horizontal (1-3GHz) (WLAN 802.11g – MCH)

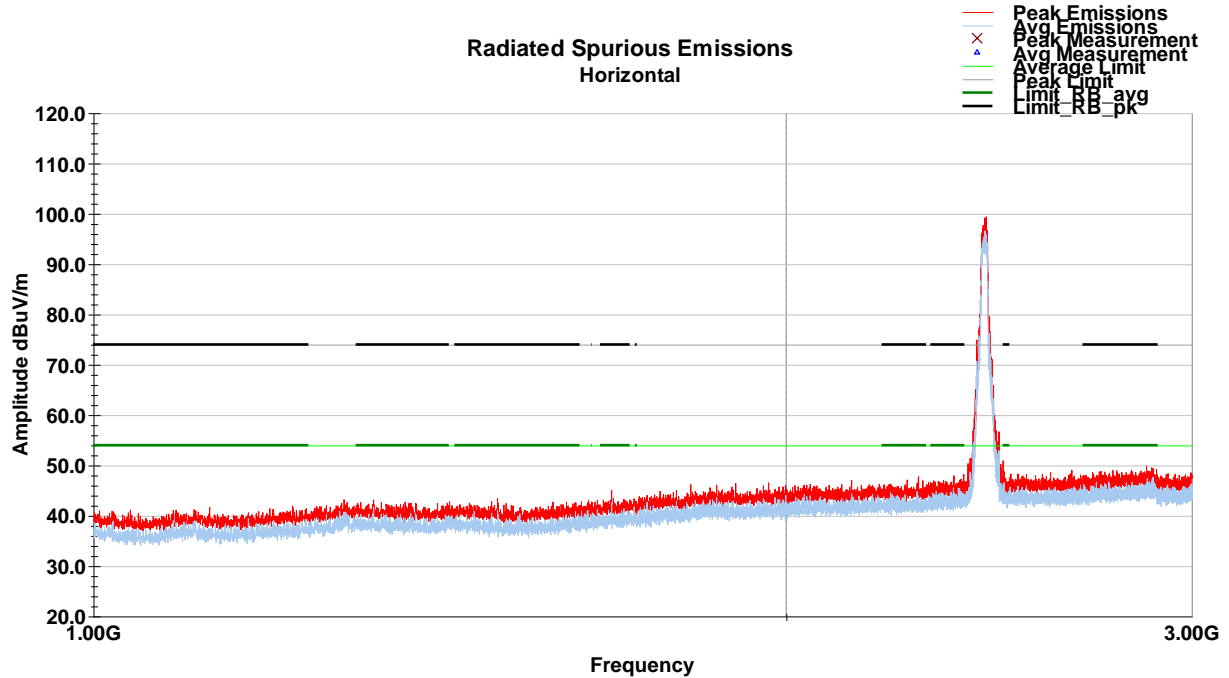


Vertical (3-18GHz) (WLAN 802.11g – MCH)

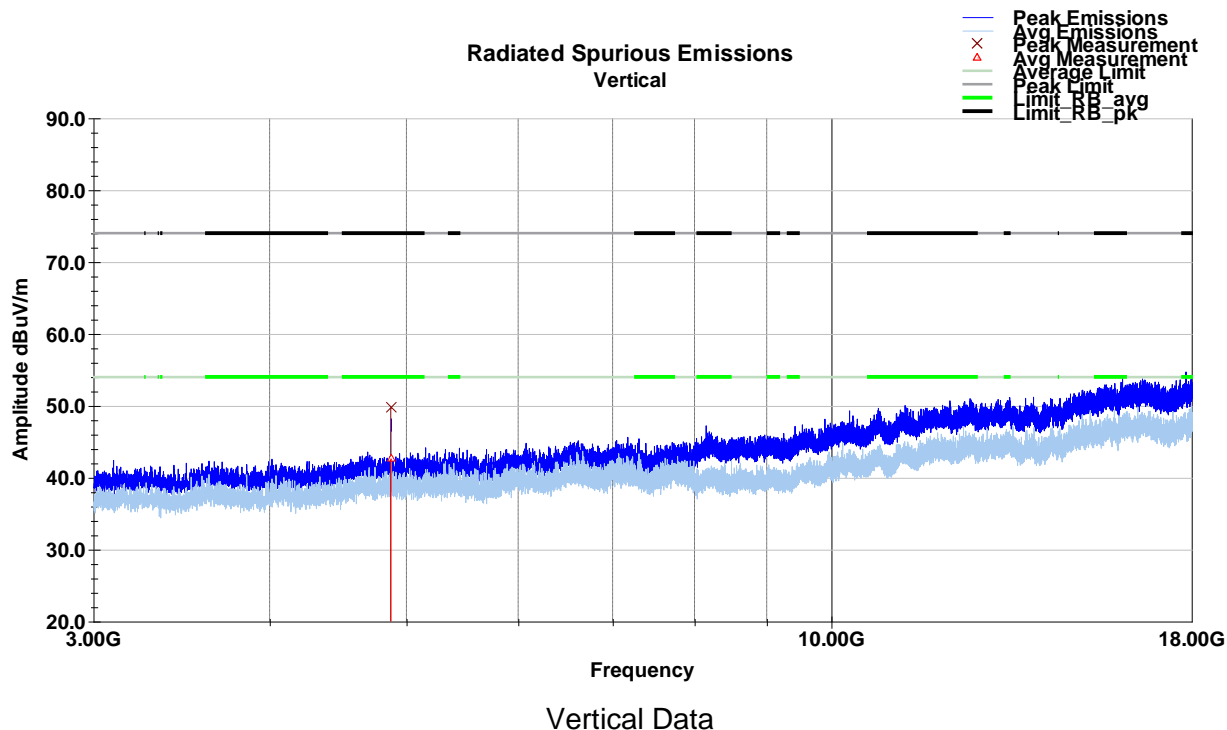

| Frequency MHz | Raw Avg dBuV | Polarity (V/H) | Azimuth (degrees) | Height (cm) | AF (dB/m) | Loss (dB) | Amp (dB) | Final Avg dBuV/m | Limit (dBuV/m) | Margin (dB) |
|---------------------------------------|-----------------|-------------------|----------------------|----------------|--------------|--------------|-------------|---------------------|-------------------|----------------|
| 4874.04 | 47.4 | V | 12.0 | 248.0 | 34.5 | 2.8 | 42.1 | 42.6 | 54.0 | -11.3 |
| Final Avg = Raw Avg + AF + Loss - Amp | | | | | | | | | | |
| Margin = Final Avg - Limit | | | | | | | | | | |


| Frequency MHz | Raw Pk dBuV | Polarity (V/H) | Azimuth (degrees) | Height (cm) | AF (dB/m) | Loss (dB) | Amp (dB) | Final Pk dBuV/m | Limit dBuV/m | Margin dB |
|-------------------------------------|----------------|-------------------|----------------------|----------------|--------------|--------------|-------------|--------------------|-----------------|--------------|
| 4874.04 | 54.5 | V | 12.0 | 248.0 | 34.5 | 2.8 | 42.1 | 49.7 | 74.0 | -24.3 |
| Final Pk = Raw Pk + AF + Loss - Amp | | | | | | | | | | |
| Margin = Final Pk - Limit | | | | | | | | | | |

Horizontal (3-18GHz) (WLAN 802.11g – MCH)

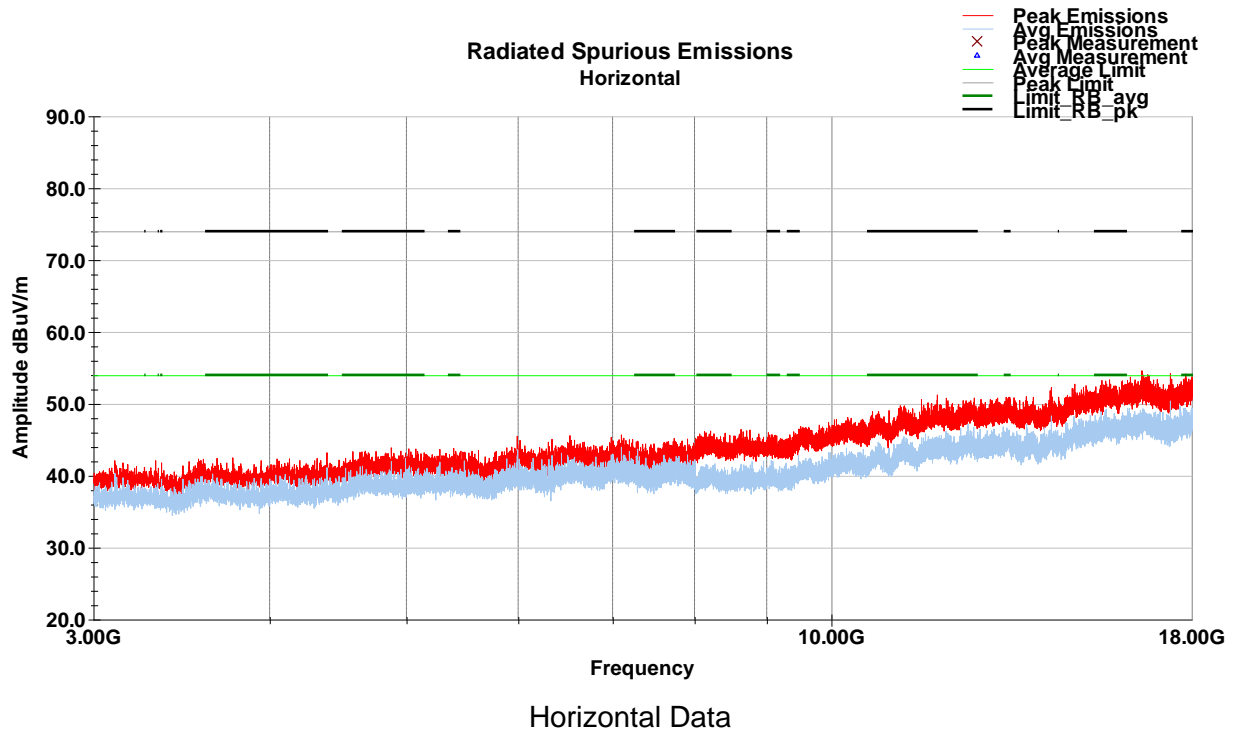


No emissions observed within 20dB of the limit.


Vertical (30-1000MHz) (WLAN 802.11g – HCH)

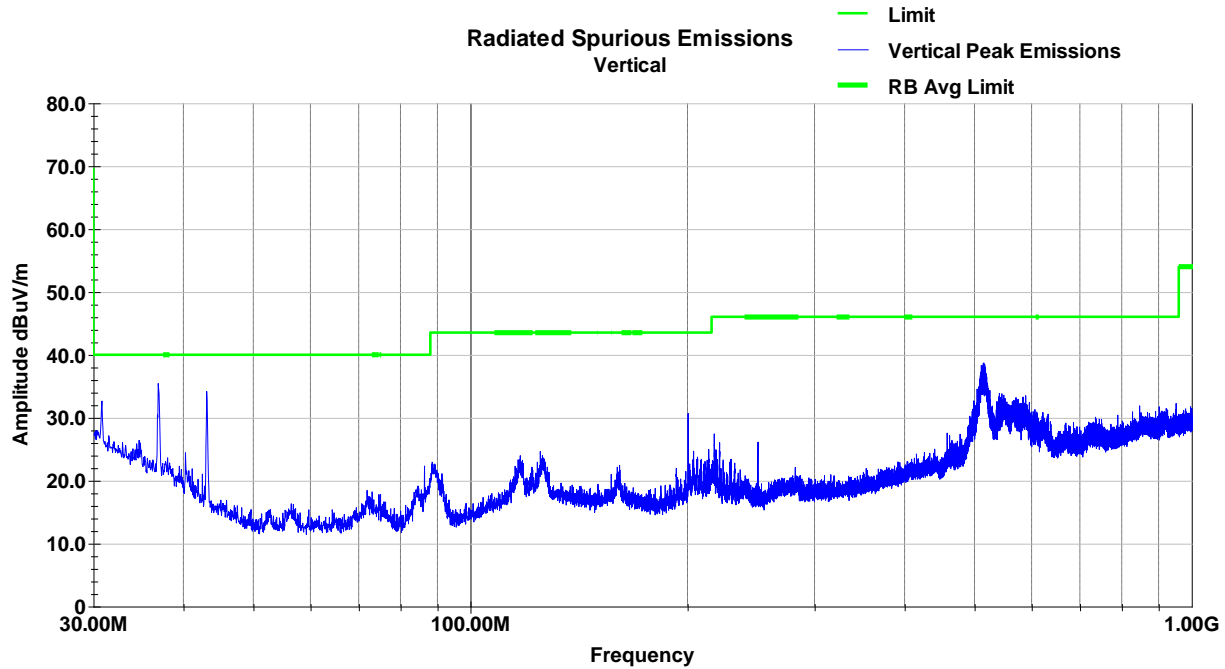


Horizontal (30-1000MHz) (WLAN 802.11g – HCH)

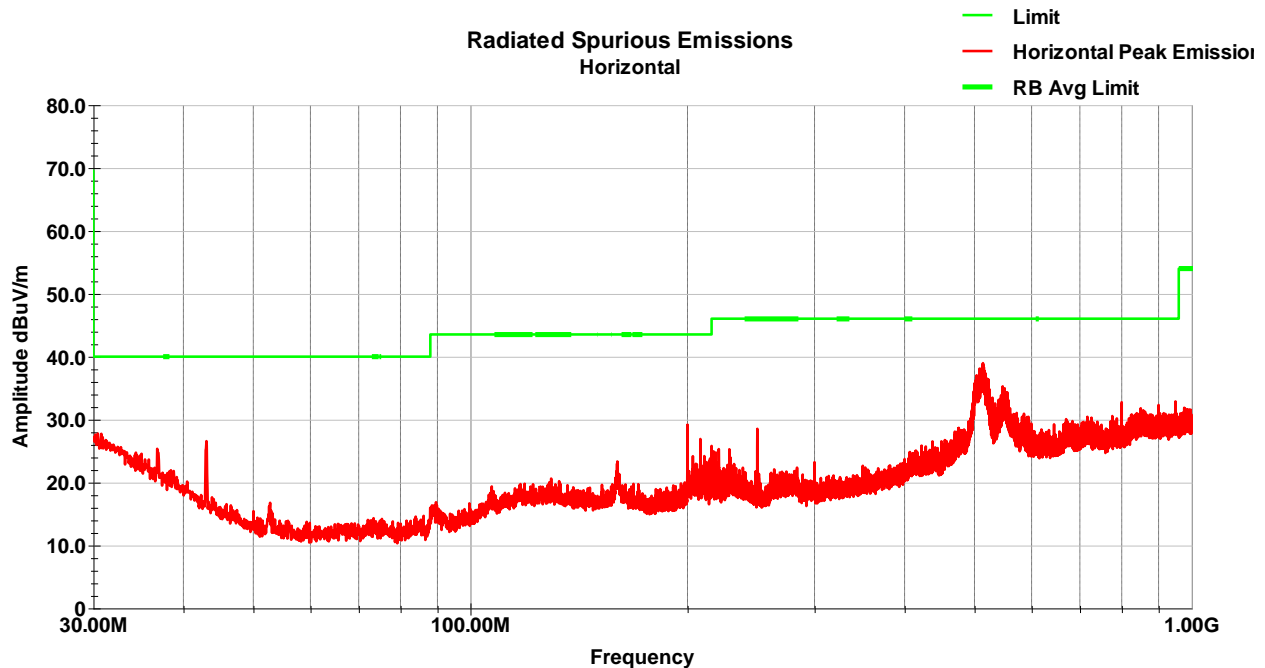


Vertical (1-3GHz) (WLAN 802.11g – HCH)

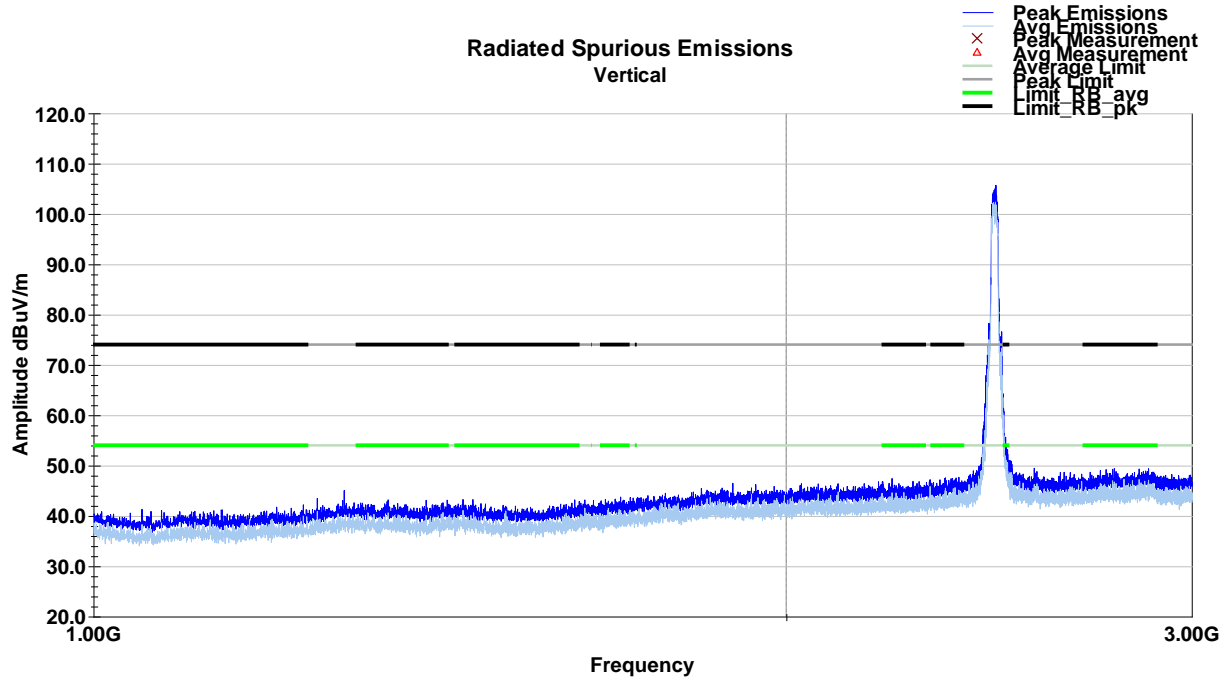

Horizontal (1-3GHz) (WLAN 802.11g – HCH)

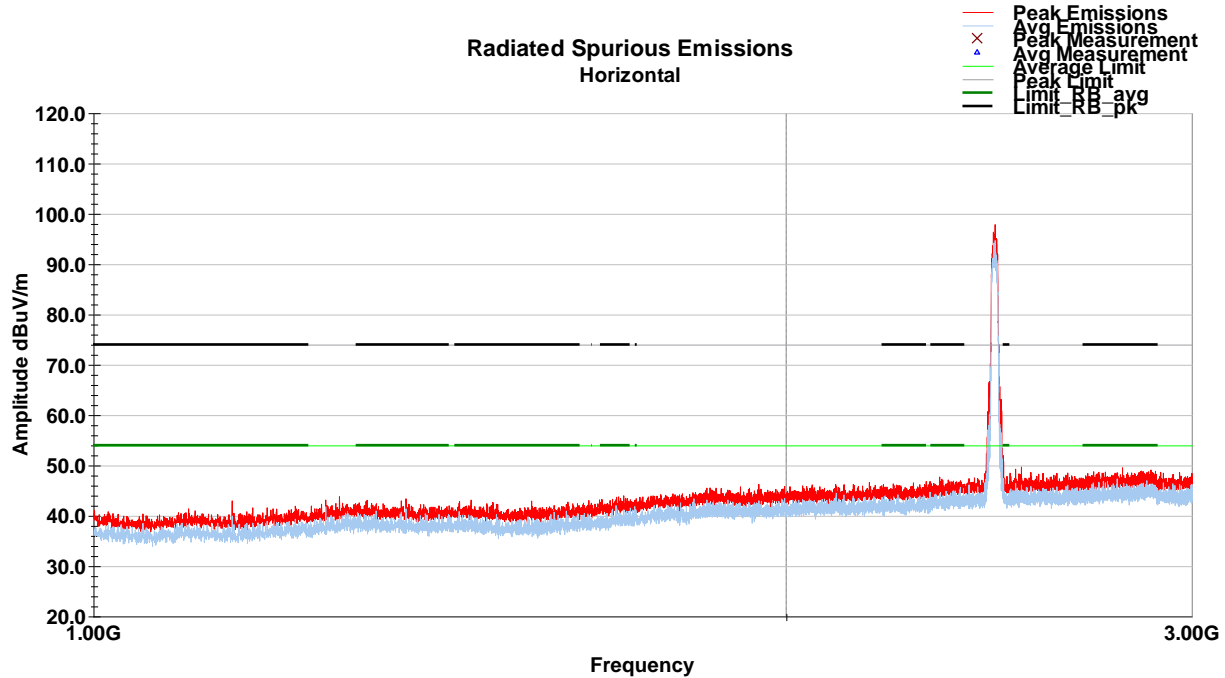


Vertical (3-18GHz) (WLAN 802.11g – HCH)

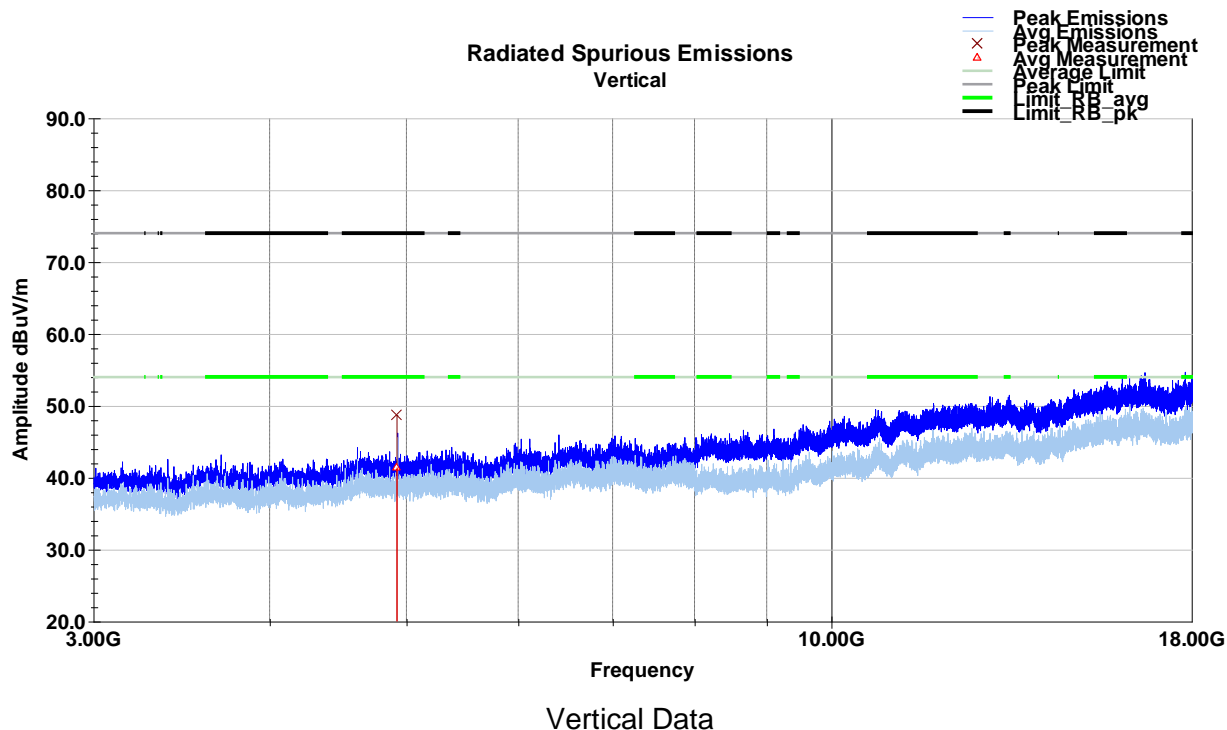

| Frequency MHz | Raw Avg dBuV | Polarity (V/H) | Azimuth (degrees) | Height (cm) | AF (dB/m) | Loss (dB) | Amp (dB) | Final Avg dBuV/m | Limit (dBuV/m) | Margin (dB) |
|---------------------------------------|-----------------|-------------------|----------------------|----------------|--------------|--------------|-------------|---------------------|-------------------|----------------|
| 4924.04 | 46.1 | V | 221.0 | 248.0 | 34.4 | 2.9 | 42.1 | 41.4 | 54.0 | -12.6 |
| Final Avg = Raw Avg + AF + Loss - Amp | | | | | | | | | | |
| Margin = Final Avg - Limit | | | | | | | | | | |

| Frequency MHz | Raw Pk dBuV | Polarity (V/H) | Azimuth (degrees) | Height (cm) | AF (dB/m) | Loss (dB) | Amp (dB) | Final Pk dBuV/m | Limit dBuV/m | Margin dB |
|-------------------------------------|----------------|-------------------|----------------------|----------------|--------------|--------------|-------------|--------------------|-----------------|--------------|
| 4924.04 | 53.5 | V | 221.0 | 248.0 | 34.4 | 2.9 | 42.1 | 48.7 | 74.0 | -25.3 |
| Final Pk = Raw Pk + AF + Loss - Amp | | | | | | | | | | |
| Margin = Final Pk - Limit | | | | | | | | | | |

Horizontal (3-18GHz) (WLAN 802.11g – HCH)

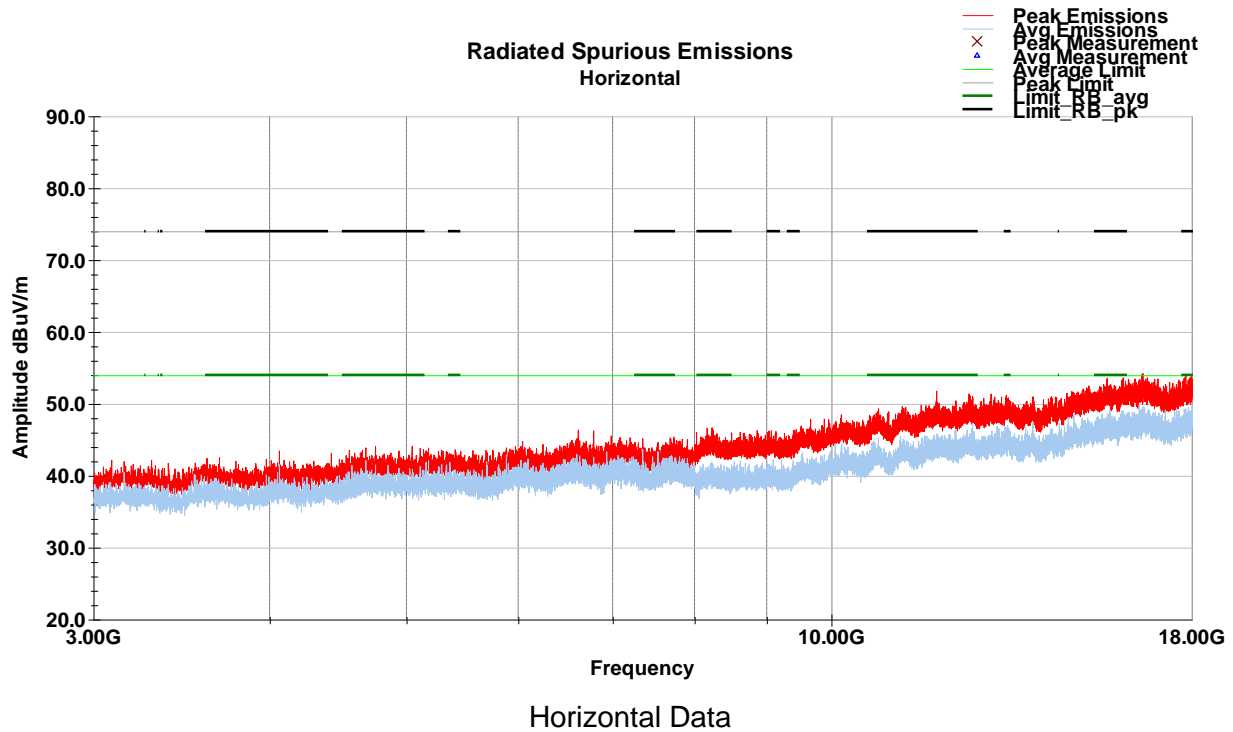

No emissions observed within 20dB of the limit.