



**KDB 865664 D01 SAR Measurement 100MHz to 6GHz  
FCC 47 CFR part 2 (2.1093)**

**SAR EVALUATION REPORT**  
*For*  
**Pocket Server with IEEE 802.11b/g**

**Model: LOG PS-3-913**  
**FCC ID: "Contains FCC ID: OV8-PS-3" and "Contains FCC ID: X7J-A10040601"**

**Report Number UL-SAR-RP12226309JD04A V3.0**  
**ISSUE DATE: 17 July 2019**

*Prepared for*  
**SEBA DYNATRONIC MESS- UND ORTUNGSTECHNIK GMBH**  
**DR. HERBERT IANN-STR 6**  
**D-96148 BAUNACH**  
**GERMANY**

*Prepared by*  
**UL VS LTD**  
**UNITS 1-3 HORIZON, KINGSLAND BUSINESS PARK**  
**WADE ROAD, BASINGSTOKE, HAMPSHIRE, RG24 8AH, UK**  
**TEL: +44 (0) 1256 312000**  
**FAX: +44 (0) 1256 312001**





**REVISION HISTORY**

| Version | Issue Date   | Revisions                                                                                                                                                              | Revised By   |
|---------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| 1.0     | 29 May 2019  | Initial Issue                                                                                                                                                          | --           |
| 2.0     | 15 July 2019 | The following amendments were made in the report:<br>1. Typo corrected in report number<br>2. FCC ID corrected in front page<br>3. Noted added in section 9.4 and 12.2 | Naseer Mirza |
| 3.0     | 17 July 2019 | The following amendments were made in the report:<br>1. Typo corrected in section 6.3                                                                                  | Naseer Mirza |
|         |              |                                                                                                                                                                        |              |
|         |              |                                                                                                                                                                        |              |
|         |              |                                                                                                                                                                        |              |
|         |              |                                                                                                                                                                        |              |

## TABLE OF CONTENTS

|                                                                      |           |
|----------------------------------------------------------------------|-----------|
| <b>1. Attestation of Test Results .....</b>                          | <b>4</b>  |
| <b>2. Test Specification, Methods and Procedures .....</b>           | <b>5</b>  |
| 2.1. Test Specification .....                                        | 5         |
| 2.2. Methods and Procedures Reference Documentation .....            | 5         |
| 2.3. Definition of Measurement Equipment .....                       | 5         |
| <b>3. Facilities and Accreditation.....</b>                          | <b>6</b>  |
| <b>4. SAR Measurement System &amp; Test Equipment.....</b>           | <b>7</b>  |
| 4.1. SAR Measurement System .....                                    | 7         |
| 4.2. SAR Measurement Procedure .....                                 | 8         |
| 4.3. Test Equipment .....                                            | 10        |
| SAR System Specifications .....                                      | 11        |
| <b>5. Measurement Uncertainty .....</b>                              | <b>12</b> |
| 5.1. Uncertainty – Freq. < 3 GHz Body Configuration 1g .....         | 13        |
| <b>6. Device Under Test (DUT) Information.....</b>                   | <b>14</b> |
| 6.1. DUT Description .....                                           | 14        |
| 6.2. Wireless Technologies .....                                     | 15        |
| 6.3. Nominal and Maximum Output power: Wi-Fi .....                   | 17        |
| <b>7. RF Exposure Conditions (Test Configurations).....</b>          | <b>18</b> |
| 7.1. Configuration Consideration .....                               | 18        |
| 7.2. SAR Test Exclusion Consideration .....                          | 18        |
| <b>8. Conducted Output Power Measurements .....</b>                  | <b>19</b> |
| 8.1. RF Output Average Power Measurement: Wi-Fi 2.4 GHz .....        | 19        |
| <b>9. Dielectric Property Measurements &amp; System Check.....</b>   | <b>20</b> |
| 9.1. Tissue Dielectric Parameters .....                              | 20        |
| 9.2. System Check .....                                              | 21        |
| 9.3. Reference Target SAR Values .....                               | 22        |
| 9.4. Dielectric Property Measurements & System Check Results .....   | 23        |
| <b>10. Measurements, Examinations and Derived Results .....</b>      | <b>24</b> |
| 10.1. General Comments .....                                         | 24        |
| <b>11. Highest Standalone SAR and Simultaneous Transmission.....</b> | <b>26</b> |
| 11.1. Highest Standalone Reported SAR .....                          | 26        |
| 11.2. Simultaneous Transmission Analysis .....                       | 27        |
| <b>12. Appendixes .....</b>                                          | <b>28</b> |
| 12.1. Photos and Ports Location .....                                | 28        |
| 12.2. System Check Plots .....                                       | 36        |
| 12.3. SAR Test Plots .....                                           | 38        |
| 12.4. Calibration Certificate for E-Field Probes .....               | 40        |
| 12.5. Calibration Certificate for Dipoles .....                      | 41        |
| 12.6. Tissues-Equivalent Media Recipes .....                         | 42        |

**1. Attestation of Test Results**

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                          |      |                                                                                      |           |       |     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|------|--------------------------------------------------------------------------------------|-----------|-------|-----|
| <b>Applicant Name</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Seba Dynatronic                                                          |      |                                                                                      |           |       |     |
| <b>Model</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | LOG PS-3-913                                                             |      |                                                                                      |           |       |     |
| <b>Test Device is</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | A representative test sample                                             |      |                                                                                      |           |       |     |
| <b>Device category</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Portable                                                                 |      |                                                                                      |           |       |     |
| <b>Date Tested</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 13 May 2019 to 15 May 2019                                               |      |                                                                                      |           |       |     |
| <b>ICNIRP Guidelines Limits for SAR Exposure Characteristics</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | General Population/Localised SAR (Head and trunk): 1g-SAR limit 1.6 W/kg |      |                                                                                      |           |       |     |
| <b>The highest reported SAR values</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <b>RF Exposure Conditions</b>                                            |      | <b>Equipment Class</b>                                                               |           |       |     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                          |      | Licensed                                                                             | DTS       | U-NII | DSS |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Standalone                                                               | Body | N/A                                                                                  | 0.15 W/Kg | N/A   | N/A |
| <b>Applicable Standards</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | FCC 47 CFR part 2 (2.1093)<br>KDB publication                            |      |                                                                                      |           |       |     |
| <b>Test Results</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Pass                                                                     |      |                                                                                      |           |       |     |
| <p>UL Verification Services Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties are in accordance with the above standard and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p><b>Note:</b> The results documented in this report apply only to the tested sample(s), under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by UKAS. This report is written to support regulatory compliance of the applicable standards stated above.</p> |                                                                          |      |                                                                                      |           |       |     |
| Issued By:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                          |      | Prepared By:                                                                         |           |       |     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                          |      |  |           |       |     |
| Naseer Mirza<br>Project Lead<br>UL VS Ltd.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                          |      | Masood Khan<br>Lab Engineer<br>UL VS Ltd.                                            |           |       |     |

## **2. Test Specification, Methods and Procedures**

### **2.1. Test Specification**

|                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Reference:</b>       | <b>KDB Publication Number: 865664 D01 SAR Measurement 100 MHz to 6 GHz</b>                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Title:</b>           | SAR Measurement Requirements for 100 MHz to 6 GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Introduction:</b>    | The SAR Measurement procedures for 100MHz to 6GHz are described in this document. Field probes, tissue dielectric properties, SAR scans, measurement accuracy and variability of the measured results are discussed. The field probe and SAR scan requirements are derived from criteria considered in standard IEEE 1528-2013. The wireless product and technology specific procedures in applicable KDB publications are required to be used unless further guidance has been approved by the FCC. |
| <b>Purpose of Test:</b> | To determine if the Equipment Under Test complies with the Specific Absorption Rate for general population/uncontrolled exposure limit of 1.6 W/kg as specified in FCC 47 CFR part 2 (2.1093).                                                                                                                                                                                                                                                                                                       |

### **2.2. Methods and Procedures Reference Documentation**

The methods and procedures used were as detailed in:

#### **IEEE 1528:2013**

IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques.

#### **FCC KDB Publication:**

KDB 248227 D01 802.11 Wi-Fi SAR v02r02

KDB 447498 D01 General RF Exposure Guidance v06

KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04

KDB 865664 D02 RF Exposure Reporting v01r02

### **2.3. Definition of Measurement Equipment**

The measurement equipment used complied with the requirements of the standards referenced in the methods & procedures section above. Section 4.3 contains a list of the test equipment used.

### **3. Facilities and Accreditation**

The test sites and measurement facilities used to collect data are located at


|                                                                                             |                                |
|---------------------------------------------------------------------------------------------|--------------------------------|
| Horizon Unit 1, Wade Road, Kingsland Business Park, Basingstoke,<br>Hampshire, RG24 8AH, UK | Facility Type                  |
| SAR Lab 60                                                                                  | Controlled Environment Chamber |

UL Verification Services Ltd, is accredited by UKAS (United Kingdom Accreditation Service), Laboratory UKAS Code 0644.

## 4. SAR Measurement System & Test Equipment

### 4.1. SAR Measurement System

The DASY system used for performing compliance tests consists of the following items:

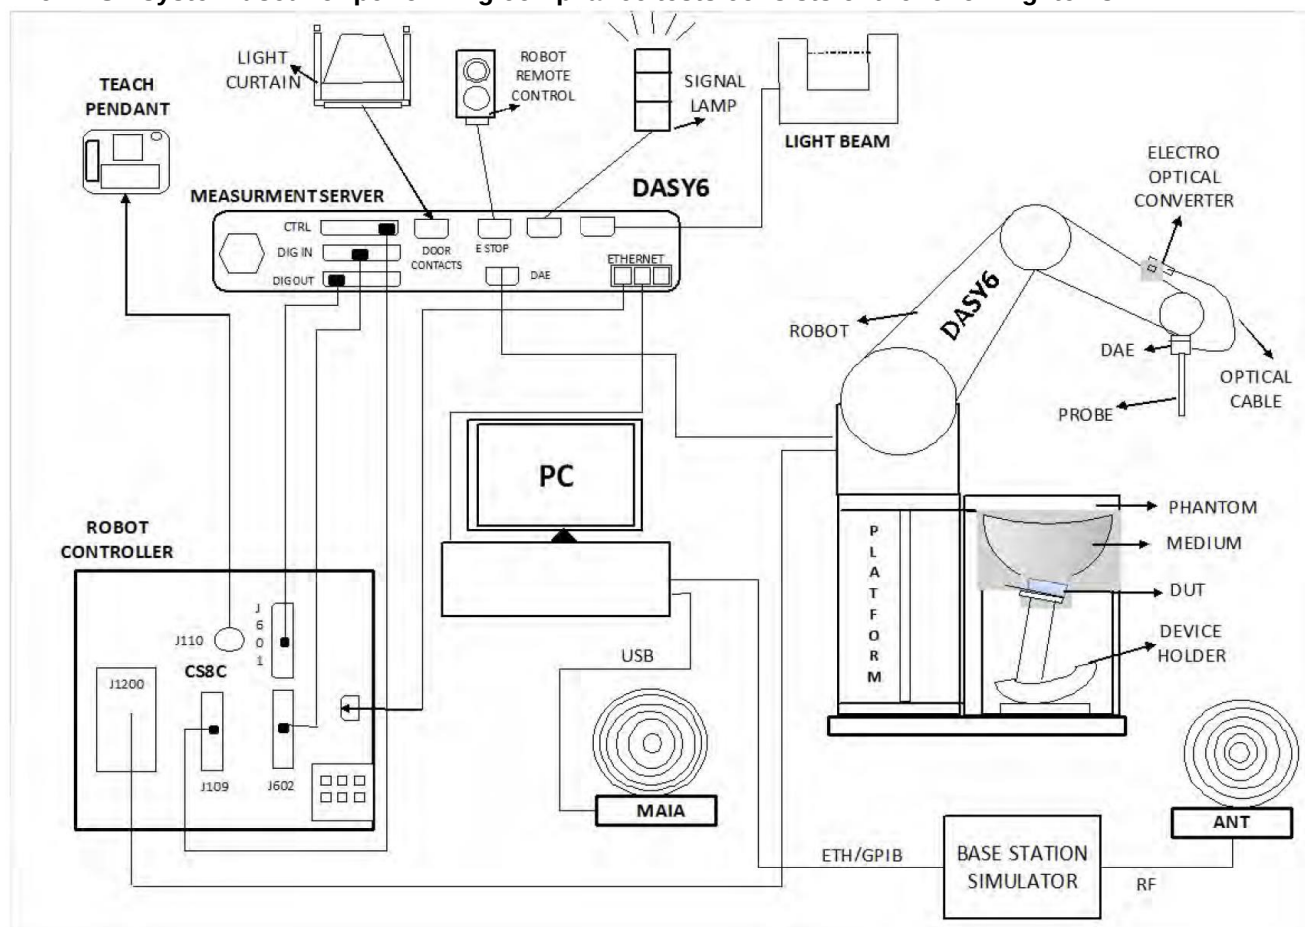

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win 8.1 or Win 10 and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## 4.2. SAR Measurement Procedure

### 4.2.1. Normal SAR Measurement Procedure

The following procedure shall be performed for each of the test conditions Measure the local SAR at a test point within 8 mm of the phantom inner surface that is closest to the DUT.

- a) Measure the two-dimensional SAR distribution within the phantom (area scan procedure).
- b) The boundary of the measurement area shall not be closer than 20 mm from the phantom side walls. The distance between the measurement points should enable the detection of the location of local maximum with an accuracy of better than half the linear dimension of the tissue cube after interpolation. A maximum grid spacing of 20 mm for frequencies below 3 GHz and  $(60/f \text{ [GHz]})$  mm for frequencies of 3 GHz and greater is recommended. The maximum distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be 5 mm for frequencies below 3 GHz and  $\delta \ln(2)/2$  mm for frequencies of 3 GHz and greater, where  $\delta$  is the plane wave skin depth and  $\ln(x)$  is the natural logarithm. The maximum variation of the sensor-phantom surface distance shall be  $\pm 1$  mm for frequencies below 3 GHz and  $\pm 0,5$  mm for frequencies of 3 GHz and greater. At all measurement points the angle of the probe with respect to the line normal to the surface should be less than  $5^\circ$ . If this cannot be achieved for a measurement distance to the phantom inner surface shorter than the probe diameter, additional uncertainty evaluation is needed.
- c) From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W /kg 1 g limit, or 1,26 W/kg for 2 W /kg, 10 g limit).
- d) Measure the three-dimensional SAR distribution at the local maxima locations identified in step c) (zoom scan procedure). The horizontal grid step shall be  $(24 / f \text{ [GHz]})$  mm or less but not more than 8 mm. The minimum zoom scan size is 30 mm by 30 mm by 30 mm for frequencies below 3 GHz. For higher frequencies, the minimum zoom scan size can be reduced to 22 mm by 22 mm by 22 mm. The grid step in the vertical direction shall be  $(8/f \text{ [GHz]})$  mm or less but not more than 5 mm, if uniform spacing is used. If variable spacing is used in the vertical direction, the maximum spacing between the two closest measured points to the phantom shell shall be  $(12/f \text{ [GHz]})$  mm or less but not more than 4 mm, and the spacing between farther points shall increase by an incremental factor not exceeding 1,5. When variable spacing is used, extrapolation routines shall be tested with the same spacing as used in measurements. The maximum distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be 5 mm for frequencies below 3 GHz and  $\delta \ln(2)/2$  mm for frequencies of 3 GHz and greater, where  $\delta$  is the plane wave skin depth and  $\ln(x)$  is the natural logarithm. Separate grids shall be centred on each of the local SAR maxima found in step c). Uncertainties due to field distortion between the media boundary and the dielectric enclosure of the probe should also be minimized, which is achieved if the distance between the phantom surface and physical tip of the probe is larger than probe tip diameter. Other methods may utilize correction procedures for these boundary effects that enable high precision measurements closer than half the probe diameter. For all measurement points, the angle of the probe with respect to the flat phantom surface shall be less than  $5^\circ$ .
- e) Use post processing (e.g. interpolation and extrapolation) procedures to determine the local SAR values at the spatial resolution needed for mass averaging.
- f) The local SAR should be measured at the same location as in Step a). SAR drift is assessed and reported in the uncertainty budget.  
In the event that the evaluation of measurement drift exceeds the 5 % tolerance, it is required that SAR be reassessed following guidelines contained within this standard.  
If the drift is larger than 5 %, then the measurement drift shall be considered a bias, not an uncertainty. A correction shall be applied to the measured SAR value. It is not necessary to record the drift in the uncertainty budget (i.e.  $u_i = 0 \%$ ). The uncertainty budget reported in a measurement report should correspond to the highest SAR value reported (after correction, if applicable). Alternatively, the uncertainty budget reported should cover all measurements, i.e., it should report a conservative value.

**Area Scan Parameters:**

|                                                                                                        | $\leq 3$ GHz                                                                                                                                                                                                                                                           | $> 3$ GHz                                               |
|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | 5 mm $\pm$ 1 mm                                                                                                                                                                                                                                                        | $\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location              | 30° $\pm$ 1°                                                                                                                                                                                                                                                           | 20° $\pm$ 1°                                            |
| Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$                 | $\leq 2$ GHz: $\leq 15$ mm<br>2 – 3 GHz: $\leq 12$ mm                                                                                                                                                                                                                  | 3 – 4 GHz: $\leq 12$ mm<br>4 – 6 GHz: $\leq 10$ mm      |
|                                                                                                        | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device. |                                                         |

**Zoom Scan Parameters:**

|                                                                                        |                                           | $\leq 3$ GHz                                                                                | $> 3$ GHz                                                                     |
|----------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$ |                                           | $\leq 2$ GHz: $\leq 8$ mm<br>2 – 3 GHz: $\leq 5$ mm*                                        | 3 – 4 GHz: $\leq 5$ mm*<br>4 – 6 GHz: $\leq 4$ mm*                            |
| Maximum zoom scan spatial resolution, normal to phantom surface                        | uniform grid: $\Delta z_{\text{Zoom}}(n)$ | $\leq 5$ mm                                                                                 | 3 – 4 GHz: $\leq 4$ mm<br>4 – 5 GHz: $\leq 3$ mm<br>5 – 6 GHz: $\leq 2$ mm    |
|                                                                                        | graded grid                               | $\Delta z_{\text{Zoom}}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface | 3 – 4 GHz: $\leq 3$ mm<br>4 – 5 GHz: $\leq 2.5$ mm<br>5 – 6 GHz: $\leq 2$ mm  |
|                                                                                        |                                           | $\Delta z_{\text{Zoom}}(n>1)$ : between subsequent points                                   | $\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$                                  |
| Minimum zoom scan volume                                                               | x, y, z                                   | $\geq 30$ mm                                                                                | 3 – 4 GHz: $\geq 28$ mm<br>4 – 5 GHz: $\geq 25$ mm<br>5 – 6 GHz: $\geq 22$ mm |

### 4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

| UL No.     | Instrument                   | Manufacturer  | Type No.            | Serial No.      | Date Last Calibrated         | Cal. Interval (Months) |
|------------|------------------------------|---------------|---------------------|-----------------|------------------------------|------------------------|
| PRE0178316 | Data Acquisition Electronics | SPEAG         | DAE4                | 1541            | 14 Mar 2019                  | 12                     |
| A1322      | Dipole Kit                   | SPEAG         | D2450V2             | 725             | 17 Sep 2018                  | 12                     |
| PRE0178314 | Probe                        | SPEAG         | EX3DV4              | 7496            | 28 Mar 2019                  | 12                     |
| G0611      | Robot Power Supply           | SPEAG         | DASY52              | F14/5UA6A1/C/01 | Calibrated as part of system | -                      |
| M1876      | Robot Arm                    | Staubli       | TX60 L              | F14/5UA6A1/A/01 | Calibrated as part of system | -                      |
| A2811      | Body Handset Positioner      | SPEAG         | MD4HACV5            | None            | Calibrated before use        | -                      |
| M1755      | DAK Fluid Probe              | SPEAG         | SM DAK 040 CA       | 1089            | Calibrated before use        | -                      |
| M1855      | Power Sensor                 | R & S         | NRV-Z51             | 103246          | 18 Jan 2019                  | 12                     |
| PRE0159221 | Power Source                 | SPEAG         | SE UMS 160 AB       | 1026            | 07 Nov 2018                  | 12                     |
| PRE0151154 | Network Analyser             | R&S           | ZND                 | 100151          | 03 Jan 2019                  | 12                     |
| A2621      | Digital Camera               | Nikon         | S3600               | 41010357        | N/A                          | -                      |
| A2252      | Phantom                      | SPEAG         | SAM Twin Phantom    | 1951            | Calibrated as part of system | -                      |
| PRE0141348 | Phantom Support Structure    | SPEAG         | DASY6 Phantom Table | -               | Calibrated as part of system | -                      |
| PRE0155857 | RS Hygrometer                | RS Components | 408-6109            | 612Q19R(2)      | 20 Mar 2019                  | 12                     |

## SAR System Specifications

|                                                 |                                                                                                                                                                          |
|-------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Robot System</b>                             |                                                                                                                                                                          |
| Positioner:                                     | Stäubli Unimation Corp. Robot Model: TX60L                                                                                                                               |
| Repeatability:                                  | ±0.030 mm                                                                                                                                                                |
| No. of Axis:                                    | 6                                                                                                                                                                        |
| Serial Number(s):                               | F14/5UA6A1/A/01                                                                                                                                                          |
| Reach:                                          | 800 mm                                                                                                                                                                   |
| Payload:                                        | 2.0 kg                                                                                                                                                                   |
| Control Unit:                                   | CS8C                                                                                                                                                                     |
| Programming Language:                           | V+                                                                                                                                                                       |
| <b>Data Acquisition Electronic (DAE) System</b> |                                                                                                                                                                          |
| Serial Number:                                  | DAE4 SN: 1541                                                                                                                                                            |
| <b>PC Controller</b>                            |                                                                                                                                                                          |
| PC:                                             | HP EliteDesk800                                                                                                                                                          |
| Operating System:                               | Windows 10                                                                                                                                                               |
| Data Card:                                      | DASY5 Measurement Servers                                                                                                                                                |
| <b>Data Converter</b>                           |                                                                                                                                                                          |
| Features:                                       | Signal Amplifier, multiplexer, A/D converted and control logic.                                                                                                          |
| Software:                                       | DASY6 PRO Software                                                                                                                                                       |
| Connecting Lines:                               | Optical downlink for data and status info.<br>Optical uplink for commands and clock.                                                                                     |
| <b>PC Interface Card</b>                        |                                                                                                                                                                          |
| Function:                                       | 24 bit (64 MHz) DSP for real time processing Link to DAE4 16 bit A/D converter for surface detection system serial link to robot direct emergency stop output for robot. |
| <b>Phantom</b>                                  |                                                                                                                                                                          |
| Phantom:                                        | SAM Phantom                                                                                                                                                              |
| Shell Material:                                 | Fibreglass                                                                                                                                                               |
| Thickness:                                      | 2.0 ±0.1 mm                                                                                                                                                              |
| <b>E-Field Probe</b>                            |                                                                                                                                                                          |
| Model:                                          | EX3DV4                                                                                                                                                                   |
| Serial No:                                      | 7496                                                                                                                                                                     |
| Construction:                                   | Triangular core                                                                                                                                                          |
| Frequency:                                      | 10MHz to >6GHz                                                                                                                                                           |
| Linearity:                                      | ±0.2 dB (30 MHz to 6 GHz)                                                                                                                                                |
| Probe Length (mm):                              | 337                                                                                                                                                                      |
| Probe Diameter (mm):                            | 10                                                                                                                                                                       |
| Tip Length (mm):                                | 9                                                                                                                                                                        |
| Tip Diameter (mm):                              | 2.5                                                                                                                                                                      |
| Sensor X Offset (mm):                           | 1                                                                                                                                                                        |
| Sensor Y Offset (mm):                           | 1                                                                                                                                                                        |
| Sensor Z Offset (mm):                           | 1                                                                                                                                                                        |

## **5. Measurement Uncertainty**

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently, the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor, such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

| Test Name                                        | Confidence Level | Calculated Uncertainty |
|--------------------------------------------------|------------------|------------------------|
| Uncertainty- Freq. < 3 GHz Body Configuration 1g | 95 %             | ±19.22 %               |

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty, the published guidance of the appropriate accreditation body is followed.

**5.1. Uncertainty – Freq. < 3 GHz Body Configuration 1g**

| Type | Source of uncertainty                                 | + Value | - Value | Probability Distribution | Divisor | C <sub>i</sub> (1g) | Standard Uncertainty |         | v <sub>i</sub> or v <sub>eff</sub> |
|------|-------------------------------------------------------|---------|---------|--------------------------|---------|---------------------|----------------------|---------|------------------------------------|
|      |                                                       |         |         |                          |         |                     | + u (%)              | - u (%) |                                    |
| B    | Probe calibration                                     | 5.050   | 5.050   | normal (k=1)             | 1.0000  | 1.0000              | 5.050                | 5.050   | ∞                                  |
| B    | Axial Isotropy                                        | 0.250   | 0.250   | normal (k=1)             | 1.0000  | 1.0000              | 0.250                | 0.250   | ∞                                  |
| B    | Hemispherical Isotropy                                | 1.300   | 1.300   | normal (k=1)             | 1.0000  | 1.0000              | 1.300                | 1.300   | ∞                                  |
| B    | Spatial Resolution                                    | 0.500   | 0.500   | Rectangular              | 1.7321  | 1.0000              | 0.289                | 0.289   | ∞                                  |
| B    | Boundary Effect                                       | 0.769   | 0.769   | Rectangular              | 1.7321  | 1.0000              | 0.444                | 0.444   | ∞                                  |
| B    | Linearity                                             | 0.300   | 0.300   | Rectangular              | 1.7321  | 1.0000              | 0.173                | 0.173   | ∞                                  |
| B    | Detection Limits                                      | 0.200   | 0.200   | Rectangular              | 1.7321  | 1.0000              | 0.115                | 0.115   | ∞                                  |
| B    | Readout Electronics                                   | 0.160   | 0.160   | normal (k=1)             | 1.0000  | 1.0000              | 0.160                | 0.160   | ∞                                  |
| B    | Response Time                                         | 0.000   | 0.000   | Rectangular              | 1.7321  | 1.0000              | 0.000                | 0.000   | ∞                                  |
| B    | Integration Time                                      | 8.520   | 8.520   | Rectangular              | 1.7321  | 1.0000              | 4.919                | 4.919   | ∞                                  |
| B    | RF Ambient conditions                                 | 3.000   | 3.000   | Rectangular              | 1.7321  | 1.0000              | 1.732                | 1.732   | ∞                                  |
| B    | Probe Positioner Mechanical Restrictions              | 4.000   | 4.000   | Rectangular              | 1.7321  | 1.0000              | 2.309                | 2.309   | ∞                                  |
| B    | Probe Positioning with regard to Phantom Shell        | 2.850   | 2.850   | Rectangular              | 1.7321  | 1.0000              | 1.645                | 1.645   | ∞                                  |
| B    | Extrapolation and integration/ Maximum SAR evaluation | 5.080   | 5.080   | Rectangular              | 1.7321  | 1.0000              | 2.933                | 2.933   | ∞                                  |
| A    | Test Sample Positioning                               | 0.147   | 0.147   | normal (k=1)             | 1.0000  | 1.0000              | 0.147                | 0.147   | 10                                 |
| A    | Device Holder uncertainty                             | 0.154   | 0.154   | normal (k=1)             | 1.0000  | 1.0000              | 0.154                | 0.154   | 10                                 |
| B    | Phantom Uncertainty                                   | 4.000   | 4.000   | Rectangular              | 1.7321  | 1.0000              | 2.309                | 2.309   | ∞                                  |
| B    | Drift of output power                                 | 5.000   | 5.000   | Rectangular              | 1.7321  | 1.0000              | 2.887                | 2.887   | ∞                                  |
| B    | Liquid Conductivity (target value)                    | 5.000   | 5.000   | Rectangular              | 1.7321  | 0.6400              | 1.848                | 1.848   | ∞                                  |
| A    | Liquid Conductivity (measured value)                  | 2.470   | 2.470   | normal (k=1)             | 1.0000  | 0.6400              | 1.581                | 1.581   | 5                                  |
| B    | Liquid Permittivity (target value)                    | 5.000   | 5.000   | Rectangular              | 1.7321  | 0.6000              | 1.732                | 1.732   | ∞                                  |
| A    | Liquid Permittivity (measured value)                  | 2.430   | 2.430   | normal (k=1)             | 1.0000  | 0.6000              | 1.458                | 1.458   | 5                                  |
|      | Combined standard uncertainty                         |         |         | t-distribution           |         |                     | 9.81                 | 9.81    | >500                               |
|      | Expanded uncertainty                                  |         |         | k = 1.96                 |         |                     | 19.22                | 19.22   | >500                               |

## 6. Device Under Test (DUT) Information

### 6.1. DUT Description

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                  |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| <b>DUT Description:</b>         | The DUT (LOG PS-3-913) is a bridge between WIFI devices and seba radio devices. It allows to communicate (program, read and view data, perform real time measurement) with the following seba devices LOG N-3, LOG P-3, LOG DX and LOG D-3. All communication between the user device and the LOG PS-3-913 is done via WIFI (LOG PS-3-913 creates a WIFI-network and has a webserver running). Thus it can be controlled by any WIFI device able to run a web browser (smartphone, tablet, laptop, PC). The LOG PS-3-913 consists of a Raspberry Pi 3 (FCC-ID: 2ABCB-RPI32) with integrated WIFI module and an additional PCB containing charging circuit, voltage converters, radio module (Anaren A1101R09A, FCC-ID: X7J-A10040601) and front panel connection. The DUT supports WLAN 2.4 GHz 802.11 b/g modes. |                  |
| <b>Sample Used:</b>             | SAR                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | S/N: 12323710002 |
|                                 | Conducted Power Measurements                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | S/N: 12334000005 |
| <b>Hardware Version Number:</b> | 6.057.03                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                  |
| <b>Software Version Number:</b> | 1.1.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                  |
| <b>Country of Manufacture:</b>  | Germany                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                  |
| <b>Device dimension</b>         | 150 x 92 x 29 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                  |
| <b>Date of Receipt:</b>         | 07 February 2019                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                  |

|                                     |                         |         |
|-------------------------------------|-------------------------|---------|
| <b>Antenna Type:</b>                | Internal integral       |         |
| <b>Number of Antenna Positions:</b> | WLAN ~ Wi-Fi 2.4 GHz    | 1 fixed |
|                                     | Short Range Radio ~ SRD | 1 fixed |
| <b>Battery Type(s):</b>             | Embedded Li-ion         |         |

## 6.2. Wireless Technologies

| Wireless Technologies | Frequency Bands | Operating Mode | Duty Cycle |
|-----------------------|-----------------|----------------|------------|
| Wi-Fi                 | 2.4 GHz         | 802.11b/g      | ~100%      |

**Wireless Technologies (Continued):**

| Wi-Fi                       |                |               |                |            |                |            |
|-----------------------------|----------------|---------------|----------------|------------|----------------|------------|
| Band                        | Description    |               |                |            |                |            |
|                             | 20 MHz BW Ch.# | Frq. (MHz)    | 40 MHz BW Ch.# | Frq. (MHz) | 80 MHz BW Ch.# | Frq. (MHz) |
| Wi-Fi 2.4 GHz (802.11b/g/n) | 1              | 2412.0        | N/A            |            |                |            |
|                             | 2              | 2417.0        |                |            |                |            |
|                             | 3              | 2422.0        |                |            |                |            |
|                             | 4              | 2427.0        |                |            |                |            |
|                             | 5              | 2432.0        |                |            |                |            |
|                             | 6              | 2437.0        |                |            |                |            |
|                             | 7              | 2442.0        |                |            |                |            |
|                             | 8              | 2447.0        |                |            |                |            |
|                             | 9              | 2452.0        |                |            |                |            |
|                             | 10             | 2457.0        |                |            |                |            |
|                             | 11             | 2462.0        |                |            |                |            |
|                             | 12             | Not Supported |                |            |                |            |
|                             | 13             | Not Supported |                |            |                |            |

**6.3.Nominal and Maximum Output power: Wi-Fi****Wi-Fi 2.4 GHz - WF1 Antenna**

|               |         |                        | Target + Tolerances (dBm) |                |
|---------------|---------|------------------------|---------------------------|----------------|
| Band          | Channel | Centre Frequency (MHz) | 802.11b                   | 802.11g        |
| Wi-Fi 2.4 GHz | 1       | 2412.0                 | 18 dBm +/-2 dB            | 18 dBm +/-2 dB |
|               | 2       | 2417.0                 | 18 dBm +/-2 dB            | 18 dBm +/-2 dB |
|               | 3       | 2422.0                 | 18 dBm +/-2 dB            | 18 dBm +/-2 dB |
|               | 4       | 2427.0                 | 18 dBm +/-2 dB            | 18 dBm +/-2 dB |
|               | 5       | 2432.0                 | 18 dBm +/-2 dB            | 18 dBm +/-2 dB |
|               | 6       | 2437.0                 | 18 dBm +/-2 dB            | 18 dBm +/-2 dB |
|               | 7       | 2442.0                 | 18 dBm +/-2 dB            | 18 dBm +/-2 dB |
|               | 8       | 2447.0                 | 18 dBm +/-2 dB            | 18 dBm +/-2 dB |
|               | 9       | 2452.0                 | 18 dBm +/-2 dB            | 18 dBm +/-2 dB |
|               | 10      | 2457.0                 | 18 dBm +/-2 dB            | 18 dBm +/-2 dB |
|               | 11      | 2462.0                 | 18 dBm +/-2 dB            | 18 dBm +/-2 dB |
|               | 12      | 2467.0                 | Not Supported             | Not Supported  |
|               | 13      | 2472.0                 | Not Supported             | Not Supported  |

| Frequency Band | Target + Tolerances (dBm) |
|----------------|---------------------------|
| SRD            | -40 dBm +/-3 dB           |

## 7. RF Exposure Conditions (Test Configurations)

### 7.1. Configuration Consideration

| Technology Antenna        | Configuration | Antenna-to-User Separation | Position | Antenna-to-Edge Separation (mm) | Evaluation Considered |
|---------------------------|---------------|----------------------------|----------|---------------------------------|-----------------------|
| WLAN ~<br>(Wi-Fi 2.4 GHz) | Body          | 0mm                        | Front    | < 25                            | Yes                   |
|                           |               |                            | Back     | < 25                            | Yes                   |
|                           |               |                            | Top      | > 25                            | No                    |
|                           |               |                            | Right    | > 25                            | No                    |
|                           |               |                            | Bottom   | > 25                            | No                    |
|                           |               |                            | Left     | > 25                            | No                    |

**Note:** The Antenna to edge separation distances are indicated in the 'Antenna Schematics' located in Section 12.1 of this report.

### 7.2. SAR Test Exclusion Consideration

| Frequency Band | Configuration(s) |
|----------------|------------------|
|                | Body             |
| WLAN 2.4 GHz   | No               |
| SRD            | Yes              |

**Note:**

- As per KDB 447498, The frequency Bands with Rated Power including Upper tolerance, which qualify for **Standalone SAR Test Exclusion**, are as per the above table.
- The details for the Maximum Rated Power and tolerance(s) can be found in section 6.

## **8. Conducted Output Power Measurements**

### **8.1. RF Output Average Power Measurement: Wi-Fi 2.4 GHz**

#### **8.1.1. Wi-Fi 802.11b (2.4 GHz) - SISO**

|                |                 | Avg Power (dBm) |                |
|----------------|-----------------|-----------------|----------------|
| Channel Number | Frequency (MHz) | 1Mbps           | Operating Mode |
|                |                 | Body            |                |
| 1              | 2412            | 18.04           | <b>802.11b</b> |
| 6              | 2437            | 18.10           |                |
| 11             | 2462            | 18.16           |                |
| 12             | 2467            | Not Supported   |                |
| 13             | 2472            | Not Supported   |                |

**Note:** Conducted power measurements for 802.11g mode not required, as the Max. Rated Power for the mode was  $\leq$  802.11b mode

## 9. Dielectric Property Measurements & System Check

### 9.1. Tissue Dielectric Parameters

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within  $\pm 2^\circ\text{C}$  of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

#### IEEE 1528:2013

| Target Frequency (MHz) | Head         |                | Body (FCC only) |                |
|------------------------|--------------|----------------|-----------------|----------------|
|                        | $\epsilon_r$ | $\sigma$ (S/m) | $\epsilon_r$    | $\sigma$ (S/m) |
| 150                    | 52.3         | 0.76           | 61.9            | 0.80           |
| 300                    | 45.3         | 0.87           | 58.2            | 0.92           |
| 450                    | 43.5         | 0.87           | 56.7            | 0.94           |
| 750                    | 41.9         | 0.89           | -               | -              |
| 835                    | 41.5         | 0.90           | 55.2            | 0.97           |
| 900                    | 41.5         | 0.97           | 55.0            | 1.05           |
| 915                    | 41.5         | 0.98           | 55.0            | 1.06           |
| 1450                   | 40.5         | 1.20           | 54.0            | 1.30           |
| 1500                   | 40.4         | 1.23           | -               | -              |
| 1610                   | 40.3         | 1.29           | 53.8            | 1.40           |
| 1640                   | 40.2         | 1.31           | -               | -              |
| 1750                   | 40.1         | 1.37           | -               | -              |
| 1800                   | 40           | 1.40           | 53.3            | 1.52           |
| 1900                   | 40           | 1.40           | 53.3            | 1.52           |
| 2000                   | 40           | 1.40           | 53.3            | 1.52           |
| 2100                   | 39.8         | 1.49           | -               | -              |
| 2300                   | 39.5         | 1.67           | -               | -              |
| 2450                   | 39.2         | 1.80           | 52.7            | 1.95           |
| 2600                   | 39           | 1.96           | -               | -              |
| 3000                   | 38.5         | 2.40           | 52.0            | 2.73           |
| 3500                   | 37.9         | 2.91           | -               | -              |
| 4000                   | 37.4         | 3.43           | -               | -              |
| 4500                   | 36.8         | 3.94           | -               | -              |
| 5000                   | 36.2         | 4.45           | 49.3            | 5.07           |
| 5100                   | 36.1         | 4.55           | 49.1            | 5.18           |
| 5200                   | 36.0         | 4.66           | 49.0            | 5.30           |
| 5250                   | 35.9         | 4.71           | 48.9            | 5.36           |
| 5300                   | 35.9         | 4.76           | 48.9            | 5.42           |
| 5400                   | 35.8         | 4.86           | 48.7            | 5.53           |
| 5500                   | 35.6         | 4.96           | 48.6            | 5.65           |
| 5600                   | 35.5         | 5.07           | 48.5            | 5.77           |
| 5700                   | 35.4         | 5.17           | 48.3            | 5.88           |
| 5750                   | 35.4         | 5.22           | 48.3            | 5.94           |
| 5800                   | 35.3         | 5.27           | 48.2            | 6.00           |
| 6000                   | 35.1         | 5.48           | -               | -              |

**NOTE:** For convenience, permittivity and conductivity values at some frequencies that are not part of the original data from Drossos et al. [B60] or the extension to 5800 MHz are provided (i.e., the values shown in italics). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6000 MHz that were linearly extrapolated from the values at 3000 MHz and 5800 MHz.

## 9.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

### 9.3. Reference Target SAR Values

The reference SAR values are obtained from the calibration certificate of system validation dipoles. The measured values are normalised to 1 Watt.

| System Dipole | Serial No. | Cal. Date   | Freq. (MHz) | Target SAR Values (mW/g) |      |
|---------------|------------|-------------|-------------|--------------------------|------|
|               |            |             |             | 1g/10g                   | Head |
| D2450V2       | 725        | 17 Sep 2018 | 2450        | 1g                       | 51.1 |
|               |            |             |             | 10g                      | 23.8 |

#### 9.4. Dielectric Property Measurements & System Check Results

The 1-g SAR and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within  $\pm 10\%$  of the manufacturer calibrated dipole SAR target. The internal limit is set to  $\pm 10\%$ .

##### Site 60

System check 2450 Head

Date: 14/05/2019

Validation dipole and Serial Number: D2450V2 / SN: 725

| Simulant                      | Frequency (MHz) | Room Temp (°C) | Liquid Temp (°C) | Parameters   | Target Value | Measured Value | Deviation (%) | Limit (%) |
|-------------------------------|-----------------|----------------|------------------|--------------|--------------|----------------|---------------|-----------|
| Head Tissue Simulation Liquid | 2450.00         | 22.3           | 20.3             | $\epsilon_r$ | 39.20        | 39.01          | -0.48         | 10.00     |
|                               |                 |                |                  | $\Sigma$     | 1.80         | 1.79           | -0.79         | 10.00     |
|                               |                 |                |                  | 1g (W/kg)    | 51.10        | 51.47          | 0.73          | 10.00     |
|                               |                 |                |                  | 10g (W/kg)   | 23.80        | 23.54          | -1.07         | 10.00     |

Note: As per FCC RF Exposure procedures - April 2019 presentation - Tissue Simulating Liquids (TSL), page 19, effective February 19, 2019, FCC has permitted the use of the head-tissue simulating liquid specified in IEC 62209-1 for all SAR tests – head and body and extremity.

## **10. Measurements, Examinations and Derived Results**

### **10.1. General Comments**

SAR test was performed in accordance with the criteria in KDB 248227.

In the 2.4 GHz band, separate SAR procedures were applied to DSSS and OFDM configurations to simplify DSSS test requirements. SAR test was evaluated on the mode with the highest rated power, which is in this case was 802.11b mode. OFDM mode was not evaluated because when the highest reported SAR for DSSS was adjusted by the ratio of OFDM to DSSS specified maximum output power, the adjusted SAR obtained was  $< 1.2\text{W/kg}$ .

Note: As per FCC RF Exposure procedures - April 2019 presentation - Tissue Simulating Liquids (TSL), page 19, effective February 19, 2019, FCC has permitted the use of the head-tissue simulating liquid specified in IEC 62209-1 for all SAR tests – head and body and extremity.

**10.2. Specific Absorption Rate - Test Results - WLAN Antenna****10.2.1. WLAN 2.4GHz Body 1g - WLAN****Max Reported SAR = 0.15 (W/kg)**

| Mode    | Dist. (mm) | DUT Position | Channel Number | Freq (MHz) | Power (dBm)   |       | 1g: SAR Results (W/kg) |              | Notes | Plot No. |
|---------|------------|--------------|----------------|------------|---------------|-------|------------------------|--------------|-------|----------|
|         |            |              |                |            | Tune Up Limit | Meas. | Meas. SAR Level        | Reported SAR |       |          |
| 802.11b | 0          | Front        | 11             | 2462.0     | 20.00         | 18.16 | 0.01                   | 0.02         | -     | -        |
| 802.11b | 0          | Back         | 11             | 2462.0     | 20.00         | 18.16 | 0.05                   | 0.07         | -     | -        |
| 802.11b | 0          | Left         | 11             | 2462.0     | 20.00         | 18.16 | 0.01                   | 0.01         | -     | -        |
| 802.11b | 0          | Back         | 1              | 2412.0     | 20.00         | 18.04 | 0.09                   | 0.15         | -     | 001      |
| 802.11b | 0          | Back         | 6              | 2437.0     | 20.00         | 18.10 | 0.05                   | 0.08         | -     | -        |

Note(s):

1. SAR measurements for 802.11g mode not required, as the Max. Rated Power for the mode was  $\leq$  802.11b mode.

## **11. Highest Standalone SAR and Simultaneous Transmission**

### **11.1. Highest Standalone Reported SAR**

#### **Individual Transmitter Evaluation per Band: Wi-Fi**

| Exposure Configuration                 | Technology Band | Reported 1g - SAR (W/Kg) | Equipment Class | Highest Reported 1g SAR (W/Kg) |
|----------------------------------------|-----------------|--------------------------|-----------------|--------------------------------|
|                                        |                 | SISO                     |                 |                                |
| BODY-WORN<br>(Separation Distance 0mm) | WLAN 2.4 GHz    | 0.15                     | DTS             | 0.15                           |

## 11.2. Simultaneous Transmission Analysis

Simultaneous transmission SAR test analysis is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

The worst case simultaneous transmission analysis is considered for the following cases:


Simultaneous Transmission combination is not considered as not supported by DUT.

## **12.Appendixes**

### **12.1.Photos and Ports Location**

| <b>Photo Reference Number</b> | <b>Title</b>                                            |
|-------------------------------|---------------------------------------------------------|
| PHT/001                       | Test configuration for the measurement of SAR Lab       |
| PHT/002                       | Back of DUT Facing Phantom at 0mm                       |
| PHT/003                       | Front of DUT Facing Phantom at 0mm                      |
| PHT/004                       | Front View of DUT                                       |
| PHT/005                       | Back View of the DUT                                    |
| PHT/006                       | Open View of DUT showing connection method via Ethernet |
| PHT/007                       | Antenna Schematics                                      |

PHT/001: Test configuration for the measurement of SAR Lab

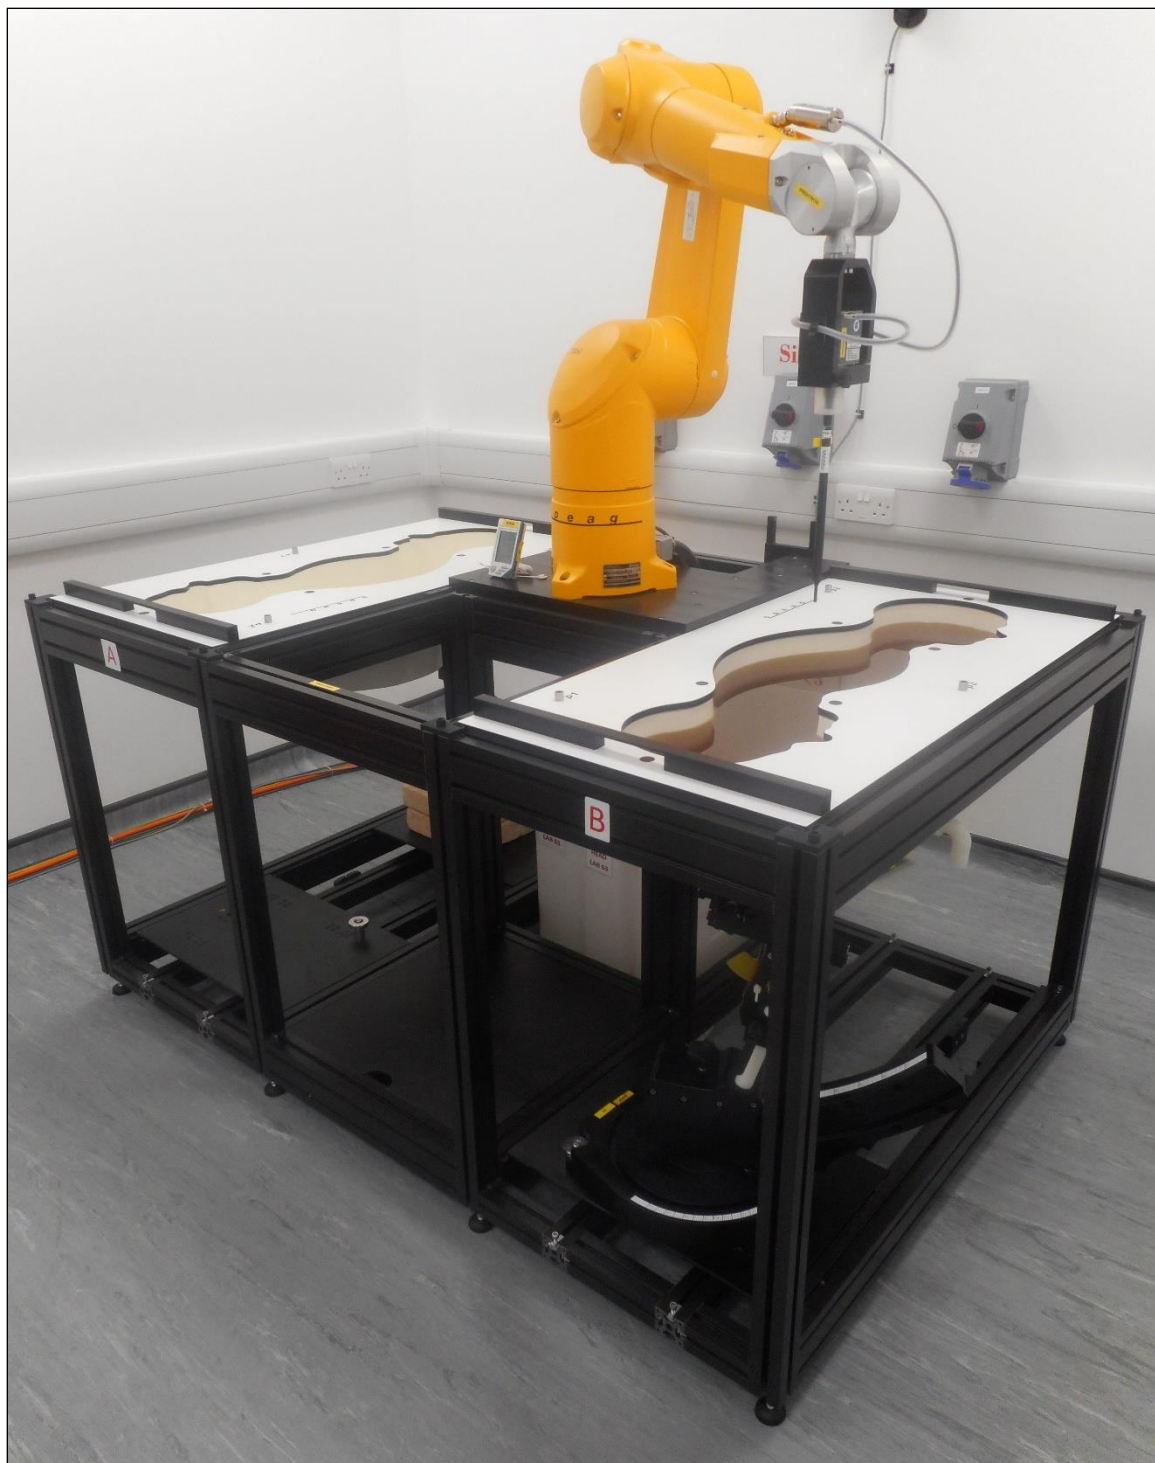


PHT/002: Back of DUT Facing Phantom at 0mm



PHT/003: Front of DUT Facing Phantom at 0mm



PHT/004: Front View of DUT

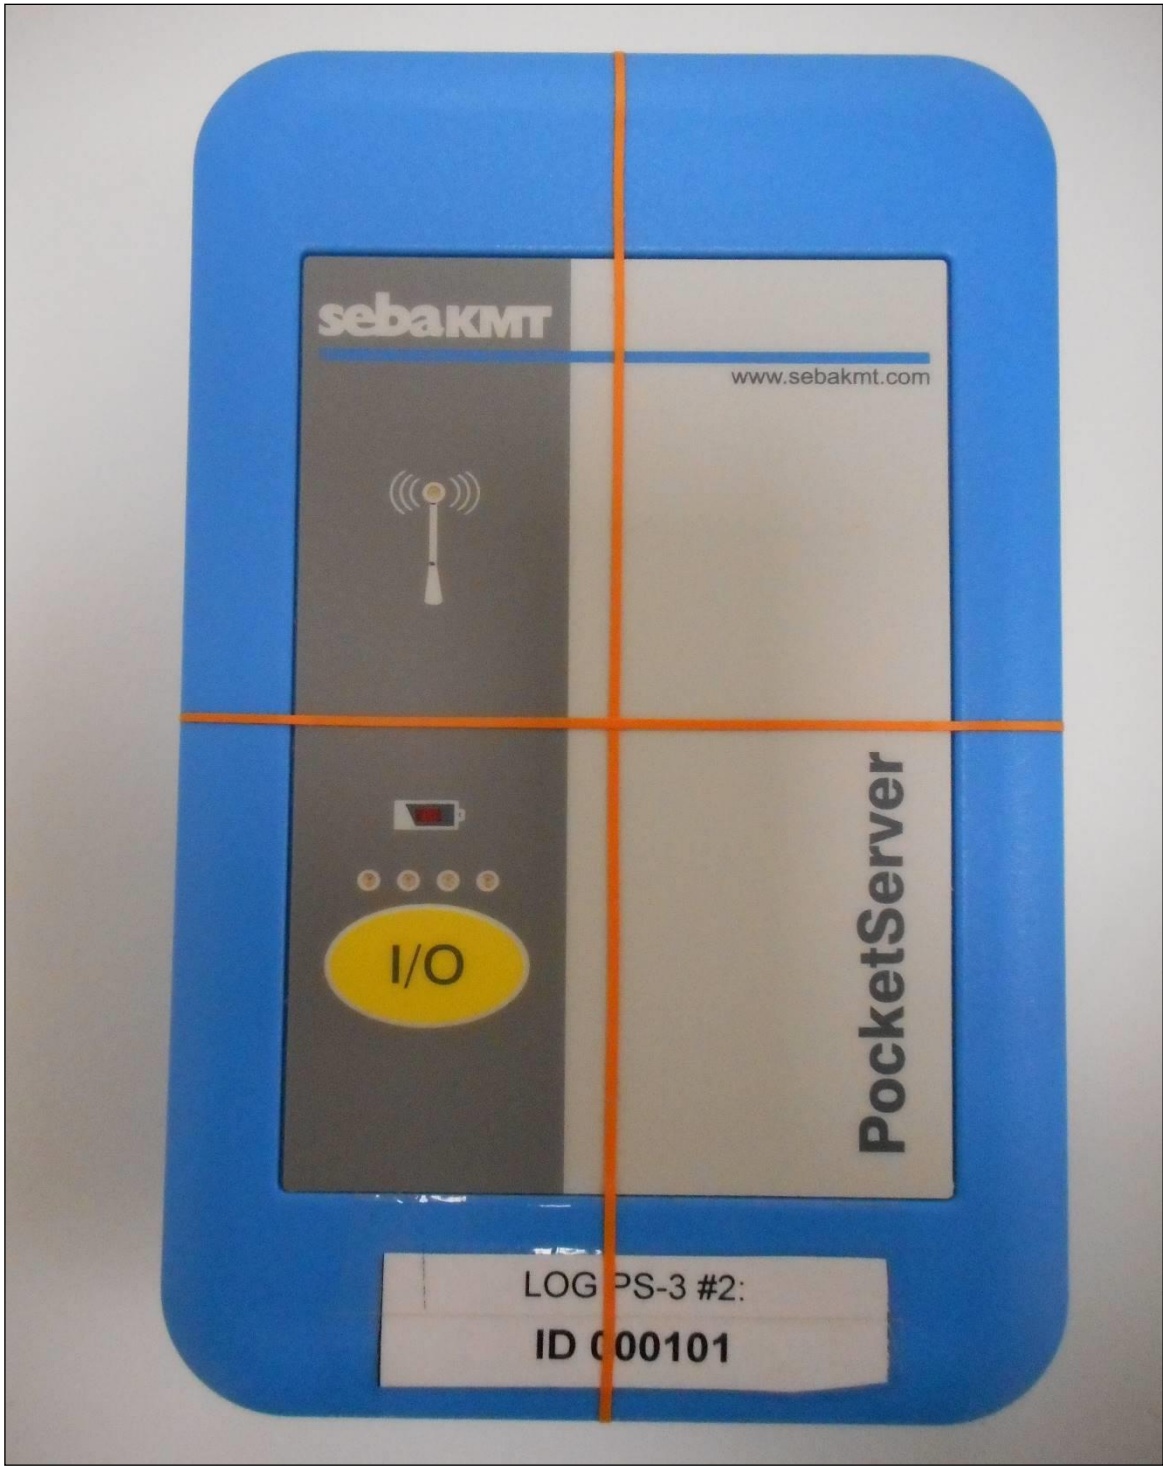


## PHT/005: Back View of the DUT



## PHT/006: Open View of DUT showing connection method via Ethernet



PHT/007: Antenna Schematics

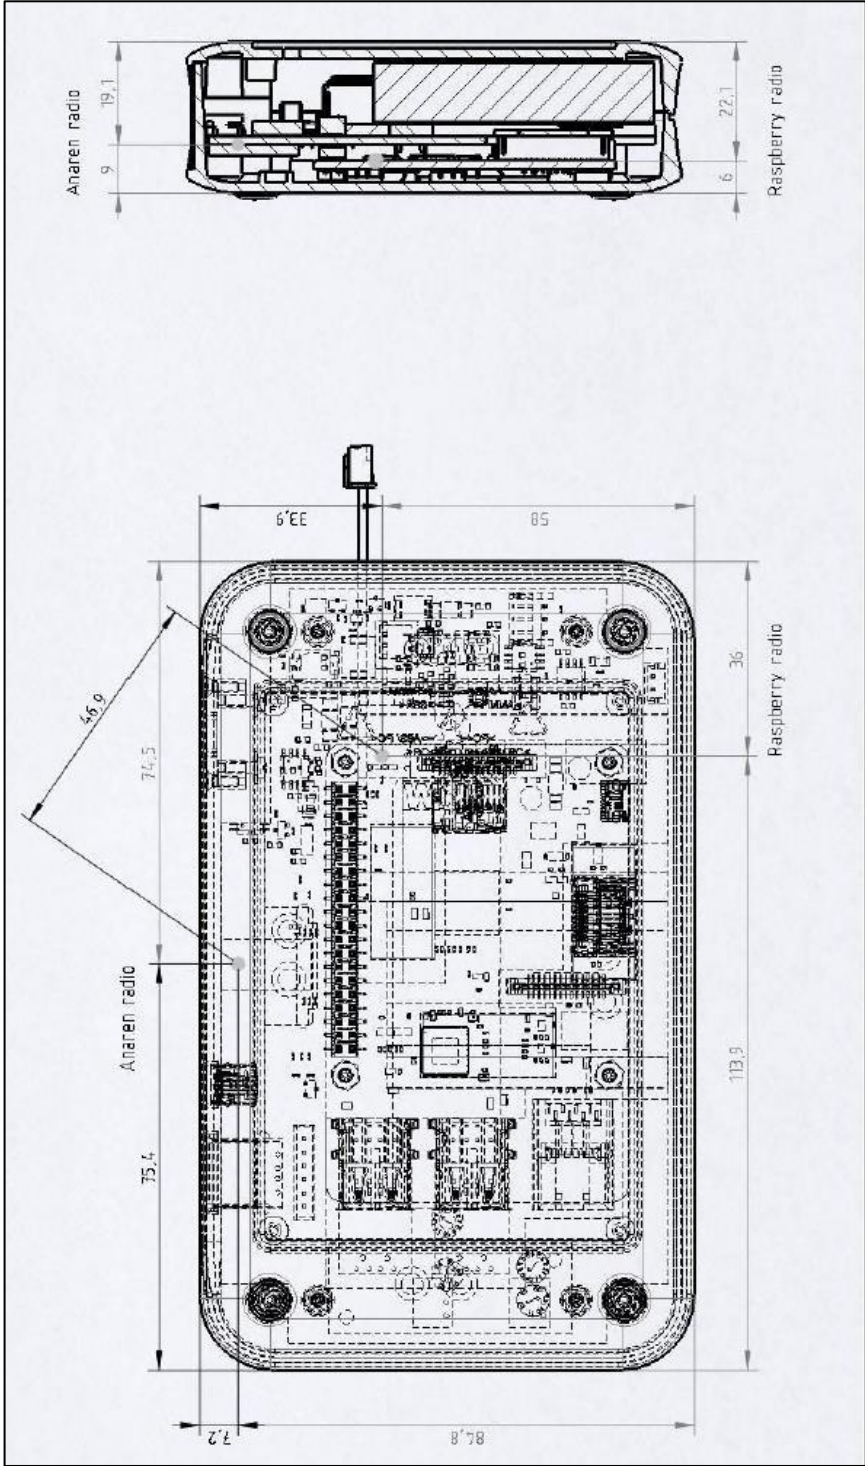

## 12.2. System Check Plots


This appendix contains the following system validation distribution scan(s).

| Scan Reference Number | Title                                        |
|-----------------------|----------------------------------------------|
| SYS/001               | System Check 2450MHz Head 14 05 19 (Site 60) |

SYS/001: System Check 2450MHz Head 14 05 19 (Site 60)

Date: 14/05/2019

DUT: D2450V2;Type: Dipole; Serial: SN725;

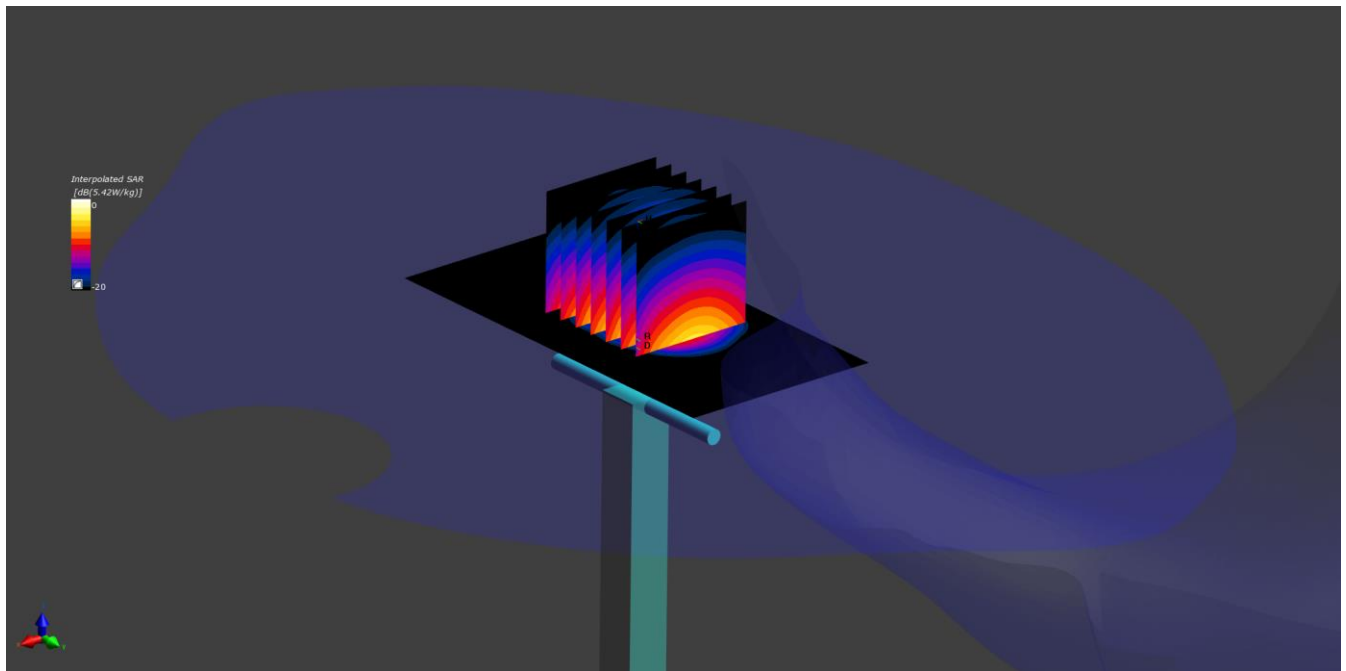

Communication System: CW UID: 0 Frequency: 2450.0 MHz; Duty Cycle: 1  
 Medium: HSL 14 05 19 2450 5% Medium parameters used:  $f = 2450.0$  MHz;  $\sigma = 1.79$  S/m;  $\epsilon_r = 39.0$ ;  $\rho = 1000$  kg/m<sup>3</sup>; No correction  
 Phantom section: Flat

## DASY 6 Configuration:

-Probe: EX3DV4 - SN7496; ConvF ( 7.69, 7.69, 7.69); Calibrated:28/03/2019

-Sensor-Surface: 1.4mm Mother Scan

-Electronics:DAE4 - SN1541; Calibrated:14/03/2019

-Phantom Type: Twin-SAM V8.0 (30deg probe tilt); Serial: 1951

**Area Scan (48.0 x96.0):**Interpolated grid: dx=12.0 mm, dy=12.0 mm

**Zoom Scan1(30.0x30.0x30.0):**Measurement grid: dx=5.0 mm, dy=5.0mm, dz=5.0mm

Reference Value = 3.115V/m; Power Drift = -0.02 dB

**SAR(1 g) = 2.58 W/kg; SAR(10 g) = 1.18 W/kg**

Note: As per FCC RF Exposure procedures - April 2019 presentation - Tissue Simulating Liquids (TSL), page 19, effective February 19, 2019, FCC has permitted the use of the head-tissue simulating liquid specified in IEC 62209-1 for all SAR tests – head and body and extremity.


12.3. SAR Test Plots

This appendix contains the following SAR distribution scans.

| Scan Reference Number | Title                         |
|-----------------------|-------------------------------|
| SAR/001               | Back 0mm WiFi 2.4 802.11b CH1 |

SAR/001: Back 0mm WiFi 2.4 802.11b CH1

Date: 15/05/2019

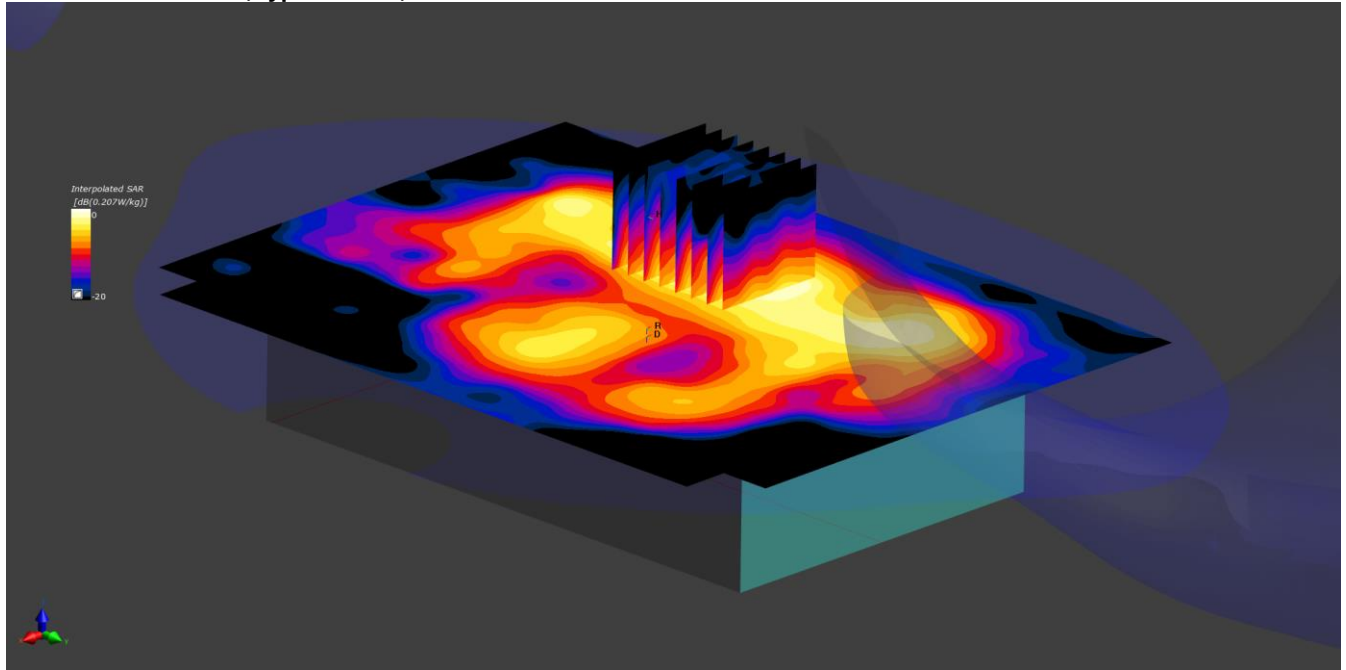**DUT: PocketServer-3;Type: Server;**

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) UID: 10415 Frequency: 2412.0 MHz; Duty Cycle: 0.99  
 Medium: HSL 14 05 19 2450 5% Medium parameters used:  $f = 2412.0$  MHz;  $\sigma = 1.76$  S/m;  $\epsilon_r = 39.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>; No correction  
 Phantom section: Flat

**DASY 6 Configuration:**

-Probe: EX3DV4 - SN7496; ConvF ( 7.69, 7.69, 7.69); Calibrated:28/03/2019  
 -Sensor-Surface: 1.4mm Mother Scan  
 -Electronics:DAE4 - SN1541; Calibrated:14/03/2019  
 -Phantom Type: Twin-SAM V8.0 (30deg probe tilt); Serial: 1951

**Area Scan (144.0 x192.0):**Interpolated grid: dx=12.0 mm, dy=12.0 mm

**Zoom Scan1(30.0x30.0x30.0):**Measurement grid: dx=5.0 mm, dy=5.0mm, dz=5.0mm  
 Reference Value = 0.108V/m; Power Drift = -0.14 dB

**SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.047 W/kg**