



TEST REPORT

Report Number: 3107498MIN-001R

Project Number: 3107498

December 8, 2006


**Evaluation of the
7281152 Remote Monitor
FCC ID: OVA1152**

**to
FCC Part 2
FCC Part 15, Subpart C, Section 15.249**


**For
Ecowater Systems, Inc.**

Test Performed by:
Intertek
7250 Hudson Blvd. Suite 100
Oakdale, MN 55128

Test Authorized by:
Ecowater Systems, Inc.
1890 Woodlane Drive
Woodbury, MN 55125

Prepared by: 
Uri Spector

Date: December 8, 2006

Approved by: 
Norman Shpilsher

Date: December 8, 2006

CONTENTS

1.0	GENERAL DESCRIPTION.....	1
1.1	Related Submittals Grants.....	1
1.2	Product Description	1
1.3	Test Methodology	1
1.4	Test Facility	1
2.0	SYSTEM TEST CONFIGURATION	2
2.1	Justification	2
2.2	EUT Setup.....	2
2.3	EUT Exercising Software	2
2.4	Special Accessories.....	2
2.5	Equipment Modification	2
2.6	Support Equipment List and Description.....	2
2.7	Test Configuration Block Diagrams	3
3.0	TEST RESULTS.....	4
3.1	Field Strength of Fundamental and Harmonics Emissions, FCC 15.249(a)(b), 15.205	5
3.2	Out of Band Spurious Emissions	7
3.3	Bandwidth of Emissions	8
3.4	Radiated Emissions, FCC 15.109, Class B	16
3.5	Test Procedure	20
3.6	Field Strength Calculation	21
4.0	TEST EQUIPMENT.....	22

1.0 GENERAL DESCRIPTION

1.1 Related Submittals Grants

This is single application of the *7281152 Remote Monitor* for Certification under FCC Part 15, Subpart C. There are no other simultaneous applications. The Receiver portion will be verified under Declaration of Conformity.

1.2 Product Description

The *7281152 Remote Monitor* is a RF receiver-transmitter operating from 909.12MHz to 920.12MHz. The intended use of the *7281152 Remote Monitor* is to generate and transmit a RF signal upon receiving the RF signal from other source. The *7281152 Remote Monitor* is powered at 4.5VDC from AA internal battery.

Antenna Description:

Integral antenna on to the RF Board inside the unit

Sample Submitted: November 14, 2006
Test Work Started: November 14, 2006
Test Work Completed: December 8, 2006

1.3 Test Methodology

Emission measurements were performed according to the procedures in ANSI C63.4-2003. All field strength radiated emissions measurements were performed in the semi-anechoic chamber, and for each scan, the procedure for maximizing emissions in Appendices D and E were followed. All field strength radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

1.4 Test Facility

The test site facility used to collect the radiated and conducted measurement data is located at 7250 Hudson Blvd., Suite 100, Oakdale, Minnesota. This test facility has been fully described in a report dated on December 2005 submitted to FCC. Please reference the site registration number: 90706, dated December 6, 2005.

2.0 SYSTEM TEST CONFIGURATION

2.1 Justification

Conducted Emissions was not performed as the EUT is battery operated.

2.2 EUT Setup

For simplicity of testing, the transmitter was wired to transmit continuously for spurious emissions testing. Testing was performed with new batteries.

2.3 EUT Exercising Software

N/A

2.4 Special Accessories

There are no special accessories necessary for compliance of these products.

Cables

N/A

2.5 Equipment Modification

No modifications were installed during the testing.

2.6 Support Equipment List and Description

HP 6813B AC Power Source/Analyzer s/n: 3524A00552

Rohde & Schwarz SMT 03, Signal Generator, s/n DE12157 used to activate the Receiver for FCC 15.109 Radiated Emissions testing.


2.7 Test Configuration Block Diagrams

The EUT was setup as tabletop equipment.

The EUT was powered at 4.5VDC from AA new batteries.

Field Strength Measurements

For simplicity of testing, the Unit was set to transmit continuously for spurious emissions measurements.

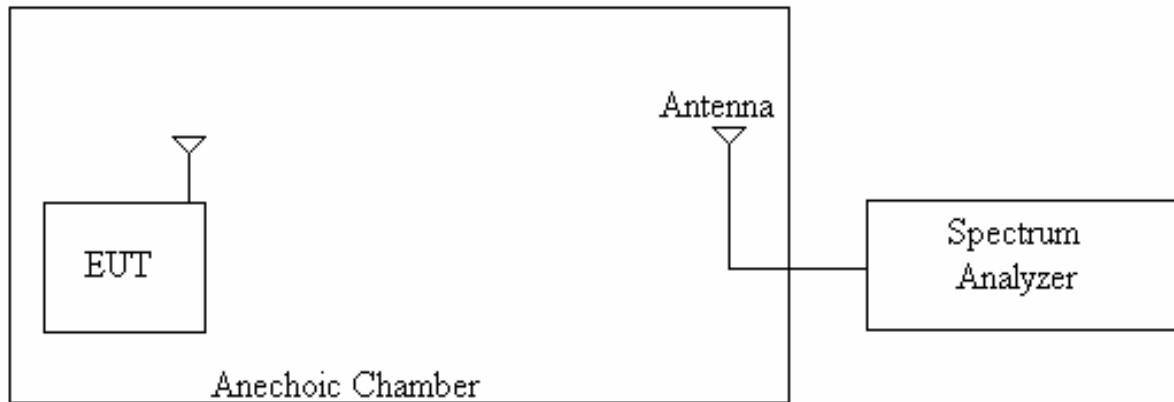

3.0 TEST RESULTS

Data is included for the worst-case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs, data tables and graphical representations of the emissions are included.

The EUT is intended for operation under the requirements of Part 15 Subpart C. Specific test requirements include the following:

47 CFR 15.249(a)(b)	Field Strength of Fundamental
47 CFR 15.249(a)(b), 15.205	Field Strength of Harmonics
47 CFR 15.209	Out of Band Spurious Emissions Bandwidth of Emissions
47 CFR 15.109	Unintentional Radiated Emissions

3.1 Field Strength of Fundamental and Harmonics Emissions, FCC 15.249(a)(b), 15.205

Field Strength of Fundamental and Harmonics Emissions measurements were made with Fundamental frequency at 909.12MHz, 913.12MHz and 920.12MHz. The Harmonics emissions were tested up to 10th harmonic.

The Tables 3-1-1, 3-1-2 and 3-1-3 show the Field Strength of Fundamental Radiation.

Graphs 1, 2, 3 show the Field Strength of Harmonics Emissions. No emissions above 3rd harmonic were detected.

Note: Worst emission measured: 38.32 dbuV/m.

Field Strength of Fundamental Ch: 1

Date: 12/6/2006

Company: Ecowater
Model: 7281152 Remote Monitor
Test Engineer: Uri Spector
Standard: FCC Part 15.249
Test Site: 3 m Anechoic Chamber
Note: Measurements were taking using a CISPR Quasi-Peak Detector with 100kHz Resolution Bandwidth
 Antenna Factors include Antenna Correction Factors and Cable Loss

Table # 3-1-1

Frequency MHz	Antenna		Antenna Factor dB(1/m)	QP Reading dBμV	Net at 3m. dBμV/m	Limit dBμV/m	Margin dB
	Polarity	Hts(m)					
909.02	V	125	25.1	67.3	92.4	94.0	-1.6
909.02	H	157	25.1	63.7	88.8	94.0	-5.2

Field Strength of Fundamental Ch: 2 **Date:** 12/6/2006
Company: Ecowater
Model: 7281152 Remote Monitor
Test Engineer: Uri Spector
Standard: FCC Part 15.249
Test Site: 3 m Anechoic Chamber
Note: Measurements were taking using a CISPR Quasi-Peak Detector
with 100kHz Resolution Bandwidth
Antenna Factors include Antenna Correction Factors and Cable Loss

Table # 3-1-2



Frequency MHz	Antenna		Antenna Factor dB(1/m)	QP Reading dBμV	Net at 3m. dBμV/m	Limit dBμV/m	Margin dB
	Polarity	Hts(m)					
913.02	V	110	25.1	67.0	92.1	94.0	-1.8
913.02	H	100	25.1	63.3	88.4	94.0	-5.5

Field Strength of Fundamental Ch: 3 **Date:** 12/6/2006
Company: Ecowater
Model: 7281152 Remote Monitor
Test Engineer: Uri Spector
Standard: FCC Part 15.249
Test Site: 3 m Anechoic Chamber
Note: Measurements were taking using a CISPR Quai-Peak Detector
with 100kHz Resolution Bandwidth
Antenna Factors include Antenna Correction Factors and Cable Loss



Table # 3-1-3

Frequency MHz	Antenna		Antenna Factor dB(1/m)	QP Reading dBμV	Net at 3m. dBμV/m	Limit dBμV/m	Margin dB
	Polarity	Hts(m)					
920.02	V	112	25.2	66.5	91.7	94.0	-2.3
920.02	H	151	25.2	63.2	88.4	94.0	-5.6



Graph 1

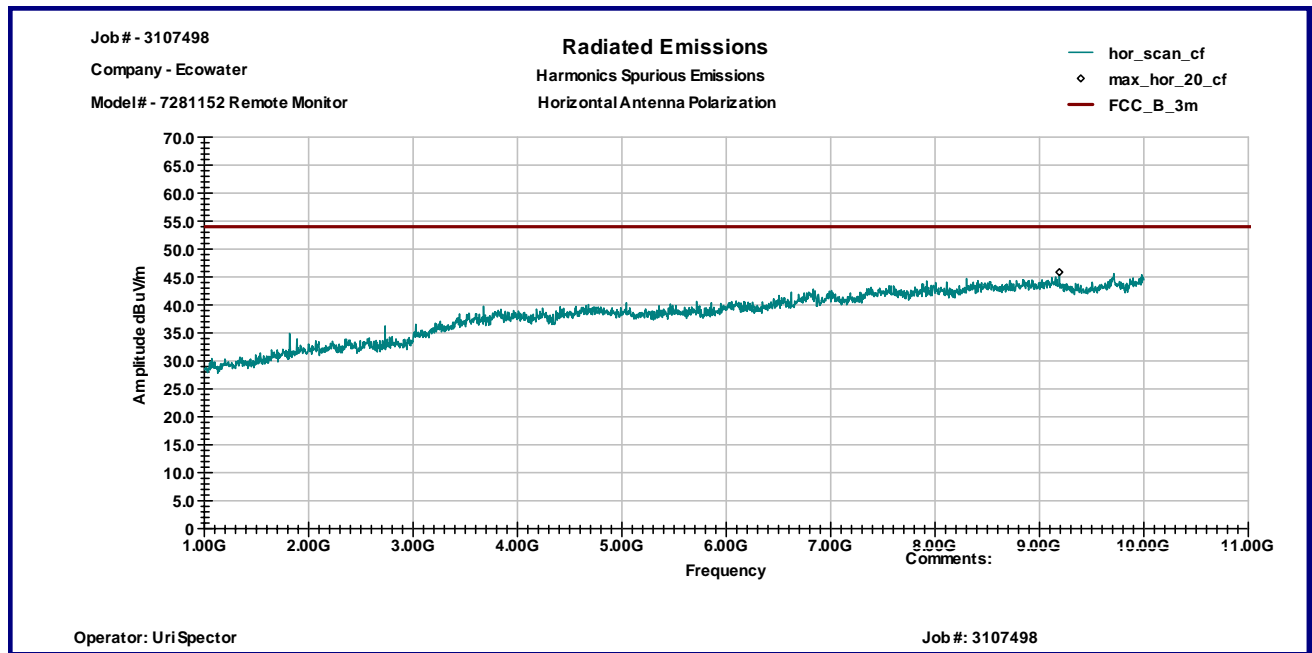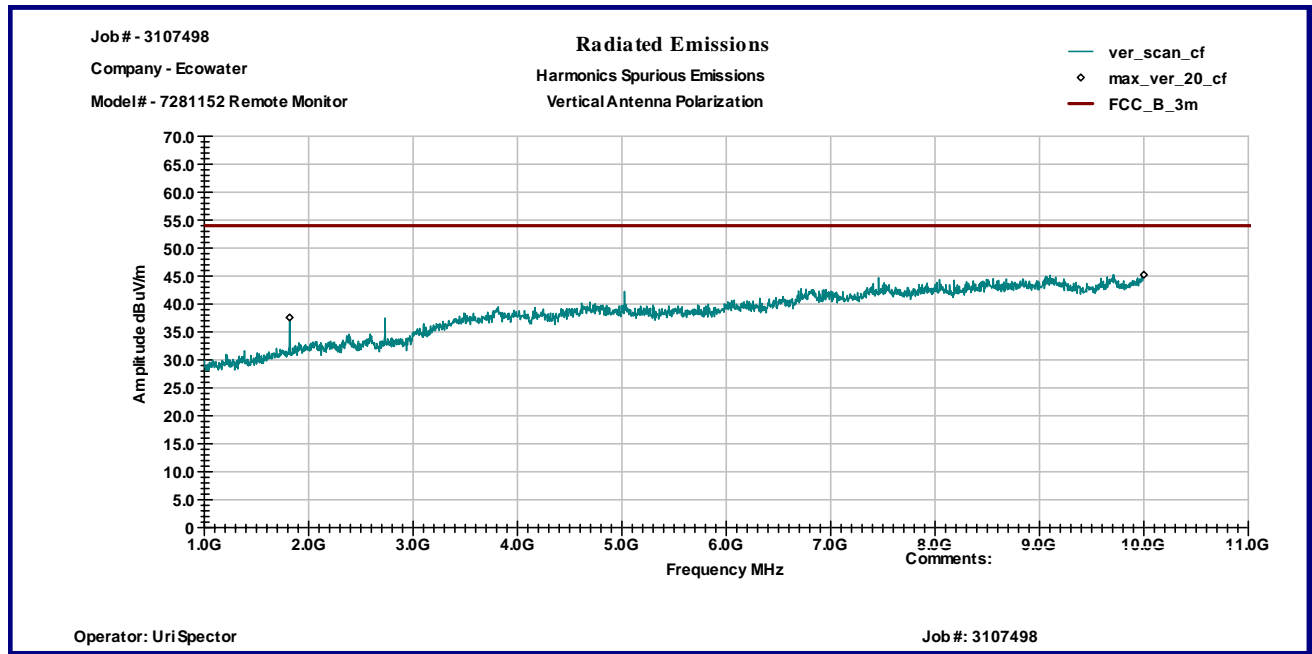

Graph 2

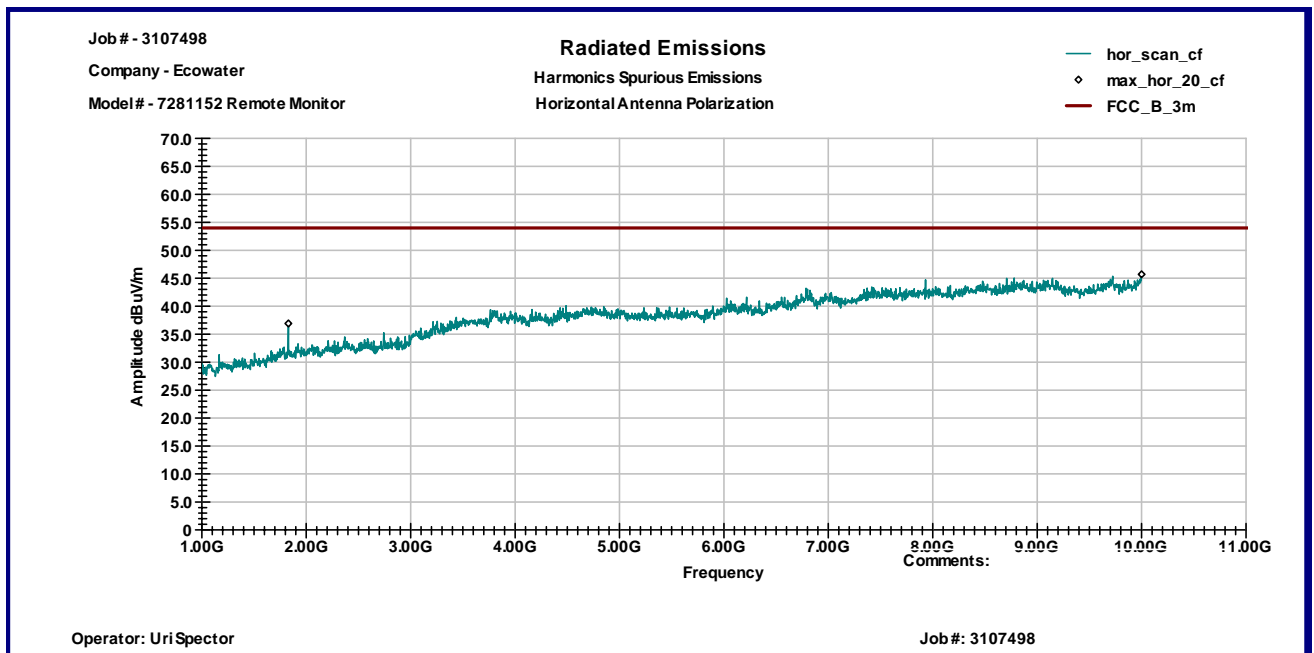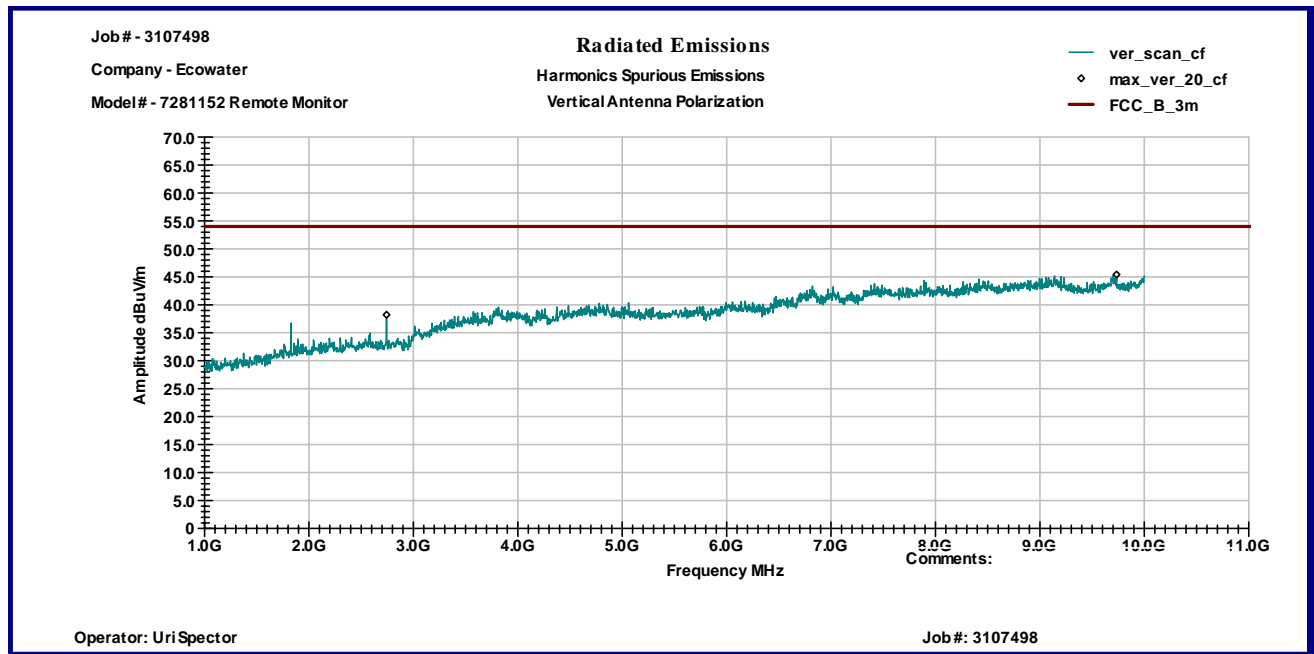

Graph 3

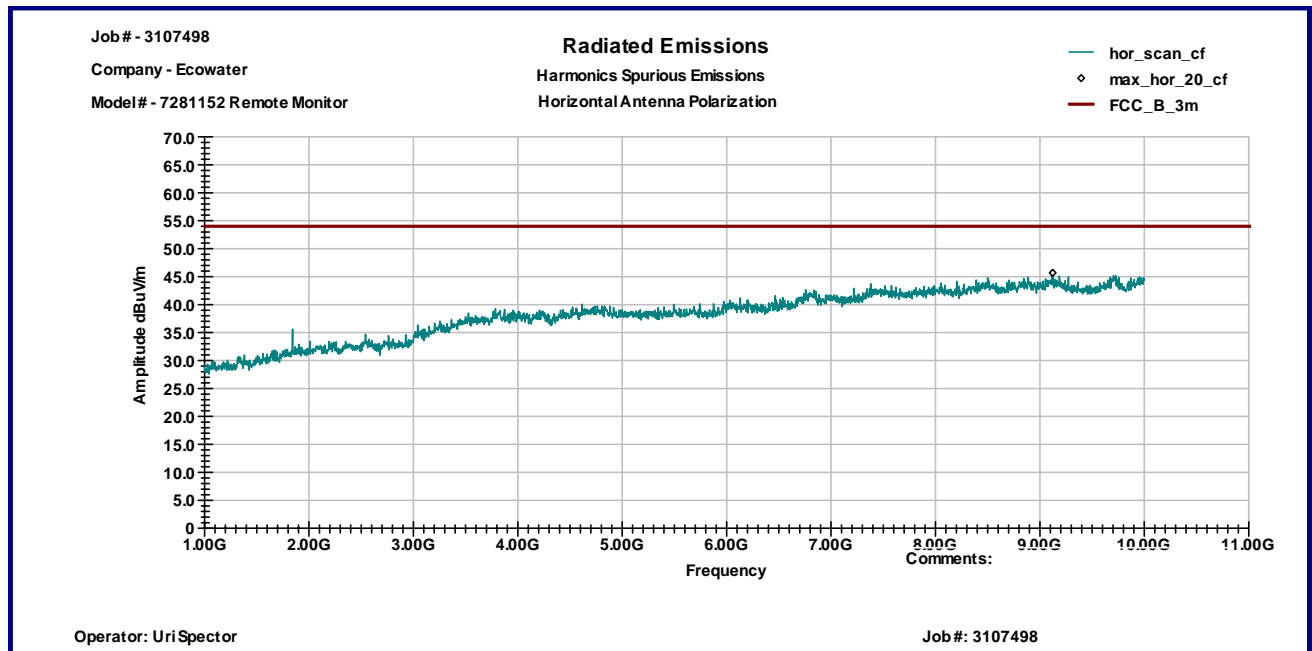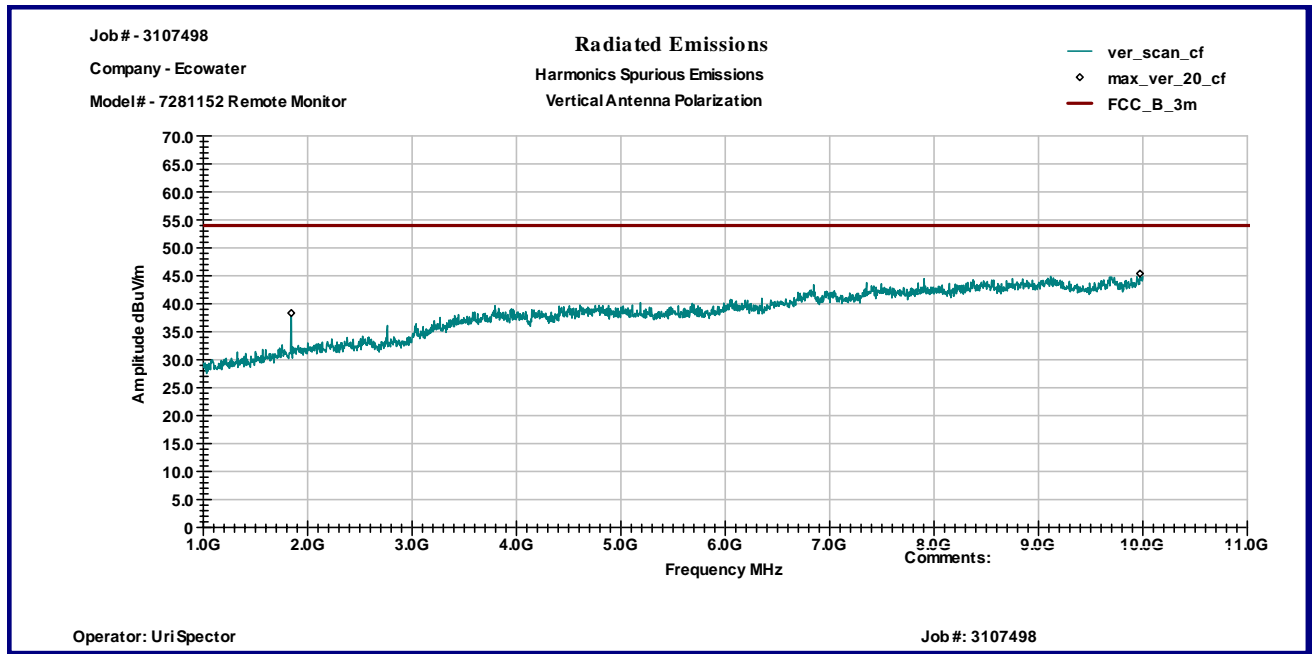

3.2 Out of Band Spurious Emissions, FCC 15.249(c), 15.209

Out-of-band measurements were made for frequencies:

- 902MHz
- 928MHz.

Output frequency of the EUT is 908.38MHz

The EUT complies with the Standard requirements Out of Band Spurious Emissions for Section 15.249(c). Table 3-2-1 shows the Out of Band Spurious Emissions.

Out of Band Spurious Emissions

Date: 12/6/2006

Company: Ecowater

Model: 7281152 Remote Monitor

Test Engineer: Uri Spector

Standard: FCC Part 15.249(c), 15.209

Test Site: 3m Anechoic Chamber, 3m measurement distance

Note: The table shows the worst case radiated emissions
All measurements were taken using a Quasi-peak detector

Table # 3-2-1

Frequency MHz	Antenna			QP reading dB μ V	Total QP dB μ V/m	QP Limit dB μ V/m	Margin dB	Comments
	Polarity	Hts(cm)	Factor (dB1/m)					
902.00	V	133	25.0	17.7	42.7	46.0	-3.3	
902.00	H	153	25.0	15.3	40.3	46.0	-5.7	
928.00	V	112	25.3	14.0	39.3	46.0	-6.7	
928.00	H	158	25.3	11.7	37.0	46.0	-9.0	

3.3 Bandwidth of Emissions


Bandwidth of Emissions measurements was made for frequency of 909.12MHz.

Bandwidth of Emissions for the EUT at level -20dB was measured at 210kHz.


Bandwidth of Emissions for the EUT at 99% power was measured at 2.72kHz.

The Graphs 3-3-1, 3-3-2 shows the Bandwidth of Emissions.

Graph # 3-3-1

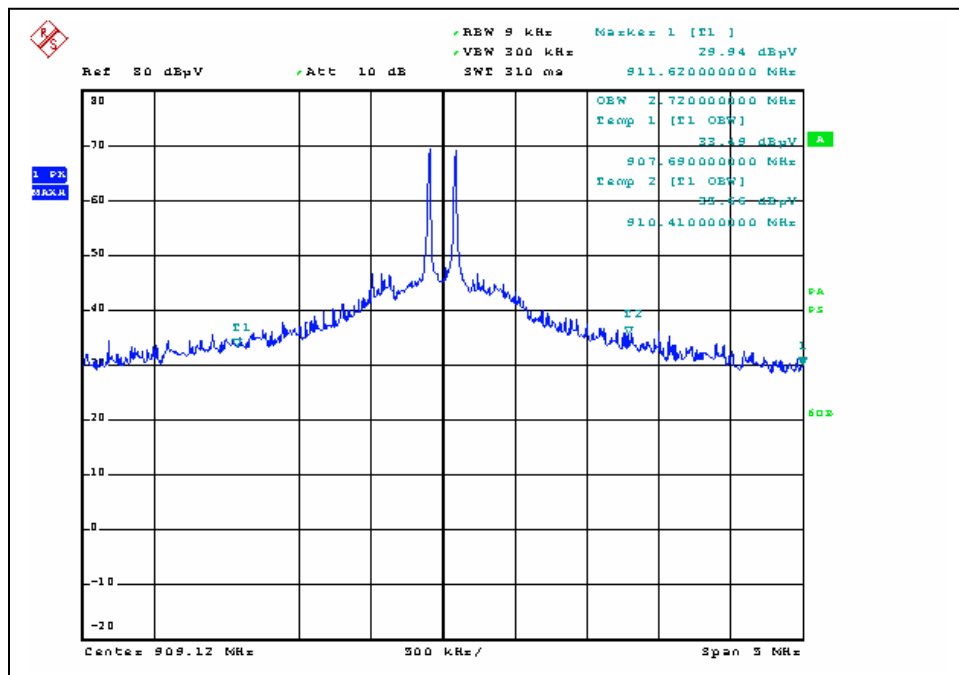

Graph # 3-3-2

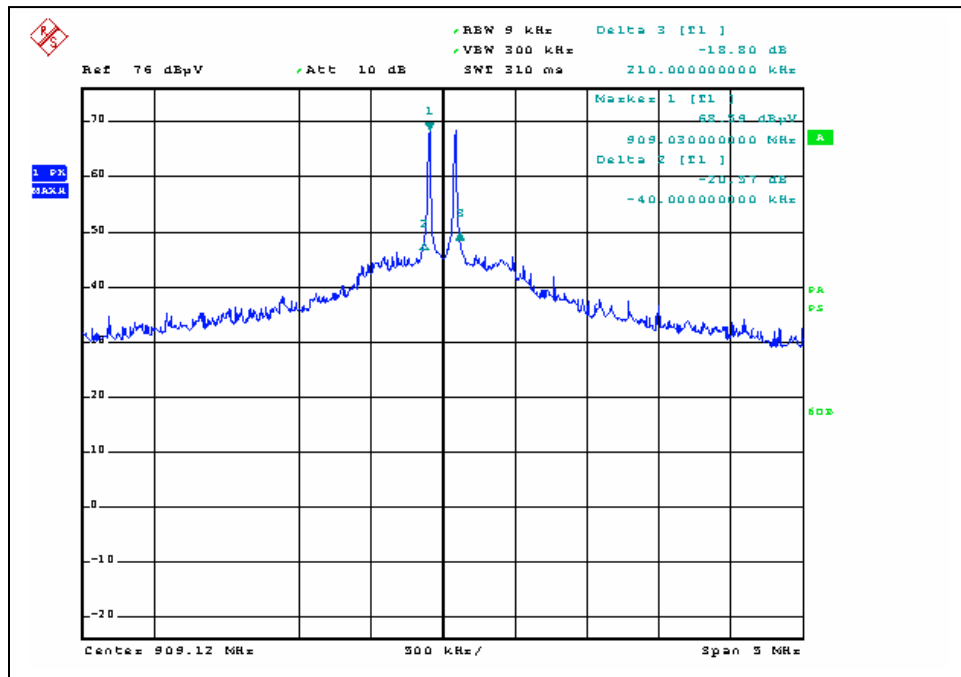


Bandwidth of Emissions measurements was made for frequency of 913.12MHz.

Bandwidth of Emissions for the EUT at level -20dB was measured at 220kHz.


Bandwidth of Emissions for the EUT at 99% power was measured at 2.86MHz.

The Graphs 3-3-3, 3-3-4 shows the Bandwidth of Emissions.

Graph # 3-3-3

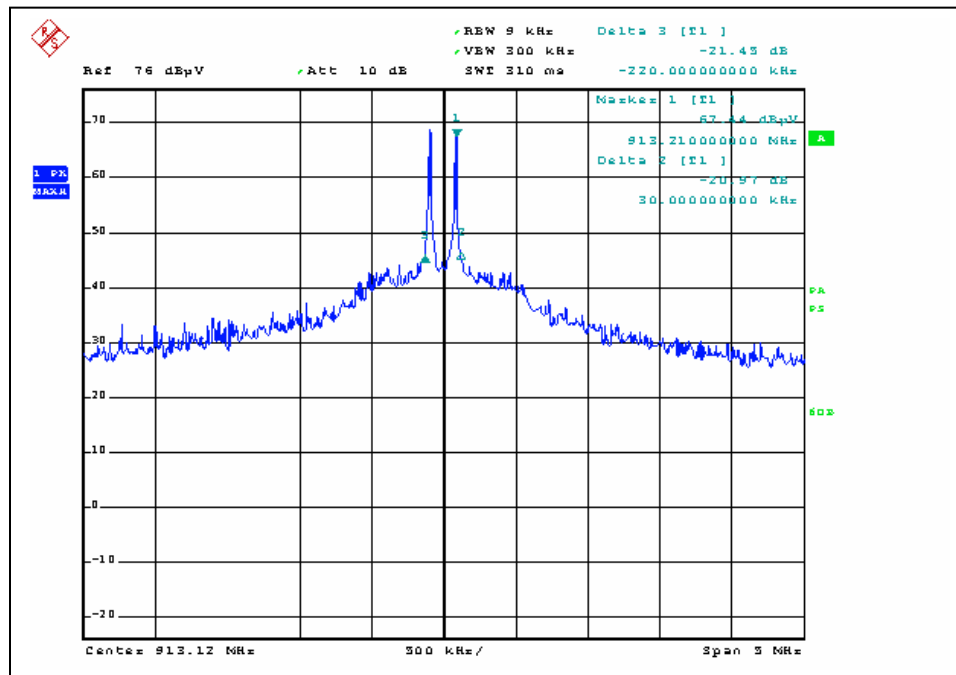


Graph # 3-3-4

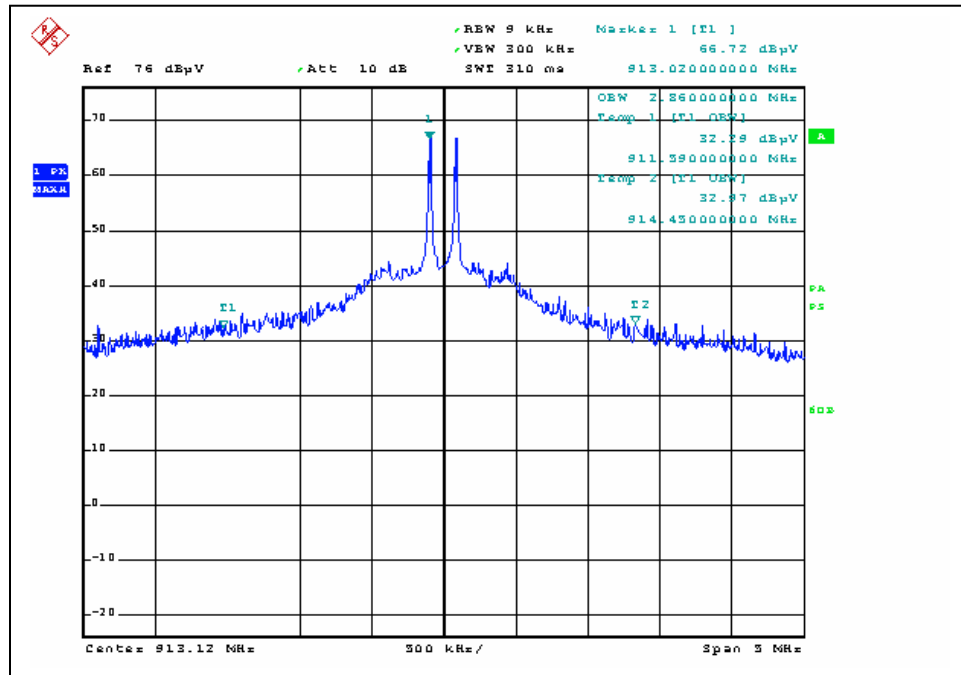

Bandwidth of Emissions for the EUT at level -20dB was measured at 220kHz
 Bandwidth of Emissions for the EUT at 99% power was measured at 2.73MHz .

Graph # 3-3-5

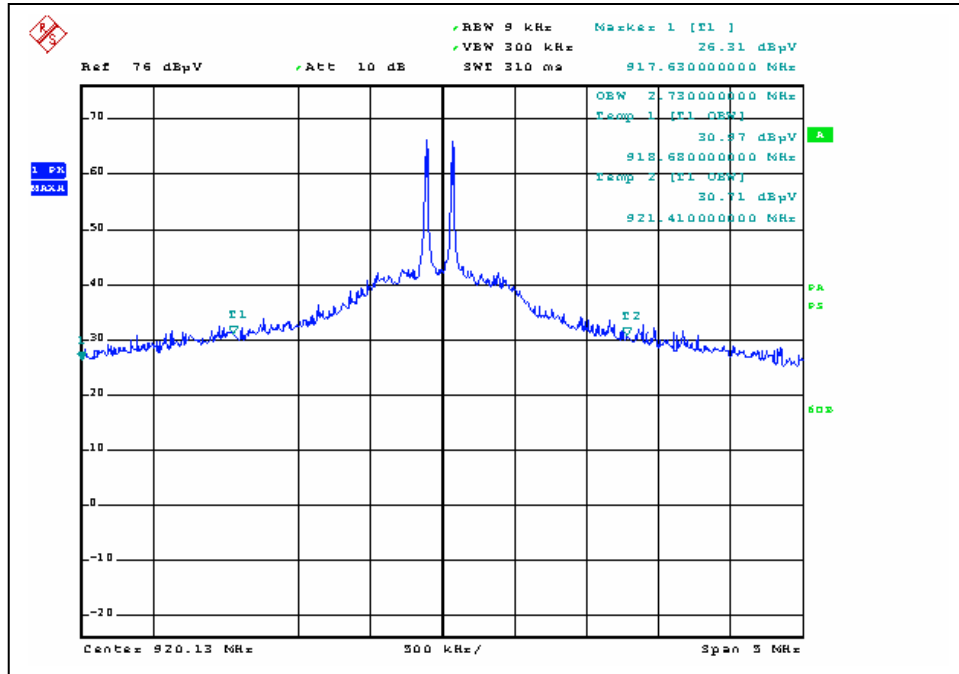


3.4 Radiated Emissions, FCC 15.109, Class B

The EUT was tested as a digital device according to FCC Part 15.109, Class B in frequency range from 30MHz to 5GHz. Radiated Emissions testing was performed in Anechoic Chamber with 3m-measurement distance. Signal generator was used in close proximity to activate the EUT in receiving mode. The Signal Generator was tuned to 913.12MHz and its antenna was located in close proximity to the EUT. **Note:** 913.12MHz transmitting frequency was excluded form the measurement

The Graphs 3-5-1 & 3-5-2 show the Radiated Emissions. No emissions were detected in the frequency range from 30MHz to 5GHz.


Graph 3-4-1

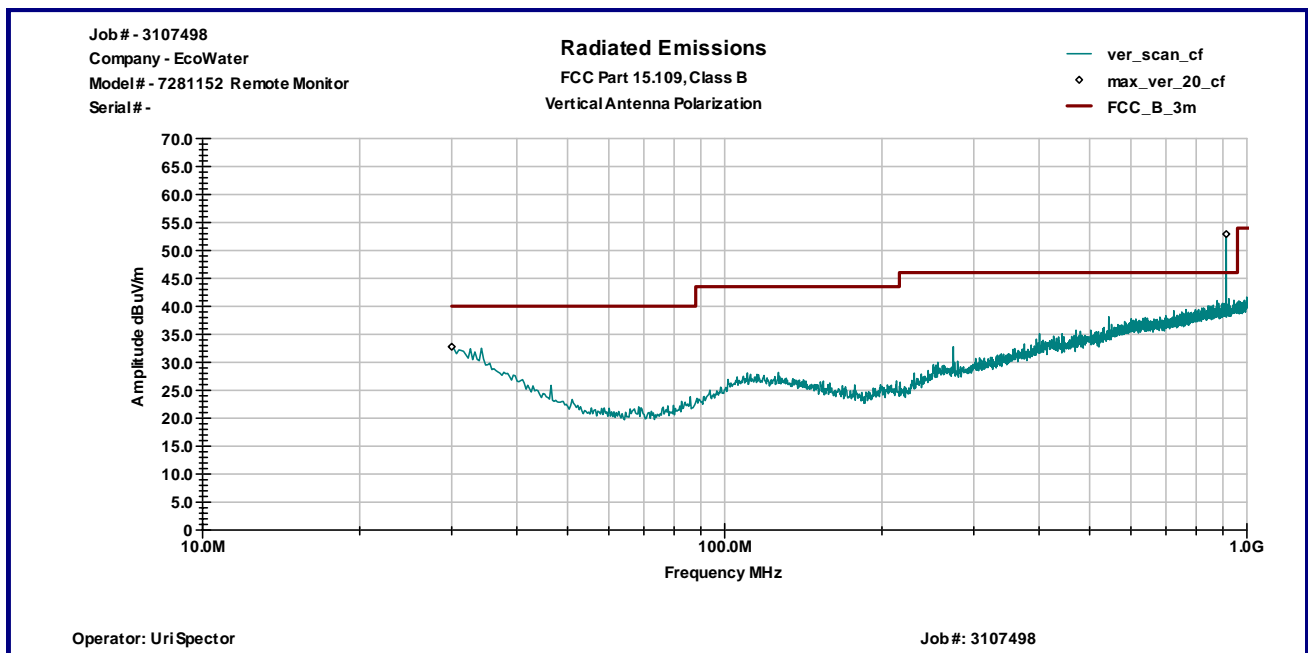

Job # - 3107498
 Company - EcoWater
 Model# - 7281152 Remote Monitor
 Serial# -

Radiated Emissions
 FCC Part 15.109, Class B
 Horizontal Antenna Polarization



— hor_scan_cf
 ◇ max_hor_20_cf
 — FCC_B_3m

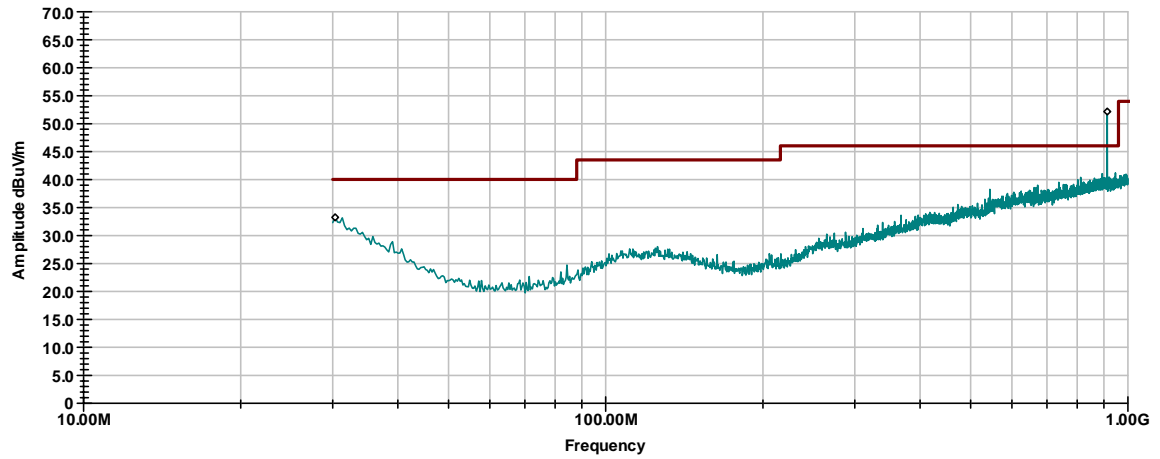

Operator: Uri Spector

Job #: 3107498

Graph 3-4-2

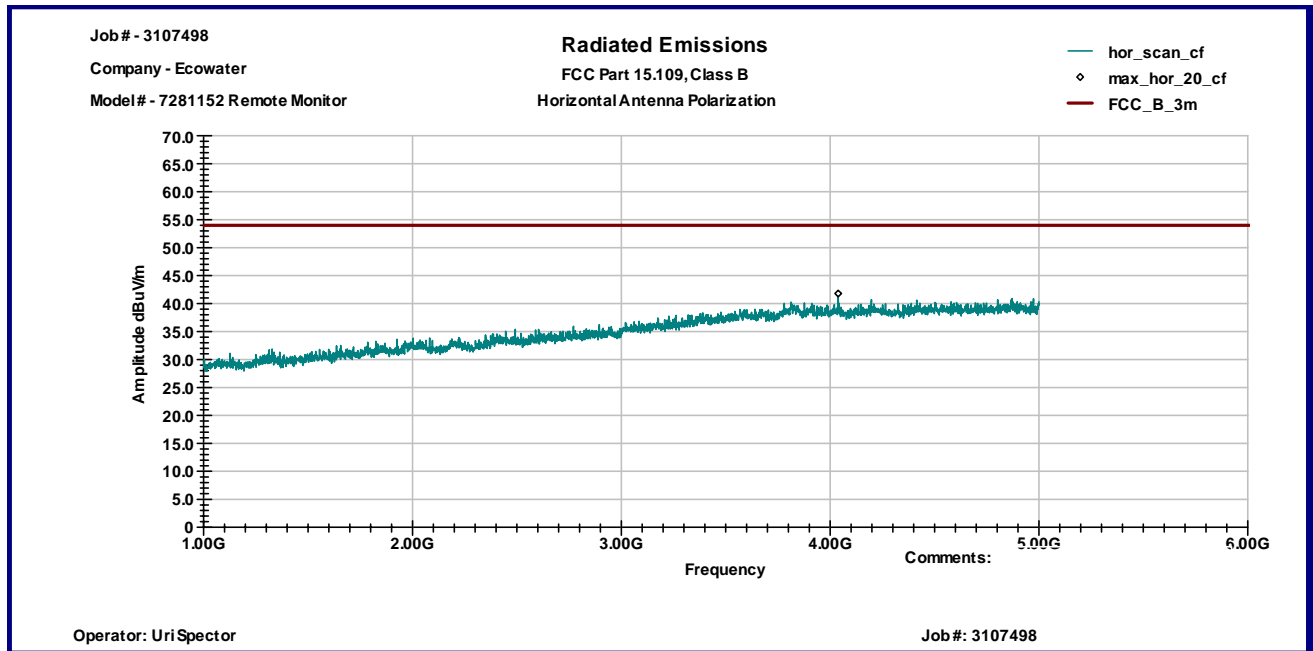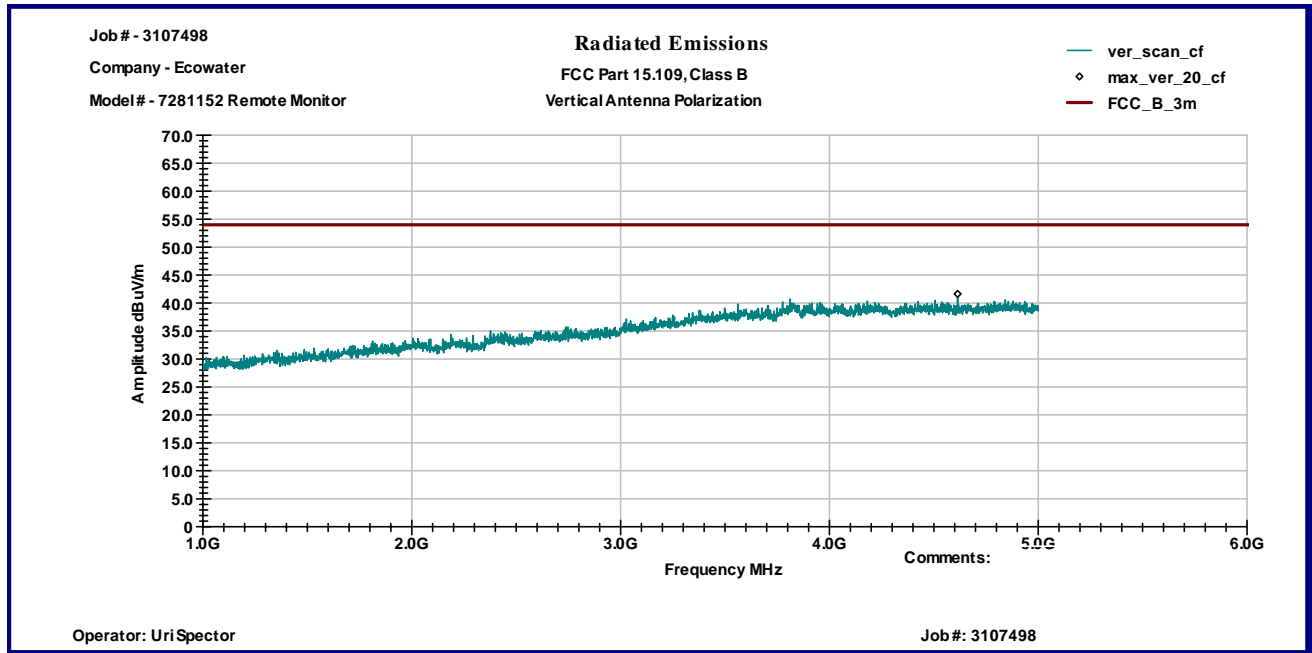

3.5 Test Procedure

Field Strength Measurements

The EUT was placed on a non-conductive table 0.8m above the ground plane inside the Anechoic Chamber. The table was centered on a motorized turntable, which allows 360-degree rotation. The measurement antenna was positioned at 3m distance. The Bicono-Log antenna was used in frequency range from 30MHz to 1GHz, and the Horn antenna was used in frequency range above 1GHz. The radiated emissions were maximized by configuring the EUT through its placement in three orthogonal axes, by rotating the EUT, by changing antenna polarization, and by changing antenna height from 1 to 4m. Method of the direct Field Strength Calculation is shown in Section 3.6.

Conducted Emissions

For conducted emissions testing, the equipment is moved to an insulating platform over the ground plane, and the EUT is powered from a LISN. Both sides of the AC line are measured and the results are compared to the applicable limits. Measurements are taken using CISPR quasi-peak and average detectors when the peak readings approach or exceed the average limit. Only quasi-peak readings are taken when the emissions from the EUT meet the average limit as measured with the quasi-peak detector.

3.6 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured emissions reading on the EMI Receiver.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where: FS = Field Strength in dB(μ V/m)

RA = Receiver Amplitude in dB(μ V)

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB(m^{-1})

AG = Amplifier Gain in dB

Assume a receiver reading of 48.1 dB(μ V) is obtained. The antenna factor of 7.4 dB(m^{-1}) and cable factor of 1.6 dB is added and amplifier gain of 16.0 dB is subtracted giving field strength of 41.1 dB(μ V/m).

$$RA = 48.1 \text{ dB}(\mu V)$$

$$AF = 7.4 \text{ dB}(m^{-1})$$

$$CF = 1.6 \text{ dB}$$

$$AG = 16.0 \text{ dB}$$

$$FS = RA + AF + CF - AG$$

$$FS = 48.1 + 7.4 + 1.6 - 16.0$$

$$FS = 41.1 \text{ dB}(\mu V/m)$$

In the tables the Cable correction factors are included to the Antenna Factors.

Tested by:

Uri Spector
EMC Project Engineer
Intertek ETL SEMKO

Signature



Date: December 8, 2006

4.0 TEST EQUIPMENT

Receivers/Spectrum Analyzers and Test Software

DESCRIPTION	SERIAL NO.	LAST CAL	CAL DUE	USED
HP85462A Receiver RF Section	3325A00106	04/06	04/07	X
HP85460A RF Filter Section	3330A00109	04/06	04/07	X
Rohde & Schwarz FSP 40 Spectrum Analyzer	100024	07/06	07/07	X
Rohde & Schwarz ESCI Spectrum Analyzer	100358	04/06	04/07	X
TILE! Instrument Control System	ver. 3.4.k.15	N/A	N/A	X

Antennas

DESCRIPTION	SERIAL NO.	LAST CAL	CAL DUE	USED
Schaffner-Chase Bicono-Log Antenna	2468	01/06	01/07	X
EMCO Horn Antenna 3115	9507-4513	01/06	01/07	X


Artificial Mains Networks/Pre-Amplifiers/Filters

DESCRIPTION	SERIAL NO.	LAST CAL	CAL DUE	USED
MITEQ Pre-Amplifier AMF-5D-00501800-28-13P	1122951	02/06	02/07	X
Reactel 7HS-1G-S12 Filter	0223	01/06	01/07	X

EXHIBIT 1
CONFIGURATION PHOTOS



Radiated Emissions Test Configuration

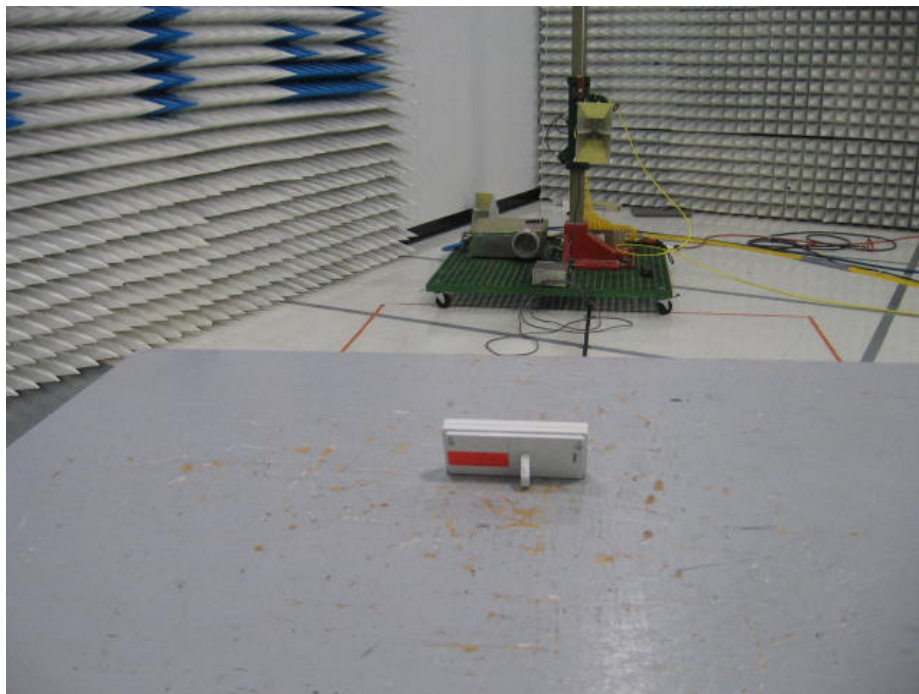

Radiated Emissions Test Configuration